





 Cite this: *Lab Chip*, 2021, 21, 4596

Amplification factor in DC insulator-based electrokinetic devices: a theoretical, numerical, and experimental approach to operation voltage reduction for particle trapping†

 Rodrigo Ruz-Cuen,^a J. Martin de los Santos-Ramírez,^a ^a
 Braulio Cardenas-Benitez,^b Cinthia J. Ramírez-Murillo,^a Abbi Miller,^c Kel Hakim,^c
 Blanca H. Lapizco-Encinas ^c and Victor H. Perez-Gonzalez ^{*a}

Insulator-based microfluidic devices are attractive for handling biological samples due to their simple fabrication, low-cost, and efficiency in particle manipulation. However, their widespread application is limited by the high operation voltages required to achieve particle trapping. We present a theoretical, numerical, and experimental study that demonstrates these voltages can be significantly reduced (to sub-100 V) in direct-current insulator-based electrokinetic (DC-iEK) devices for micron-sized particles. To achieve this, we introduce the concept of the amplification factor—the fold-increase in electric field magnitude due to the presence of an insulator constriction—and use it to compare the performance of different microchannel designs and to direct our design optimization process. To illustrate the effect of using constrictions with smooth and sharp features on the amplification factor, geometries with circular posts and semi-triangular posts were used. These were theoretically approximated in two different systems of coordinates (bipolar and elliptic), allowing us to provide, for the first time, explicit electric field amplification scaling laws. Finite element simulations were performed to approximate the 3D insulator geometries and provide a parametric study of the effect of changing different geometrical features. These simulations were used to predict particle trapping voltages for four different single-layer microfluidic devices using two particle suspensions (2 and 6.8 μm in size). The general agreement between our models demonstrates the feasibility of using the amplification factor, in combination with nonlinear electrokinetic theory, to meet the prerequisites for the development of portable DC-iEK microfluidic systems.

 Received 12th July 2021,
 Accepted 23rd September 2021

DOI: 10.1039/d1lc00614b

rsc.li/loc

Introduction

Insulator-based electrokinetics (iEK) is an emerging microfluidic technology where dielectric materials and interfaces determine the spatial distribution of an externally applied electric field, producing motion of fluids and particles contained therein. This principle has been exploited to design and implement microdevices for controlling the position, velocity, and concentration of biological and non-biological particles in lab-on-a-chip and point-of-care platforms.¹ When

direct current (DC) electric fields are applied to an iEK device (DC-iEK), they interact with the charge distributions at the interfaces of the different material phases involved. From these interactions, three main electrokinetic phenomena arise: electroosmosis (EO), electrophoresis (EP) and dielectrophoresis (DEP)—a non-uniform electric field spatial distribution is required for DEP to exist. It is, then, through the combined effect of EO, EP and DEP, that particle control (mostly trapping) is achieved. The extent to which EO and EP remain linear with the magnitude of the applied electric fields critically depends on the degree of polarization of the electric double layers (EDL) formed at the channel/liquid and particle/liquid interfaces, respectively. In the case of DEP, the exerted force on particles is dependent on their induced polarization and the gradient of the squared magnitude of the electric field, *i.e.*, $F_{\text{DEP}} \propto \nabla(\mathbf{E} \cdot \mathbf{E})$. Understanding how the presence of insulators alters the distribution and magnitude of electric fields has therefore been the subject of numerous iEK studies.^{2,3}

^a School of Engineering and Sciences, Tecnológico de Monterrey, Monterrey, Nuevo Leon 64849, Mexico. E-mail: vhpg@tec.mx

^b Department of Biomedical Engineering, University of California, Irvine, Irvine, CA 92697, USA

^c Microscale Bioseparations Laboratory, Rochester Institute of Technology, Rochester, New York 14623, USA

† Electronic supplementary information (ESI) available. See DOI: 10.1039/d1lc00614b



Until recently, DEP was considered strong enough to balance the combined effect of linear EP and EO in DC-iEK devices for particle trapping.² Additionally, the nonlinear nature of EP (also known as EP⁽³⁾ or EP of the second kind^{4,5}) had not been posited as a possible major contributor to particle trapping phenomena.⁶ However, when taking such nonlinear nature into consideration, a hypothesis can be defined where the electrokinetic trapping of particles is mainly attributed to the balancing of linear EP⁽¹⁾ and nonlinear EP⁽³⁾ kinetic components with EO flow (Fig. 1A). Exploring this path, recent studies on experimental microorganism trapping assays indicated that DEP represented about 0.89% to 5.85% of the nonlinear EP, and demonstrated that this higher order DC-iEK phenomena can be used to build an electrokinetic characterization library of cells.⁷ The same principle has already been used to study in more detail the electrokinetic properties and behavior of bioparticles in DC insulator-based systems.^{8,9} These results suggest that producing electric fields of high magnitude capable of eliciting these nonlinear responses can, in fact, be more critical to particle trapping than producing fields with high $\nabla(\mathbf{E}\cdot\mathbf{E})$.

Typically, iEK devices use insulating structures ('posts') embedded in a microchannel to alter the electric field distribution produced by an electric potential difference applied across the microchannel.¹⁰ Because these structures can be readily obtained through well-known, simple, and affordable 2D soft-lithography techniques, DC-iEK devices have been applied to the trapping of a variety of bioparticles and

biomolecules, including proteins, DNA, viruses, cells and cell organelles.^{11–13} Nonetheless, widespread adoption of DC-iEK devices has been limited by their operation voltage, which can be as high as 3000 V for manipulating polystyrene particles and 4000 V for PEGylated proteins in traditional designs.^{14–16} Evidently, high voltages carry several practical problems for lab-on-a-chip applications, such as electrolysis, joule heating, and complex electrical equipment,^{16,17} and thereby reduce the applicability of DC-iEK devices to biological systems.

Several studies have focused on reducing the operation voltage requirements in DC-iEK microfluidic systems.^{18–24} For instance, devices with 3D constrictions have been used to enhance the \mathbf{E} field nonuniformity, which while effective for achieving low trapping voltages for relatively large polystyrene particles (10 μm), need to be individually micro-milled.¹⁸ Other works focusing on 2D DC-iEK devices have concentrated in maximizing the magnitude of $\nabla(\mathbf{E}\cdot\mathbf{E})$ to increase DEP, mainly seeking to explore the effect of post shape through finite element numerical simulations of the electric field distribution.^{19–23} This is in part because the other main controllable variable involved, namely post separation (commonly referred to as 'gap'), is generally regarded as the limiting factor, both from a technological and parameter optimization standpoint: smaller gaps generally result in stronger fields albeit at greater fabrication complexity. Furthermore, a recent work has demonstrated that increasing the number of insulating obstacles longitudinally present in a microchannel inversely affects the magnitude of the obtained electric field, even if the same gap sizes are used for multiple columns.²⁴ These observations suggest that the presence of dielectrics and the constriction shape they form alters the electric field distribution and magnitude nontrivially for equal gap sizes, which warrants an analysis of the expressions and scaling laws that could estimate the expected electric field enhancement in DC-iEK devices.

The present study aims to reduce the operation voltage in DC-iEK devices by building on two main observations: i) that producing high-magnitude electric fields—rather than high $\nabla(\mathbf{E}\cdot\mathbf{E})$ —elicits nonlinear EP and thereby particle trapping;⁶ and ii) that using single dielectric constrictions, rather than multiple columns, increases the electric field magnitude.²⁴ Voltage reduction was therefore achieved by optimizing the geometry of DC-iEK devices. First, we introduced a device geometry consisting of a single dielectric constriction formed by two circular posts—a minimal system that captures the gap/post dimensions, and that admits analytic solutions to the electric field distribution.⁶ We demonstrate an improvement to this system through a sharp triangular constriction for which the solution can also be analytically approximated. Analytical expressions of the electric field allowed us to explicitly define the field magnitude enhancement—deemed the 'amplification factor'. Although we previously introduced this concept in a recent work on DC-iEK particle trapping experiments,⁶ here we present for the first time how this concept allows the derivation of explicit electric field scaling laws to compare our designs. Theoretical approximations were then improved on through

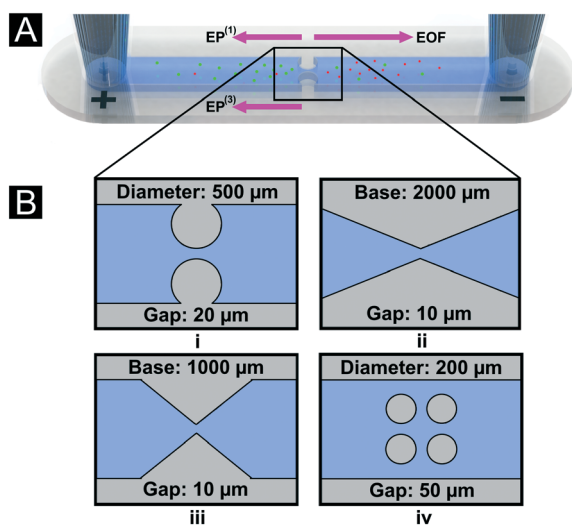


Fig. 1 Schematic representation of the channel designs used for particle trapping. (A) Illustration of a channel with reservoirs and the electrokinetic effects experienced by the two negatively charged particles employed in the study. Arrows represent the direction of the predominant electrokinetic components. In our system, EO flow direction is from left to right, while EP and EP⁽³⁾ migration is from right to left. (B) An illustration of the four channel designs that were studied (i, circular; ii and iii, triangular; iv, multi-column), along with the design variables of the insulating posts where the gap size is the spacing between two post boundaries.



full numerical simulations of the complete 3D geometries of the microdevices to parametrically explore (in a more realistic model) the effects of post diameter and gap in the circular geometry (Fig. 1B, i), and triangle base and gap size (Fig. 1B, ii and iii). The numerical model was validated by experimentation with 2 and 6.8 μm polystyrene particles to confirm the reduction of trapping voltages. A segmented regression routine optimized using the least squares method was implemented to analyze the experimental fluorescence intensity and to obtain an automatic and objective determination of trapping voltages. Finally, the optimized circular and triangular geometries (Fig. 1B, i and iii) were used to evaluate the separation of the two particles by size and their performance compared to a conventional DC-iEK design (Fig. 1B, iv).²⁵ We demonstrate that trapping voltages of ~ 80 V can be attained at a standard conductivity of 20–25 $\mu\text{S cm}^{-1}$ —being, to our knowledge, the lowest trapping voltages reported to date for 2D DC-iEK microfluidic systems using particles in this size range.²⁶ Our findings illustrate how dielectric constriction optimization can maximize the attainable \mathbf{E} field magnitude, thereby reducing voltage requirements and enabling improved portability in DC-iEK systems.

Theory

Nonlinear electrokinetics

In this study, we use EO and EP to achieve particle manipulation in DC-iEK devices featuring a non-uniform \mathbf{E} field spatial distribution (even with $\nabla(\mathbf{E}\cdot\mathbf{E}) \neq 0$, we neglect DEP based on recent evidence suggesting its contribution to particle velocity in these systems is marginal).^{6,7} EO is the movement of a fluid with respect to a surface and EP is the movement of charged particles relative to a fluid. Both EK phenomena are affected by the interaction of solute ions and surface charges in the solid phases, which give rise to the electric double layer (EDL) of the channel walls (important for EO) and particle (important for EP).²⁷ In the presence of a low-magnitude \mathbf{E} field, EO and EP behave linearly with respect to the electric field and their velocity components to a first order approximation are:

$$\mathbf{u}_{\text{EO}}^{(1)} = \mu_{\text{EO}}^{(1)}\mathbf{E} = -\frac{\varepsilon_m \zeta_w}{\eta}\mathbf{E} \quad (1)$$

$$\mathbf{u}_{\text{EP}}^{(1)} = \mu_{\text{EP}}^{(1)}\mathbf{E} = \frac{\varepsilon_m \zeta_p}{\eta}\mathbf{E} \quad (2)$$

where $\mu_{\text{EO}}^{(1)}$ and $\mu_{\text{EP}}^{(1)}$ are the first order electroosmotic and electrophoretic mobilities, respectively, which are functions that depend on the medium permittivity (ε_m), wall zeta potential (ζ_w), particle zeta potential (ζ_p), and medium viscosity (η). However, when a high-magnitude electric field is applied, it modifies the EDL of the particles by inducing a concentration polarization on the diffuse layer. Nonlinearity in the electrophoretic response is introduced by the above-mentioned surface conductance, a phenomenon known as electrokinetics of the second kind as initially described by Dukhin.⁵ Since

then, several contributions have enabled us to better understand non-linear EK,^{6,28,29} where the net electrophoretic velocity $\mathbf{u}_{\text{EP}}^{(3)}$ is expressed as a third order approximation:

$$\mathbf{u}_{\text{EP}}^{(3)} = \mu_{\text{EP}}^{(1)}\mathbf{E} + \mu_{\text{EP}}^{(3)}\mathbf{E}^3 \quad (3)$$

$$\mu_{\text{EP}}^{(3)} = -\frac{\mu_{\text{EP}}^{(1)} + \mu_{\text{EO}}^{(1)}}{(E_{\text{EEC}})^2} \quad (4)$$

Here, $\mu_{\text{EP}}^{(3)}$ represents the third-order electrophoretic mobility that depends on the first order mobilities, as well as the electrokinetic equilibrium condition (E_{EEC}). The E_{EEC} —a recently introduced fundamental concept that has radically shifted the perspective behind the analysis of particle manipulation in these microfluidic devices⁶—describes the balance between linear EO, linear EP, and nonlinear EP, and can be characterized experimentally.⁸ When adding these effects on the particle, the total particle velocity can be defined as:

$$\mathbf{u}_p = \mathbf{u}_{\text{EO}}^{(1)} + \mathbf{u}_{\text{EP}}^{(3)} \quad (5)$$

where $\mathbf{u}_{\text{EO}}^{(1)}$ is the EO component, and $\mathbf{u}_{\text{EP}}^{(3)}$ is the combination of velocities for the linear and non-linear EP effects. eqn (5) can be rewritten as:

$$\mathbf{u}_p = \mu_{\text{EO}}\mathbf{E} + \mu_{\text{EP}}^{(1)}\mathbf{E} + \mu_{\text{EP}}^{(3)}\mathbf{E}^3 \quad (6)$$

Notice that eqn (6) suggests a dependence of particle velocity with the \mathbf{E} field magnitude, which differs from previous studies that considered DEP as the predominant phenomenon—therefore focusing on optimizing $\nabla(\mathbf{E}\cdot\mathbf{E})$ yielding a non-optimal reduction in voltage.

Analytic expressions of the electric field

We explored two main geometries for introducing an electric field non-uniformity that allowed the capture of microparticles: i) circular posts and ii) semi-triangular-shaped posts (with rounded tips). We present two analytic solutions, which can be used to approximate the non-uniform electric field within the microfluidic devices when an external field $E_0\hat{\mathbf{j}}$ is applied (see Fig. 2). Single-constriction channels were analyzed because previous studies demonstrated improved particle trapping capabilities in insulator arrays featuring a single column of posts.²⁴ Another advantage of using single-constriction channels is that they can be approximately represented through a suitable choice of coordinate systems for which the Laplace equation $\nabla^2\phi = 0$ is separable (typically by neglecting the third out-of-plane coordinate as an approximation).

Electric field solution for circular posts. We have previously demonstrated that a circular two-post geometry admits a representation in the bipolar coordinate system (see Fig. 2A and B).⁶ The two posts can be approximated as two dielectric circles of diameter D and conductivity σ_i , separated by a distance G , and immersed in an infinite, outer medium of conductivity σ_o . Far from the constriction, the condition



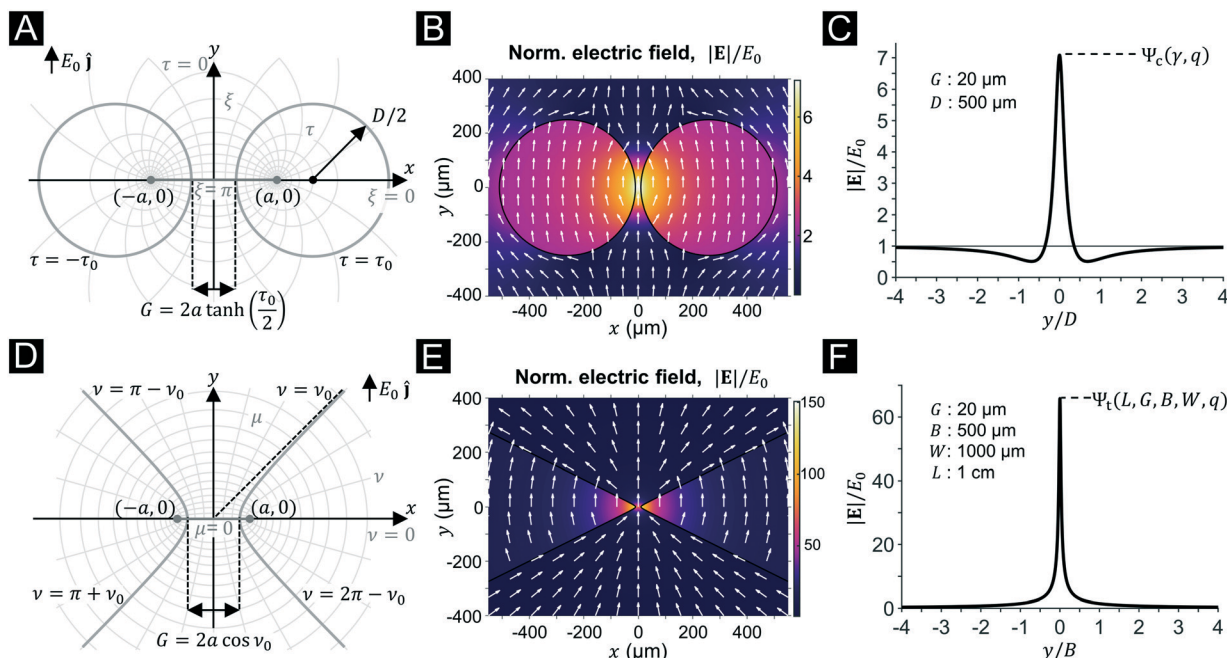


Fig. 2 Analytic solution of the electric field for the two geometries used. (A) Bipolar coordinate system, showing the relative position of insulator posts. (B) Electric field solution, where the colormap indicates the magnitude normalized to the applied field E_0 , and arrows the direction. (C) Cutline plot of the normalized electric field magnitude along the central axis in (B), showing a maximum of Ψ_c . (D–F) In analogy to (A–C), figures are displayed for the elliptic coordinate system.

that the applied field becomes $E_0\hat{j}$ (*i.e.*, the applied DC-bias) results in a non-uniform electric field $\mathbf{E}_c(x,y)$, which along the central axis of the device varies as:

$$\mathbf{E}_c(0,y) = E_0 \left[1 - \frac{8}{1 + \left(\frac{y}{a}\right)^2} \operatorname{Re} \left\{ \sum_{m=1}^{\infty} \frac{m \left(\frac{y-ia}{y+ia}\right)^m}{g(\gamma)^{2m} \left(\frac{1+q}{1-q}\right) - 1} \right\} \right] \hat{j} \quad (7)$$

$$= E_0 Y_c(y, \gamma, q) \hat{j}$$

where a corresponds to the circle foci coordinate in bipolar coordinates, $i = \sqrt{-1}$, $g(\gamma) = 1 + \gamma + \sqrt{\gamma(\gamma+2)}$, which is a function of the gap-to-post ratio:

$$\gamma = G/D \quad (8)$$

and the ratio of material conductivities, $q = \sigma_i/\sigma_o$ (σ_i for the inner dielectric and σ_o for the outer electrolyte). The subscript c has been used to designate the solution for the circular geometry. Notice that eqn (7), which is plotted in Fig. 2C, can be explicitly written as a product of the externally applied field $E_0\hat{j}$, and a gain function encoding the amplification factor at y , which is independent of the DC-bias. Evaluation at the origin, where eqn (7) is maximum, results in:

$$\mathbf{E}_c(0,0) = E_0 \left[1 - 8 \cdot \sum_{m=1}^{\infty} \frac{m(-1)^m}{g(\gamma)^{2m} \left(\frac{1+q}{1-q}\right) - 1} \right] \hat{j} \quad (9)$$

$$= E_0 \Psi_c(\gamma, q) \hat{j}$$

where the function Ψ_c corresponds to the DC field-independent amplification factor for the circular post geometry. This number indicates the fold increase in magnitude of the applied field $E_0\hat{j}$ provided the geometry (γ), and the ratio of conductivities (q).

Electric field solution for triangular posts. The above procedure can be generalized for other coordinate systems, provided that the boundary conditions can be suitably represented in those systems. We observed that a geometry consisting of a triangular dielectric constriction can be approximately represented by $v = \text{constant}$ curves (*i.e.*, hyperbolas) in the elliptic system of coordinates (μ, v) (see Fig. 2D). This representation has the added benefit of smoothing the triangular tips with a finite curvature radius (similar to what is observed in PDMS structures obtained by soft lithography³⁰), instead of using unrealistically sharp tips. The foci of ellipses are located at $(a,0)$ and $(-a,0)$ in Cartesian coordinates, and can be related to the gap dimensions

through the equation $a = \frac{G}{2} \sqrt{\left(\frac{B}{W}\right)^2 + 1}$, where B is the base

of the triangle post, and W the width of the microchannel (see ESI†). The solution to the Laplace equation in this coordinate system has been found by exploiting the symmetry of the boundary conditions, and by noting that the potential solution outside the dielectric (ϕ_o) requires that $\phi_o(v, \mu) = \phi_o(\pi - v, \mu)$, and $\phi_o(v, 0) = 0$ (see ESI† for the complete derivation). Evaluation of the applied field boundary condition leads to the 2D electric field solution in elliptic coordinates (Fig. 2E). In particular, the expression for the



reduce G or alternatively decrease v_0 to reduce $2a$ (as seen in Fig. 2D, lowering the angle v_0 is equivalent to reducing the base of the triangle posts).

Experimental section

Computational model

A computational model was developed using COMSOL Multiphysics (COMSOL Inc. Burlington, MA, USA) to study the variation and scaling of the electric field under different post geometries. A 3D channel geometry with dimensions 1 cm long \times 1 mm wide \times 40 μm tall was used as an approximation of the fabricated devices—described in the microdevices section—to study the circular and triangular post designs. The amplification factors Ψ_c and Ψ_t from eqn (9) and (12) depend on the geometrical quantities $\gamma = G/D$ and $\Omega = 2a/L$, respectively. Therefore, a parametric study for the circular geometry was performed to optimize the post diameter (D) and the gap between the structures (G) with respect to the objective function Ψ_c ; and for the triangular geometry, the study optimized the length of the triangle base ($\sim L$) and the gap between structures ($\sim 2a$) with respect to the objective function Ψ_t . The numerically computed amplification factors, Ψ_c^N and Ψ_t^N , were extracted from a 10000 μm -long cutline at the center of the simulated channels between the insulating structures (see ESI† for a visualization of the cutline). Results from this model are discussed in the E field optimization section. Furthermore, a parametric sweep on the electric potential, which reproduces the voltage ramp applied in the experiments and described in the experimental procedures section, was used to study the mean velocity that a particle would experience when migrating across the channel. Particles have a velocity function described by eqn (6) that depends on the electric field distribution in the channel and will experience zero-velocity and get trapped at the E_{EEC} . Results from this model are discussed in the trapping results section. ESI† Tables S1 and S2 lists the definitions and parameters employed in the COMSOL Multiphysics simulation.

Microdevices

Standard soft lithography techniques were used to fabricate microdevices by patterning the specific design in polydimethylsiloxane (PDMS) and completing the device by sealing the channel with a PDMS-coated glass wafer *via* plasma treatment of both contacting interfaces. The details of the process can be found elsewhere.³¹ This process ensured that all internal walls of the microchannel had the same wall zeta potential (ζ_w), resulting in consistent electroosmotic flow. For each design used, a mold to cast PDMS (Dow Corning, Midland, MI) was fabricated by spin coating the substrate with a 40 μm layer of SU-83050 photoresist (MicroChem, Newton MA) followed by soft baking at 95 $^\circ\text{C}$ for 15 min. After UV exposure of the photoresist to 225 mJ cm^{-2} , baking was carried out at 95 $^\circ\text{C}$ for 11 min followed by development for 7 min and hard baking at 150 $^\circ\text{C}$ for 10 min. The dimensions of the 4

different microchannels designs used in this study are depicted in Fig. 1B.

Suspending medium and particle samples

The suspending media was DI water with adjusted pH and conductivity, by the addition of 0.1 M KOH and 0.05% (v/v) of Tween 20 (Amresco, New York, NY), to final values of pH = 6.0–6.5 and conductivity = 20–25 $\mu\text{S cm}^{-1}$. Surfactant Tween 20 was added to prevent particle agglomeration. This suspending medium produced a wall zeta potential (ζ_w) of -97.3 mV and $\mu_{\text{EO}} = 7.58 \times 10^{-8}$ $\text{m}^2 \text{V}^{-1} \text{s}^{-1}$ in the PDMS devices, as measured with current monitoring experiments.³² Two types of carboxylated polystyrene microparticles (Magsphere, Pasadena, CA) were used in this study and their characteristics are listed in Table 1. For experimentation, microsphere suspensions were diluted into the suspending media with concentrations of 7.2×10^5 and 5.7×10^6 particles mL^{-1} for the 2 and 6.8 μm particles, respectively.

Experimental procedures.

All trapping experiments started with a clean microchannel that was conditioned by filling it with the suspending medium overnight. To decrease pressure driven backflow during the experiments, large reservoirs (~ 2 mL) were placed at the inlet and outlet of the channel as shown in Fig. 1A. The particle suspension was then introduced in the reservoirs (2 and 1 μL , for the 2 and 6.8 μm particles, respectively). The particle concentration in the solution is small to avoid the formation of particle lumps and to achieve a high accuracy in the determination of the first trapping voltage for individual particles. Different particle suspension volumes were used for each particle size to have a comparable fluorescence level for the larger and smaller particles. This procedure was followed for testing channels shown in Fig. 1B. Particle separation experiments were performed in the same manner, with the difference that both types of particles were simultaneously introduced into the same channel. A “linear sweep” DC voltage was applied across the channel *via* a high voltage power supply (Model HVS6000D, LabSmith, Livermore, CA) fitted with platinum wire electrodes that were placed in the inlet and outlet reservoirs. Custom voltage sequences were created employing the software Sequence provided by the manufacturer of the voltage supply, increasing from 0 to 500 V at fixed increments of 4 V s^{-1} and from 0 to 250 V at fixed increments 2 V s^{-1} for the 2 and 6.8 μm particles, respectively. The mean standard deviation between the programmed and the experimental voltage

Table 1 Microparticle information and EK properties determined in this study

Part. diameter [μm]	Color	ζ_p [mV]	$\mu_{\text{EP}}^{(1)} \times 10^{-8}$ [$\text{m}^2 \text{V}^{-1} \text{s}^{-1}$]	$\mu_{\text{EP}}^{(3)} \times 10^{-19}$ [$\text{m}^4 \text{V}^{-3} \text{s}^{-1}$]
2	Red	-57.5	-3.10	-8.97
6.8	Green	-50.0	-2.70	-9.87



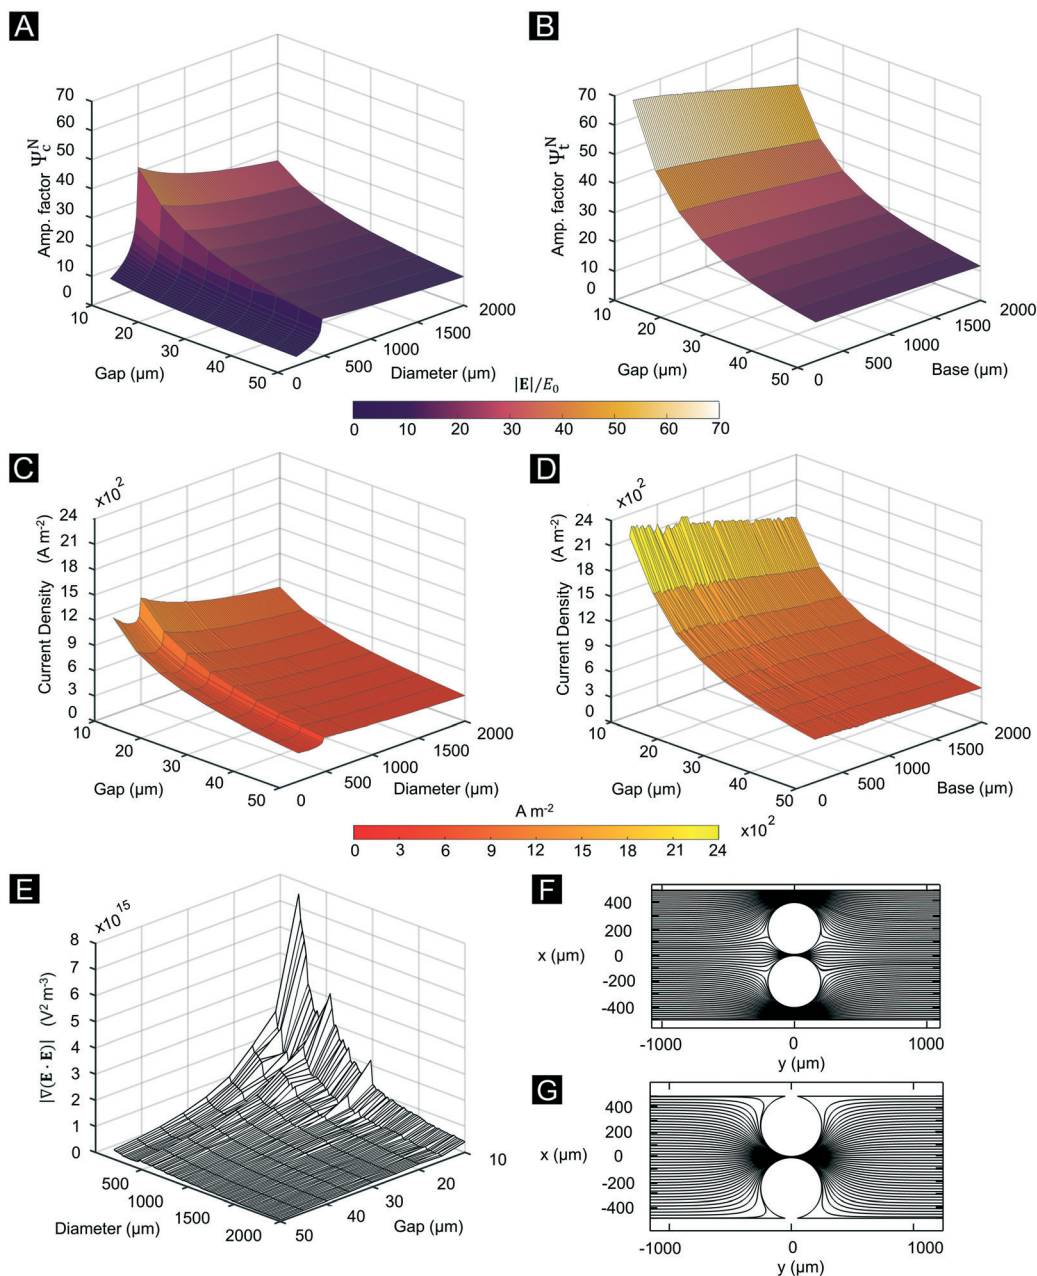


Fig. 4 Computational modelling results from the parametric study for the circular and triangular geometries. (A) Ψ_C^N as a function of the optimized variables for the circular geometry. (C) Electric current density $|\mathbf{J}|$ as a function of optimized variables for the circular geometry. (B and D) In analogy to (A and C), figures are displayed for the triangular geometry. (E) $|\nabla(\mathbf{E}\cdot\mathbf{E})|$ as a function of optimized variables for the circular geometry. Electric field lines for two circular geometries: (F) non-optimal geometry with small posts and (G) optimal geometry with posts touching the channel walls.

of $|\mathbf{J}|$ accurately captures the optimization trends shown in Fig. 4A, where the optimal configuration for the circular structures occurs with posts 500 μm in diameter and 10 μm in gap size. Similarly, in Fig. 4D the value of $|\mathbf{J}|$ reflects the optimization trends in Fig. 4B, where the optimal configuration for the triangular structures occurs when the length of the base of the triangular structures and the gap are minimum in size.

Our numerical results demonstrated that optimizing for the maximum amplification factor enhancement does not

necessarily lead to the same optimized geometry obtained if $|\nabla(\mathbf{E}\cdot\mathbf{E})|$ was maximized instead. This counterintuitive result was verified by computing the average of $|\nabla(\mathbf{E}\cdot\mathbf{E})|$ over the constriction area in the circular geometry (Fig. 4E), which leads to the conclusion that the optimized geometry is the case $G: 10 \mu\text{m}$, $D: 200 \mu\text{m}$. That geometry, however, results in $|\mathbf{J}| = 13.54 \times 10^2 \text{ A m}^{-2}$, which is lower than the current density obtained for the $G: 10 \mu\text{m}$, $D: 500 \mu\text{m}$ case that optimizes the amplification factor ($|\mathbf{J}| = 14.92 \times 10^2 \text{ A m}^{-2}$). Fig. 4F shows the former case, where only 11% of electric



field lines enter the central constriction area, resulting in $\Psi_c^N = 7.07$, whereas the optimal case in Fig. 4G amplifies up to $\Psi_c^N = 25.64$ with 100% of the lines concentrated in the gap. Similarly, we computed $|\mathbf{J}|$ for the non-optimal triangular channel geometry shown in Fig. 1B, ii ($19.39 \times 10^2 \text{ A m}^{-2}$ and $\Psi_t^N = 50.73$) as well as for the optimal triangular channel shown in Fig. 1B, iii ($23.34 \times 10^2 \text{ A m}^{-2}$ and $\Psi_t^N = 59.9$). Therefore, the presented theoretical and numerical study illustrates that electric current density optimization leads to the greatest amplification factor enhancement, which is the decisive factor (rather than the distribution of $\nabla(\mathbf{E} \cdot \mathbf{E})$) in particle trapping voltage, as recently suggested by observations on DC-iEK devices.⁶

Particle trapping results

We tested the particle trapping performance of the fabricated microdevices (Fig. 1) to determine the “first trapping” and “total trapping” voltages. Here, the first trapping voltage is

defined as the applied potential difference at which particles begin to trap (*i.e.*, when there is a balance of the linear EO and EP phenomena and higher order effects of EP⁽³⁾ for the buffer–particle–electric field system) at the gap between posts while other particles keep flowing through. Total trapping, on the other hand, occurs when the applied potential difference is high enough so that no particle can cross the gap between posts. The first trapping results are shown in Table 2, along with measurements of the device gaps and calculated amplification factors for those geometries. We show in this table an inverse relationship between calculated amplification factors and the first trapping voltages, which can be explained by means of eqn (6). Using this equation, in combination with the EK properties of Table 1, allowed us to determine the theoretical electric field magnitude—and hence, voltage—at which particles halt (*i.e.*, zero velocity). Fig. 5A and B depict bar plots comparing this prediction and the experimental first trapping voltages. The average relative error between the experimental and theoretical trapping for all cases is 18.02%

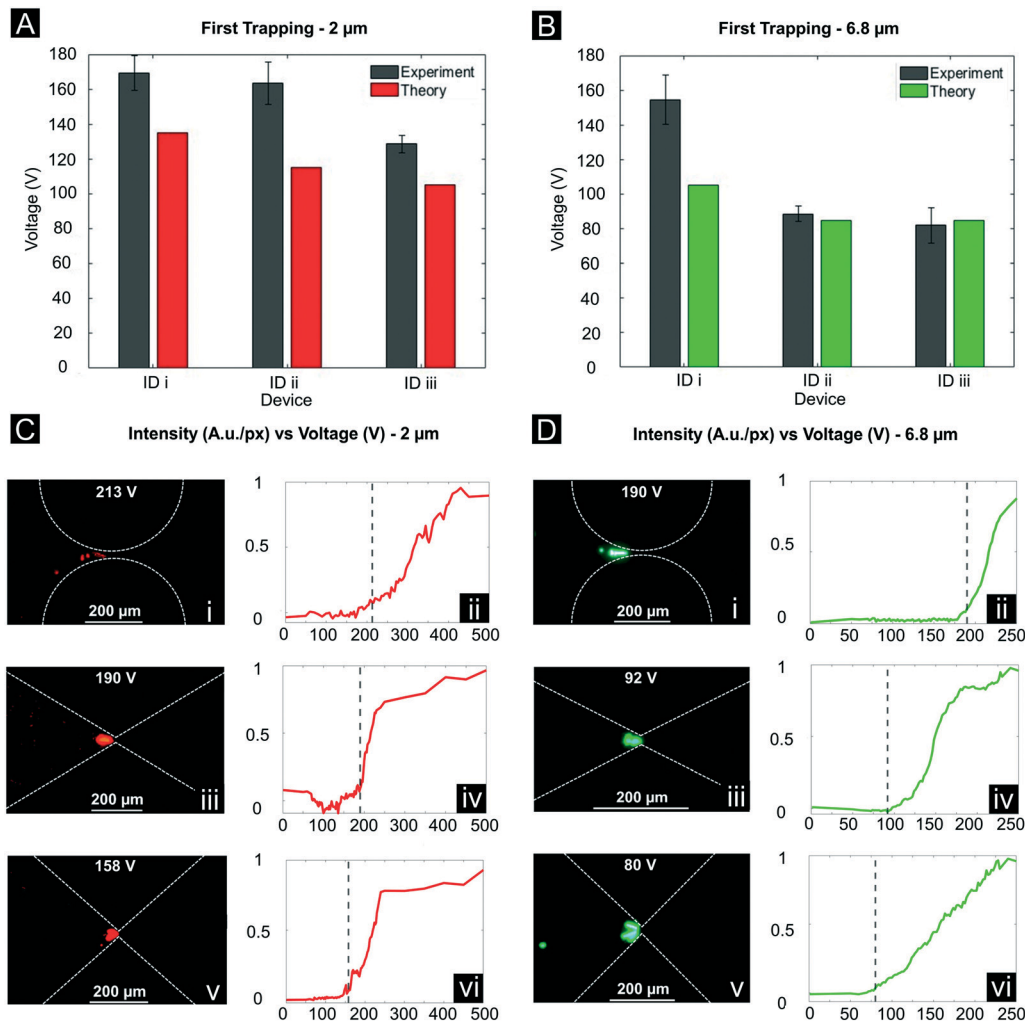


Fig. 5 Trapping voltages for different device and particle combinations. (A) First trapping voltage for the 2.0 μm particle. The bars in gray color show the first trapping voltage observed experimentally, the bars in red color show the first trapping voltages computed using eqn (6) (C i, iii, v) Total trapping voltage for device ID i, ID ii, and ID iii respectively (C ii, iv, vi) fluorescence intensity plotted as the applied voltage is increased until total trapping is achieved (B and D) in analogy to (A and C) figures are displayed in green for the 6.8 μm particle.



- 17 R. C. Gallo-Villanueva, V. H. Perez-Gonzalez, B. Cardenas-Benitez, B. Jind, S. O. Martinez-Chapa and B. H. Lapizco-Encinas, *Electrophoresis*, 2019, **40**, 1408–1416.
- 18 W. A. Braff, A. Pignier and C. R. Buie, *Lab Chip*, 2012, **12**, 1327–1331.
- 19 C. V. Crowther and M. A. Hayes, *Analyst*, 2017, **142**, 1608–1618.
- 20 G. R. Pesch, L. Kiewidt, F. Du, M. Baune and J. Thöming, *Electrophoresis*, 2016, **37**, 291–301.
- 21 J. S. Kwon, J. S. Maeng, M. S. Chun and S. Song, *Microfluid. Nanofluid.*, 2008, **5**, 23–31.
- 22 A. LaLonde, A. Gencoglu, M. F. Romero-Creel, K. S. Koppula and B. H. Lapizco-Encinas, *J. Chromatogr. A*, 2014, **1344**, 99–108.
- 23 M. A. Saucedo-Espinosa and B. H. Lapizco-Encinas, *J. Chromatogr. A*, 2015, **1422**, 325–333.
- 24 V. H. Perez-Gonzalez, R. C. Gallo-Villanueva, B. Cardenas-Benitez, S. O. Martinez-Chapa and B. H. Lapizco-Encinas, *Anal. Chem.*, 2018, **90**, 4310–4315.
- 25 Q. Chen and Y. J. Yuan, *RSC Adv.*, 2019, **9**, 4963–4981.
- 26 C. J. Ramirez-Murillo, J. M. de los Santos-Ramirez and V. H. Perez-Gonzalez, *Electrophoresis*, 2021, **42**, 565–587.
- 27 B. J. Kirby, *Micro-and nanoscale fluid mechanics: transport in microfluidic devices*, Cambridge university press, 2010.
- 28 O. Schnitzer, R. Zeyde, I. Yavneh and E. Yariv, *Phys. Fluids*, 2013, **25**, 052004.
- 29 O. Schnitzer and E. Yariv, *Phys. Fluids*, 2014, **26**, 122002.
- 30 T. W. Odom, J. C. Love, D. B. Wolfe, K. E. Paul and G. M. Whitesides, *Langmuir*, 2002, **18**(13), 5314–5320.
- 31 D. V. Polniak, E. Goodrich, N. Hill and B. H. Lapizco-Encinas, *J. Chromatogr. A*, 2018, **1545**, 84–92.
- 32 M. A. Saucedo-Espinosa and B. H. Lapizco-Encinas, *Biomicrofluidics*, 2016, **10**, 033104.
- 33 N. Hill and B. H. Lapizco-Encinas, *Electrophoresis*, 2019, **40**(18–19), 2541–2552.
- 34 Y. Ren, W. Liu, Y. Tao, M. Hui and Q. Wu, *Micromachines*, 2018, **9**, 102.

