

Nanoscale

Accepted Manuscript



This is an *Accepted Manuscript*, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this *Accepted Manuscript* with the edited and formatted *Advance Article* as soon as it is available.

You can find more information about *Accepted Manuscripts* in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this *Accepted Manuscript* or any consequences arising from the use of any information it contains.

ARTICLE

High sensitivity flexible Lamb-wave humidity sensor with graphene oxide sensing layer

Cite this: DOI: 10.1039/x0xx00000x

Weipeng Xuan¹, Xingli He¹, Jinkai Chen¹, Wenbo Wang¹, Xiaozhi Wang^{1*}, Yang Xu¹, Zhen Xu², Y.Q. Fu³ and J.K. Luo^{4,1*},Received 00th January 2012,
Accepted 00th January 2012

DOI: 10.1039/x0xx00000x

www.rsc.org/

This paper reports high performance flexible lamb wave sensors with a graphene oxide sensing layer. The devices were fabricated on piezoelectric ZnO thin films deposited on flexible polyimide substrates. Two resonant peaks, namely the zero order antisymmetric (A0) and symmetric (S0) mode lamb waves, were observed and fitted well with the theoretical analysis and modelling. With graphene oxide microflakes as the sensing layer, the sensing performance of both wave modes was investigated. The humidity sensitivity of the A0 mode is 145.83 ppm/%RH (at humidity 85%RH), higher than that of S0 mode of 89.35 ppm/%RH. For the first time, we demonstrated that the flexible humidity sensors work as usual without noticeable deterioration in performance even under severe bending conditions up to 1500 μE . Also the sensors showed an excellent stability upon repeated bending for thousand times. All the results demonstrate that the lamb wave flexible humidity sensors have a great potential for application in flexible electronics.

1. Introduction

Humidity monitoring and controlling are of great importance in various fields, such as meteorology, historical relic protection, medical/healthcare product development, industrial manufacturing, agriculture and wearable or mobile electronics. Many types of advanced humidity sensors¹ have been developed, including resistance², capacitance³, surface acoustic wave (SAW)⁴ based sensors using new materials and the state-of-art of micro-fabrication technologies. Recently, flexible electronics has received significant attentions^{5, 6} owing to its great potential for applications and advantages compared to those on rigid substrates. Many flexible technologies and applications have been proposed and investigated, such as flexible transistors⁷⁻⁹, pressure sensors¹⁰, integrated circuits¹¹, photodetector⁶ *etc.* SAW device is one of the building blocks for electronics and communication, and has been used as frequency filters and waveguides¹², resonators¹³ and various types of sensors¹⁴. We have fabricated high performance flexible SAW devices based on ZnO piezoelectric thin films deposited on polyimide substrates^{15, 16}, showing excellent potential for various sensing applications. Among them, the ZnO SAW humidity sensors without any additional sensing layer have shown comparable performance to those on rigid substrates⁴.

Nanomaterials have large surface to bulk ratios, and have been often used as sensitive layers to improve the sensitivity of sensors^{17, 18}. Graphene oxide (GO) is a layered material which is formed by

hydrophilic oxygenated graphene sheets with oxygen functional groups on their basal planes and edges¹⁹. GO-films have been utilized for humidity sensing,^{2,3} as their hydrogen bond (H-bond) of the oxygen functional groups and water molecules within the interlayer cavities have a high capability to absorb water molecules, which in-turn affect the electrical, structural and mechanical properties of the films³. The performance of an impedance type humidity sensor using the GO as a sensing layer has recently been developed², showing an ultra-fast response and a high sensitivity. We have recently developed a transparent SAW device-based humidity sensor using GO as the sensing layer with ZnO film deposited on glass substrate²⁰, showing significant improvement in sensitivity and response speed. In this paper, we report the development of flexible ZnO SAW humidity sensors using the GO microflakes as the sensing layer, and demonstrate the sensitivity of flexible SAW sensor is much better than that without the GO sensing layer⁴. Although the insertion loss of the flexible sensor is a bit larger and the sensitivity is slightly smaller compared to those on a rigid substrate, the flexible sensors show an excellent sensing performance even at severe bending states up to 1500 μE , and the sensors still remain operable condition after being bent for 8000 times, demonstrating its great flexibility and reliability for commercial applications.

2. Experimental

2.1. Device fabrication

Polyimide (PI) tape (60 μm) was used to fabricate the flexible SAW devices, which was glued on a glass substrate for easy fabrication. ZnO piezoelectric film with a *c*-axis (0002) orientation was deposited on the PI film by direct current (DC) reactive magnetic sputtering. The properties of the piezoelectric ZnO films were characterized and results were reported in our previous paper¹⁵. The SAW devices with the structure shown in figure 1, have two 50 pairs aluminium (Al) interdigitated transducers (IDTs) that were fabricated by standard UV-photolithography and lift-off process. The wavelength, λ , of the SAW devices was set to be 12, 16, 20, 24, 28, and 30 μm , respectively. Since the acoustic wave energy deteriorates rapidly within the polymer substrate, the length of the wave propagation path was kept shorter, and was fixed at 10λ for all the devices tested.

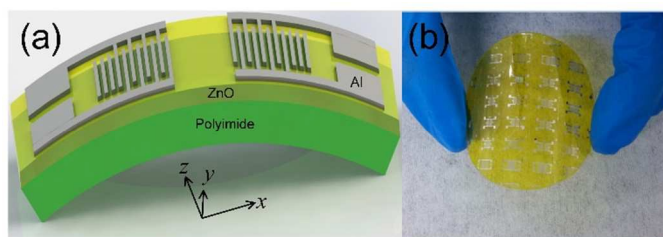


Fig.1 Schematic view of the flexible SAW device (a) and a photograph of the flexible devices fabricated (b).

2.2. Deposition of graphene oxide sensing layer

The GO microflakes were prepared from natural graphite flakes with an average lateral size of 50 μm , as reported previously²¹. The initial GO dispersion had a concentration of 2 mg/ml , then it was further diluted by deionized (DI) water at ratios of 1:50, 1:20 and 1:10 to form GO dispersions with different concentrations. These GO dispersions were drop-cast on the surface of the devices with a volume of 4 μl , covering the wave propagation path and the IDT areas, as it can enhance the sensitivity significantly as reported in our previous work²⁰. They were left to evaporate slowly at room temperature to obtain GO films with different thicknesses. Deposition of a thin GO film on the device surface would induce little effect on the transmission property of the SAW devices compared to the devices without the GO film as long as the thickness is less than 500 nm as shown in our previous paper²⁰, which was also confirmed by our experiments in this work.

2.3. Characterization and measurements

Frequency responses of the SAW sensors were investigated using an Agilent E5071C network analyzer, and data was acquired by a LabVIEW based software through a GPIB bus in real time. The transmission spectra, S_{21} , of the SAW devices typically have two resonant peaks, mode 1 and 2 as shown in figure 2(a).

The thickness of three types of GO microflakes films coated with different GO dispersions was measured using a profilometer (Alpha Step® D-100 Stylus Profiler, KLA-Tencor), and the results are shown in figure 4(a). The GO films were characterized using Raman

(inVia-Reflex, Renishaw, 532 nm laser) and Fourier transform infrared spectroscopy (FTIR, Nicolet 6700, Thermo Fisher scientific Inc).

For humidity sensing, the sensor was fixed in a sealed metal box, consisting of inlet/outlet for gas to flow in/out. A hygromograph (SHT71, Sensirion) was attached at the outlet as a reference for temperature and humidity²². The details of the characteristics and parameters of the sensors used for sensing are summarized in table 1.

Table 1. Summary of the parameters and characteristics of the sensors.

Sample NO.	Freq. (MHz)		GO thickness (nm)	Sensitivity (ppm/%RH) (at 85%RH)	
	A0	S0		A0	S0
D1	150	395	100±20	49.34	25.72
D2	150	395	260±30	137.56	42.44
D3	150	395	400±30	145.83	89.35

3. Results and discussion

3.1. Theoretical analysis of wave modes

Polyimide is often used as acoustic absorption layer²³ as the acoustic wave would damp quickly with little reflection. We found that the acoustic wave energy is mostly confined in the ZnO piezoelectric layer, which indicates the acoustic wave is a kind of plate wave, or lamb wave. At higher frequencies, the wave velocity of the lamb wave converges towards the Rayleigh wave velocity, and with the increase in layer thickness, it gradually changes into Rayleigh wave modes as will be shown later. Therefore they are often mixed without clearly defined boundary^{15, 16}. Generally, the lamb wave only has displacements in the *x*- and *z*-directions as indicated in figure 1(a), and has the antisymmetric and symmetric modes based on their displacement patterns²⁴. Two resonant peaks with large signal amplitudes were observed for the fabricated devices as shown in figure 2(a), ascribed as mode 1 and mode 2, respectively. The quality factor, *Q*, for the mode 1 and 2 is 50 and 72, respectively, lower than those of the devices on a rigid substrate (168)²⁰, but still good enough for sensing experiments.

Theoretical analysis was then carried out to identify the wave modes. The frequency dispersion equations of the Rayleigh-Lamb can be written as²⁵

$$\frac{\tan(qh/2)}{\tan(ph/2)} = -\frac{4k^2pq}{(q^2-k^2)^2} \quad \text{symmetric mode} \quad (1)$$

$$\frac{\tan(qh/2)}{\tan(ph/2)} = -\frac{(q^2-k^2)^2}{4k^2pq} \quad \text{antisymmetric mode} \quad (2)$$

here *p* and *q* are given as

$$p^2 = \left(\frac{\omega}{c_t}\right)^2 - k^2 \quad \text{and} \quad q^2 = \left(\frac{\omega}{c_s}\right)^2 - k^2, \quad (3)$$

here *h* is the thickness of ZnO piezoelectric plate, $k = \omega/c_p$ is the wave number, c_p is the phase velocity of the lamb wave, ω is the angular frequency, c_t and c_s are the longitudinal wave and shear

wave velocities of the ZnO piezoelectric layer. The phase velocity of the wave correlated to the wavelength is $c_p = (\omega/2\pi)\lambda$.

Figure 2(b) shows the dispersion curves of the phase velocities of the first three wave modes calculated from the above equations. Comparing the experimental data with the zero modes of theoretical results, A0 mode and S0 mode, both of the wave modes from the experiment fit very well with the theoretical values. Therefore, the two resonant peaks of the flexible SAW devices are the lowest (zero) antisymmetric (A0) and symmetric (S0) vibrations of the lamb waves. As it can be seen that the velocities of A0 and S0 modes gradually become the same as the product of $f \cdot h$ becomes larger, i.e., changing into the Rayleigh wave mode.

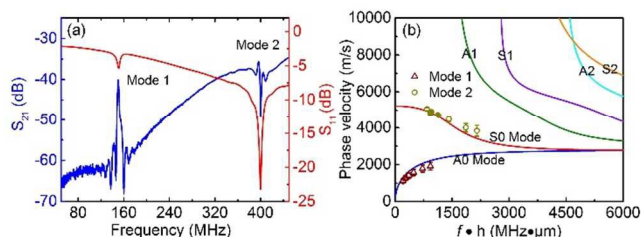


Fig. 2 S-parameters of the device with a wavelength of 12 μm , (a) and comparison of the phase velocities between the experimental data of the mode 1 and mode 2 with different wavelengths and the theoretical analysis of the lamb wave (b).

3.2. Graphene oxide sheets characterization

The size of the GO microflakes has a wide distribution ranging from several micrometres (5 μm) to tens of micrometres as shown in figure 3(a). The XRD measurement results show that the layer-to-layer distance (d-spacing) is about 8.15 Å ($2\theta=10.85^\circ$), larger than that in graphite (3.35 Å, $2\theta=26.3^\circ$). This interlayer distance is approximately one-molecule-layer thickness of water molecules, possibly due to the hydrogen-bonding between the GO flakes^{26, 27}.

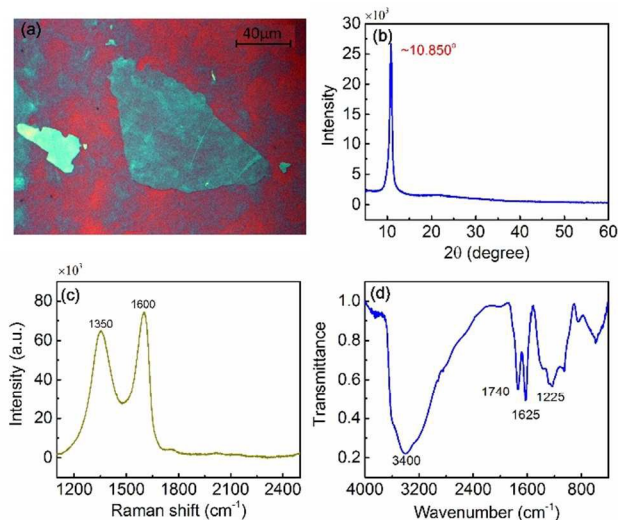


Fig. 3 A microscope image of the graphene oxide microflakes on SiO_2/Si substrate; (a) X-ray diffraction curve (b); Raman spectrum recorded with $\lambda_{\text{exc}} = 532 \text{ nm}$ (c), and FTIR spectrum (d) of the GO film.

The Raman spectrum (figure 3(c)) shows two prominent peaks at 1350 and 1600 cm^{-1} , corresponding to the well-documented D-band and G-band, respectively²⁸, confirming the lattice distortion of the GO²⁹. FTIR was performed on the GO microflakes for further characterization. The most important characteristic features are the broad and high intensity band at 3400 cm^{-1} (O–H stretching vibrations) and the bands at 1740 cm^{-1} (C=O stretching vibrations from carbonyl and carboxylic groups), 1625 cm^{-1} (skeletal vibrations from unoxidized graphitic domains), 1226 cm^{-1} (C–OH stretching vibrations)³⁰. In brief, the hydrogen bond networks that involve functional groups on the GO plates and water molecules within the interlayers enhance the hydrophilicity of the GO layer³¹.

3.3. Humidity sensing

The humidity sensing performance of both the A0 and S0 modes with and without a GO sensing layer were investigated with the results shown in figure 4(b) (all of the sensing was conducted at room temperature ($\sim 25^\circ\text{C}$) unless specially mentioned). Typically, the S0 mode has a larger frequency shift than that of the A0 mode. The humidity sensitivity is defined as follows,

$$S_m = \frac{\Delta f}{\Delta \text{RH} \cdot f_0} \quad (3)$$

The sensitivity of both the wave modes is listed in table 1, much higher than those with bare ZnO surface⁴ and is comparable to those of ZnO/glass SAW devices with the same GO sensing layer²⁰. This is because the hydrophilic GO film enhances the water absorption capability through the oxygen-rich groups, strengthening the mass loading effect and causing a larger frequency shift. The GO flakes also significantly increase the effective sensing area, thus drastically improve the sensitivity²⁰. Although the S0 mode has a larger frequency shift and a higher resolution than that of the A0 mode, it has a lower sensitivity as it has a higher working frequency. Nevertheless, using both two wave modes have significantly improved the accuracy and sensitivity for humidity sensing, demonstrating the potential usage of this dual-mode flexible humidity sensor.

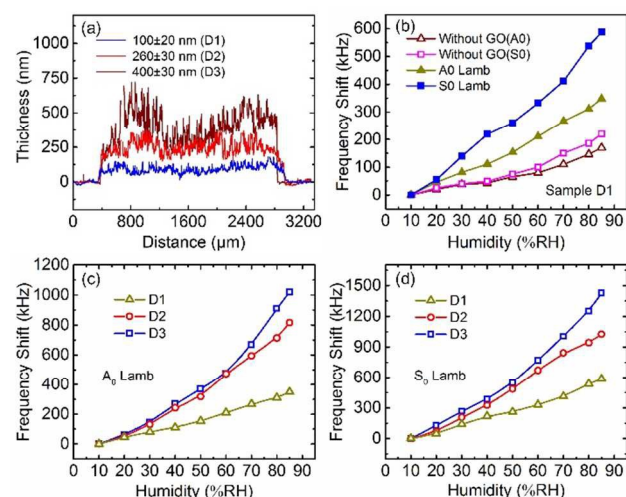


Fig. 4 The profiles of the GO films with different thicknesses formed using different GO dispersions (a); Frequency shift as a function of humidity for both the A0 and S0 modes of sample D1 with and without GO sensing layer (b); Frequency shift as a function of humidity for the A0 mode (c) and the S0 mode (d), respectively, of samples D1, D2, D3.

Based on our previous analysis^{4,20}, we believe that the frequency shift is mainly induced by the mass loading effect. According to Sauerbrey's equation³², the mass loading on the surface of a resonator has a linear relationship with the frequency shift, Δf , as follows,

$$\Delta f = -Cf_0^2 \Delta m/A \quad (4)$$

where C is a constant related to the substrate, and f_0 the resonant frequency, $\Delta m/A$ the mass change per unit area.

The thickness of the GO sensing layer was found to have a significant effect on the sensitivity of the sensors. Figures 4(c) and (d) are a comparison of the sensing performances of sensor D1, D2 and D3 with different GO thicknesses (figure 4(a)). It is clear that sensor with a thicker GO layer has a larger frequency shift for both the A0 and S0 modes. For a thicker GO film, there would be a larger effective sensing area, which leads to a stronger water molecules adsorption. This in-turn results in a larger mass loading and frequency shift. Samples D2 and D3 show similar trends of frequency variation with humidity change, but the increment of frequency shift for D3 at a fixed humidity level is not as large as that of D2. This is because the effective sensing area does not increase linearly with the increase of the GO layer thickness due to the accumulation effect. The frequency shift becomes larger with the increase in humidity, meaning that the frequency shift is not a linear function of humidity. At a higher humidity, the water molecules start to penetrate deeply into the GO flakes layer, making more surface area available for humidity sensing. The hydrogen-bond of the absorbed water molecules will further contribute to the absorption process, thus enhancing the sensitivity at a higher humidity level.

Detailed responses of frequency shift and insertion loss upon a stepwise increase and decrease of RH were investigated for the A0 mode of sample D3, and the results are shown in figures 5(a) and (b). Both of them show very small hysteresis when the humidity increases and then returns to its initial value. When the humidity is increased, more water molecules are absorbed by the GO film, hence the frequency shift increases as explained above. When the humidity is changed from 10%RH to 85%RH, however, the insertion loss only changes less than 1 dB, clearly indicating that the acoustic energy absorbed by the GO film and the water content is rather limited, ensuring the sensor work well in this humidity range.

We also investigated the repeatability of both modes with a fast humidity change between 10%RH and 80%RH. As exhibited in figure 5(c), the flexible SAW humidity sensors show a good repeatability within this humidity range. Meanwhile, the response and recovery behaviours were also tested between the 10%RH and 80%RH as shown in figure 5(d). The average response time (absorption process) for the A0 and S0 modes is about 20 s (16-22 s), and the recovery time (desorption process) is about 5 s, slightly longer compared with those of the SAW sensor made on rigid

substrates²⁰, but much better than most of the humidity sensors reported in the literature³.

Since the lamb waves excited in a piezoelectric layer are combined waves of particle displacement and piezoelectric potential, both the strain field and potential can be influenced by the environment, resulting in the changes in wave propagation. The former is called mechanical effect, induced by elastic viscosity change of the surface layer and mass loading on the surface. The latter is called acoustoelectric effect, of which the conductivity or permittivity will influence the sensing performance. The conductivity effect can be excluded as explained in our previous report²⁰. For a GO film, individual GO flakes are interlinked via a network of hydrogen bond mediated by oxygen-containing functional groups and water molecules, and the hydrogen bonds play an important role in determining the property of GO film^{26, 27, 31, 33}. The variation of the interlayer distance depends on the water content. As the GO is hydrophilic, water molecular residue may still be present in interlayer voids even after a prolonged drying process²⁶. Thus, initially two types of hydrogen bonds exist, i.e., H-bond between the functional groups attached to graphene sheet and H-bond involving with water molecules. At a lower humidity level, the H-bond network is dominated by the functional group, which absorbs molecules initially. Whereas at a higher humidity, water molecules absorbed by the GO film increase, and the H-bond network is dominated by water molecules³¹. All of these H-bonds would absorb water molecules, thus increasing the mass on the surface of the device. This can explain why the frequency shift will change at various relative humidity values.

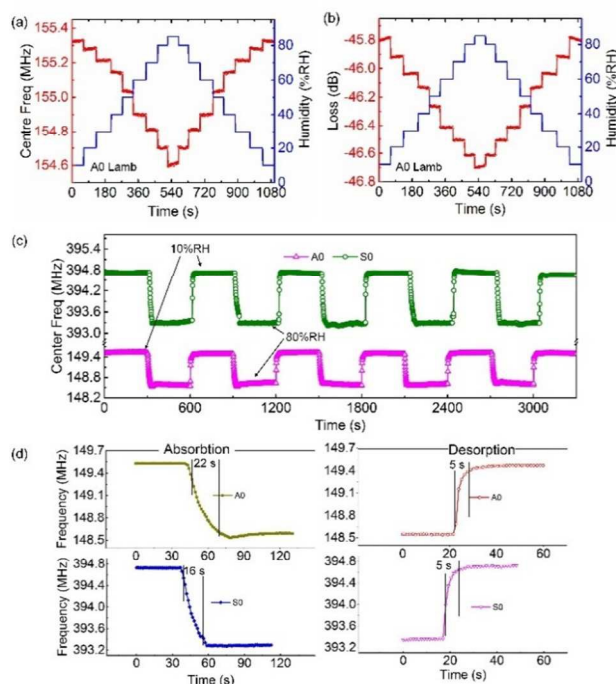


Fig.5 Detailed responses of the resonant frequency shift (a) and insertion loss (b) of the A0 mode, sample D3 to humidity change; the repeatability of the frequency of the A0 and S0 (c) modes of sample D3 when the humidity was repeatedly changed from 10%RH to 80%RH. (d) Detailed frequency response curves, showing the response and recovery times of the sensor (D3).

On the other hand, the typical interlayer distance of GO films reported in literature is 6 to 11 Å because of the H-bond, depending on humidity^{27,33}. This means that the volume of the GO layer will expand at a higher humidity, thus influencing the mechanical properties of the GO film. The experimental measured elastic moduli for the GO layers is 6-42 GPa^{26,34}, much smaller than the Young's modulus of the ZnO layer (110-140 GPa)³⁵. According to ref.³⁶, we can treat the GO film as an acoustic thin layer, and the viscoelastic effect contributes little to the sensing response. Therefore, mass loading is the main effect that induces the velocity change and energy attenuation.

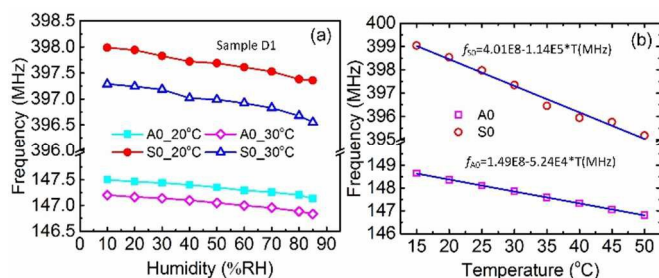


Fig.6 The resonant frequency of D1 as a function of humidity at 20°C and 30°C (a) and as a function of temperature at 30%RH (b). The temperature coefficient of frequency for both the wave modes has an excellent linearity with the correlation coefficient of 0.9996 for A0 and 0.9832 for S0.

Temperature is another important factor which would affect the sensing results significantly. Figure 6(a) shows the influence of temperature on the frequency shift as function of humidity for both the A0 and S0 modes of sample D1. Results show that the general trend for the changes of frequencies with humidity remains unchanged, but the values of frequency shift are varied significantly when the temperature is changed. Figure 6(b) shows the frequency as a function of temperature for both the modes, and the frequency decreases linearly with the increase in temperature as expected. The temperature coefficient of frequency (TCF= $\Delta f/\Delta T$) for both modes have an excellent linearity. Since the two modes have different TCFs, they can be utilized for temperature compensation or calibration processes³⁷ to eliminate temperature effect on humidity sensing result, a very important issue for commercial applications.

Although ZnO film is also sensitive to various gases,³⁸ the frequency shift induced by absorption of gases in atmosphere is quite small, in the order of less than kHz when there is no catalyst is used. This is much smaller than what induced by humidity change of several hundreds of KHz, therefore the interference from gases is not an issue for this humidity sensor.

3.4. Humidity sensing under bending and flexibility of the sensor

We have also investigated the sensing performance of the humidity sensors at bending states. The thin PI film with SAW devices was bonded onto a 250 μm thick PET substrate for easy handling, and the devices with the handling PET substrate were further glued on a flexible steel bar, connected to SMA connectors through flexible PCB as shown in figure 7(a). The transmission properties at the flat and bent states were then recorded. The devices were tested under various bending angles. Results showed that the

signal amplitude of the resonant peak remains almost unchanged when the bending angle is smaller than 30°, and then decreases slightly with increasing the bending angle further with one of the results shown in figure 7(b). At a bending angle of 36°, the strain is about 1500 $\mu\epsilon$ ^{16,39}. A frequency shift of 150 kHz was observed which is attributed to the deformation of the device and change of the acoustic velocity¹⁶. When the device is further bent, the ZnO crystal quality may deteriorate slightly (cracks and defects are generated in the ZnO film), leading to the increased attenuation of the acoustic energy¹⁶.

Figure 7(c) is the performance comparison of humidity sensing for the A0 and S0 modes of sample D3, unbent and bent at an angle of 36°. The frequency shifts for both the wave modes of the sensor unbent and bent increase with the increase in humidity, showing a similar trends. There is no apparent differences in frequency shift at humidity level smaller than 50%RH for both the wave modes, and the difference becomes slightly larger with the further increase of humidity level above 50%RH, but still smaller than 5% at 85%RH. This clearly indicates that the flexible humidity sensors can still work well under severe bending conditions, and demonstrates its potential for flexible electronic applications. The slightly increased frequency shift for the sensor under bending is believed to be caused by the increased surface of the GO sensing layer under bending.

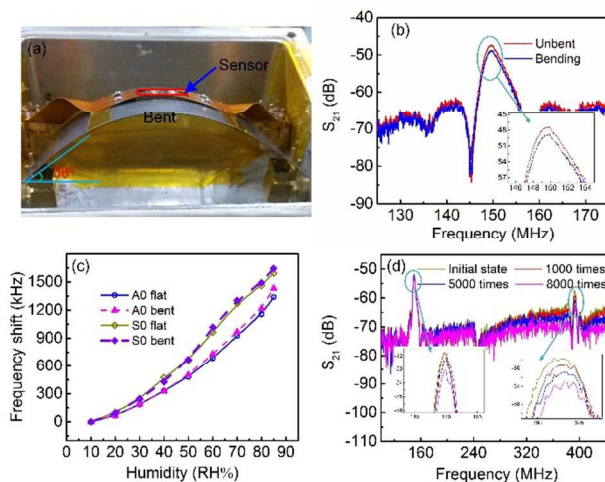


Fig.7 Photograph of the sensor at a bent state (a); Comparison of transmission spectra (b), frequency shifts of a flexible humidity sensor ($\lambda=12 \mu\text{m}$, D3) unbent and bent at an angle of 36°(c), and (d) the dependence of the transmission property of the sensor as a function of bending cycles.

The stability of the flexible sensor upon repeated bending was also tested by a homemade robotic arm between flat and a fixed bending angle of 36° (1500 $\mu\epsilon$). The detailed bending experiment can be seen from the movie in supplement information (SI). Figure 7(d) is the comparison of the transmission spectra before and after bent for 1000, 5000 and 8000 cycles, respectively. The resonant frequency does not change apparently, whereas the signal amplitude decreases slightly with the increase of bending cycles. However the sensor still possesses good transmission properties even after bent for 8000 cycles, demonstrating its excellent potential for flexible electronic applications.

4. Conclusion

We demonstrated a due-mode flexible lamb wave humidity sensor, using GO microflakes as the humidity sensing material. For the two working modes of the lamb waves, the antisymmetric mode shows a higher sensitivity than the symmetric mode, while the frequency shift of the S0 mode induced by humidity change is larger than that of A0 mode. The humidity sensitivity of both the wave modes increase with the increase in humidity level, and can be improved significantly by using a thicker GO film. For the first time, we demonstrated that the flexible humidity sensor can work very well at severe bent conditions, and both the wave modes show only a slight difference from those of the device unbent, demonstrated its great potential for application as a flexible humidity sensor.

Acknowledgements

This work was supported by NSFC (Nos. 61274037, 61274123, and 61474099) and the Zhejiang Provincial NSF (Nos. Z11101168 and LR12F04001). The authors also would like to acknowledge the financial support by the Innovation Platform of Micro/Nano devices and Integration System, Zhejiang University, and Royal Academy of Engineering UK-Research Exchange with China and India.

Notes and references

- Dept. of Info. Sci. & Electr. Eng., Zhejiang University, 38 Zheda Road, Hangzhou 310027, P. R. China. E-mail: xw224@zju.edu.cn
- MOE Key Lab. of Macromolecul. Synth. & Funct., Dept. of Polym. Sci. & Eng., Zhejiang University, 38 Zheda Road, Hangzhou 310027, China.
- Dept. of Phys. & Electr. Eng., Facult. of Eng. & Environ., University of Northumbria, Newcastle upon Tyne, NE1 8ST, UK
- Institute of Renewable Energy & Environ. Technol., University of Bolton, Bolton, BL3 5AB, UK E-mail:jl2@bolton.ac.uk
- B. M. Kulwicki, *J. Am. Ceram. Soc.*, 1991, **74**, 697-708.
- S. Borini, R. White, D. Wei, M. Astley, S. Haque, E. Spigone, N. Harris, J. Kivioja and T. Ryhanen, *ACS Nano*, 2013, **7**, 11166-11173.
- H. Bi, K. Yin, X. Xie, J. Ji, S. Wan, L. Sun, M. Terrones and M. S. Dresselhaus, *Sci. Rep.*, 2013, **3**, 2714.
- X. L. He, D. J. Li, J. Zhou, W. B. Wang, W. P. Xuan, S. R. Dong, H. Jin and J. K. Luo, *J. Mater. Chem. C*, 2013, **1**, 6210.
- S. Park, G. Wang, B. Cho, Y. Kim, S. Song, Y. Ji, M. H. Yoon and T. Lee, *Nat. Nanotechnol.*, 2012, **7**, 438-442.
- S. R. Tamalampudi, Y. Y. Lu, U. R. Kumar, R. Sankar, C. D. Liao, B. K. Moorthy, C. H. Cheng, F. C. Chou and Y. T. Chen, *Nano Lett.*, 2014, **14**, 2800-2806.
- T. Sekitani, U. Zschieschang, H. Klauk and T. Someya, *Nat. Mater.*, 2010, **9**, 1015-1022.
- T. Sekitani, T. Yokota, U. Zschieschang, H. Klauk, S. Bauer, K. Takeuchi, M. Takamiya, T. Sakurai and T. Someya, *Science*, 2009, **326**, 1516-1519.
- D. K. Kim, Y. Lai, B. T. Diroll, C. B. Murray and C. R. Kagan, *Nat. Commun.*, 2012, **3**, 1216.
- S. C. B. Mannsfeld, B. C. K. Tee, R. M. Stoltenberg, C. V. H. H. Chen, S. Barman, B. V. O. Muir, A. N. Sokolov, C. Reese and Z. N. Bao, *Nat. Mater.*, 2010, **9**, 859-864.
- D. M. Sun, M. Y. Timmermans, Y. Tian, A. G. Nasibulin, E. I. Kauppinen, S. Kishimoto, T. Mizutani and Y. Ohno, *Nat. Nanotechnol.*, 2011, **6**, 156-161.
- H. Nakahata, A. Hachigo, S. Shikata and N. Fujimori, Ultrasonics Symposium, 1992. Proceedings, Tucson, AZ, 1992.
- Y. Zhu, Y. Zheng, C. Sun, Y. Gao, A. Y. Gu and H. Campanella, *Sens. Actuators, A*, 2014.
- I. Voiculescu and A. N. Nordin, *Biosens. Bioelectron.*, 2012, **33**, 1-9.
- H. Jin, J. Zhou, X. He, W. Wang, H. Guo, S. Dong, D. Wang, Y. Xu, J. Geng, J. K. Luo and W. I. Milne, *Sci. Rep.*, 2013, **3**, 2140.
- X. L. He, H. W. Guo, J. K. Chen, W. B. Wang, W. P. Xuan, Y. Xu and J. K. Luo, *Appl. Phys. Lett.*, 2014, **104**, 213504.
- Q. Kuang, C. Lao, Z. L. Wang, Z. Xie and L. Zheng, *J. Am. Chem. Soc.*, 2007, **129**, 6070-6071.
- X. Wang, B. Ding, J. Yu, M. Wang and F. Pan, *Nanotechnology*, 2010, **21**, 055502.
- D. R. Dreyer, S. Park, C. W. Bielawski and R. S. Ruoff, *Chem. Soc. Rev.*, 2010, **39**, 228-240.
- W. Xuan, M. He, N. Meng, X. He, W. Wang, J. Chen, T. Shi, T. Hasan, Z. Xu, Y. Xu and J. K. Luo, *Sci. Rep.*, 2014, **4**, 7206.
- Z. Xu, H. Sun, X. Zhao and C. Gao, *Adv. Mater.*, 2013, **25**, 188-193.
- Sensirion, Datasheet of SHT71, http://www.sensirion.com/fileadmin/user_upload/customers/sensirion/Dokumente/Humidity/Sensirion_Humidity_SHT7x_Datasheet_V5.pdf, 4, Jan, 2015.
- C. A. Johnsen, T. L. Bagwell and J. L. Henderson, Ultrasonics Symposium, 1988. Proceedings, Chicago, IL, 1988.
- Z. Chen, L. Fan, S.-y. Zhang and H. Zhang, *J. Appl. Phys.*, 2014, **115**, 204513.
- J. L. Rose, *Ultrasonic Guided Waves in Solid Methods*, Cambridge University Press, Cambridge, 2004.
- D. A. Dikin, S. Stankovich, E. J. Zimney, R. D. Piner, G. H. Dommett, G. Evmenenko, S. T. Nguyen and R. S. Ruoff, *Nature*, 2007, **448**, 457-460.
- A. Lerf, A. Buchsteiner, J. Pieper, S. Schöttl, I. Dekany, T. Szabo and H. P. Boehm, *J. Phys. Chem. Solids*, 2006, **67**, 1106-1110.
- M. A. Pimenta, G. Dresselhaus, M. S. Dresselhaus, L. G. Cancado, A. Jorio and R. Saito, *Phys. Chem. Chem. Phys.*, 2007, **9**, 1276-1291.
- Y. Zhu, S. Murali, W. Cai, X. Li, J. W. Suk, J. R. Potts and R. S. Ruoff, *Adv. Mater.*, 2010, **22**, 3906-3924.
- A. B. Bourlinos, D. Gournis, D. Petridis, T. Szabo, A. Szeri and I. Dekany, *Langmuir*, 2003, **19**, 6050-6055.
- N. V. Medhekar, A. Ramasubramaniam, R. S. Ruoff and V. B. Shenoy, *ACS Nano*, 2010, **4**, 2300-2306.
- K. Bodenhöfer, A. Hierlemann, G. Noetzel, U. Weimar and W. Göpel, *Anal. Chem.*, 1996, **68**, 2210-2218.
- A. Buchsteiner, A. Lerf and J. Pieper, *J. Phys. Chem. B*, 2006, **110**, 22328-22338.
- S. Park, K. S. Lee, G. Bozoklu, W. Cai, S. T. Nguyen and R. S. Ruoff, *ACS Nano*, 2008, **2**, 572-578.
- Y. Q. Fu, J. K. Luo, X. Y. Du, A. J. Flewitt, Y. Li, G. H. Markx, A. J. Walton and W. I. Milne, *Sens. Actuators, B*, 2010, **143**, 606-619.
- S. J. Martin, G. C. Frye and S. D. Senturia, *Anal. Chem.*, 1994, **66**, 2201-2219.
- Q. Liu and A. J. Flewitt, *Appl. Phys. Lett.*, 2014, **105**, 213511.
- S. Y. Wang, J. Y. Ma, Z. J. Li, H. Q. Su, N. R. Alkurd, W. L. Zhou, L. Wang, B. Du, Y. L. Tang, D. Y. Ao, S. C. Zhang, Q. K. Yu and X. T. Zu, *J. Hazard. Mater.*, 2015, **285**, 368-374.
- J. Chen, X. He, W. Wang, W. Xuan, J. Zhou, X. Wang, S. R. Dong, S. Garner, P. Cimo and J. K. Luo, *J. Mater. Chem. C*, 2014, **2**, 9109-9114.