


ChemComm

Chemical Communications

rsc.li/chemcomm

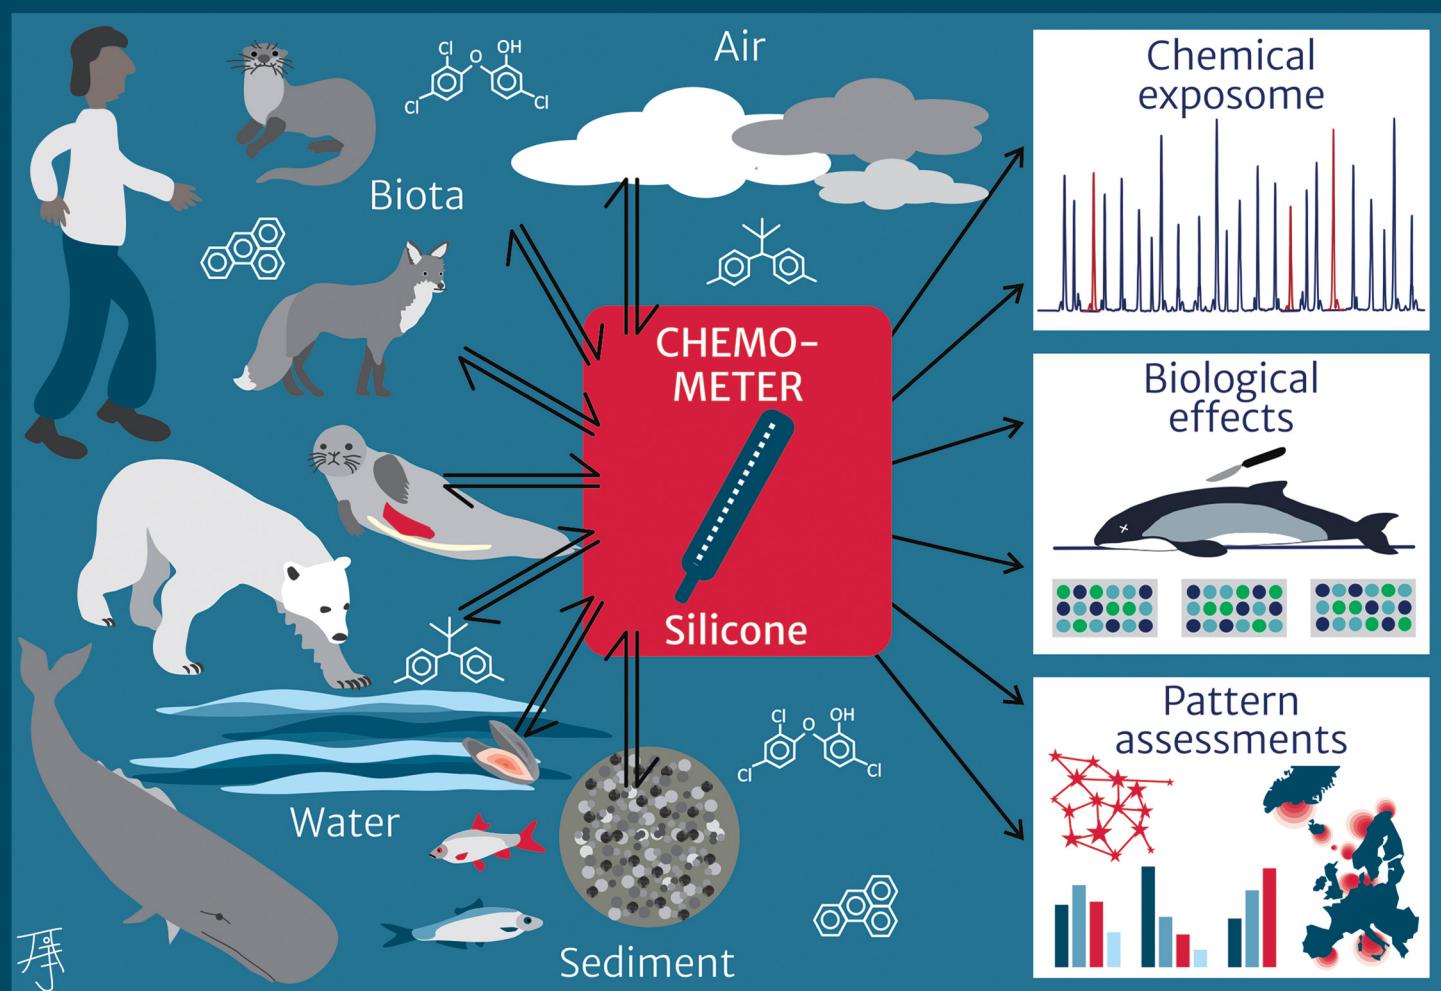

ISSN 1359-7345



Cite this: *Chem. Commun.*, 2023, 59, 3193

Chemometers: an integrative tool for chemical assessment in multimedia environments

Elisa Rojo-Nieto *^a and Annika Jahnke *^{ab}

We propose novel chemometers – passive equilibrium samplers of, e.g., silicone – as an integrative tool for the assessment of hydrophobic organic compounds in multimedia environments. The traditional way of assessing levels of organic pollutants across different environmental compartments is to compare the chemical concentration normalized to the major sorptive phase in two or more media. These sorptive phases for hydrophobic organic compounds differ between compartments, e.g., lipids in biota and organic carbon in sediments. Hence, comparability across media can suffer due to differences in sorptive capacities, but also extraction protocols and bioavailability. Chemometers overcome these drawbacks; they are a common, universal and well-defined polymer reference phase for sampling of a large range of nonpolar organic pollutants in different matrices like biota, sediment and water. When bringing the chemometer into direct contact with the sample, the chemicals partition between the sample and the polymer until thermodynamic equilibrium partitioning is established. At equilibrium, the chemical concentrations in the chemometers can be determined and directly compared between media, e.g., between organisms of different trophic levels or inhabiting different areas, between organs within an organism or between biotic and abiotic compartments, amongst others. Chemometers hence allow expressing the data on a common basis, as the equilibrium partitioning concentrations in the polymer, circumventing normalizations. The approach is based on chemical activity rather than total concentrations, and as such, gives a measure of the "effective concentration" of a compound or a mixture. Furthermore, chemical activity is the main driver for partitioning, biouptake and toxicity. As an additional benefit, the extracts of the chemometers only require limited cleanup efforts, avoiding introduction of a bias between chemicals of different persistence, and can be submitted to both chemical analysis and/or bioanalytical profiling.

Received 17th December 2022,
Accepted 8th February 2023

DOI: 10.1039/d2cc06882f

rsc.li/chemcomm

^a Helmholtz Centre for Environmental Research – UFZ, Department of Ecological Chemistry, Permoserstr. 15, 04318 Leipzig, Germany. E-mail: elisa.rojo-nieto@ufz.de, annika.jahnke@ufz.de

^b Institute for Environmental Research, RWTH Aachen University, 52074 Aachen, Germany



Elisa Rojo-Nieto
Elisa Rojo-Nieto, UFZ, pursues environmental research, having a special interest in novel passive equilibrium sampling and its applications in multimedia environmental compartments (chemometers). She holds a PhD in Marine Pollution (2012), and her current research concentrates on two aspects: (a) the use of chemometers to study environmental pollution, focusing on aquatic, terrestrial and human bioaccumulation assessments, and (b) the presence and partitioning of pollutants in plastics from the marine environment. ResearchGate: <https://www.researchgate.net/profile/Elisa-Rojo-Nieto>.



Annika Jahnke

Annika Jahnke, UFZ, pursues exposome research, combining environmental and human health assessment using identical chemometer tools. She holds a PhD in Environmental Chemistry (2007) and a Professorship in Exposome Analytics at RWTH Aachen University (since 2020). Her special interests are in novel passive equilibrium sampling to investigate chemical activity driving the partitioning, fate and effects of environmental pollutants and in environmental weathering and fate of plastics and associated chemicals. ResearchGate: <https://www.researchgate.net/profile/Annika-Jahnke>.



Introduction

Thermodynamic gradients are a major driver of numerous processes in and between environmental media, including the partitioning and fate of organic pollutants. They help to identify the direction of diffusion of chemicals and to quantify the potential for spontaneous physicochemical processes, such as sorption and partitioning¹ as well as bioaccumulation. Thermodynamic gradients can be characterized as gradients in, *e.g.*, chemical activity, but also in fugacity or freely dissolved concentrations. These metrics all have in common that they allow for understanding and predicting environmental processes. In this article, we use the chemical activity concept.

To determine the chemical activity of an environmental contaminant in a medium, equilibrium sampling devices can be used, a special format of which are polymeric passive equilibrium samplers, referred to here as “chemometers”. Chemometers consist of polymers, such as, *e.g.*, silicone rubber for neutral, nonpolar hydrophobic organic compounds (HOCs), in diverse formats, tailor-made for their specific purpose. The HOCs studied with silicone chemometers usually span a wide range of hydrophobicities, with typical $\log K_{\text{OW}}$ ranges from 2.5 to 9.0, where K_{OW} is the compound-specific octanol/water partition coefficient.

For passive equilibrium sampling, the chemometer is brought in contact with the medium to be studied. The chemicals then partition between the sample and the chemometer until a thermodynamic equilibrium between the two phases is reached. At equilibrium, chemicals still move between the two phases, but the concentrations remain constant. The same applies for the chemical activity which can be described as follows (eqn (1)):

$$a = \gamma_{\text{silicone}} \times C_{\text{silicone}} \quad (1)$$

where “ a ” is the chemical activity, γ_{silicone} is the activity coefficient of a compound in the silicone and C_{silicone} is the concentration of the compound in the silicone.

Mayer *et al.*² introduced an analogy between equilibrium sampling devices, such as chemometers, and thermometers: like thermometers, which are deployed in direct contact with the sample until they reach thermal equilibrium with their surroundings, chemometers are brought into thermodynamic equilibrium with the medium they are immersed in. Thermometers then allow us to read the temperature, whereas chemometers give an indication of the chemical activity of a compound in the medium of interest. As has been stated above, chemical activity is the main driver of the free concentrations of pollutants (C_{free}) available for processes such as biouptake and partitioning as well as toxicity. Chemometers applied to single or multiple environmental media allow for comparison between (i) organisms of different trophic levels or inhabiting different areas, (ii) organs within an organism or, (iii) biotic and abiotic compartments, amongst others. Their deployment in different media circumvents normalization of the chemical concentration to the relevant sorptive phases common in traditional approaches. Hence, chemometers imply a lower risk of introducing bias.

Instead of single chemicals, chemometers take up complex mixtures of pollutants with widely varying physicochemical properties from a broad range of media. Furthermore, they allow for the assessment of the chemical activity gradient between media, approached by the ratio of concentrations of a chemical in the chemometers equilibrated with different media, samples or compartments. Silicone has proven useful for this purpose because it enriches HOCs in a similar way as biota lipids, and even complex sample types have been shown not to alter the sorptive capacity of the silicone.³

Once in direct contact with the sample, at first the uptake curve of chemicals into the chemometer is steep and linear, as a result of the strong gradient in chemical activity between both phases (Fig. 1(A)). It then flattens, showing a curvilinear intermediate phase, until it reaches a plateau when equilibrium is approached. Following the sampling, the chemometer is retrieved from the sample, its surface is thoroughly cleaned, and the chemicals from the chemometer are extracted using a suitable solvent or mixture(s) of solvents. Depending on the medium that was sampled and the analytical requirements, a non-destructive⁴ or destructive cleanup⁵ can be used to remove matrix constituents and enhance the analytical result. However, in general, chemometer extracts require less cleanup compared to traditional exhaustive solvent extraction methods due to lower amounts of co-extracted matrix, such as lipids, which is one of the benefits of this approach. Following cleanup, the extracts of chemometers equilibrated with

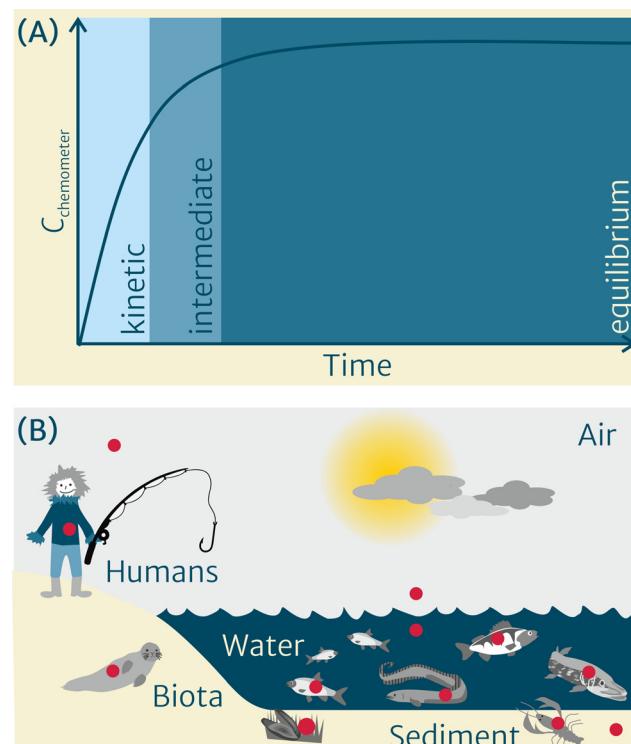


Fig. 1 (A) Uptake kinetics of a chemical into the chemometer, with the concentration in the chemometer ($C_{\text{chemometer}}$) plotted vs. time. (B) Multi-media environment sampled with chemometers (red circles), covering abiotic media (sediment, water, air) and diverse biota, including humans.



multimedia environments (Fig. 1(B)) can be submitted to chemical profiling and/or bioanalytical characterization.

Several prerequisites apply for successfully using chemometers, as summarized by Mayer *et al.*:² (i) the chemometer must be applied under negligible depletion conditions, *i.e.*, not more than 5% of the chemical mass present/available in the sample must be transferred into the sampler in order not to alter the equilibrium concentration (*i.e.*, not to perturb chemical activity); (ii) the response time of the chemometer must be sufficiently short to correctly mirror fluctuations in environmental levels, which can be ensured by a suitable design, including maximizing its surface area-to-volume ratio; and (iii) the sorptive properties of the chemometer must not be altered by immersion in complex matrices.³

The same working principle, but in reversed mode, is known as passive dosing, where a polymer is pre-loaded with a mixture of HOCs (resembling environmental or artificial mixtures) and used for dosing those compounds into air or aqueous media. Thanks to passive dosing, stable exposure concentrations can be maintained over time, even for HOCs, as required amongst others for bioaccumulation assessment and (eco)toxicological studies.^{6–11}

In recent years, we have teamed up in a group of scientists to jointly work towards widely establishing the chemometer concept in the multimedia environment (Fig. 1(B)) within the project CHEMO-RISK.

CHEMO-RISK covered four major applications (Fig. 2): (i) thermodynamics-based bioaccumulation assessment, by deploying chemometers in abiotic and biotic media of different trophic levels in a Swedish background lake combined with chemical profiling; (ii) internal exposure and effects, by applying chemometers in diverse tissues of marine mammals from the North and Baltic Seas and submitting them to chemical and bioanalytical profiling, subsequently linked in an iceberg modeling approach; (iii) developing chemometers for non-invasive human exposure assessment, applied, amongst others, on the study participants' skin; and (iv) in a final step, applying chemometers to investigate patterns of known and unknown chemicals across samples and media, in order to identify,

e.g., bioaccumulative chemicals from comparison of peak areas, without the need of knowing their identity *a priori*. The latter approach may provide useful for prioritization of unknown peaks that are interesting to identify, *e.g.*, if a peak shows explicit biomagnification in a trophic network or can be linked to adverse effects, *e.g.*, *via* effect-directed analysis.

According to the underlying concept, the chemometer constitutes of a common polymeric reference phase – in our case silicone – which is equilibrated with diverse sample types and media, allowing for direct comparison of the concentrations of a chemical in the silicone equilibrated with the multimedia environment. Since the enrichment of potentially hazardous environmental chemicals in lipids of biota, including humans, often is a major concern, we may then translate the concentration in the silicone, C_{silicone} , to the concentration in model lipids, C_{lipid} , using lipid/silicone partition coefficients, $K_{\text{lipid/silicone}}$ (ref. 12–19) according to eqn (2):

$$C_{\text{lipid}} = C_{\text{silicone}} \times K_{\text{lipid/silicone}}. \quad (2)$$

Instead of model (storage) lipids, C_{silicone} might be translated into concentrations in other relevant biological phases (*e.g.*, proteins), depending on the target chemicals, provided that partition coefficients are available or can be modeled.

In general, equilibrium partitioning concentrations in silicone at equilibrium with environmental media converted to a lipid basis are considered more comprehensible for scientists, regulators, and the general public.²⁰ In this regard, the chemometer approach with the derived equilibrium partitioning concentrations in lipids has similarity to the equilibrium lipid partitioning concentrations introduced by Webster *et al.*²¹ The major advancement is that we combine the unique features of chemometers in quantifying freely dissolved concentrations and chemical activity and make use of directly comparing chemical concentrations in the silicone, whereas Webster *et al.* worked with data from all kinds of studies, mostly based on traditional exhaustive solvent (*i.e.*, total) extractions. As such, the pioneering approach by Webster *et al.* considered total chemical loads, not taking into account that strong sorption to organic phases may reduce bioavailability in many multimedia systems.

Current environmental risk assessment usually compares the total concentrations of a single chemical in the main surrounding compartment relevant for the exposure of the organism to the highest concentration that did not show adverse effects in standard test species (*e.g.*, the no observed effect level/concentration, NOEL/NOEC). This approach entails a number of major shortcomings, such as that (a) exposure and effect are evaluated separately in standard settings, hence ignoring site-specific factors; (b) the bioavailability of the chemical is not taken into account; (c) application of different methods hampers comparability across studies; (d) evaluation of single chemicals precludes taking into account mixture effects; and (e) ecosystem health assessments are not directly transferrable to human health.

Chemometers represent a major advancement in this context because they (a) are used in site-specific assessments to

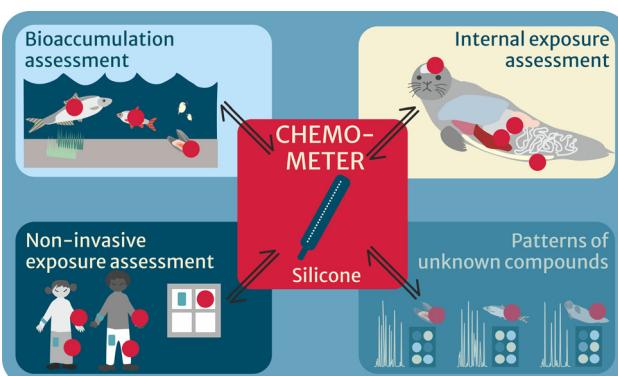


Fig. 2 Four applications of chemometers (red circles) in the project CHEMO-RISK, of which "Patterns of unknown compounds" is being developed.



integrate exposure and effect assessment by allowing to submit extracts from identical chemometers to both chemical profiling and bioanalytical characterization; (b) represent the fraction of the total concentration of the chemical that is bioavailable; (c) provide a standardized approach applicable to diverse environmental media for enhanced comparability; (d) cover a broad chemical universe; and (e) can be applied for environmental biota and humans, allowing for direct comparability of the outcomes.^{22,23}

State-of-the-art in multimedia passive sampling

In recent years, a range of peer-reviewed scientific publications regarding the use of chemometers in one or more environmental compartments has been published, and Table 1 compiles a related literature overview. The criteria for inclusion, in addition to applying polymeric passive samplers in environmental compartments to determine concentrations and/or characterize effects, included a restriction to studies that focused on nonpolar HOCs (amenable to gas chromatographic (GC) separation coupled to mass spectrometric (MS) detection). Table 1 summarizes a synopsis of these studies, aiming to provide a general impression of the application of chemometers in environmental studies of HOCs until now, but it does not claim to be an exhaustive review of all the studies published up to date. In the table it can be observed that the main polymers used in this regard are silicone and polyethylene (PE), together with polyurethane foam (PUF). What also becomes obvious is an increase of studies in recent years, which partly is a result of the advantages that this approach brings to environmental assessments.

Soils and sediments were the first compartments to be equilibrated with chemometers,^{22,23} using *ex situ* setups, which can be performed in a non-depletive mode due to the high sorptive capacity of such samples for HOCs. Furthermore, equilibration times of several weeks are facilitated by adding agents such as sodium azide to stabilize the samples. Suspended particulate matter (SPM) from aquatic environments has been studied likewise.^{24–26}

More recently, biota have been sampled with chemometers,^{38,78,96} and nowadays, methods are established even for lean tissues, based on frequent mixing of the samples to avoid local depletion, that make it feasible to reach equilibrium within a reasonable time frame, *i.e.*, before the tissue starts to decay. The methods were originally developed for fish muscle tissue and whole fish,^{78,80} but have recently been adapted to include different organs and tissues of marine mammals⁷⁵ and humans.³³ Regarding the study of human exposure, as a result of ethical limitations, non-invasive formats such as silicone wristbands or similar devices have usually been applied.⁸² Those devices comprise the disadvantage that they measure not only the release of chemicals from the human body *via* the skin, but also, at least partially, the environmental exposure through air. An exception are few studies such as Baumer *et al.*³³ using *in tissue* sampling in body donors *post-mortem*.

Contrarily, in water it is still challenging to achieve equilibrium partitioning of HOCs, especially for the more hydrophobic compounds. According to the literature,⁸³ the uptake of certain HOCs (up to a $\log K_{ow}$ of 5.5) from water into chemometers may take as long as 4 months until equilibrium is reached even under agitated conditions. However, for compounds with a $\log K_{ow} > 5.5$ it remains challenging to reach equilibrium within a reasonable time frame, and for some compounds it will not even be reached after 6 months. Hence, chemometers have mainly been used in kinetic mode in water, sampling in the linear uptake phase (Fig. 1(A)). The results are then usually extrapolated to concentrations in equilibrium conditions based on the dissipation of performance reference compounds (PRCs) that had been loaded into the polymer prior to their exposure to water.⁹⁷

The same approach is commonly used for atmospheric sampling.⁹⁷ In air, the most commonly used polymer is PUF, together with PE (more precisely low-density PE, LDPE).^{44,55,56,62,64,65,67,79,84,87,88} Some studies^{44,84} have aimed to deploy chemometers for sampling the air over several seasons and years, allowing to establish temporal trends, and thus to evaluate, *e.g.*, the effectiveness of control measures of POPs on a global scale.

Summarizing, chemometers have recently been used successfully in diverse environmental compartments (Table 1), but there remains an enormous potential for development and extension. In the next sections we will focus on novel approaches and ongoing advancements regarding the use of chemometers in multimedia environments and the next steps to be addressed.

Major advancements

Within our project CHEMO-RISK, we have achieved major improvements towards establishing chemometers as powerful and solid tools for environmental and human health assessment in three application areas: thermodynamics-based bioaccumulation, internal exposure and effect assessment and non-invasive human exposure assessment (Fig. 2).

Thermodynamics-based bioaccumulation

Bioaccumulation of environmental chemicals in aquatic biota is of concern for the involved species and related ecosystem health, but also for human exposure in case of consumption. In this, “bioaccumulation” includes both uptake from the organism’s abiotic environment (bioconcentration) and from its diet (*i.e.*, biomagnification across trophic levels). Opposed to bioconcentration, which is expected to yield equal chemical activity, biomagnification is supposed to be accompanied by an increase in chemical activity from one trophic level to the next one,⁹⁸ but this assumption has to date not been experimentally confirmed.



Table 1 Overview of studies applying chemometers to nonpolar HOCs in environmental compartments, including targeted chemical(s), polymer used, the studied compartments and the applied analysis technique. Abbreviations: POM (polyoxymethylene), PUF (polyurethane foam), PE (polyethylene), PMMA (poly(methyl methacrylate)), PCBs (polychlorinated biphenyls), PAHs (polycyclic aromatic hydrocarbons), PYRs (pyrethroids), OCPs (organochlorine pesticides), PBDEs (polybrominated diphenyl ethers), CHCs (chlorinated hydrocarbons), HCB (hexachlorobenzene), PCPPs (personal care products and pharmaceuticals), PCDD/Fs (polychlorinated-*p*-dibenzodioxins/furans), NHFRs (novel halogenated flame retardants), and OPEs (organophosphate esters)

Ref.	Chemicals of concern	Polymer(s)	Environmental compartment				Evaluation	
			Atmosphere	Water	Sediment /SPM	Env. biota	Humans	Chemical analysis
Alkon <i>et al.</i> (2022) ²⁷	Pesticides, PYRs	Silicone (wristbands)					×	×
Allan <i>et al.</i> (2013) ²⁸	PAHs, PCBs, OCPs and CHCs	Silicone				×		×
Allan <i>et al.</i> (2021) ²⁹	PAHs, PCBs, OCPs and CHCs	Silicone			×			×
Arcury <i>et al.</i> (2021) ³⁰	Pesticides	Silicone (wristbands)					×	×
Baumer <i>et al.</i> (2020) ³¹	PCBs, OCPs and CHCs	Silicone				×		×
Baumer <i>et al.</i> (2021a) ³²	PAHs, PCBs, OCPs, PBDEs and CHCs	Silicone				×		×
Baumer <i>et al.</i> (2021b) ³³	PAHs, PCBs, pesticides, PBDEs, CHCs, OFRs and musks	Silicone				×	×	×
Beckingham <i>et al.</i> (2013) ³⁴	PCBs, OCPs and CHCs	POM				×		×
Bergmann <i>et al.</i> (2017) ³⁵	PCBs, pesticides, PAHs, and PCPPs	Silicone (wristbands)					×	×
Booij <i>et al.</i> (2016) ³⁶	Review	Silicone			×			
Chen <i>et al.</i> (2020) ³⁷	PCBs	Silicone				×		×
Chen <i>et al.</i> (2022) ³⁸	PCBs	Silicone				×		×
Claessens <i>et al.</i> (2015) ³⁹	PAHs, PCBs, pesticides and pharmaceuticals	Silicone			×		×	×
Cornelissen <i>et al.</i> (2008) ⁴⁰	PCDD/Fs and PCBs	POM			×			×
Dixon <i>et al.</i> (2018) ⁴¹	PAHs	Silicone (wristbands)					×	×
Figueiredo <i>et al.</i> (2017) ⁴²	PCBs	Silicone and PE			×	×		×
Fuchte <i>et al.</i> (2020) ⁴³	PAHs	Silicone			×			×
Global atmospheric passive sampling (GAPS) network ⁴⁴	POPs, <i>e.g.</i> , PCBs, OCPs	PUF		×				
Harley <i>et al.</i> (2019) ⁴⁵	Pesticides	Silicone (wristbands)					×	×
Hendryx <i>et al.</i> (2020) ⁴⁶	PAHs	Silicone (wristbands)					×	×
Jahnke <i>et al.</i> (2009) ⁴⁷	PCBs	Silicone				×		×
Jahnke <i>et al.</i> (2011) ⁴⁸	PCBs	Silicone				×		×
Jahnke <i>et al.</i> (2012) ⁴⁹	PCBs	Silicone				×		×
Jahnke <i>et al.</i> (2014a) ⁵⁰	HCB and PCBs	Silicone			×	×		×
Jahnke <i>et al.</i> (2014b) ⁵¹	HCB and PCBs	Silicone			×			×
Jahnke <i>et al.</i> (2018) ⁵²	—	Silicone			×			×
Jin <i>et al.</i> (2015) ⁵³	PCBs, PBDEs and PCDDs	Silicone					×	×
Jonker <i>et al.</i> (2018) ⁵⁴	PAHs and PCBs	PE, silicone and polyacrylate			×		×	
Khairy <i>et al.</i> (2015) ⁵⁵	PCBs	PE	×		×			×
Khairy and Lohmann (2017) ⁵⁶	PBDEs	PE	×		×	×		×
Kile <i>et al.</i> (2016) ⁵⁷	PBDEs	Silicone (wristbands)					×	×
Lang <i>et al.</i> (2018) ⁵⁸	PCBs	Silicone				×		×
Lao <i>et al.</i> (2016) ⁵⁹	PAHs, PCBs, PBDEs, OCPs and musks	PMMA		×	×			×
Li <i>et al.</i> (2013) ⁶⁰	—	Silicone			×			×
Li <i>et al.</i> (2014) ¹⁴	PBDEs	Silicone				×		×
Lohmann <i>et al.</i> (2012) ⁶¹	PCBs and OCPs	PE			×			×
Lohmann <i>et al.</i> (2013) ⁶²	PBDEs	PE	×		×			×
Mäenpää <i>et al.</i> (2011) ²²	PCBs	Silicone				×		×
Mäenpää <i>et al.</i> (2015b) ⁶³	PCBs	Silicone			×	×		×
McDonough <i>et al.</i> (2016) ⁶⁴	PBDEs and NHFRs	PE	×		×			×



Table 1 (continued)

Ref.	Chemicals of concern	Polymer(s)	Environmental compartment				Evaluation	
			Atmosphere	Water	Sediment /SPM	Env. biota	Humans	Chemical analysis
Meierdierks <i>et al.</i> (2021) ⁶⁵	PAHs	PE	×					×
Meierdierks <i>et al.</i> (2022) ⁶⁶	PAHs	PE	×		×			×
Meire <i>et al.</i> (2016) ⁶⁷	OCPs	PE	×	×				×
Mustajärvi <i>et al.</i> (2017) ⁶⁸	—	Silicone						×
Muz <i>et al.</i> (2020) ⁶⁹	PAHs, PCBs, PBDEs, CHCs, PYRs, OCPs, UV filters and musks	Silicone			×		×	×
Nguyen <i>et al.</i> (2020) ⁷⁰	Flame retardants	Silicone (incl. wristbands)				×	×	
Niu <i>et al.</i> (2020) ⁷¹	PAHs, PCBs, PBDEs, CHCs, PYRs, OCPs, UV filters and musks	Silicone					×	×
Niu <i>et al.</i> (2021) ²⁶	PAHs, PCBs, PBDEs, CHCs, PYRs, OCPs, UV filters and musks	Silicone			×		×	×
Pintado-Herrera <i>et al.</i> (2020) ⁷²	PAHs, PCBs, pesticides, OPFRs, UV filters and musks	Silicone		×				×
Reche <i>et al.</i> (2020) ⁷³	PAHs	Silicone (wristbands)				×	×	×
Reddam <i>et al.</i> (2020) ⁷⁴	OPEs	Silicone (wristbands)				×	×	×
Reichenberg <i>et al.</i> (2008) ²³	PAHs	Silicone			×			×
Reiter <i>et al.</i> (2022) ⁷⁵	—	Silicone				×		
Rohlman <i>et al.</i> (2019) ⁷⁶	PAHs	Silicone (wristbands)				×	×	×
Rojo-Nieto and Perales (2015) ⁷⁷	PAHs	Silicone			×			×
Rojo-Nieto <i>et al.</i> (2019) ⁷⁸	PAHs, PCBs and OCPs	Silicone				×		×
Ruge <i>et al.</i> (2015) ⁷⁹	PAHs and PBDEs	PE	×	×				×
Rusina <i>et al.</i> (2017) ⁸⁰	PCBs, OCPs and CHCs	Silicone				×		×
Sacks and Lohmann (2012) ⁸¹	PBDEs	PE		×	×			×
Samon <i>et al.</i> (2022) ⁸²	Review	Silicone (wristbands)					×	×
Schäfer <i>et al.</i> (2015) ⁸³	PCBs	Silicone			×			×
Schuster <i>et al.</i> (2021) ⁸⁴	POPs, <i>e.g.</i> , PCBs, OCPs	PUF	×					
Smedes <i>et al.</i> (2013) ⁸⁵	PCBs and PAHs	Silicone			×			×
Smedes <i>et al.</i> (2020) ⁸⁶	PCBs, PBDEs, OCPs and CHCs	Silicone			×	×		×
Strandberg <i>et al.</i> (2022) ⁸⁷	PAHs	PUF	×					
Smith and Jeong (2021) ⁶	—	Silicone						×
Tuduri <i>et al.</i> (2005) ⁸⁸	PCBs	PUF	×					
Travis <i>et al.</i> (2020) ⁸⁹	PCBs, flame retardants and pesticides	Silicone (wristbands)				×	×	
Vrana <i>et al.</i> (2018) ⁹⁰	PAHs, PCBs and CHCs	Silicone and PE		×				×
Vrana <i>et al.</i> (2019) ⁹¹	PAHs, PCBs, PBDEs, OCPs and CHCs	Silicone		×				×
Wang <i>et al.</i> (2020) ⁹²	Flame retardants (PBDEs and NBFRs)	Silicone (wristbands)				×	×	
Wernicke <i>et al.</i> (2022a) ²⁴	PAHS, PCBs and OCPs	Silicone			×			×
Wernicke <i>et al.</i> (2022b) ²⁵	PAHS, PCBs and OCPs	Silicone	×	×				×
Wise <i>et al.</i> (2022) ⁹³	PBDEs, NBFRs and OPEs	Silicone (wristbands)				×	×	
Xie <i>et al.</i> (2021) ⁹⁴	OPEs	Silicone (wristbands)				×	×	
Young <i>et al.</i> (2021) ⁹⁵	PCBs, PBDEs, BFRs, OPEs, pesticides and PAHs	Silicone (wristbands)						×

To characterize bioaccumulation, diverse metrics have been proposed derived from the ratio of total concentrations of a pollutant in the organism, normalized to its lipid fraction in the case of HOCs, over its concentrations in the main exposure

medium normalized to the major sorptive phase, *e.g.*, organic carbon in sediment. Examples include: bioconcentration factors ($BCF = C_{biota}/C_{water}$) for uptake from the abiotic environment, (b) biomagnification factors ($BMF = C_{predator}/C_{prey}$) for uptake *via*



food, (c) biota/sediment accumulation factors ($BSAF = C_{biota}/C_{sediment}$), (d) trophic magnification factors (TMF) and (e) fugacity or activity ratios.

To date, activity ratios have mainly been calculated from traditional monitoring data, *i.e.*, from sorption phase-normalized concentrations.⁹⁹ Drawbacks of this normalization approach include differences in sorptive capacities, *e.g.*, for “lipids” (in many cases operationally defined as extractable organic matter) between storage lipids and membrane lipids, opposed to other sorptive phases such as proteins of relevance in lean tissues^{78,100–102} or for “organic carbon” relative to black carbon in different fractions as a function of site-specific conditions, hence limiting comparability. The overall goal regarding activity ratios is to express the data on a common basis to enable direct comparison, circumventing normalizations, which becomes feasible when directly comparing $C_{chemometer}$ across samples.

Novel chemometers have been developed in the CHEMO-RISK project to extend their applicability domain, previously restricted to samples rich in transporter agents, such as lipids or organic carbon, to enable equilibration with biota of different lipid contents^{78,103} and sediment for application in a well-defined model ecosystem, the Swedish Lake Ången. The concentrations of the sampled pollutants in the chemometer can then be directly compared across the different compartments and trophic levels to provide insights into the thermodynamic factors affecting bioaccumulation. However, it has to be kept in mind that a larger amount of sample is necessary in this application compared to exhaustive extraction, to ensure working in non-depletive mode.

The results from this project have proven that chemometers are a promising tool to evaluate chemical pollutants in biota, allowing to determine metrics such as the TMF directly using the concentrations determined in the chemometers, hence avoiding the need of normalization to the major sorptive phases.¹⁰³ The results further corroborate the general assumption that biomagnification is accompanied by an increase in chemical activity. Taking into account eqn (1), if biomagnification is accompanied by an increase in the concentrations in the chemometers, it implies an increase of chemical activity in the higher trophic level opposed to the lower trophic level, which was observed in our study.¹⁰³ Within this work it has thus been experimentally confirmed that biomagnification across the food web implies an increase in the concentrations of the chemometers equilibrated with species from higher trophic levels, equivalent to an increase in chemical activity.

Furthermore, the use of chemometers in different biotic and abiotic compartments has extended their application to determine activity ratios between biota and their surrounding abiotic compartments (*e.g.*, sediments), using eqn (3):

$$a_{biota}/a_{sediment} = C_{silicone \rightleftharpoons biota}/C_{silicone \rightleftharpoons sed} \quad (3)$$

where $C_{silicone \rightleftharpoons biota}$ is the concentration of the chemometer equilibrated with biota and $C_{silicone \rightleftharpoons sed}$ is the concentration in the same type of chemometer, but equilibrated with the abiotic compartment (in this case with sediment, and potentially in the

future equilibrated with water). Using a similar approach, other studies like the one from Smedes *et al.*⁸⁶ have compared chemometer-based concentrations in water and fish from different trophic levels, in this case applying PRCs to extrapolate concentrations obtained with kinetic sampling in water to equilibrium using the dissipation of PRCs. In other publications, like Wernicke *et al.*²⁵ and Allan *et al.*¹⁰⁴ the activity ratios were approximated using chemometers in the abiotic compartment (water and/or suspended particulate matter) in combination with exhaustive extraction in fish, followed by their translation into lipid-based concentrations, assuming model lipids at equilibrium with the abiotic compartment.

Chen *et al.*^{37,38} recently developed another interesting approach to study the thermodynamics of biomagnification through the application of chemometers in food before and after passing the gastrointestinal tract (feces) of different zoo-based predator species.^{37,38} Regarding bioaccumulation studies, Allan *et al.*¹⁰⁵ Adolfsson-Erici¹⁰⁶ *et al.* and O’Connell *et al.*¹⁰⁷ have explored the feasibility of *in vivo* sampling following implantation of chemometers for studying HOCs through the insertion of a silicone sampler into trout. Other researchers such as Narváez Valderrama *et al.*¹⁰⁸ follow this research line.

Considering the sampling in air as another abiotic compartment and the potential comparison with biota samples, in the CHEMO-RISK project we studied human exposure in the indoor environment by means of thin silicone films attached to the kitchen windows of the study participants for non-invasive human exposure assessment (see Fig. 2). No PRCs were used in this case to avoid elevated exposure. The results are still under evaluation, but the setup might represent an interesting approach to compare concentrations in chemometers of the identical polymer deployed in different human-related compartments, further addressing the characterization of the human exposome.

Internal exposure and effect assessment

Internal exposure to a chemical at the target site is known to be best suited to explain observed effects.¹⁰⁹ However, in many cases only external exposure data are accessible, which implies a limited degree of correlation between exposure and effects. For total concentrations in either exposure medium (water or sediment) or biota tissues, normalization-related challenges apply: tissues have different compositions including diverse fractions of storage lipids *vs.* membrane lipids, and in lean tissues other sorptive phases such as proteins gain importance.¹⁰⁰

Chemometers open up for characterizing chemical activity in target tissues following *in tissue* equilibration of the polymer, avoiding the need for normalization. The simultaneous uptake of very diverse compounds into the polymer moreover allows for investigation of chemical exposure and mixture toxicity across different organs: chemometers have the inherent advantage of transferring mixtures of nonpolar HOCs into the extract



either submitted to analytical determination or dosed into, *e.g.*, bioassays without changing the chemical composition of the mixture.^{2,52,75} As an additional benefit, chemometers transfer less disturbing matrix constituents such as lipids into the extracts; hence non-destructive cleanup procedures are often sufficient, limiting alterations of the mixture composition.

In our project, chemometers have been developed to study mixtures of chemicals from *in tissue* sampling of different organs, *i.e.*, blubber, liver, kidney and brain tissues of stranded marine mammals.^{32,75} The related hypothesis was that HOCs mainly accumulate in storage lipids and that the chemical activity hence would be the highest in blubber tissues. However, the results of the bioanalytical profiling (oxidative stress response and activation of xenobiotic metabolism) showed only minor differences for the oxidative stress response (AREc32), while blubber extracts did not activate the aryl hydrocarbon receptor (AhR-CALUX) up to concentrations where cytotoxicity occurred.^{32,75} Only the peroxisome proliferator-activated receptor gamma (PPAR γ -bla) indicated an elevated chemical activity in chemometers equilibrated with liver, followed by kidney, brain, and blubber tissues.⁷⁵

Subsequent chemical profiling of a wide range of legacy and emerging pollutants in the extracts was performed but did not show clear tissue-specific patterns.¹¹⁰ The reason may be that those chemicals that are known to activate PPAR γ -bla were not specifically targeted in the chemical analysis,⁶⁹ which is strong support to complementarily work with chemical screening and bioanalytical profiling to capture the whole exposome of an organism. In combination with chemical profiling, the observed effects can then be related to the measured chemicals in an approach called “iceberg modeling”¹¹¹ to determine to which extent the known chemicals contribute to the observed effects. Our recent study indicated that for highly contaminated individuals and assays such as AhR-CALUX in which legacy HOCs elicit strong effects, a large fraction of both the specific effect and the observed cytotoxicity can be explained by the measured chemicals.¹¹⁰ Contrarily, the fraction explained in the other assays was well below 1% as far as specific effects are concerned, whereas regarding cytotoxicity, the explained fractions were between 0.1 and 10%.

Non-invasive human exposure assessment

The fate and effects of environmental chemicals in humans is of major concern, but very challenging to assess due to ethical issues and the related limited availability of study material. Regarding chemometers, in the last decade, silicone wristbands have been proposed as a non-invasive chemical assessment tool and have been used in multiple studies to characterize personal exposure in a variety of populations such as in Samon *et al.*⁸² However, with this approach it is challenging to reach equilibrium with the chemicals sequestered from the human skin within a reasonable time frame due to the thickness of the wristband and limited contact with the skin. Furthermore, as is exposed not only

to the human skin but also to the surrounding air, clothes, *etc.*, the origin of the sampled chemicals is poorly defined and may be heavily impacted, *e.g.*, by particles deposited on the wristbands or personal care products used by the study participant. This may be the reason why many studies apply the wristbands with a perspective on passive air sampling. In addition, being in direct contact with the skin, some of the procedures that are commonly used to extrapolate concentrations in chemometers applied in the kinetic uptake phase to equilibrium partitioning concentrations (such as, *e.g.*, the use of PRCs) are not suitable in this setup.

In order to overcome those drawbacks, in our project new chemometers have been designed as non-invasive alternatives for human exposure assessment¹¹² with a perspective to subsequent comparison to patterns and levels in human blood. We have assessed different sampler formats, including thin silicone skin patches that offer a larger contact area between the chemometer and the human skin, applied to the upper thigh of the study participants¹¹² and compared the obtained results to the performance of the commonly used silicone wristbands. In a pre-study, we assessed the uptake kinetics for 1d, 3d, or 5d of exposure. Furthermore, different combinations of isolation layers, consisting of medical gauze and a weaved activated carbon fabric, have been tested to isolate uptake from either the skin or the surrounding air. In addition, silicone films attached to the study participants’ kitchen windows have been tested to investigate the external exposure of the study participants from indoor air.

Comparison of the results for the different isolation layers indicated that the activated carbon fabric was not suitable in our setting because not only did it isolate the silicone skin patches from airborne chemicals, it also depleted the silicone of the sampled compounds.¹¹² The gauze, however, proved suitable to prevent deposition of contaminants onto the silicone chemometer. Comparison of the sampled contaminant patterns and burdens showed that the wristbands had enhanced sensitivity as they sampled substantially higher levels in the silicone, despite their thickness and limited, poorly controlled contact to the skin, due to airborne deposition being the major uptake pathway. However, the extracts of the wristbands contained much more disturbing matrix so that certain time windows of the chromatograms were hardly quantifiable if at all. Overall, as in the case of the silicone wristbands, drawbacks of the silicone skin patches such as limited uptake rates, *etc.* imply that these chemometers do not reach steady state with the human body either. Some preliminary results¹¹³ showed that, even if certain benefits of the skin patches were observed relative to the wristbands, including cleaner chromatograms, improvements in the design are still necessary to be able to successfully apply them in large-scale monitoring or cohort studies.

Another interesting approach regarding the study of the human exposome using chemometers was described in Baumer *et al.*,³³ where *post-mortem* samples of different tissues from body donors were equilibrated with chemometers and submitted to both chemical analysis and bioassays. This research opens up a new pathway for investigating the human



lifelong exposure to mixtures of chemicals. Further chemometer approaches to study the human exposome have been explored for human biomonitoring, such as silicone breast implants, which equilibrate in the body over time and provide a measure of the overall body burden.^{107,114}

Next steps

To fully establish chemometers as powerful and solid tools in environmental and human health assessment, further steps to be taken include the following four aspects: (i) fostering the development and use of identical polymers for all environmental and human compartments or translation into concentrations in the same polymer; (ii) achieving equilibrium partitioning for chemometers in water; (iii) overcoming challenges in studies of the human exposome; and (iv) identifying patterns of known, suspected and unknown chemicals across multimedia compartments.

Identical polymers or conversion into the same polymeric phase

For each polymeric chemometer, irrespective of whether it is silicone, PE or any other polymer, there is a large variety of materials available. These distinct polymers have slightly different sorptive characteristics for chemicals. Unless the identical polymer is used for chemometers applied in every environmental compartment, allowing for direct and unbiased comparison, the equilibrium partitioning concentration in the polymers require translation into the same material to be comparable.

For this conversion, polymer/polymer partition coefficients are needed, which are only partly available in the literature for a subset of the polymers and a range of nonpolar HOCs.^{115,116} As a consequence, efforts have to be taken in order to (i) establish a solid and wide set of highly precise polymer/polymer partition coefficients that allow for those translations; (ii) further develop the chemometers applied in certain environmental compartments to be applicable also in the other compartments. Although some steps have already been taken in that direction, such as using silicone sheets (normally used for biota and water) for sediments or using coated jars (normally used for soil/sediments/SPM) for biota,^{37,38} in most of the cases different chemometers are still used for sampling of nonpolar HOCs in the different environmental compartments within a study which then have to be translated for direct comparability.

Achieving equilibrium partitioning in water

As mentioned above, achieving equilibrium partitioning between a chemometer and water is very challenging within a reasonable time frame for many of the nonpolar, highly hydrophobic HOCs. Due to the very high polymer/water partition coefficients for HOCs, equilibrating the samplers with

negligible depletion of the sample requires huge volumes of water, rendering *ex situ* equilibration in the laboratory, *e.g.*, under agitation, impossible. Thus, the sampling with chemometers has to be done on the field.

The usual procedure is to measure the concentrations in the kinetic uptake phase (Fig. 1(A)) and extrapolate them to concentrations at equilibrium (i) either by using field dissipation data of a set of PRCs covering the range of physicochemical properties of the analytes for calculating the sampling rates in the field deployment or (ii) using sampling rates derived under laboratory conditions, which are challenging to extrapolate to field conditions. According to the guideline by Smedes and Booij,¹¹⁷ for using PRCs: the retained PRC fraction f can be calculated for each PRC by the ratio of the amount left in the field sampler N_t upon retrieval from the field and the measured original amount as derived from the laboratory controls (average) N_0 according to eqn (4):

$$f = \frac{N_t}{N_0} = e^{-\frac{B \times t}{K_{pw} \times M^{0.47} \times m}} \quad (4)$$

where B is a constant depending on the hydrodynamic condition around the deployed sampler, t is the deployment duration, K_{pw} is the compound-specific polymer/water partition coefficient for the sampler, M is the molar mass and m is the mass of the sampler.

Then, the sampling rate R_s for each compound can be calculated as follows in eqn (5):

$$R_s = B/M^{0.47}. \quad (5)$$

Despite this approach working reasonably well for chemical analysis (with larger uncertainties when the degree of equilibration is low),²⁵ it cannot be applied when the extracts are to be submitted to bioanalytical profiling because of the differences in degree of equilibration of the unknown chemicals and the potential effects elicited by the PRCs, which is one of the drawbacks of this approach. Having an equilibrium chemometer for the water phase would open up not only for broad use of bioassays, but also for routine applications, *e.g.*, within regular water quality monitoring. Additional benefits of equilibrium chemometers for water include more accurate data and redundancy of sampling rates, rendering calculations using polymer/water partition coefficients straightforward ($C_{water} = C_{silicone} \times K_{water/silicone}$). Due to the potentially broad applicability, using chemometers in equilibrium mode in water would represent the “gold standard” for this compartment.

Some progress has been made in this direction, aiming to reduce the water boundary layer to increase uptake rates into the chemometer, as well as towards minimizing the thickness of the chemometers to maximize the surface area in contact with the sample relative to the sampler volume. Examples include (i) a device referred to as dynamic passive sampler,^{90,91} (ii) the pre-equilibration of the chemometers with another medium, *e.g.* sediment, from the study site, prior to exposure to water in order to start from a chemical activity close to equilibrium to allow faster attainment of equilibrium partitioning with water,⁹¹ or (iii) the use of silicone-coated jars under a continuous movement of water which appeared to be promising for moderately



hydrophobic contaminants.¹⁰³ Despite those advancements, equilibrium partitioning between chemometers and water remains to date unsolved in a practical way.

Overcoming challenges in human studies

To date, most of the studies regarding humans have focused on non-invasive human exposure assessment through external devices, such as silicone wristbands. As stated above, those approaches do not reach equilibrium with the human body *via* the skin, but rather (also) sample other compartments such as the surrounding air. In order to comprehensively study the human exposome, further approaches need to be explored, such as the ones proposed by Abel *et al.* (in prep.),¹¹² applying different formats of external chemometers, or by Baumer *et al.*³³ equilibrating the chemometers *post-mortem* with different human tissues, but these approaches are still of limited scope and/or restricted to *post-mortem* investigations. In order to broaden the scope of human biomonitoring with chemometers despite very restrictive ethics, one interesting approach may be to use samples that are taken during regular surgeries collected as by-products. These leftovers could provide a valuable set of samples, in particular if complemented by detailed medical information about the study participants.

Chemical patterns across multimedia compartments

One of the major advantages of applying chemometers to study the environmental fate and bioaccumulation of pollutants is the direct comparability between chemometers equilibrated with different multimedia environmental compartments. As such, chemometers help overcoming substantial bias related to the multitude of methods and approaches applied to date which all reduce comparability. The use of activity ratios (section “Thermodynamics-based bioaccumulation” and eqn (3)) is one possibility to compare between compartments when targeted analysis yields quantifiable concentrations of a chemical in each chemometer. This approach has been applied successfully in Rojo-Nieto *et al.* (in prep.)¹⁰³ for sediments and aquatic biota from different trophic levels.

Beyond that targeted application, chemometer extracts are also ideally suited for suspect screening and nontargeted analysis. By exploring the extracts in a nontargeted way, peak patterns across different sample types can be studied without knowing the identity of the underlying compounds. In our project, we have explored chemometer-based pattern analysis for chemical profiling to identify increasing or decreasing peaks in biota from one location covering diverse trophic levels,¹¹⁸ in which increasing peak areas up the food web indicate biomagnification and decreasing peak areas may point at chemicals that are biotransformed (Fig. 3). Until now, suspect screening and nontarget analysis have been applied to chemometer extracts exposed to abiotic compartments,

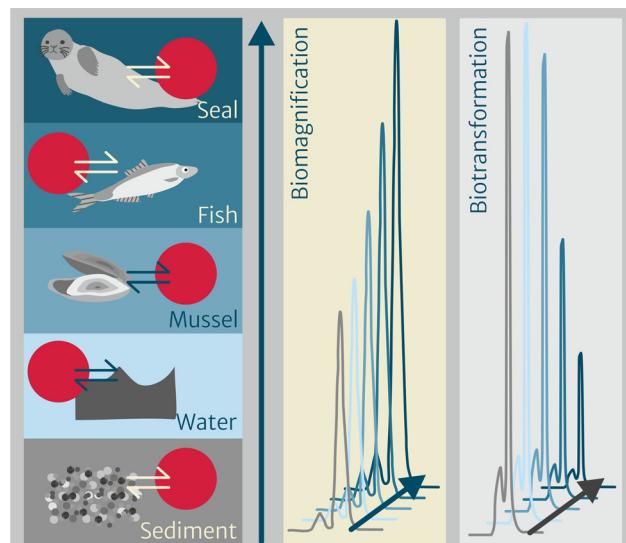


Fig. 3 Pattern analysis of known, suspected and unknown peaks based on chemometer extracts.

mainly to water for less hydrophobic compounds,^{119–121} but not yet to biota.

Another approach has focused on chemical patterns between different organs and tissues of marine mammals¹²² (*i.e.*, blubber, liver, kidney and brain) to characterize the chemical mixture and potentially identify yet unrecognized chemicals that strongly biomagnify or are biotransformed as a result of enzymatic action, for example. The underlying hypothesis is that identical chemometers equilibrated with different tissues within one organism or across individuals from the same environment allow for an initial screening based on comparing chromatograms, allowing for peaks with interesting patterns to be selected for potential identification. In this context, chemicals known to strongly biomagnify (*e.g.*, hexachlorinated PCBs) or to be subject to biotransformation (*e.g.*, certain PAHs) can help to establish the related workflows. If successful within different biota and/or tissues, future applications may address the additional challenge of comparing abiotic to biotic compartments.

Abandoned research lines

In our efforts to design versatile, robust and reliable multimedia chemometers, the following approaches could not be successfully established and were hence abandoned: (i) silicone-coated glass wool for equilibration in the water phase; (ii) silicone nets produced by electrospinning for equilibration in the water phase; (iii) chemometers made of different polymers for the water phase, as a chemical proxy for the exposome of diverse tissues of aquatic biota; (iv) identical cleanup methods for chemical analysis and bioanalytical profiling. The ideas behind were: (i) and (ii) to maximize the surface area in contact with the water while allowing high water flow to reduce the water boundary layer and increase uptake kinetics; (iii) to mimic different tissues using diverse polymers that enrich less hydrophobic compounds than the HOCs targeted



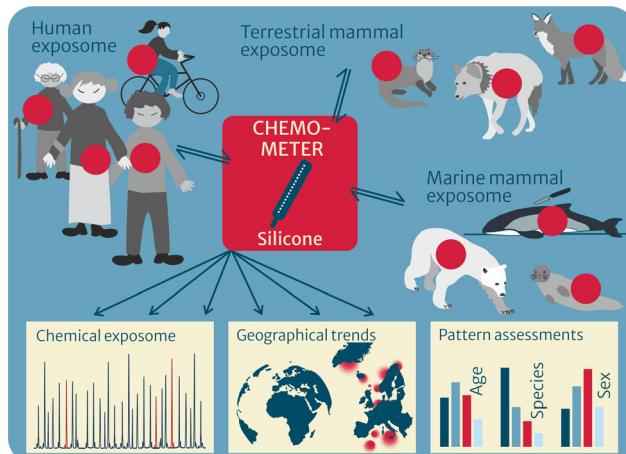


Fig. 4 Chemometers to characterize the exposome in top predators such as terrestrial and marine mammals as well as humans.

with silicone; (iv) to use the identical clean-up for all chemometer-based studies which proved impossible in our work so far due to reduced instrument lifetime of samples submitted to the cleanup used for biotesting on the one hand and blank issues of the cleanup used for chemical analysis in bioanalytical assessment on the other hand.¹¹⁰

Besides those abandoned research lines, some challenges have been addressed and partially overcome: (i) the impact of co-dosed lipids in cell-based bioassays and (ii) background contamination of silicone mono- and oligomers in the chemometer extracts. Those obstacles have been overcome as follows: (i) the effect of the co-dosed lipids has been quantified and modeled in the bioassays,¹²³ and environmental concentrations can now be corrected for co-extracted lipids; (ii) the co-extraction of silicone mono- and oligomers has been evaluated and discussed in Muz *et al.*⁴ and it can partially be solved applying the non-destructive cleanup protocol. In addition, using different solvents for extracting the chemicals from the chemometers could minimize the co-extraction of any polymeric matrix.

Conclusions

Chemometers have proven to be promising tools for environmental and human health assessment of a broad chemical universe of nonpolar HOCs in multimedia environments. As such, they give highly valuable additional information to traditional exhaustive extraction methods, making chemometers in certain cases the superior approach. The unique concept allows for direct comparison of chemical profiles and levels across abiotic and biotic environmental media, across organisms or between organs, over time and space (for temporal and geographical trends) and is expected to generate novel insights into the environmental fate and effects of multiple pollutants. Furthermore, pattern analysis may help to find relevant candidates for the identification of important, yet unknown pollutants. The approach has also proven promising

for human health assessment and is being tested within suspect and nontargeted screening. Finally, whereas the focus of CHEMO-RISK was on method development, validation and proof-of-concept of multimedia passive sampling with chemometers, the follow-up project EXPOSO-METER will apply the established chemometers to give a comprehensive overview of the exposome of humans, terrestrial mammals and marine mammals (Fig. 4).

Author contributions

E. R. N. contributed to conceptualization, methodology, investigation, validation, writing – original draft and supervision. A. J. was responsible for conceptualization, validation, resources, writing – original draft, visualization, supervision, funding acquisition and project administration (<https://www.elsevier.com/authors/policies-and-guidelines/credit-author-statement>).

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

The work presented here represents the core outcome of the CHEMO-RISK project (www.ufz.de/chemo-risk) supported by the European Research Council (ERC) under the European Union's Horizon 2020 research and innovation program (grant agreement no. 715173). Additional work that has been included is part of the Helmholtz Association-funded project EXPOSO-METER (www.ufz.de/exposo-meter) supported within the funding program of first-time appointments of excellent women scientists (grant agreement no. W2/W3-126). The manuscript could be improved substantially based on insightful comments by Theo Wernicke, Eva Reiter and Sebastian Abel. We gratefully acknowledge Philipp Mayer for initiating this research line and for his guidance in our first and subsequent steps in this research field. We thank each member of the “Chemometers Group”, two anonymous reviewers and numerous other colleagues for the good discussions and valuable comments.

References

- 1 F. Reichenberg and P. Mayer, *Environ. Toxicol. Chem.*, 2006, **25**, 1239–1245.
- 2 P. Mayer, J. Toll, J. L. M. Hermens and D. Mackay, *Environ. Sci. Technol.*, 2003, **37**, 184–191.
- 3 A. Jahnke and P. Mayer, *J. Chromatogr. A*, 2010, **1217**, 4765–4770.
- 4 M. Muz, E. Rojo-Nieto and A. Jahnke, *Environ. Toxicol. Chem.*, 2021, **40**, 2693–2704.
- 5 F. Smedes, J. Sobotka, T. P. Rusina, P. Fialová, P. Carlsson, R. Kopp and B. Vrana, *Environ. Sci. Technol.*, 2020, **54**, 7942–7951.
- 6 K. E. C. Smith and Y. Jeong, *Environ. Sci. Technol.*, 2021, **55**, 9538–9547.
- 7 K. E. C. Smith, G. J. Oostingh and P. Mayer, *Chem. Res. Toxicol.*, 2010, **23**, 55–65.
- 8 P. Mayer, J. Wernsing, J. Toll, P. G. J. de Maagd and D. T. H. M. Sijm, *Environ. Sci. Technol.*, 1999, **33**, 2284–2290.



9 K. E. C. Smith, N. Dom, R. Blust and P. Mayer, *Aquat. Toxicol.*, 2010, **98**, 15–24.

10 P. Mayer and M. Holmstrup, *Environ. Sci. Technol.*, 2008, **42**, 7516–7521.

11 E. Rojo-Nieto, K. E. C. Smith, J. A. Perales and P. Mayer, *Aquat. Toxicol.*, 2012, **120–121**, 27–34.

12 A. Jahnke, M. S. McLachlan and P. Mayer, *Chemosphere*, 2008, **73**, 1575–1581.

13 F. Smedes, *Chemosphere*, 2019, **223**, 748–757.

14 H. Li, B. Zhang, Y. Wei, F. Wang, M. J. Lydy and J. You, *Environ. Sci. Technol.*, 2014, **48**, 6957–6964.

15 K. Mäenpää, M. T. Leppänen, K. Figueiredo, F. Tigistu-Sahle and R. Käkelä, *Arch. Environ. Contam. Toxicol.*, 2015, **68**, 193–203.

16 B. I. Escher, C. E. Cowan-Ellsberry, S. Dyer, M. R. Embry, S. Erhardt, M. Halder, J. H. Kwon, K. Johanning, M. T. T. Oosterwijk, S. Rutishauser, H. Segner and J. Nichols, *Chem. Res. Toxicol.*, 2011, **24**, 1134–1143.

17 S. Endo, B. Mewburn and B. I. Escher, *Chemosphere*, 2013, **90**, 505–511.

18 Y. Pei, H. Li and J. You, *Sci. Total Environ.*, 2017, **598**, 385–392.

19 L. Jin, C. Gaus, L. van Mourik and B. I. Escher, *Environ. Sci. Technol.*, 2013, **47**, 7982–7988.

20 F. Smedes, *Chemosphere*, 2019, **223**, 748–757.

21 E. Webster, D. Mackay and K. Qiang, *J. Great Lakes Res.*, 1999, **25**, 318–329.

22 K. Mäenpää, M. T. Leppänen, F. Reichenberg, K. Figueiredo and P. Mayer, *Environ. Sci. Technol.*, 2011, **45**, 1041–1047.

23 F. Reichenberg, F. Smedes, J. A. Jönsson and P. Mayer, *Chem. Cent. J.*, 2008, **2**, 1–10.

24 T. Wernicke, S. Abel, B. I. Escher, J. Koschorreck, H. Rüdel and A. Jahnke, *Ecotoxicol. Environ. Saf.*, 2022, **232**, 113285.

25 T. Wernicke, E. Rojo-Nieto, A. Paschke, C. Nogueira Tavares, M. Brauns and A. Jahnke, *Environ. Sci. Eur.*, 2022, **34**, DOI: [10.1186/s12302-022-00644-w](https://doi.org/10.1186/s12302-022-00644-w).

26 L. Niu, J. Ahlheim, C. Glaser, R. Gunold, L. Henneberger, M. König, M. Krauss, M. Schwientek, C. Zarfl and B. I. Escher, *Environ. Sci. Technol.*, 2021, **55**, 5106–5116.

27 A. Alkon, R. B. Gunzard, R. Castorina, P. D. Hoffman, R. P. Scott, K. A. Anderson and A. Bradman, *J. Pediatr. Health Care*, 2022, **36**, 34–45.

28 I. J. Allan, K. Bæk, T. O. Haugen, K. L. Hawley, A. S. Høgfeldt and A. D. Lillicrap, *Environ. Sci. Technol.*, 2013, **47**, 11660–11667.

29 I. J. Allan, B. Vrana, J. de Weert, A. Kringstad, A. Ruus, G. Christensen, P. Terentjev and N. W. Green, *Sci. Rep.*, 2021, **11**, 1–12.

30 T. A. Arcury, H. Chen, S. A. Quandt, J. W. Talton, K. A. Anderson, R. P. Scott, A. Jensen and P. J. Laurienti, *Sci. Total Environ.*, 2021, **763**, 144233.

31 A. Baumer, B. I. Escher, J. Landmann and N. Ulrich, *Anal. Bioanal. Chem.*, 2020, **412**, 7295–7305.

32 A. Baumer, S. Jäsch, N. Ulrich, I. Bechmann, J. Landmann and B. I. Escher, *Environ. Sci. Technol.*, 2021, **55**, 9097–9108.

33 A. Baumer, S. Jäsch, N. Ulrich, I. Bechmann, J. Landmann, A. Stöver and B. I. Escher, *Environ. Int.*, 2021, **157**, 106867.

34 B. Beckingham and U. Ghosh, *Chemosphere*, 2013, **91**, 1401–1407.

35 A. J. Bergmann, P. E. North, L. Vasquez, H. Bello, M. del C. G. Ruiz and K. A. Anderson, *J. Exposure Sci. Environ. Epidemiol.*, 2017, **27**, 560–568.

36 K. Booij, C. D. Robinson, R. M. Burgess, P. Mayer, C. A. Roberts, L. Ahrens, I. J. Allan, J. Brant, L. Jones, U. R. Kraus, M. M. Larsen, P. Lepom, J. Petersen, D. Pröfrock, P. Roose, S. Schäfer, F. Smedes, C. Tixier, K. Vorkamp and P. Whitehouse, *Environ. Sci. Technol.*, 2016, **50**, 3–17.

37 Y. Chen, Y. D. Lei, J. Wensvoort and F. Wania, *Environ. Sci. Technol.*, 2020, **54**, 6842–6849.

38 Y. Chen, Y. D. Lei, J. Wensvoort, S. Gourlie and F. Wania, *Environ. Sci. Technol.*, 2022, **56**, 9497–9504.

39 M. Claessens, E. Monteyne, K. Wille, L. Vanhaecke, P. Roose and C. R. Janssen, *Mar. Pollut. Bull.*, 2015, **93**, 9–19.

40 G. Cornelissen, K. Wiberg, D. A. G. Broman, H. P. H. Arp, Y. Persson, K. Sundqvist and P. Jonsson, *Environ. Sci. Technol.*, 2008, **42**, 8733–8739.

41 H. M. Dixon, R. P. Scott, D. Holmes, L. Calero, L. D. Kincl, K. M. Waters, D. E. Camann, A. M. Calafat, J. B. Herbstman and K. A. Anderson, *Anal. Bioanal. Chem.*, 2018, **410**, 3059–3071.

42 K. Figueiredo, K. Mäenpää, M. Lyytikäinen, J. Taskinen and M. T. Leppänen, *Sci. Total Environ.*, 2017, **601–602**, 340–345.

43 H. E. Fuchte, A. Schäffer, K. Booij and K. E. C. Smith, *Environ. Sci. Technol.*, 2020, **54**, 15759–15767.

44 T. Harner, et al., Global Atmosphere Passive Sampling (GAPS) Network, <https://gml.noaa.gov/obop/mlo/programs/coop/gaps/gaps.html>.

45 K. G. Harley, K. L. Parra, J. Camacho, A. Bradman, J. E. S. Nolan, C. Lessard, K. A. Anderson, C. M. Poutasse, R. P. Scott, G. Lazaro, E. Cardoso, D. Gallardo and R. B. Gunier, *Sci. Total Environ.*, 2019, **652**, 1022–1029.

46 M. Hendryx, S. Wang, K. A. Romanak, A. Salamova and M. Venier, *Environ. Pollut.*, 2020, **257**, 113501.

47 A. Jahnke, P. Mayer, D. Broman and M. S. McLachlan, *Chemosphere*, 2009, **77**, 764–770.

48 A. Jahnke, P. Mayer, M. Adolfsson-Erici and M. S. McLachlan, *Environ. Toxicol. Chem.*, 2011, **30**, 1515–1521.

49 A. Jahnke, P. Mayer and M. S. McLachlan, *Environ. Sci. Technol.*, 2012, **46**, 10114–10122.

50 A. Jahnke, P. Mayer, M. S. McLachlan, H. Wickström, D. Gilbert and M. Macleod, *Environ. Sci.: Processes Impacts*, 2014, **16**, 464–472.

51 A. Jahnke, M. MacLeod, H. Wickström and P. Mayer, *Environ. Sci. Technol.*, 2014, **48**, 11352–11359.

52 A. Jahnke, A. Sobek, M. Bergmann, J. Bräunig, M. Landmann, S. Schäfer and B. I. Escher, *Environ. Sci.: Processes Impacts*, 2018, **20**, 1667–1679.

53 L. Jin, B. I. Escher, C. J. Limpus and C. Gaus, *Chemosphere*, 2015, **138**, 292–299.

54 M. T. O. Jonker, S. A. Van Der Heijden, D. Adelman, J. N. Apell, R. M. Burgess, Y. Choi, L. A. Fernandez, G. M. Flavetta, U. Ghosh, P. M. Gschwend, S. E. Hale, M. Jalalizadeh, M. Khairy, M. A. Lampi, W. Lao, R. Lohmann, M. J. Lydy, K. A. Maruya, S. A. Nutile, A. M. P. Oen, M. I. Rakowska, D. Reible, T. P. Rusina, F. Smedes and Y. Wu, *Environ. Sci. Technol.*, 2018, **52**, 3574–3582.

55 M. Khairy, D. Muir, C. Teixeira and R. Lohmann, *Environ. Sci. Technol.*, 2015, **49**, 13787–13797.

56 M. A. Khairy and R. Lohmann, *Environ. Sci. Technol.*, 2017, **51**, 9062–9071.

57 M. L. Kile, R. P. Scott, S. G. O'Connell, S. Lipscomb, M. MacDonald, M. McClelland and K. A. Anderson, *Environ. Res.*, 2016, **147**, 365–372.

58 S. C. Lang, P. Mayer, A. Hursthouse, D. Kötke, I. Hand, D. Schulz-Bull and G. Witt, *Chemosphere*, 2018, **191**, 886–894.

59 W. Lao, Y. Hong, D. Tsukada, K. A. Maruya and J. Gan, *Environ. Sci. Technol.*, 2016, **50**, 13470–13476.

60 J. Y. Li, J. Y. M. Tang, L. Jin and B. I. Escher, *Environ. Toxicol. Chem.*, 2013, **32**, 2888–2896.

61 R. Lohmann, J. Klanova, P. Kukucka, S. Yonis and K. Bollinger, *Environ. Sci. Technol.*, 2012, **46**, 10471–10479.

62 R. Lohmann, J. Klanova, P. Kukucka, S. Yonis and K. Bollinger, *Environ. Sci. Technol.*, 2013, **47**, 13967–13975.

63 K. Mäenpää, M. T. Leppänen, K. Figueiredo, P. Mayer, D. Gilbert, A. Jahnke, C. Gil-Allué, J. Aukkanen, I. Nybom and S. Herve, *Environ. Toxicol. Chem.*, 2015, **34**, 2463–2474.

64 C. A. McDonough, G. Puggioni, P. A. Helm, D. Muir and R. Lohmann, *Environ. Sci. Technol.*, 2016, **50**, 9133–9141.

65 J. Meierdierks, C. Zarfl, B. Beckingham and P. Grathwohl, *Environ. Sci.: Atmos.*, 2021, **1**, 253–266.

66 J. Meierdierks, C. Zarfl, B. Beckingham and P. Grathwohl, *ACS Environ. Au.*, 2022, **2**(6), 536–548.

67 R. O. Meire, M. Khairy, A. C. Targino, P. M. A. Galvão, J. P. M. Torres, O. Malm and R. Lohmann, *Chemosphere*, 2016, **144**, 2175–2182.

68 L. Mustajärvi, A. K. Eriksson-Wiklund, E. Gorokhova, A. Jahnke and A. Sobek, *Environ. Sci.: Processes Impacts*, 2017, **19**, 1404–1413.

69 M. Muz, B. I. Escher and A. Jahnke, *Environ. Sci. Technol.*, 2020, **54**, 15861–15871.

70 L. v Nguyen, S. Gravel, F. Labrèche, B. Bakhiyi, M. A. Verner, J. Zayed, L. M. Jantunen, V. H. Arrandale and M. L. Diamond, *Environ. Sci. Technol.*, 2020, **54**, 15277–15286.

71 L. Niu, E. Carmona, M. König, M. Krauss, M. Muz, C. Xu, D. Zou and B. I. Escher, *Environ. Sci. Technol.*, 2020, **54**, 13197–13206.

72 M. G. Pintado-Herrera, I. J. Allan, E. González-Mazo and P. A. Lara-Martín, *Environ. Sci. Technol.*, 2020, **54**, 6693–6702.

73 C. Reche, M. Viana, B. L. van Drooge, F. J. Fernández, M. Escribano, G. Castaño-Vinyals, M. Nieuwenhuijsen, P. E. Adami and S. Bermon, *Sci. Total Environ.*, 2020, **717**, 137161.



74 A. Reddam, G. Tait, N. Herkert, S. C. Hammel, H. M. Stapleton and D. C. Volz, *Environ. Int.*, 2020, **136**, 105499.

75 E. B. Reiter, B. I. Escher, U. Siebert and A. Jahnke, *Environ. Int.*, 2022, **165**, 107337.

76 D. Rohlman, H. M. Dixon, L. Kincl, A. Larkin, R. Evoy, M. Barton, A. Phillips, E. Peterson, C. Scaffidi, J. B. Herbstman, K. M. Waters and K. A. Anderson, *BMC Public Health*, 2019, **19**, DOI: [10.1186/s12889-019-7217-z](https://doi.org/10.1186/s12889-019-7217-z).

77 E. Rojo-Nieto and J. A. Perales, *Environ. Sci.: Processes Impacts*, 2015, **17**, 1331–1339.

78 E. Rojo-Nieto, M. Muz, J. Koschorreck, H. Rüdel and A. Jahnke, *Chemosphere*, 2019, **220**, 501–504.

79 Z. Ruge, D. Muir, P. Helm and R. Lohmann, *Environ. Sci. Technol.*, 2015, **49**, 13777–13786.

80 T. P. Rusina, P. Carlsson, B. Vrana and F. Smedes, *Environ. Sci. Technol.*, 2017, **51**, 11250–11257.

81 V. P. Sacks and R. Lohmann, *Environ. Pollut.*, 2012, **162**, 287–293.

82 S. M. Samon, S. C. Hammel, H. M. Stapleton and K. A. Anderson, *Environ. Int.*, 2022, 169.

83 S. Schäfer, C. Antoni, C. Möhlenkamp, E. Claus, G. Reifferscheid, P. Heininger and P. Mayer, *Chemosphere*, 2015, **138**, 856–862.

84 J. K. Schuster, T. Harner, A. Eng, C. Rauert, K. Su, K. C. Hornbuckle and C. W. Johnson, *Environ. Sci. Technol.*, 2021, **55**, 9479–9488.

85 F. Smedes, L. A. van Vliet and K. Booij, *Environ. Sci. Technol.*, 2013, **47**, 510–517.

86 F. Smedes, T. P. Rusina, P. Fialova, R. Kopp and B. Vrana, *Environ. Sci. Technol.*, 2020, **54**, 7942–7951.

87 B. Strandberg, C. Österman, H. Koca Akdeva, J. Moldanová and S. Langer, *Polycyclic Aromat. Compd.*, 2022, **42**, 448–459.

88 L. Tuduri, T. Harner and H. Hung, *Environ. Pollut.*, 2006, **144**, 377–383.

89 S. C. Travis, D. S. Aga, E. I. Queirolo, J. R. Olson, M. Daleiro and K. Kordas, *Sci. Total Environ.*, 2020, **740**, 140136.

90 B. Vrana, F. Smedes, I. Allan, T. Rusina, K. Okonski, K. Hilscherová, J. Novák, P. Tarábek and J. Slobodník, *Sci. Total Environ.*, 2018, **636**, 1597–1607.

91 B. Vrana, T. Rusina, K. Okonski, R. Prokeš, P. Carlsson, R. Kopp and F. Smedes, *Sci. Total Environ.*, 2019, **664**, 424–435.

92 Y. Wang, A. Peris, M. R. Rifat, S. I. Ahmed, N. Aich, L. V. Nguyen, J. Urík, E. Eljarrat, B. Vrana, L. M. Jantunen and M. L. Diamond, *Sci. Total Environ.*, 2020, **720**, 137480.

93 C. F. Wise, S. C. Hammel, N. J. Herkert, M. Ospina, A. M. Calafat, M. Breen and H. M. Stapleton, *Environ. Sci. Technol.*, 2022, **56**, 1149–1161.

94 Q. Xie, Q. Guan, L. Li, X. Pan, C. L. Ho, X. Liu, S. Hou and D. Chen, *Environ. Pollut.*, 2021, **282**, 117011.

95 A. S. Young, N. Herkert, H. M. Stapleton, J. G. Cedeño Laurent, E. R. Jones, P. MacNaughton, B. A. Coull, T. James-Todd, R. Hauser, M. L. Luna, Y. S. Chung and J. G. Allen, *Environ. Int.*, 2021, **156**, 106727.

96 T. P. Rusina, P. Carlsson, B. Vrana and F. Smedes, *Environ. Sci. Technol.*, 2017, **51**, 11250–11257.

97 K. Booij, F. Smedes and E. M. van Weerlee, *Chemosphere*, 2002, **46**, 1157–1161.

98 F. A. P. C. Gobas, X. Zhang and R. Wells, *Environ. Sci. Technol.*, 1993, **27**, 2855–2863.

99 L. P. Burkhard, J. A. Arnot, M. R. Embry, K. J. Farley, R. A. Hoke, M. Kitano, H. A. Leslie, G. R. Lotufo, T. F. Parkerton, K. G. Sappington, G. T. Tomy and K. B. Woodburn, *Integr. Environ. Assess. Manage.*, 2012, **8**, 17–31.

100 A. M. H. DeBruyn and F. A. P. C. Gobas, *Environ. Toxicol. Chem.*, 2007, **26**, 1803–1808.

101 A. Jahnke, J. Holmbäck, R. A. Andersson, A. Kierkegaard, P. Mayer and M. MacLeod, *Environ. Sci. Technol. Lett.*, 2015, **2**, 193–197.

102 K. Mäenpää, M. T. Leppänen, K. Figueiredo, F. Tigistu-Sahle and R. Käkelä, *Arch. Environ. Contam. Toxicol.*, 2015, **68**, 193–203.

103 E. Rojo-Nieto, *et al.*, From TMFs to multimedia activity ratios: chemometers as a versatile tool to study bioaccumulation of HOCs in aquatic ecosystems (in prep.).

104 I. J. Allan, B. Vrana and A. Ruus, *Environ. Sci. Technol.*, 2022, **56**, 7945–7953.

105 I. J. Allan, K. Bæk, T. O. Haugen, K. L. Hawley, A. S. Høgfeldt and A. D. Lillicrap, *Environ. Sci. Technol.*, 2013, **47**, 11660–11667.

106 M. Adolfsson-Erici, G. Åkerman and M. S. McLachlan, *Chemosphere*, 2012, **88**, 62–68.

107 S. G. O'Connell, N. I. Kerkvliet, S. Carozza, D. Rohlman, J. Pennington and K. A. Anderson, *Environ. Int.*, 2015, **85**, 182–188.

108 J. F. Narvaez Valderrama, *et al.*, 13th IPSW 2022, in Abstract book – Conference proceedings.

109 B. I. Escher and J. L. M. Hermens, *Environ. Sci. Technol.*, 2004, **38**, 455A–462A.

110 E. B. Reiter, *et al.*, Chemical Profiling and Bioanalytical Measurement of Passive Sampling Extracts of Different Organs from Marine Mammals (under review).

111 P. A. Neale, S. Ait-Aissa, W. Brack, N. Creusot, M. S. Denison, B. Deutschmann, K. Hilscherová, H. Hollert, M. Krauss, J. Novák, T. Schulze, T. B. Seiler, H. Serra, Y. Shao and B. I. Escher, *Environ. Sci. Technol.*, 2015, **49**, 14614–14624.

112 S. Abel, *et al.*, Comparing Non-Invasive Passive Sampling Approaches to Monitor Human Exposure to Environmental Contaminants (in prep.).

113 S. Abel, *et al.*, SETAC Europe 32 Annual Meeting. Abstract book – Conference proceedings (223–224), 2022.

114 I. J. Allan, K. Bæk, A. Kringstad, H. E. Roald and K. V. Thomas, *Environ. Int.*, 2013, **59**, 462–468.

115 D. Gilbert, G. Witt, F. Smedes and P. Mayer, *Anal. Chem.*, 2016, **88**, 5818–5826.

116 K. Booij, F. Smedes and I. J. Allan, Guidelines for determining polymer-water and polymer-polymer partition coefficients of organic compounds, *ICES Techniques in Marine Environmental Sciences*, 2017, vol. 61., 2017.

117 F. Smedes and K. Booij, *ICES Techniques in Marine Environmental Sciences*, 2012, vol. 52, p. 20.

118 M. Muz, *et al.*, Investigating patterns of known and unknown chemicals across samples and media using chemometers (in prep.).

119 L. L. Hohrenk-Danzouma, M. Vosough, V. I. Merkus, F. Drees and T. C. Schmidt, *Environ. Sci. Technol.*, 2022, **56**, 5466–5477.

120 X. Gao, P. Huang, Q. Huang, K. Rao, Z. Lu, Y. Xu, G. W. Gabrielsen, I. Hallanger, M. Ma and Z. Wang, *Environ. Pollut.*, 2019, **253**, 1–10.

121 R. Guibal, S. Lissalde, A. Charriau, G. Poulier, N. Mazzella and G. Guibaud, *J. Chromatogr. A*, 2015, **1387**, 75–85.

122 V. J. Schacht, *et al.*, Chemometers for exploring patterns of known and unknown chemicals in organs of marine mammals (in prep.).

123 E. B. Reiter, A. Jahnke, M. König, U. Siebert and B. I. Escher, *Environ. Sci. Technol.*, 2020, **54**, 4240–4247.

