


 Cite this: *RSC Adv.*, 2024, 14, 28724

Essential aspects of the CFD software modelling of biomass gasification processes in downdraft reactors

 ZiTeng Yu,^{ab} ZiXing Wang,^{ab} HuiXiong Zhong^{ab} and KeKe Cheng *^{ab}

Mathematical modelling and simulation of gasification processes are increasingly used in the scientific field. This review explores the application of computational fluid dynamics (CFD) in modeling biomass gasification processes in downdraft gasifiers. It discusses the different types of gasification agents used, the composition of syngas, and key operational parameters influencing the process. The review then delves into the aspects of CFD modeling, focusing on the implementation of sub-models within ANSYS fluent software. The limitations of the existing literature are addressed, and strategies for enhancing downdraft gasifier performance are proposed to facilitate successful commercialization.

 Received 6th July 2024
 Accepted 29th August 2024

DOI: 10.1039/d4ra04886e

rsc.li/rsc-advances

1. Introduction

Biomass refers to any organic material generated as forest residues or residual by-products of agricultural activities, including solid-state or pulp waste derived from pruning ornamental trees in urban environments, or remains from crop cleaning to prevent pests and forest fires.^{1,2} As agricultural production continues to expand, the volume of residual by-products also increases, often leading to environmental concerns.³ However, these wastes can be converted into thermal or heat energy through thermochemical processes such as direct combustion, pyrolysis, and gasification.⁴ In particular, gasification is a promising technique for converting biomass into clean energy.^{5,6} Among the different types of gasifiers, downdraft gasifiers are simple and economically designed, and their application in biomass gasification has become widespread.⁷

The global scientific community continues to evaluate and offer possible solutions to the problems that affect the gasification process to expand the use of this technology in both developed and developing countries. The main challenges include understanding and predicting the parameters that provide insights into the functionality of the gasification process.^{8,9}

Various methods are employed to predict the behavior and functionality of the gasification process, which can be concrete (direct measurements in pilot plants) or virtual (mathematical equations used to describe the physical or chemical properties

of the process). By employing these methods, variables are analyzed and factors affecting the process are investigated. The method is selected based on the purpose of fuel. Mathematical modelling is essential for understanding and predicting possible changes or alterations during the gasification process.¹⁰ The advantage of mathematical modelling lies in avoiding the high costs of experimentation and enabling the study of different situations at varying levels of complexity solely through computational means.⁹

The use of mathematical modelling and simulation has increased as a means to study and predict changes in the parameters that affect the biomass gasification process.^{10,11} These include thermodynamic models and kinetic models. Thermodynamic models represent equilibrium *via* perfect mixing and infinite reaction time, offering flexibility as they are time-invariant and unaffected by dynamics. Kinetic models predict non-equilibrium product distribution, system changes, and residence times in chemical reactors.¹² Computational fluid dynamics (CFD) modelling has shown particular promise, and commercial software programs such as ANSYS Fluent and OpenFOAM are widely utilized.^{13,14}

OpenFOAM and ANSYS Fluent are used for chemical engineering fluid dynamics, including reactors. They offer rapid data generation, user-friendly interfaces, documentation, and simplified biomass gasification simulation.¹⁵ It is easier for researchers to use these software programs for simulating biomass gasification processes. A one-dimensional volume particle model is coupled with ANSYS Fluent's dense discrete phase model (DDPM) through user-defined functions to achieve a multi-scale modeling approach. It exhibits good consistency with experimental data within a feasible computational time frame and allows for in-depth analysis of processes inside the reactor. This enables tracking of individual reaction particles while resolving gradients within the particles.¹⁶

^aGuangdong Provincial Key Laboratory of Distributed Energy Systems, Dongguan University of Technology, Dongguan 523808, China. E-mail: chengke@dgut.edu.cn

^bChina-Latin America Joint Laboratory for Clean Energy and Climate Change, School of Chemical Engineering and Energy Technology, Dongguan University of Technology, 523808, China



The review will meticulously examine the application of Computational Fluid Dynamics (CFD) in optimizing downdraft gasifiers for biomass gasification, encompassing peer-reviewed journal articles and conference papers published within the last decade. The primary objective is to systematically analyze the interplay between gasification agents, reactor types, and operational parameters on syngas composition, heating value, and gasification efficiency. Inclusion criteria for studies will be meticulously defined, prioritizing those employing CFD as a core analytical methodology and ensuring the availability of detailed data regarding model setup, parameters, and results. The analysis will follow a structured and systematic approach, focusing on key parameters and categorizing studies based on the CFD model employed.

2. Gasification processes

During biomass gasification, water content, temperature, lignocellulosic structure, and particle size are key factors that affect the efficiency of gasification and the composition of the syngas. When the water content in biomass increases from 20% to 40%, the gasification efficiency decreases by about 10%. Furthermore, an excessively high water content can lead to a reduction in the hydrogen content of the syngas, as water reacts with hydrocarbons to produce water vapor.¹ Temperature also has a significant impact on the efficiency of gasification and the composition of the syngas. When the temperature rises from 700 °C to 900 °C, the gasification efficiency increases by about 20%, while the hydrogen content in the syngas decreases from 25% to 20%.³ The lignocellulosic structure refers to the pore structure within the biomass, and its size and distribution can affect the diffusion and transfer of gases, thereby influencing the efficiency of gasification and the composition of the syngas. The larger the lignocellulosic structure, the easier it is for gases to diffuse and transfer, which is conducive to improving gasification efficiency and the hydrogen content of the syngas.⁴ Particle size also has a significant impact on the efficiency of gasification and the composition of the syngas. When the particle size decreases from 1 mm to 0.5 mm, the gasification efficiency increases by about 20%, and the hydrogen content in the syngas also increases accordingly. Therefore, during the gasification process, appropriate operating parameters should be selected based on specific circumstances to enhance the gasification efficiency and the hydrogen content of the syngas.⁵

Gasification is a process in which incomplete combustion of the fuel or, using different terminologies, partial oxidation, occurs due to the insufficiency of a gasification agent.^{17–19} The partial oxidation of the fuel provides energy for various processes that occur during gasification such as drying, devolatilization, and reduction. The gaseous products of devolatilization consist of CO, CO₂, H₂, CH₄, H₂O, steam, and light hydrocarbons.^{20,21} Sometimes, tars and char are also present. Tars, as organic byproducts, exist in the form of steam at the gasification temperature (above 400 °C) and are in a liquid state at ambient temperature, whereas at high temperatures, they can decompose and form light gases such as CO, CO₂, and H₂.^{2,22}

Char is a solid residue that undergoes oxidation *via* heterogeneous reactions, producing CO and CO₂ in proportions that depend on the operating temperature, gasifier, oxygen availability, and ash content of the biomass.

3. Classification of gasifiers

The study of the gasification process has spanned over two centuries, resulting in various gasifier configurations ranging from small-scale laboratory (pilot plants) to industrial scale. A comparative classification of the reactors can be made as shown in Fig. 1.²³

While this review primarily focuses on downdraft gasifiers, it is crucial to acknowledge the existence and relevance of other gasifier types. A brief overview of these alternatives is provided below to contextualize downdraft gasifiers within the broader spectrum of gasification technologies.

All reactors differ in four main parameters: the medium (gasification agent), the pressure applied, the heat source, and the overall design. There are three design configurations, each with several subcategories. For the purposes of this current

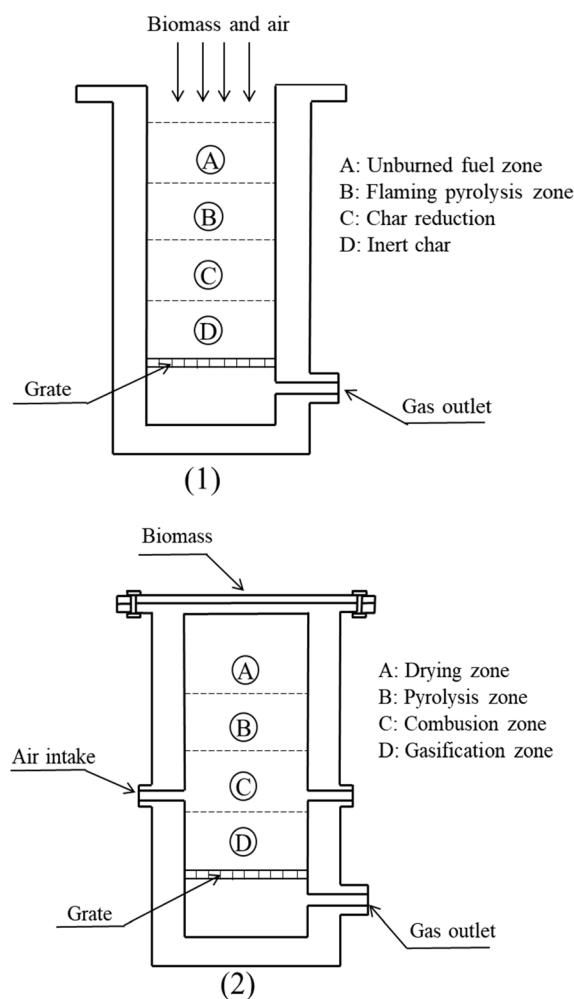


Fig. 1 Different designs of downdraft gasifiers: a gasifier with open top (1) and a gasifier with closed top (2).



review, below we provide a brief comparative analysis of fluidized bed design and fixed bed design, focusing on downdraft and updraft reactor types.

3.1 Fluidized gasifiers

In fluidized bed gasifiers, air is introduced through a bed of pre-treated solid particles at a velocity enough to keep the particles in a suspended state and behave like a fluid.²⁴ This velocity is known as the fluidization rate and is crucial for these types of gasifiers.^{25,26} The fundamental purpose of fluidized bed gasifier technology is to obtain syngas with a higher percentage of hydrogen, which is a product of the biomass gasification process.²⁷ These gasifiers have a lower temperature at the exit of the process, leading to an increase in tar content because the reactor temperatures do not reach the level necessary for the tar to disintegrate into other chemical species.^{25,26,28}

3.2 Entrained gasifiers

Entrained flow gasifiers use oxygen as the gasification agent, operating at temperatures around 1200–1500 °C. This enables the handling of a wider range of coal types and offers high efficiency.^{29,30} However, the high temperatures and use of microscopic fuel particles lead to increased energy consumption and material costs, limiting their applicability for biomass gasification.^{31–35}

3.3 Updraft gasifiers

In updraft gasifiers, the gasification agent enters through the bottom of the bed and moves upwards, while the fuel or biomass moves from top to bottom.³⁶ Similar to fluidized bed gasifiers, updraft gasifiers also have lower temperatures at the exit of the process, resulting in an increased tar content due to the same reasons mentioned earlier.^{37–41}

3.4 Downdraft gasifiers

As shown in Fig. 1, downdraft gasifiers have two reactor design configurations: open and closed.^{42,43} The open design is widely used today. Biomass is added from the top, simultaneously drawing in primary air, ensuring no hot spots at the reactor inlet and reducing inefficiencies in the thermochemical process.

A downdraft is formed by a straight cylinder of thermo-resistant material or an interior cylinder with a reduction called a throat or nozzle. The latter is widely used for the gasification of poly-dispersed materials such as small, low-density grain shells. The nozzle design is one of the most studied configurations for downdraft gasifiers.⁴⁴ Air enters the throat area through several nozzles distributed radially in the center of the gasifier. These nozzles are the conduits for secondary air, where biomass oxidation begins and heat transfer increases the temperature in the reactor bed. Due to the heating of the bed, drying zones appear and devolatilization starts. The synthesis gas and biomass moved downward.⁴⁵ In the absence of oxygen, gasification reactions occur at high temperatures, thus the tar concentration is low because temperatures reach the level at which tar disintegrates into other chemical species.^{46–48} The

disadvantage of downdraft gasifiers is that the high temperature of the gases at the process outlet leads to heat loss, resulting in the formation of alkaline vapors and particles.⁴⁹ Therefore, it is essential that the gas product of gasification be cleaned for future use.^{50,51}

3.5 Gaps in the existing literature

While extensive research exists on various gasifier types, comprehensive reviews specifically focusing on downdraft gasifiers and their CFD modelling are limited. This review aims to fill this gap by providing a detailed analysis of downdraft gasifier design, operational parameters, syngas composition, and CFD modelling approaches. By consolidating existing knowledge and highlighting potential areas for further investigation, this review aims to contribute to the advancement of downdraft gasifier technology and its successful commercialization.

4. Parameters of studies in gasification modelling

To address the question of key parameters in gasification modeling, this section focuses on factors that significantly influence simulation efficiency and accuracy. These parameters, as identified through a review of various studies, include moisture content, reactor temperature,⁵² equivalence ratio, and particle size.⁵³ The moisture content impacts combustion, temperature distribution, and steam content. The reactor temperature influences reaction rates and syngas composition, affecting LHV. The equivalence ratio controls temperature and product yields, while the particle size affects gasification rates and temperature profiles. Optimizing these parameters enhances simulation reliability and gasifier performance.

The integration of feedstock properties in biomass gasification models involves considerations of moisture content, particle size, and composition.^{54,55} The moisture content impacts combustion time and matrix temperature, affecting the reaction efficiency and steam content. The particle size affects the reaction kinetics and product distribution, with smaller particles enhancing H₂ and CO production.^{52,56} Chemical compositions including elemental ratios influence gas formation.⁵⁷ Thermodynamic and non-stoichiometric equilibrium models are used to incorporate these parameters.⁵⁸ Thermodynamic models account for biomass type and composition but require significant computational resources, while non-stoichiometric models are simpler but have limitations.^{59,60} Overall, these parameter optimizations can enhance the gasification efficiency and economics.

Model validation and calibration in biomass gasification rely on a combination of experimental data, sensitivity analysis, and comparison with established models. Experimental validation involves comparing model predictions with experimental data to adjust parameters until the model accurately captures the process behavior.⁶¹ Sensitivity analysis identifies influential parameters, ensuring their accurate representation and assessing model robustness.²³ Benchmarking with existing



models and employing machine learning algorithms for pattern identification and predictive modeling further enhances reliability.⁶² Careful parameter selection, continuous refinement, and utilization of validated models are essential for maintaining model accuracy and reliability.

4.1 Moisture content of the feedstock

A direct relationship has been demonstrated between the moisture content in the biomass and the final composition of the gas obtained in the gasification simulation process.⁶³ Amit Kumar Biswas *et al.*⁶⁴ observed that an increase in the moisture content of the biomass leads to a prolonged combustion time of the biomass pellets and an increase in the temperature of the matrix. It is expected that the increase in the moisture content of the biomass will decrease the temperature value in the drying zone due to the relative heating of the feedstock upon entering the gasification zone. The moisture content greatly affects the reactor temperature, causing an increase in steam content, which favors other reactions that are less efficient in energy conversion.^{65,66}

Andrés Melgar *et al.*⁶⁷ demonstrated in their study that when the ratio of air/fuel is higher, the moisture content of the biomass is lower. Higher efficiency of cold gas is obtained in the gasification process. Based on the variation in the preheating temperature of the feed gas and the steam/air ratio (S/A), Yueshi Wu *et al.*⁶⁸ developed a 2D CFD model in ANSYS Fluent of a downdraft gasifier with an HTAG-type technology. The behavior of the temperature profile within the gasifier and the composition of the synthesis gas were analyzed. The authors demonstrate that with the increase in bed temperature, the residence time of the biomass decreases, causing an increase in combustible gases (H₂ and CO) and a decrease in tars. This phenomenon does not occur with the decrease in temperature inside the reactor, which would lead to a decrease in the LHV of the gas and the appearance of condensed tars, which would be detrimental to the gasification process. C. Dejtrakulwong *et al.*⁶⁹ conducted a parametric study focusing on the effects of the humidity of biomass and the air/biomass ratio on the height of the fundamental zone of a downdraft gasifier. The authors show an increase in the height of the pyrolysis zone and a decrease in the reduction zone with the decrease in moisture of the material to be gasified. For the air/biomass ratio, there is a decrease in the main areas of the downdraft gasifier when this ratio increases. Shweta Sharma *et al.*⁷⁰ reported a decrease in the efficiency of the gasification process when the moisture content in the biomass is higher; this behavior is similar in the study.⁷¹ Vladimirs Kirsanovs *et al.*⁷² focused their study on a real downdraft gasification facility with a nominal capacity of 400 kW. The investigation shows that biomass moisture, fuel supply, and the ratio of secondary/primary air flows have a significant effect on the gasification process. The researchers established that the decrease in the moisture content of the fuel from 21.1 to 10.9% causes an increase in the efficiency of the hot gas by 17% and the decrease in fuel flow causes a decrease in the thermal capacity of the plant and the efficiency by more than 5.0%.

4.2 Effect of temperature on the gasification process

The reactor temperature significantly impacts the gasification process, influencing reaction kinetics, equilibrium, tar formation, and overall efficiency.^{73–76}

Studies have shown that increasing the temperature promotes endothermic reactions such as steam gasification and the Boudouard reaction, leading to higher CO and H₂ production.^{77–79} This results in a decrease in CO₂ and H₂O concentrations and an increase in the lower heating value (LHV) of the syngas.⁷⁸

This has been confirmed by studies in which biomass gasification with a steam/air mixture is evaluated as a gasification agent.^{70,80,81} Additionally, higher temperatures can reduce the tar content by promoting tar cracking and decomposition.²⁰

4.3 Equivalence ratio (ER)

The equivalence ratio (ER), which compares the actual fuel-to-air ratio with the stoichiometric ratio, plays a critical role in the gasification process, affecting the reactor temperature, syngas composition, efficiency, and tar formation.^{82–84} An optimal ER is essential for achieving the highest lower heating value (LHV) and minimizing energy losses.²³ Studies by Rukshan Jayathilake *et al.*⁸⁵ and Pratik N. Sheth *et al.*⁸⁶ highlight that while a higher ER can increase the temperature and promote complete combustion, it may also lead to increased tar production; conversely, a lower ER can result in incomplete combustion and reduced tar, but with a trade-off in LHV and efficiency. Junxi Jia *et al.*⁸⁷ analyzed the effect of the equivalence ratio (ER), the biomass feed flow, and the steam/biomass ratio in a downdraft gasifier; it is demonstrated that a warming of the gasification zone increases the formation of combustible species and causes an increase in the LHV of the gas. Chao Gai *et al.*⁷⁹ used air as a gasification agent in a downdraft gasifier to evaluate the operation parameters. The temperature profile of the reactor and the composition of the synthesis gas produced by the process are studied. The author evaluated an ER ranging between 0.18 and 0.41, demonstrating that the main characteristics of the gasifier are affected. The ER values between 0.28 and 0.32 result in an LHV, optimal with this value at 5.39 MJ N⁻¹ m⁻³, and an increase in cold gas yield of 73.61%. However, ER values outside this range lead to a reduction in the previous parameters. The CH₄/H₂ ratio experiences little or almost zero ER variation. This is because the two species decrease in the same way, although the fraction of H₂ is much larger in relation to the small variations of CH₄.^{88,89}

Pratik N. Sheth *et al.*⁸⁶ studied the impact of the variation in the ER parameter in a downdraft gasifier fueled with wood and using air as the gasification agent on the composition of the gas at the exit of the process. Their study reported that the trends in the growth and reduction of CO and H₂ fractions were consistently opposite to those of N₂ and CO₂. The CO/CO₂ and H₂/CO₂ ratios initially showed an increasing trend with the increase in ER within the range of 0.18–0.32 but decreased for higher ER values.^{90,91} Controlling the ER is therefore a balancing act to ensure the desired syngas quality and process performance.



4.4 Particle size

The particle size has a profound effect on gasification processes, influencing both reaction kinetics and product distribution. Smaller particle sizes expedite the reaction process by increasing the surface area available for reactions to occur, leading to faster conversion of biomass to syngas and a greater emphasis on the production of hydrogen (H₂) and carbon monoxide (CO).^{92,93} Conversely, larger particle sizes lead to slower reaction rates, limiting the exposure of biomass to the reaction environment and resulting in lower syngas production.⁹⁴ The size of the particles also dictates the distribution of the products in the syngas. Smaller particles, with their greater surface area, facilitate the endothermic steam gasification and Boudouard reactions, leading to higher H₂ and CO yields. Larger particles, however, tend to favor the exothermic water-gas shift reaction, resulting in increased production of carbon dioxide (CO₂) and water (H₂O).^{93,95,96}

4.5 Composition of the syngas obtained from different studies

The gasification process is a series of thermochemical transformations that convert biomass or solid organic materials into combustible gases under high-temperature conditions (800–1000 °C) and in the presence of gasification agents such as air, oxygen, and steam.^{97–100} Depending on the gasification agent and the origin of the biomass, various compositions and qualities of process gases can be obtained.¹⁰¹

In the works of Z. A. Zainal *et al.*¹⁰² and P. P. Dutta *et al.*,¹⁰³ the focus is on downdraft gasifiers where the gasification agent is air. Air as a gasification agent is the most widely implemented technology today because the gasification process is simple and economically feasible.^{104,105} V. M. Jaganathan *et al.*¹⁰⁶ used an O₂–CO₂ mixture for the thermochemical conversion of three types of biomasses (agricultural waste, coconut shell, and wood pellets) to enhance the low heating value (LHV) of the syngas. In the study by Daniele Antolini *et al.*,¹⁰⁷ a mixture of air and CO₂ was used as the gasification agent. The injection of CO₂ led to an increased consumption of coal, favoring the Boudouard reaction, resulting in a higher CO conversion compared to air alone. The study showed a 20–30% reduction in the rate of biomass consumption compared to air gasification alone.

The final composition of the gas obtained during the gasification process depends on multiple factors including the biomass and the gasifier, as well as the operational conditions (temperature, pressure, and gasification agent),^{108–110} as illustrated in Table 1.

All review articles report that the gas composition after conversion depends on the gasifier and the gasifying agent used in the process. As can be seen from Table 1, different gasifying agents result in a range of heating values (HV) for the obtained process gases. Using air as a gasifying agent is the most common method because it is economic and easy to operate. However, since air contains a large amount of nitrogen, it dilutes the combustible gases in the output gas, leading to a relatively low heating value of the syngas. Additionally, air gasification typically produces more CO and less H₂. Steam

gasification or CO₂ gasification can produce syngas with higher heating values, especially at high temperatures. These methods can produce hydrogen-rich syngas because they promote the water–gas shift reaction and the methane reforming reaction. These methods are usually more complex and costly, but they are very attractive for producing high-heating-value gases or hydrogen for specific chemical reactions. Using oxygen as a gasifying agent can increase the heating value of the output gas and significantly increase the production of hydrogen. This is because oxygen gasification produces more CO and H₂, thereby increasing the energy density of the syngas. However, using pure oxygen as a gasifying agent is costly and requires a more complex system to supply and operate the oxygen.

In summary, the choice of different gasifying agents has a significant impact on the effectiveness of biomass gasification, requiring a trade-off between cost, technical complexity, and the quality of the output gas.

4.6 Optimizing gasification efficiency

The optimization of gasification processes is significantly influenced by the interplay between temperature, particle size, and equivalence ratio. Higher temperatures accelerate reaction rates and shift reaction equilibria, promoting the formation of hydrogen (H₂) and carbon monoxide (CO).^{79,123} Smaller particle sizes enhance the kinetics and favor H₂ and CO production, while larger particles tend to favor CO₂ and H₂O formation.^{92,93} The equivalence ratio (ER) controls the balance of chemical reactions, influencing syngas composition, efficiency, and tar formation.^{85,86}

These interactions are complex and must be carefully managed to achieve optimal process performance. The ideal conditions depend on the specific biomass type and desired syngas product mix. By carefully controlling and optimizing these parameters, researchers can enhance the kinetics of the gasification process, tailor the product distribution to meet specific process requirements, and maximize the lower heating value (LHV) and efficiency of the syngas produced.^{85,86}

In conclusion, the interactions between the temperature, particle size, and equivalence ratio are pivotal for gasification process optimization. These parameters must be carefully controlled and balanced to achieve the desired syngas composition, maximize LHV, and minimize tar formation.

5 Numerical modelling

Over the years, various types of numerical and non-numerical modelling have been developed, ranging from the simplest, such as zero-dimensional modelling, to the most complex, three-dimensional modelling.^{61,124–127} The models most commonly described in the scientific literature include thermodynamic equilibrium modelling, kinetic modelling, computational fluid dynamics (CFD) modelling, and artificial neural network (ANN) modelling.^{128–130} A good model provides assistance and identifies the sensitivity of gasification performance to variations in different operating and design parameters.¹³¹



Table 1 Composition of syngas with different gasification agents and types of gasifiers

Composition (vol%)							
Gasification agent	H ₂	CO	CO ₂	CH ₄	N ₂	HV (MJ m ⁻³)	Reference
Air (downdraft)	21.06	19.61	12.01	0.64	46.68	4.72	111
Air (downdraft)	7.12	17.56	13.74	1.01	60.57	—	112
Air (downdraft)	18.25	25.85	7.84	2.9	45.16	—	113
Air (downdraft)	15.62	15.62	14.37	1.95	52.42	15.45	114
Air (updraft)	11	24	9	3	53	5.5	115
O ₂ (downdraft)	32	48	15	2	3	10.4	116
Air (BFB)	14.1	18.7	14.7	3.5	47.7	n.d.	117
Steam (CFB)	34.2	27.2	22.7	11.1	4.8	n.d.	118
Steam (BFB)	52	23	18	7	n.d.	n.d.	26
Air (BFB)	19.24	18.2	10.89	0.57	40.23	4.57	118
Steam (CFB)	43.6	33.2	11.7	11.5	—	1.3	119
Air (BFB)	5.0–16.3	9.9–22.4	9.0–19.4	2.2–6.2	41.6–61.6	3.7–8.4	120
Steam (BFB)	38–56	17–32	13–17	7–12	0	12.2–13.8	120
Oxygen (open top)	30–34	30–37	25–29	4–6	—	10–15	121
Steam/CO ₂ (open top)	24–50	30–45	10–19	5–12	—	12–20	121
Oxy/steam (downdraft)	45–51	13–25	15–20	1–4	—	7–10	122

The mathematical description of the biomass gasification process is generally based on the laws of heat and mass transfer, energy laws, and the principle of momentum conservation. More complex models are employed to analyze the fluid dynamics and chemical reactions. The simplest models consider material and energy balances throughout the reactor to predict the composition of the gas produced, without taking into account chemical processes and reactions. These models include global mass and heat balances throughout the reactor and are referred to as equilibrium modelling.

Many researchers have analyzed the processes of mathematical modelling and simulation, which has made them faster and less expensive to perform. The modelling and simulation of the gasification process is a complex phenomenon, involving the transformation of organic matter based on its carbonaceous structure. The simulations achieved during the research provide invaluable information for understanding the physicochemical processes occurring within the reactor, thus facilitating future design, construction, and optimization of gasification equipment.

5.1 Thermodynamic equilibrium modelling

The Gibbs free energy minimization principle serves as the foundation of thermodynamic equilibrium modelling, often referred to as zero-dimensional modelling.^{132,133} When the gasifier achieves chemical equilibrium, its composition is deemed the most stable, at which point entropy increases and the Gibbs free energy is minimized. Thermodynamic equilibrium modelling can serve as a useful tool for predicting the possible composition of the syngas at the reactor outlet and for studying the effects of different process parameters on the gas obtained at the outlet of the gasifier. However, thermodynamic equilibrium modelling cannot assess the effects of fluid dynamic or geometric parameters, fluidization velocities of fluidized beds, or the height of the gasifier, among other design variables. There are two ways to establish chemical equilibrium:

using equilibrium constants (stoichiometric methods) and by directly minimizing Gibbs free energy (non-stoichiometric methods).^{134,135}

The stoichiometric model requires clearly defined reaction mechanisms, where chemical reactions and the species involved in the process are incorporated. The main objective of this modelling is to evaluate the equilibrium constants of a set of reactions that can be associated with Gibbs free energy. It is necessary to establish the specifications of the chemical reactions and the species involved in the process. The non-stoichiometric model focuses on the direct minimization of Gibbs free energy in the system, without the need to propose possible reactions that could be carried out.

In equilibrium modelling, only the elementary composition of the biomass expressed in the form of separate chemical species is required, such as C, H, O, N, and S if the biomass contains it.¹³⁶ This is why thermodynamic or thermochemical equilibrium modelling is particularly suitable for cases where all possible reactions that may occur in the gasification process are not required. It should be noted that researchers who describe these two models in detail use the Lagrange method as an optimization method to perform the minimization of Gibbs free energy.^{55,65} Other optimization methods could also be used to achieve the same goal. Conducting a comparative study of different methods of minimization, as well as their results, could be a topic for future research.

5.2 Kinetic modelling

Kinetic modelling can explore a wide range of factors that equilibrium models cannot. The models are founded on kinetic principles, which elucidate the chemical reactions occurring throughout the biomass gasification process, and they are indispensable for the development, evaluation, and enhancement of gasifiers.¹³⁷ For instance, residence time, gasifier design, fuel feeding rate, and reactor hydraulics can all be predicted using these models. The kinetic model can also



accurately describe the conversion mechanisms throughout the length of the gasifier.¹³⁸ Kinetic mechanisms involve parameters such as the hydrodynamics of the reactor, the residence time of biomass particles, the length of the reactor, reaction rates, and the formation of chemical species.

Equilibrium modelling calculates the maximum yield that can be obtained under equilibrium conditions, which may differ significantly from the actual yield achieved within the gasifier. Although these models are convenient choices for embedding in flowsheet calculations for system-wide analysis, their output reliability is lower. Kinetic modelling may be more suitable if a more precise model is required, as it requires knowledge of reactor hydrodynamics, energy, and mass balances to obtain the gas yield at a specific operating state.¹³⁹

In summary, kinetic modelling includes not only reaction and transport dynamics but also a distribution and transformation model of biomass particles within the reactor, analyzing discrete phases in different gasification zones. These models provide a set of parameters for investigating the behavior of the biomass gasification process *via* simulation, although they require more programming and computational time for simulation.¹⁴⁰ Many authors have conducted significant work aimed at analyzing kinetic modelling, as can be seen in studies.^{138,141–144} These studies address issues related to kinetic modelling and present different solutions to these arising issues.

5.3 CFD modelling

Kinetic models rely on detailed chemical reactions that are not dependent on the reactor geometry.⁴⁷ The limitations of kinetic models are addressed through CFD modelling, which involves the combined solution of mass, momentum, energy, turbulence, and fluid dynamics of flow. It provides a better understanding of the interactions between different phases and reactions inside the gasifier. The results can then be used to optimize the operation of downdraft gasifiers, leading to the production of higher-value syngas. Meanwhile, the increasing popularity of downdraft gasifiers and the applicability of the gas obtained from the gasification process have prompted us to conduct this literature review, aiming to unify and explain the various methods, models, and sub-models used in CFD, and to provide a reliable research path for new researchers while guiding research in the commercial CFD software.

In the literature review, it is observed that authors propose the use of different analytical models, methods, and forms. Maria Puig-Arnabat *et al.*¹⁴⁵ conducted a review with the objective of comparing and analyzing various biomasses used in the gasification process. In their study, they mention gasification models proposed by different authors and briefly describe the properties of different types of gasifiers. The research does not mention CFD modelling but refers to Aspen Plus as a robust software program. It also analyzes different gasification agents and briefly introduces Artificial Neural Network (ANN) optimization processes.

Tigabwa Y. Ahmed *et al.*¹⁴⁶ refer to mathematical modelling techniques that focus on the formation of chemical species,

particularly hydrogen. For a better understanding, they categorize the models into two broad categories: mathematical modelling (equilibrium, kinetic modelling) and modelling and simulation (CFD). They do not refer to the so-called 'black box testing software' such as Aspen Plus or DWSIM as modelling or simulation tools. The research by Dipal Baruah *et al.*¹³⁹ is entirely based on the biomass gasification process in fluidized bed-type gasifiers. Focusing on chemical and kinetic equilibrium modelling, they briefly mention CFD modelling and some techniques used in them. Similarly, ANN techniques are proposed without going into any depth. In the work of Tapas Kumar Patra *et al.*,¹⁴⁰ various models of the downdraft-type gasification process were analyzed, including thermodynamic numerical modelling, balance modelling, kinetic, CFD, ANN, and Aspen Plus. Patra performed a critical analysis of the effects of some gasification process parameters and presented the advantages and disadvantages of each modelling technique. The article refers to many processes but does not analyze them in depth; it serves as an informative basis for what was achieved in research in 2015. M. La Villetta *et al.*²³ presented a vision of different models, namely: thermodynamic, kinetic equilibrium, and Artificial Neural Network (ANN). The scope seems fairly restrictive as CFD modelling is not discussed, and other models mentioned are described very generally. The article studies some parameters that affect the gasification process and their influence on the composition of the gas obtained in the process. However, it does not propose any techniques such as ANN to optimize the gasification process. Jürgen Karl *et al.*¹⁴⁷ in their work provided a layout and sizing of the so-called dual fluidized bed (DFB) gasifiers and studied the characteristics and operation of these types of gasifiers working with steam as a gasification agent. The article also reviews the interaction properties of the biomass and the bed, the efficiency of the gas obtained and its quality in the DFB gasifiers. However, this work does not mention CFD modelling or any optimization methods. The work of Ana Ramos *et al.*⁵³ studied different modelling techniques of biomass gasification and co-gasification processes. The article is based on the dynamic modelling of fluids, kinetic, thermodynamic, and computational modelling. The review introduces the topic in general, without emphasizing ANN and only mentioning some of the programs that utilize the CFD methods without going into any specifics. Sahar Safarian *et al.*¹⁴⁸ in their study investigated different gasification models, focusing on fluidized bed gasifiers. The study showcases a number of published articles on gasification process modelling. These articles are selected to serve the author's purpose, so the vast majority are models applied exclusively in fluidized bed gasifiers. The authors emphasize thermodynamic, kinetic, and kinetic/equilibrium modelling, stating that thermodynamic equilibrium modelling is the most widely used. Although a brief description of CFD and ANN modelling is provided, the study diminishes the importance of these modelling algorithms, despite the fact that their use has been increasing in the scientific community worldwide.

The study of biomass gasification attempts to explore alternative approaches to facilitate a deeper understanding of this thermochemical process. As biomass gasification research



becomes increasingly complex, the computational methods involved have also become extremely intricate, with iterative processes consuming a significant amount of time. These programs employ computational fluid dynamics (CFD) modelling systems, typically denoted by the acronym CFD in English.¹⁴⁹ CFD is a computationally intensive program used globally to achieve simulations and models that closely resemble the reality of a given process, thereby reducing the use of material resources and lowering the costs of new projects.¹⁵⁰ Computational fluid dynamics has been utilized as a crucial design tool in various industrial sectors, and CFD techniques have demonstrated the capability to provide accurate predictions for certain chemical processes.^{151,152} Unlike previous models, CFD modelling offers a visual and more comprehensive representation of the biomass gasification process. It provides quantitative and qualitative solutions to the physical and chemical processes in biomass gasification plants; it allows for simulations using different operational parameters of a reactor in a more cost-effective manner.

Computational Fluid Dynamics (CFD) can be instrumental in the process modelling that takes place inside biomass reactors, including various types of downdraft gasifiers. It serves as an advanced tool that assists in the analysis and comprehension of the gasification process, providing temperature profiles and the potential formation of distinct chemical species, as well as parameter profiles specified by researchers in their solutions.^{149,153}

This computational method is based on the numerical solution of the Navier–Stokes momentum equations and the transfer and conservation of mass. Some studies have been conducted on the numerical solution of flow equations for typical fluids, whether in differential or vectorial form.^{26,154,155} CFD modelling is based on simulating patterns (such as velocity profiles, temperature, pressure, chemical species, or flow variables) within a given geometry, which involves solving a set of equations that govern the modelling. This starts with the fragmentation of the geometry (control volume) into small geometric segments (volume or finite elements), creating a computational mesh where the variables of interest are solved.

Some guidelines for the proper use of solution-adaptive refinement and grid-independent are guided as follows:

- The surface mesh must be fine enough to adequately represent the important features of the geometry.
- The initial mesh should contain enough cells to capture the essential features of the flow field. Subsequent gradient adaptation can be used to sharpen the shock and establish a grid-independent solution.
- A reasonably well-converged solution should be obtained before you perform an adaptation. If you adapt to an incorrect solution, cells will be added in the wrong region of the flow. However, you must use careful judgment in deciding how well to converge the solution before adopting, because there is a trade-off between adapting too early to an unconverged solution and wasting time by continuing to iterate when the solution is not changing significantly. Note that this does not directly apply to dynamic adaptation, as here the solution is

adapted either at every iteration or at every time step, depending on the solver being used.

- When performing gradient adaptation, you must select suitable variables. For some flows, the choice is clear. For instance, adapting to gradients of pressure is a good criterion for refining in the region of shock waves. In most incompressible flows, however, it makes little sense to refine pressure gradients. A more suitable parameter in an incompressible flow might be mean velocity gradients. If the flow feature of interest is a turbulent shear flow, it will be important to resolve the gradients of turbulent kinetic energy and turbulent energy dissipation, so these might be appropriate refinement variables. In reacting flows, the temperature or concentration (or mole or mass fraction) of reacting species might be appropriate.

- Poor adaptation practices can have adverse effects. One of the most common mistakes is to over-refine a particular region of the solution domain, causing very large gradients in cell volume. This can adversely affect the accuracy of the solution.

The discretization (in space and time) of the differential equations results in a system of algebraic equations; their numerical solution yields the unknowns of the problem in each element of the mesh, which are the distributions of the velocity and temperature components.^{149,153} This approach to solving the Navier–Stokes equations in either 1D, 2D, or 3D has been created with commercial software programs such as ANSYS Fluent, CFX, CFD2000, CFD, and Phoenix, mentioned in the course of this review. This software has been utilized in many of the latest research projects because it offers the option to simulate various configurations and process operations for this gasification. Table 2 presents a set of articles where different models are used according to the gasifier and other parameters that influence the choice of an appropriate modelling strategy.

Simulation in commercial CFD solution software such as CFX Fluent, STAR-CD, STAR-CCM, OpenFOAM, and COMSOL MULTI FACE, among others, has been employed in numerous scientific research projects, both for dynamic modelling and for simulating various types of gasification processes now in practice. J. Ward *et al.*¹⁷³ developed a model using ASPEN PLUS to maximize the yield of products obtained during pyrolysis, such as bio-oils, biochar, and syngas; their study utilized four types of biomass (green waste, pine chips, wood, and birch). The formation of chemical species in the syngas was analyzed based on the temperature, operating conditions, and biomass characteristics. The authors noted and demonstrated that crushed green waste is more efficient in producing bio-oil, as it has a higher cellulose content and lower moisture. Bhargav Manek *et al.*¹⁷⁴ conducted research on the gasification of coal in an updraft gasifier, using a steam/air mixture as the gasification agent. ANSYS Fluent was used for the simulation and numerical modelling of the gasifier. In this work, the authors employed various parameters, such as the equivalence ratio (ER) ranging from 0.24 to 0.36. To simulate the coal gasification process, an Euler–Lagrange-type discrete phase approach was adopted. The software yielded temperature profiles along the reactor and syngas compositions that varied with the operating parameters proposed by the researcher. The authors stated that increasing the steam/air ratio promotes the formation of H₂ in the gas



Table 2 Numerical modelling of biomass gasifiers

References	Software	Oxidizer	Type of gasifier	Type of feedstock	Studied parameters	Started models
Luc Gerun <i>et al.</i> ¹⁵⁶	2D axisymmetric CFD	Air/Steam	Downdraft	Wood chips	The nozzle surface area Air injection velocity	Model RNG k-epsilon Eddy dissipation concept
A. Rogel-Ramírez ¹⁵⁷	2D CFD PHOENICS algorithm IPSA	Air	Downdraft	Rice husk	Air to feed Biomass to feed Gas composition	Experimental number Conservation equations Eulerian model/k-epsilon model Numerical/validated with bibliography
Cleiton B. da Porciúncula <i>et al.</i> ¹⁵⁸	ANSYS® CFX 11.0, CFD 3D	Air	Downdraft	Wastes, leather industries	Syngas composition	Turbulence model k-w (frequency)) Numerical
I. Janajreh <i>et al.</i> ¹⁵⁹	ANSYS fluent, CFD 2D axisymmetric	Air	Downdraft	Wood chips	The temperature along the gasifier equivalent ratio Composition of adiabatic and non-adiabatic outflow gases	Turbulence model standard k-epsilon The discrete solid particle phase solved in a Lagrange frame of reference (DPM) Experimental and numerical
Keran D. Patel <i>et al.</i> ¹⁶⁰	Fluent 6.2.16 2D	Air	Downdraft	Lignite	Temperature flow pattern formation Turbulence and product gas composition	Turbulence model standard k-epsilon Eddy dissipation combustion model Probability density function (PDF) Non-Premixed combustion model Second-order discretization numerical
Xijia Lu <i>et al.</i> ¹⁶¹	ANSYS fluent	Oxygen	Entrained	Coal	Different radiations in a gasifier model	Focus Euler-Lagrange discrete Transfer Radiation model (DTRM) Radiation model, P-1, Rosseland Surface-to-surface (S2S), and discrete Ordinates (DO) turbulence model Standard k-epsilon numerical
H. Liu ¹⁶²	ANSYS fluent and programming language C, 2Dy3D	Air	Circulating fluidized bed	Biomass	Equivalence ratio Char combustion distribution coefficient	Turbulence model RNG k-epsilon Eulerian-Eulerian gas-solid drag model Gidaspow's model Radiation model P-1 Numerical
Rahul Gupta <i>et al.</i> ¹⁶³	ANSYS fluent, 2D	Air	Downdraft	Sobabul wood	Airflow, the number of air intake points	Turbulence model standard k-epsilon Radiation model P-1 Discrete phase Species transport Experimental and numerical
Xiaoke Ku <i>et al.</i> ¹⁶⁴	OpenFOAM (CFD-DEM)/ 3D	Steam	Fluidized bed	Pinewood	Steam/biomass ratio reactor temperature	Eulerian-Lagrange multi-phase model



Review

Table 2 (Contd.)

References	Software	Oxidizer	Type of gasifier	Type of feedstock	Studied parameters	Started models
Pubet Meenaroach <i>et al.</i> ¹⁶⁵	CFD fluent 2D axisymmetric	Air	Downdraft	Wood chips	Biomass retention time Biomass injection in different positions Euler–Lagrange multiphase model Syngas composition	Numerical Gasifier inlet airflow Turbulence model standard k-epsilon
Reactor temperature M. anil <i>et al.</i> ¹⁵³	Numerical ANSYS Fluent/2D	Air/steam	Bubbling fluidized bed	Sawdust	Equivalent ratio Steam/biomass ratio Airflow Steam temperature Coal flow	Multi-phase model Eulerian–Eulerian Numerical
Aytekin Gel <i>et al.</i> ¹⁶⁶	MFIX/3D	Steam/oxygen	Bubbling FB	Coal	Coal particle diameter Steam/oxygen ratio Reactor temperature	Multi-phase model Eulerian–Eulerian Experimental and numerical
Hui Liu <i>et al.</i> ¹⁶⁷	Barracuda reactor virtual/3D	Steam/oxygen	Dual fluidized-bed	Almond prunings	Steam/biomass ratio Combustion air supply	The gas phase is described by the large Eddy simulation (LES) MP-PIC (multiphase particle-in-cell) Experimental and numerical
S. Rupesh <i>et al.</i> ¹⁶⁵	ASPEN plus	Air/steam Effects of CaO addition	R Gibbs-	Sawdust	Gasifier temperature Equivalence ratio (ER)	Non-stoichiometric quasi-steady state model Total Gibbs free energy of the system is minimum Numerical
Linbo Yan <i>et al.</i> ¹⁶⁸	OpenFOAM/3D	Steam	Dual fluidized bed (DFB)	Biomass	Steam/biomass ratio Fluidization rate Biomass feed cup The diameter of biomass particles Bed temperature	MP-PIC DEM Eulerian model
R. Esquivel <i>et al.</i> ¹⁶⁹	ANSYS Fluent/3D	Air	Downdraft	Sawdust pellets	Inlet airflow to the gasifier Syngas chemical composition	Numerical Multi-phase model Eulerian–Eulerian Turbulence model standard k-epsilon Experimental and numerical
Chen Juhui <i>et al.</i> ¹⁴⁹	ANSYS 16.0 with the self-programming code 2D	Steam/air	Internal circulating fluidized bed (ICFB)	Coal/Biomass	Circulation time Ratio of equivalences Steam/biomass ratio Biomass feed flow	Euler multifluid model with the kinetic theory of granular mixing (KTGM) Experimental and numerical
Xiaoyan Gao <i>et al.</i> ¹⁷⁰	ANSYS Fluent/2D	Air Air/CO ₂	Entrained flow	Rice husk	Gasification temperature particle diameter Equivalent ratio CO ₂ /biomass ratio	Turbulence model standard k-epsilon Euler–Lagrange model Eddy-dissipation Experimental and numerical
Mikael Risberg <i>et al.</i> ¹⁷¹	ANSYS CFX	Air	Cyclonic	Wood dust	Mass fuel flow Mass airflow Equivalence ratio (ER)	Euler–Lagrange model Turbulence model standard k-epsilon



Table 2 (Contd.)

References	Software	Oxidizer	Type of gasifier	Type of feedstock	Studied parameters	Started models
Xiaoyan Gao <i>et al.</i> ¹⁷²	ANSYS Fluent/2D	Air	Entrained flow	Coal	Turbulence Syngas composition Product equivalent ratio	Experimental and numerical Euler–Lagrange model Turbulence model standard k-epsilon UDF Eddy dissipation P-1 radiation model Numerical
Tamer M. Ismail <i>et al.</i> ⁸⁹	COMMENT-code/2D	Air	Fluidized bed	Coffee husks	Equivalent ratio The moisture content of biomass	Eulerian multifluid model Turbulence model standard k-epsilon Experimental and numerical
Phuet Prasertcharoensuk <i>et al.</i> ²⁰	ANSYS Fluent/3D	Air	Downdraft	Wood	Throat diameter Throat diameter ratios gasifier area Quantity positions air intake nozzles	Eulerian–Eulerian model Turbulence model standard k-epsilon Numerical
Yueshi Wu <i>et al.</i> ⁶⁸	ANSYS Fluent/2D	Steam/air	Downdraft	Wood pellets	Steam/air ratio The preheating temperature of the gasification agent Biomass flow Inlet airflow	Eulerian–Eulerian model Model eddy dissipation Turbulence model standard k-epsilon Numerical

produced by gasification. All results were compared with a real gasifier of the same type and parameters, showing consistency between the data obtained from numerical simulations and experimental simulations. The importance of validating numerical simulation results against experimentally obtained data is worth emphasizing. In this case, the authors validated their numerical simulation against a commercial plant used by the ceramics industry in Morbi (India). Keran D. Patel *et al.*¹⁶⁰ utilized fluid dynamics in the Fluent solver to simulate the gasification process in a downdraft scheme. The authors used coal as the raw material and air as the gasification agent. This article constructs and meshes the control volume in GAMBIT; this software only allows for the construction, meshing, and marking of boundary conditions; the simulation was carried out by Fluent in this case. Keran D. Patel *et al.*¹⁶⁰ evaluated various parameters to study the efficiency of the gasifier, the temperature profile along the reactor, the turbulence, and the formation of chemical species throughout the entire control volume. The authors compared the simulation results with those available in the literature. Thus, it can be seen that many authors successfully use the CFD software for their research, with some of the work reviewed in this article.^{175,176}

Computational Fluid Dynamics (CFD) has been applied to the modelling of numerous biomass gasification processes, although all of these processes share a common feature: the

Navier–Stokes equations, which describe the conservation of mass, energy, and momentum in all possible dimensions. According to the literature consulted, a large number of articles have authors who use commercial software for modelling to predict the composition of the syngas product of the biomass transformation process.¹⁷⁷ Other studies focus on the impact of ER (equivalence ratio) on species formation and the temperature profile of the model. All of these studies are validated through models proposed by the researchers.

The study is based on the regulation and simulation of downdraft gasification, aiming to assess the possibility of using waste from the leather industry in Rio Grande do Sul, Brazil, to produce energy. The simulation is carried out in a commercial CFD simulation package within the CFX 11.0 software. The researchers simulated the four main zones of downdraft gasifiers (drying, devolatilization, reduction, and combustion), and the temperature profile within the gasifier. Christian Maier *et al.*¹⁷⁸ in their article described a two-phase flow model within a fixed carbon bed gasifier. The comparison of the simulation results with the data shown in the literature yields a good approximation. Additionally, optimal operating parameters are predicted to achieve the highest efficiency.¹⁷⁹

Rahul Gupta *et al.*¹⁶³ used CFD to analyze the performance of a 10 kW downdraft gasifier. The model was simulated in ANSYS Fluent, using a transport model of species with volumetric



reactions and particle surfaces to calculate the temperature of the syngas at the exit of the simulation and the mass fraction of each element that composes it.

Umesh Kumar *et al.*⁷⁸ developed a two-dimensional multi-phase numerical model (2D) to simulate the gasification process of rubberwood, specifically the discrete phase model (DPM), focusing on the Euler–Lagrange equations. The model was used to determine the relationship between the gas composition at the exit of the process and different equivalence ratio (ER) values. The ER values within the range of 0.35 to 0.6 were studied, which indicates that as the ER value increases, the temperature in the oxidation zone increases due to the increased concentration of O₂ in the oxidation zone.

Pichet Ninduangdee *et al.*¹⁸⁰ studied two models of a pressurized circulating fluidized bed carbon enhanced with CO₂, to predict the composition of the syngas at the exit of the gasification process.^{154,181} These two simulation models were developed in commercial software ANSYS Fluent and CFPD Barracuda. Model generation and simulation provided an approximation of the process development and the composition of the gases at the exit, which were compared with an experimental plant. The authors verified that the temperature distribution obtained in the overall simulation in both programs was consistent with that shown experimentally, although in Fluent, the temperature and appearance of chemical species were better approximated compared to the CFPD model. It was also confirmed that enrichment with CO₂ as a gasification agent could increase the concentration of CO per unit of fuel in the syngas and thus improve the efficiency of the process.

Rahul Gupta *et al.*¹⁶³ presented an innovative model for the combustion of packed biomass bedding, considering an Euler–Granular model for the hydrodynamics of the multiphase flow of particle-gas and a thermally thin particle model. The new fixed-bed model has the advantage of considering the profiles of species and energy formation of the combustion bed close to reality and allows us to consider the physical and chemical properties of the fuel particles, as well as the influence of the primary air intake on the efficiency of the process. Ravi Kumar Rachamala *et al.*¹⁸² used ANSYS CFX 11.0 to analyze the temperature distribution throughout the gasifier chamber and analyze the airflow in the process. They adjust the nozzle angles in the reduction chamber from 0° to 30° with four nozzles in circles. A reduction in the airflow rate in the central region was observed when the angle was 0°, not so when the angle of the nozzle increased to 30°. The comparison of all cases in the article shows that the best design is a throttle nozzle with an angle of 30° and four inclined nozzles with the same angle, achieving almost complete gasification with maximum temperatures of 1483 K.

The validation and calibration of CFD models for biomass gasifiers involve comparing model predictions with experimental data, sensitivity analysis, benchmarking, mesh independence studies, and statistical analysis. These techniques ensure the model's accuracy by aligning predictions with physical observations, reducing errors, and enhancing predictive capabilities. Key references include Wang *et al.*¹⁸³ for

experimental validation, Bilbao *et al.*¹⁸⁴ for sensitivity analysis, Kumar and Shankar¹⁸⁵ for benchmarking, Yu *et al.*¹⁸⁶ for mesh independence, and Pan *et al.*¹⁸⁷ for statistical analysis.

The challenges in CFD modeling of biomass gasifiers involve complex reaction mechanisms, turbulent flow, heat and mass transfer, and biomass heterogeneity. Addressing these includes detailed reaction mechanisms, advanced turbulence models, enhanced heat and mass transfer models, and accounting for biomass heterogeneity. The validation of high-quality data is crucial. These challenges can be addressed through a multidisciplinary approach, combining expertise in chemical engineering, fluid dynamics, and computational methods.

6 Conclusion and outlook

This comprehensive review elucidated the pivotal role of Computational Fluid Dynamics (CFD) in modeling the complex process of biomass gasification within downdraft gasifiers. The study systematically analyzed the results of various investigations, categorizing them based on critical parameters such as gasification agents, reactor types, and operational conditions. This approach reveals the interplay between these factors and their impact on syngas composition, heating value, and gasification efficiency.

The findings emphasize the versatility of CFD in predicting the performance of downdraft gasifiers under diverse operating scenarios. By simulating fluid dynamics, heat transfer, and chemical reactions, CFD models offer valuable insights into potential challenges such as tar/char formation and temperature distribution. This information is crucial for optimizing gasifier design, guiding parameter selection for maximum efficiency and environmental friendliness, and facilitating virtual testing to expedite product development.

Looking ahead, several avenues for future research beckon. Investigating the influence of various feedstocks on gasification efficiency and syngas composition remains essential. Exploring the integration of CFD with optimization techniques such as Artificial Neural Networks (ANN) could further enhance the prediction accuracy and design optimization. Additionally, studying the long-term behavior and durability of gasifiers under different operating conditions is vital for their successful commercialization and widespread adoption.

This review underscores the transformative potential of CFD in advancing the field of biomass gasification within downdraft gasifiers. The insights gained contribute to a deeper understanding of the complex processes involved and pave the way for the development of more efficient and sustainable gasification technologies. As research continues to refine CFD models and explore new optimization techniques, the full potential of biomass gasification as a viable energy source for a sustainable future draws nearer.

Data availability

No primary research results, software or code have been included and no new data were generated or analysed as part of this review.



Author contributions

ZiTeng Yu, writing the original manuscript and data collation. ZiXing Wang, writing the original manuscript and data collation. HuiXiong Zhong, data collation; KeKe Cheng, supervision, investigation, conceptualisation, project management and funding acquisition.

Conflicts of interest

The authors declare no conflict of interest.

Acknowledgements

This work was supported by the Guangdong Basic and Applied Basic Research Foundation (No. 2021B1515140041), and Guangdong Provincial Key Laboratory of Distributed Energy Systems (No. 2020B1212060075).

Notes and references

- R. Hermawan, A. Suryosaty, Y. T. Tosuli and H. Dafiqurrohman, *Case Stud. Therm. Eng.*, 2024, **56**, 104182.
- N. Yesilova, O. Tezer, A. Ongen and A. Ayol, *Int. J. Hydrogen Energy*, 2024, **76**, 290–303.
- Ö. Tezer, N. Karabağ, A. Öngen and A. Ayol, *Int. J. Hydrogen Energy*, 2023, **48**(60), 22909–22920.
- B. I. Ali and D. G. Gunjo, *Int. J. Thermofluids*, 2024, **22**, 100608.
- Y. Zhang, A. Zhou, Z. Li, H. Zhang, Y. Xiong, R. Xiao, Z. Hu and X. Wang, *J. Energy Inst.*, 2024, **114**, 101596.
- R. Aguado, A. Baccioli, A. Liponi and D. Vera, *Energy Convers. Manage.*, 2023, **289**, 117149.
- S. Khan, I. Adeyemi, K. Moustakas and I. Janajreh, *Environ. Res.*, 2024, **252**, 118597.
- C. Rodriguez Correa, T. Otto and A. Kruse, *Biomass Bioenergy*, 2017, **97**, 53–64.
- S. Ferreira, E. Monteiro, P. Brito and C. Vilarinho, *Energies*, 2019, **12**(1), 160.
- K. Rabea, S. Michailos, M. Akram, K. J. Hughes, D. Ingham and M. Pourkashanian, *Energy Convers. Manage.*, 2022, **258**, 115495.
- K. W. Kuttin, H. Yu, M. Yang, L. Ding, X. Chen, G. Yu and F. Wang, *Green Carbon*, 2024, **2**, 176–196.
- C. A. Díaz González, D. C. de Oliveira, D. M. Yepes, L. E. Pacheco and E. E. Silva, *Energy Convers. Manage.*, 2023, **296**, 117570.
- M. Hassan, I. Ahmad, M. Anwar, S. A. Muhammed Ali, Y. Subramanian and A. K. Azad, *Mater. Today Proc.*, 2023, DOI: [10.1016/j.matpr.2023.07.085](https://doi.org/10.1016/j.matpr.2023.07.085).
- F. Patuzzi, D. Basso, S. Vakalis, D. Antolini, S. Piazzi, V. Benedetti, E. Cordioli and M. Baratieri, *Energy*, 2021, **223**, 120039.
- J. Pérez, D. Borge and J. Agudelo, *Rev. Fac. Ing., Univ. Antioquia*, 2010, **52**(52), 95–107.
- L. von Berg, A. Anca-Couce, C. Hochenauer and R. Scharler, *Fuel, Part B*, 2022, **324**, 124677.
- Q. Eri, W. Wu and X. Zhao, *Energies*, 2017, **10**(12), 2163–2182.
- P. Prasertcharoensuk, D. A. Hernandez, S. J. Bull and A. N. Phan, *Biomass Bioenergy*, 2018, **116**, 216–226.
- B. I. Ali and D. G. Gunjo, *Res. Eng.*, 2023, **20**, 101642.
- U. Kumar and M. C. Paul, *Chem. Eng. Sci.*, 2019, **195**, 413–422.
- M. La Villetta, M. Costa and N. Massarotti, *Renewable Sustainable Energy Rev.*, 2017, **74**, 71–88.
- S. Du, J. Wang, Y. Yu and Q. Zhou, *Renewable Energy*, 2023, **202**, 483–498.
- P. Ninduangdee and V. I. Kuprianov, *Bioresour. Technol.*, 2015, **182**, 272–281.
- N. Pichet and K. Vladimír, *Appl. Energy*, 2016, **176**, 34–48.
- W. Fu, Y. Zhang, L. Cui, H. Liu and T. Maqsood, *Bioresour. Technol.*, 2023, **369**, 128378.
- P. Ninduangdee and K. Vladimír, *Biomass Bioenergy*, 2018, **112**, 73–84.
- M. Dammann, M. Mancini, T. Kolb and R. Weber, *Therm. Sci. Eng. Prog.*, 2023, **42**, 101772.
- Q. Guo, R. Li, G. Yang, Y. Liu, Q. Deng and Z. He, *Energy Rep.*, 2023, **9**, 4298–4305.
- M. Haas, M. Dammann, S. Fleck and T. Kolb, *Fuel*, 2023, **334**, 126572.
- J. Gao, W. Su, X. Wang, X. Song, J. Wang, J. Yang and G. Yu, *J. Mater. Res. Technol.*, 2023, **24**, 8754–8765.
- T. Xu, Y. Wu and S. Bhattacharya, *Int. J. Min. Sci. Technol.*, 2021, **31**(3), 473–481.
- A. Y. Ilyushechkin, D. G. Roberts and D. J. Harris, *Fuel Process. Technol.*, 2014, **118**, 98–109.
- N. Samani, R. Khalil, M. Seljeskog, J. Bakken, R. K. Thapa and M. S. Eikeland, *Fuel*, 2024, **362**, 130713.
- J. Qi, Y. Wang, M. Hu, P. Xu, H. Yuan and Y. Chen, *Energy*, 2023, **268**, 126642.
- M. Ismail T and M. A. El-Salam, *Renewable Energy*, 2015, **78**, 484–497.
- A. Salah, L. Hanel, M. Beirrow and G. Scheffknecht, *Comput.-Aided Chem. Eng.*, 2016, **38**, 19–24.
- N. Fernando and M. Narayana, *Renewable Energy*, 2016, **99**, 698–710.
- C. Diblasi, C. Branca, A. Galgano, D. Meier, I. Brodzinski and O. Malmros, *Biomass Bioenergy*, 2007, **31**(11–12), 802–811.
- L. Ding, K. Yoshikawa, T. M. Ismail and M. Abd El-Salam, *Energy Procedia*, 2017, **142**, 166–171.
- K. M. N. Ravi, B. K. Suresh and K. A. Venkata Vishnu, *Int. J. Adv. Eng. Res. Develop.*, 2016, **3**(1), 58–64.
- J. D. Martínez, K. Mahkamov, R. V. Andrade and E. E. Silva Lora, *Renewable Energy*, 2012, **38**(1), 1–9.
- X. Shang, J. Xie, J. Chen and Y. Gu, *ACS Omega*, 2024, **9**(18), 20378–20387.
- A. Zachl, M. Buchmayr, J. Gruber, A. Anca-Couce, R. Scharler and C. Hochenauer, *Renewable Energy*, 2024, **226**, 120407.
- A. Kumar, *Fuel*, 2024, **361**, 130708.



- 45 A. M. Salem and M. C. Paul, *Biomass Bioenergy*, 2023, **168**, 106656.
- 46 D. Awasthi, A. Datta and N. Gakkhar, *Mater. Today Proc.*, 2023, DOI: [10.1016/j.matpr.2023.05.625](https://doi.org/10.1016/j.matpr.2023.05.625).
- 47 P. Kumar, P. M. V. Subbarao, L. D. Kala and V. K. Vijay, *Chem. Eng. J. Adv.*, 2023, **13**, 100431.
- 48 M. Siedlecki and W. de Jong, *Biomass Bioenergy*, 2011, **35**, S40–S62.
- 49 P. J. Woolcock and R. C. Brown, *Biomass Bioenergy*, 2013, **52**, 54–84.
- 50 R. Saini, S. M Mahajani, S. Deb Barma and D. Srinivas Rao, *J. Cleaner Prod.*, 2024, **434**, 139955.
- 51 A. Ramos, E. Monteiro and A. Rouboa, *Renewable Sustainable Energy Rev.*, 2019, **110**, 188–206.
- 52 H. Beohara, B. Gupta, V. K. Sethib and M. Pandeyb, *Int. J. Therm. Technol.*, 2012, **2**(1), 134–140.
- 53 N. Ramzan, A. Ashraf, S. Naveed and A. Malik, *Biomass and Bioenergy*, 2011, **35**(9), 3962–3969.
- 54 D. Gündüz Han, K. Erdem and A. Midilli, *Int. J. Hydrogen Energy*, 2023, **48**(99), 39315–39329.
- 55 V. Shirke, S. V. Ranade and R. Bansal, *Mater. Today: Proc.*, 2018, **5**(11), 22983–22992.
- 56 S. Tomasek, Á. Bárkányi, A. Egedy and N. Miskolczi, *Chem. Eng. J. Adv.*, 2024, **17**, 100586.
- 57 R. Mouselmani, A. Hachem, A. Alaaeddine, E. Métay and M. Lemaire, *Org. Biomol. Chem.*, 2018, **16**(35), 6600–6605.
- 58 S. Hwa Lee, K. Young Kwon, B. Kil Choi and H. Deog Yoo, *J. Electroanal. Chem.*, 2022, **924**, 116828.
- 59 L. Moretti, F. Arpino, G. Cortellessa, S. Di Fraia, M. Di Palma and L. Vanoli, *Energies*, 2022, **15**(1), 61.
- 60 A. Atikah Ahmad, N. Abdullah Zawawi, F. Hafiz Kasim, A. Inayat and A. Khasri, *Renewable and Sustainable Energy Reviews*, 2016, **53**, 1333–1347A.
- 61 A. K. Biswas, M. Rudolfsson, M. Broström and K. Umeki, *Appl. Energy*, 2014, **119**, 79–84.
- 62 S. Rupesh, C. Muraleedharan and P. Arun, *Resour., Conserv. Recycl.*, 2016, **2**(2), 94–103.
- 63 E. Monteiro, T. M. Ismail, A. Ramos, M. Abd El-Salam, P. Brito and A. Rouboa, *Energy*, 2018, **142**, 862–877.
- 64 A. Melgar, J. F. Pérez, H. Laget and A. Horillo, *Energy Convers. Manage.*, 2007, **48**(1), 59–67.
- 65 Y. Wu, Q. Zhang, W. Yang and W. Blasiak, *Energy Fuels*, 2013, **27**(6), 3274–3282.
- 66 C. Dejtrikulwong and S. Patumsawad, *Energy Procedia*, 2014, **52**, 142–149.
- 67 S. Sharma and P. N. Sheth, *Energy Convers. Manage.*, 2016, **110**, 307–318.
- 68 V. Kirsanovs, D. V. Blumberga, I. Rochas, C. Vigant and E. Vigants, *Energy Procedia*, 2017, **128**, 332–338.
- 69 V. Kirsanovs, D. Blumberga, I. Veidenbergs, C. Rochas, E. Vigants and G. Vigants, *Energy Procedia*, 2017, **128**, 332–338.
- 70 A. Okati, M. R. Khani, B. Shokri, E. Monteiro and A. Rouboa, *J. Energy Inst.*, 2023, **107**, 101173.
- 71 R. Mandal and T. Maity, *J. Process Control*, 2023, **129**, 103031.
- 72 K. Erdem, D. Gündüz Han and A. Midilli, *Int. J. Hydrogen Energy*, 2024, **52**, 1434–1444.
- 73 A. Pitkääoja and J. Ritvanen, *Energy*, 2022, **244**, 123201.
- 74 S. Rapagnà and A. Latif, *Biomass Bioenergy*, 1997, **12**(4), 281–288.
- 75 U. Kumar, A. M. Salem and M. C. Paul, *Energy Procedia*, 2017, **142**, 822–828.
- 76 C. Gai and Y. Dong, *Int. J. Hydrogen Energy*, 2012, **37**(6), 4935–4944.
- 77 S. Rapagnà and A. Latif, *Biomass Bioenergy*, 1997, **12**(4), 281–288.
- 78 S. N. Sazali, K. A. Al-attab and Z. A. Zainal, *Energy*, 2019, **186**, 115901.
- 79 T. Sathish, S. Karthikeyan, R. sathyamurthy, A. Kumar, K. Rajaram, S. S. Kumar, A. A. Al-Kahtani, B. Pandit, M. Gupta, N. Senthilkumar, N. Malik and M. Ubaidullah, *Int. J. Hydrogen Energy*, 2024, DOI: [10.1016/j.ijhydene.2024.01.323](https://doi.org/10.1016/j.ijhydene.2024.01.323).
- 80 S. Sarker and H. K. Nielsen, *Energy Convers. Manage.*, 2015, **103**, 801–813.
- 81 H. Liu, R. J. Cattolica and R. Seiser, *Chem. Eng. Sci.*, 2017, **169**, 235–245.
- 82 R. Jayathilake and S. Rudra, *Energies*, 2017, **10**(8), 1232.
- 83 P. N. Sheth and B. V. Babu, *Int. J. Hydrogen Energy*, 2010, **35**(19), 10803–10810.
- 84 J. Jia, L. Xu, A. Abudula and B. Sun, *Energy Convers. Manage.*, 2018, **155**, 138–146.
- 85 N. D. Couto, V. B. Silva, E. Monteiro and A. Rouboa, *Energy*, 2015, **93**, 864–873.
- 86 T. M. Ismail, M. Abd El-Salam, E. Monteiro and A. Rouboa, *Appl. Therm. Eng.*, 2016, **106**, 1391–1402.
- 87 D. K. Singh and J. V. Tirkey, *Int. J. Hydrogen Energy*, 2021, **46**(36), 18816–18831.
- 88 A. Okati, M. Reza Khani, B. Shokri, E. Monteiro and A. Rouboa, *Fuel*, 2023, **331**, 125952.
- 89 H. Rezk, A. Inayat, M. A. Abdelkareem, A. G. Olabi and A. M. Nassef, *Energy*, 2022, **239**, 122072.
- 90 M. Simone, F. Barontini, C. Nicoletta and L. Tognotti, *Bioresour. Technol.*, 2012, **116**, 403–412.
- 91 D. Lu, K. Yoshikawa, T. M. Ismail and M. Abd El-Salam, *Appl. Energy*, 2018, **220**, 70–86.
- 92 V. R. Patel, D. S. Upadhyay and R. N. Patel, *Energy*, 2014, **78**, 323–332.
- 93 S. J. Yoon, Y.-I. Son, Y.-K. Kim and J.-G. Lee, *Renewable Energy*, 2012, **42**, 163–167.
- 94 S. Hashem Samadi, B. Ghobadian, M. Nosrati and M. Rezaei, *Fuel*, 2023, **333**, 126249.
- 95 Ö. Tezer, N. Karabağ, A. Öngen and A. Ayol, *Sustain. Energy Technol. Assess.*, 2023, **56**, 103042.
- 96 A. Singh, A. M. Shivapuji and S. Dasappa, *Appl. Therm. Eng.*, 2023, **234**, 121247.
- 97 M. HajiHashemi, S. Mazhkoo, H. Dadfar, E. Livani, A. Naseri Varnosefaderani, O. Pourali, S. Najafi Nobar and A. Dutta, *Energy*, 2023, **276**, 127506.
- 98 R. Raj, J. V. Tirkey, D. K. Singh and P. Jena, *J. Energy Inst.*, 2023, **109**, 101271.



- 99 Z. A. Zainal, R. Ali, C. H. Lean and K. N. Seetharamu, *Energy Convers. Manage.*, 2001, **42**(12), 1499–1515.
- 100 P. P. Dutta, V. Pandey, A. R. Das, S. Sen and D. C. Baruah, *Energy Procedia*, 2014, **54**, 21–34.
- 101 P. Milčák, M. Baláš, M. Lisý, H. Lisá, P. Kracík and J. Lachman, *Fuel Process. Technol.*, 2024, **258**, 108091.
- 102 M. Cortazar, L. Santamaria, G. Lopez, J. Alvarez, L. Zhang, R. Wang, X. Bi and M. Olazar, *Energy Convers. Manage.*, 2023, **276**, 116496.
- 103 V. M. Jaganathan and S. Varunkumar, *Fuel*, 2019, **244**, 545–558.
- 104 D. Antolini, S. S. Ail, F. Patuzzi, M. Grigante and M. Baratieri, *Fuel*, 2019, **253**, 1473–1481.
- 105 J. Makwana, A. D. Dhass, P. V. Ramana, D. Sapariya and D. Patel, *Int. J. Thermofluids*, 2023, **20**, 100492.
- 106 K. Rabea, S. Michailos, K. J. Hughes, D. Ingham and M. Pourkashanian, *Energy Convers. Manage.*, 2023, **298**, 117812.
- 107 C. Freda, E. Catizzone, A. Villone and G. Cornacchia, *Res. Eng.*, 2024, **21**, 101763.
- 108 Z. Zainal, R. Ali, C. Lean and K. Seetharamu, *Energy Convers. Manage.*, 2001, **42**(12), 1499–1515.
- 109 M. A. Masmoudi, K. Halouani and M. Sahraoui, *Energy Convers. Manage.*, 2017, **144**, 34–52.
- 110 O. Yucel and M. A. Hastaoglu, *Fuel Process. Technol.*, 2016, **144**, 145–154.
- 111 K. Arun, M. Venkata Ramanan and S. Sai Ganesh, *Energy Fuels*, 2016, **30**(9), 7435–7442.
- 112 A. Bridgwater, *Fuel*, 1995, **74**(5), 631–653.
- 113 H. Olgun, S. Ozdogan and G. Yinesor, *Biomass Bioenergy*, 2011, **35**(1), 572–580.
- 114 S. Vakalis and K. Moustakas, *Appl. Energy*, 2019, **242**, 526–533.
- 115 K. T. Wu and R. Y. Chein, *Energy Procedia*, 2015, **75**, 214–219.
- 116 S. Rapagnà, N. Jand, A. Kiennemann and P. U. Foscolo, *Biomass Bioenergy*, 2000, **19**(3), 187–197.
- 117 J. Gil, J. Corella, M. a. P. Aznar and M. A. Caballero, *Biomass Bioenergy*, 1999, **17**(5), 389–403.
- 118 D. Prando, S. Shivananda Ail, D. Chiaramonti, M. Baratieri and S. Dasappa, *Fuel*, 2016, **181**, 566–572.
- 119 K. N. Dhanavath, K. Shah, S. K. Bhargava, S. Bankupalli and R. Parthasarathy, *J. Environ. Chem. Eng.*, 2018, **6**(2), 3061–3069.
- 120 A. V. Bridgwater, *Fuel*, 1995, **74**(5), 631–653.
- 121 A. Hashemisohi, L. Wang and A. Shahbazi, *Chem. Eng. Res. Des.*, 2024, **206**, 1–11.
- 122 M. Y. Arshad, H. Jaffer, M. W. Tahir, A. Mehmood and A. Saeed, *J. Taiwan Inst. Chem. Eng.*, 2024, **156**, 105365.
- 123 H. Zuo, K. Zeng, D. Zhong, J. Li, H. Xu, Y. Lu, Y. Yu, H. Yang and H. Chen, *Fuel*, 2024, **367**, 131174.
- 124 F. Njuguna, H. Ndiritu, B. Gathitu, M. Hawi and J. Munyalo, *Bioresour. Technol. Rep.*, 2023, **22**, 101477.
- 125 Y. Liu, D. Bi, M. Yin, K. Zhang, H. Liu and S. Liu, *Therm. Sci. Eng. Prog.*, 2024, **50**, 102584.
- 126 O. Yucel and E. S. Aydin, *J. Indian Chem. Soc.*, 2023, **100**(1), 100854.
- 127 K. W. Kuttin, A. Leghari, H. Yu, Z. Xia, L. Ding and G. Yu, *Chem. Eng. Sci.*, 2024, **287**, 119716.
- 128 H. O. Kargbo, J. Zhang and A. N. Phan, *Int. J. Hydrogen Energy*, 2023, **48**(29), 10812–10828.
- 129 M. Costa, V. Rocco, C. Caputo, D. Cirillo, G. Di Blasio, M. La Villetta, G. Martoriello and R. Tuccillo, *Appl. Therm. Eng.*, 2019, **160**, 114083.
- 130 M. Mohamadi-Baghmolaei, P. Zahedizadeh, M. Khajeh, S. Zendeheboudi and N. M. C. Saady, *Energy Convers. Manage.*, 2024, **307**, 118302.
- 131 J. Brito, F. Pinto, A. Ferreira, M. A. Soria and L. M. Madeira, *Fuel Process. Technol.*, 2023, **250**, 107859.
- 132 Y. Zhao, J. Yao, G. Chen, J. Liu, Z. Cheng, L. Wang, W. Yi and S. Xu, *Energy Convers. Manage.*, 2023, **295**, 117623.
- 133 S. Yao, Y. Zhang, J. Xia, T. Xie, Z. Zhang, H. Li and J. Hu, *Case Stud. Therm. Eng.*, 2023, **52**, 103680.
- 134 A. De Padova, E. Giglio and M. Santarelli, *Renewable Energy*, 2024, **223**, 120071.
- 135 J. Yu and J. D. Smith, *Chem. Eng. Process.*, 2018, **125**, 214–226.
- 136 D. Baruah and D. C. Baruah, *Renewable Sustainable Energy Rev.*, 2014, **39**, 806–815.
- 137 T. K. Patra and P. N. Sheth, *Renewable Sustainable Energy Rev.*, 2015, **50**, 583–593.
- 138 A. M. Salem and M. C. Paul, *Biomass Bioenergy*, 2018, **109**, 172–181.
- 139 L. Yan, Y. Cao and B. He, *Chem. Eng. J.*, 2018, **331**, 435–442.
- 140 A. Saravanakumar, M. J. Hagge, T. M. Haridasan and K. M. Bryden, *Biomass Bioenergy*, 2011, **35**(10), 4248–4260.
- 141 I. G. Donskoy, A. V. Keiko, A. N. Kozlov, V. A. Shamansky and D. A. Svishchev, *Renew. Bioresour.*, 2016, **4**(1), 1–4.
- 142 M. Puig-Arnavat, J. C. Bruno and A. Coronas, *Renewable Sustainable Energy Rev.*, 2010, **14**(9), 2841–2851.
- 143 T. Y. Ahmed, M. M. Ahmad, S. Yusup, A. Inayat and Z. Khan, *Renewable Sustainable Energy Rev.*, 2012, **16**(4), 2304–2315.
- 144 J. Karl and T. Pröll, *Renewable Sustainable Energy Rev.*, 2018, **98**, 64–78.
- 145 S. Safarian, R. Unnpórsson and C. Richter, *Renewable Sustainable Energy Rev.*, 2019, **110**, 378–391.
- 146 J. Chen, W. Yin, S. Wang, G. Yu, J. Li, T. Hu and F. Lin, *Energy Convers. Manage.*, 2017, **148**, 506–516.
- 147 L. von Berg, A. Anca-Couce, C. Hochenauer and R. Scharler, *Energy Convers. Manage.*, 2023, **286**, 117070.
- 148 J. Chen, S. Zhong, D. Li, C. Zhao, C. Han, G. Yu and M. Song, *Int. J. Hydrogen Energy*, 2022, **47**(53), 22328–22339.
- 149 M. Yang, J. Zhang, S. Zhong, T. Li, T. Løvås, H. Fatehi and X.-S. Bai, *Combust. Flame*, 2022, **236**, 111744.
- 150 M. Anil, R. S. M. C and A. P., *Energy Procedia*, 2016, **90**, 154–162.
- 151 L. P. R. Pala, Q. Wang, G. Kolb and V. Hessel, *Renewable Energy*, 2017, **101**, 484–492.
- 152 S. Kraft, F. Kirnbauer and H. Hofbauer, *Appl. Energy*, 2017, **190**, 408–420.
- 153 L. Gerun, M. Paraschiv, R. Vîjeu, J. Bellettre, M. Tazerout, B. Göbel and U. Henriksen, *Fuel*, 2008, **87**(7), 1383–1393.
- 154 A. Rogel-Ramírez, *Ing., Invest. Tecnol.*, 2008, **9**, 329–338.



Review

- 155 C. B. da Porciúncula, N. R. Marcilio, M. Godinho and A. R. Secchi, in *Computer Aided Chemical Engineering*, ed. R. M. de Brito Alves, C. A. O. do Nascimento and E. C. Biscaia, Elsevier, 2009, vol. 27, pp. 1071–1076.
- 156 I. Janajreh and M. Al Shrah, *Energy Convers. Manage.*, 2013, **65**, 783–792.
- 157 K. D. Patel, N. K. Shah and R. N. Patel, *Procedia Eng.*, 2013, **51**, 764–769.
- 158 X. Lu and T. Wang, *Int. J. Heat Mass Transfer*, 2013, **67**, 377–392.
- 159 H. Liu, *Waterloo*, 2014.
- 160 R. Gupta, P. Jain and S. Vyas, *Int. J. Curr. Eng. Technol.*, 2017, **7**, 4.
- 161 X. Ku, T. Li and T. Løvås, *Chem. Eng. Sci.*, 2015, **122**, 270–283.
- 162 P. Meenaroch, S. Kerdsuwan and K. Laohalidanond, *Energy Procedia*, 2015, **79**, 278–283.
- 163 A. Gel, M. Shahnam, J. Musser, A. K. Subramaniyan and J.-F. Dietiker, *Ind. Eng. Chem. Res.*, 2016, **55**(48), 12477–12490.
- 164 H. Liu, R. J. Cattolica and R. Seiser, *Int. J. Hydrogen Energy*, 2016, **41**(28), 11974–11989.
- 165 S. Rupesh, C. Muraleedharan and P. Arun, *Resour.-Effic. Technol.*, 2016, **2**(2), 94–103.
- 166 L. Yan, C. J. Lim, G. Yue, B. He and J. R. Grace, *Bioresour. Technol.*, 2016, **221**, 625–635.
- 167 R. Esquivel, P. C. Treto and K. S. Ramirez, *Comput. Eng.*, 2018, **20**, 16–26.
- 168 X. Gao, F. Xu, F. Bao, C. Tu, Y. Zhang, Y. Wang, Y. Yang and B. Li, *Renewable Energy*, 2019, **139**, 611–620.
- 169 X. Gao, Y. Zhang, B. Li and X. Yu, *Energy Convers. Manage.*, 2016, **108**, 120–131.
- 170 J. Ward, M. G. Rasul and M. M. K. Bhuiya, *Procedia Eng.*, 2014, **90**, 669–674.
- 171 B. Manek, M. S. Javia, A. Harichandan and H. Ramani, *Therm. Sci. Eng. Prog.*, 2019, **9**, 11–20.
- 172 N. Abani and A. F. Ghoniem, *Fuel*, 2013, **104**, 664–680.
- 173 A. Chaurasia, *Energy*, 2016, **116**, 1065–1076.
- 174 C. Maier, C. Jordan, M. Harasek, C. Feilmayr and C. Thaler, *Chem. Eng. Transac.*, 2012, **29**, 925–930.
- 175 M. Risberg, P. Carlsson and R. Gebart, *Appl. Therm. Eng.*, 2015, **90**, 694–702.
- 176 M. K. Cohce, I. Dincer and M. A. Rosen, *Int. J. Hydrogen Energy*, 2010, **35**(10), 4970–4980.
- 177 P. Ninduangdee and V. I. Kuprianov, *Biomass Bioenergy*, 2018, **112**, 73–84.
- 178 D. Vera, B. de Mena, F. Jurado and G. Schories, *Appl. Therm. Eng.*, 2013, **51**(1–2), 119–129.
- 179 R. K. Rachamala, M. Baba, K. Kumar and A. Vishnu, *Int. J. Adv. Eng. Res. Dev.*, 2016, **3**, 3–134.
- 180 S. I. Serdyukov, M. I. Kniazeva, I. A. Sizova, Y. V. Zubavichus, P. V. Dorovatovskii and A. L. Maximov, *Mol. Catal.*, 2021, **502**, 111357.
- 181 I. Wysocka, J. Karczewski, A. Gołębiewska, M. Łapiński, B. M. Cieślík, M. Maciejewski, B. Kościelska and A. Rogala, *Int. J. Hydrogen Energy*, 2023, **48**(29), 10922–10940.
- 182 H. Pei, G. Liu, R. Guo, N. Liu and Z. Mo, *Int. J. Hydrogen Energy*, 2022, **47**(83), 35227–35240.
- 183 Z. Wang, N. Ze, S. Jun, L. Peng, N. Yan, Z. Wei and W. Xian, *Fuel Process. Technol.*, 2019, **185**, 31–38.
- 184 J. Bi, Z. Hao, C. Di, G. Peng, L. Xing and G. Aggidis, *Energy Convers. Manage.*, 2018, **165**, 856–865.
- 185 A. Kumar and P. Shankar, *Renewable Sustainable Energy Rev.*, 2017, **76**, 1378–1390.
- 186 X. Yu, C. Xi, T. Kienpin, E. Marwa and A. Rizwan, *Renewable Energy*, 2016, **95**, 423–433.
- 187 W. Pan, L. Ming, Z. Xu, Y. Kai, M. Yue and Y. Jun, *Energy Convers. Manage.*, 2015, **89**, 832–839.

