

CORRECTION

[View Article Online](#)
[View Journal](#) | [View Issue](#)



Cite this: *React. Chem. Eng.*, 2016, **1**,
340

DOI: 10.1039/c6re90010k
rsc.li/reaction-engineering

Correction: Controlled generation and use of CO in flow

Steffen V. F. Hansen,^{a,b} Zoe E. Wilson,^a Trond Ulven^{*b} and Steven V. Ley^{*a}

Correction for ‘Controlled generation and use of CO in flow’ by Steffen V. F. Hansen *et al.*, *React. Chem. Eng.*, 2016, DOI: 10.1039/c6re00020g.

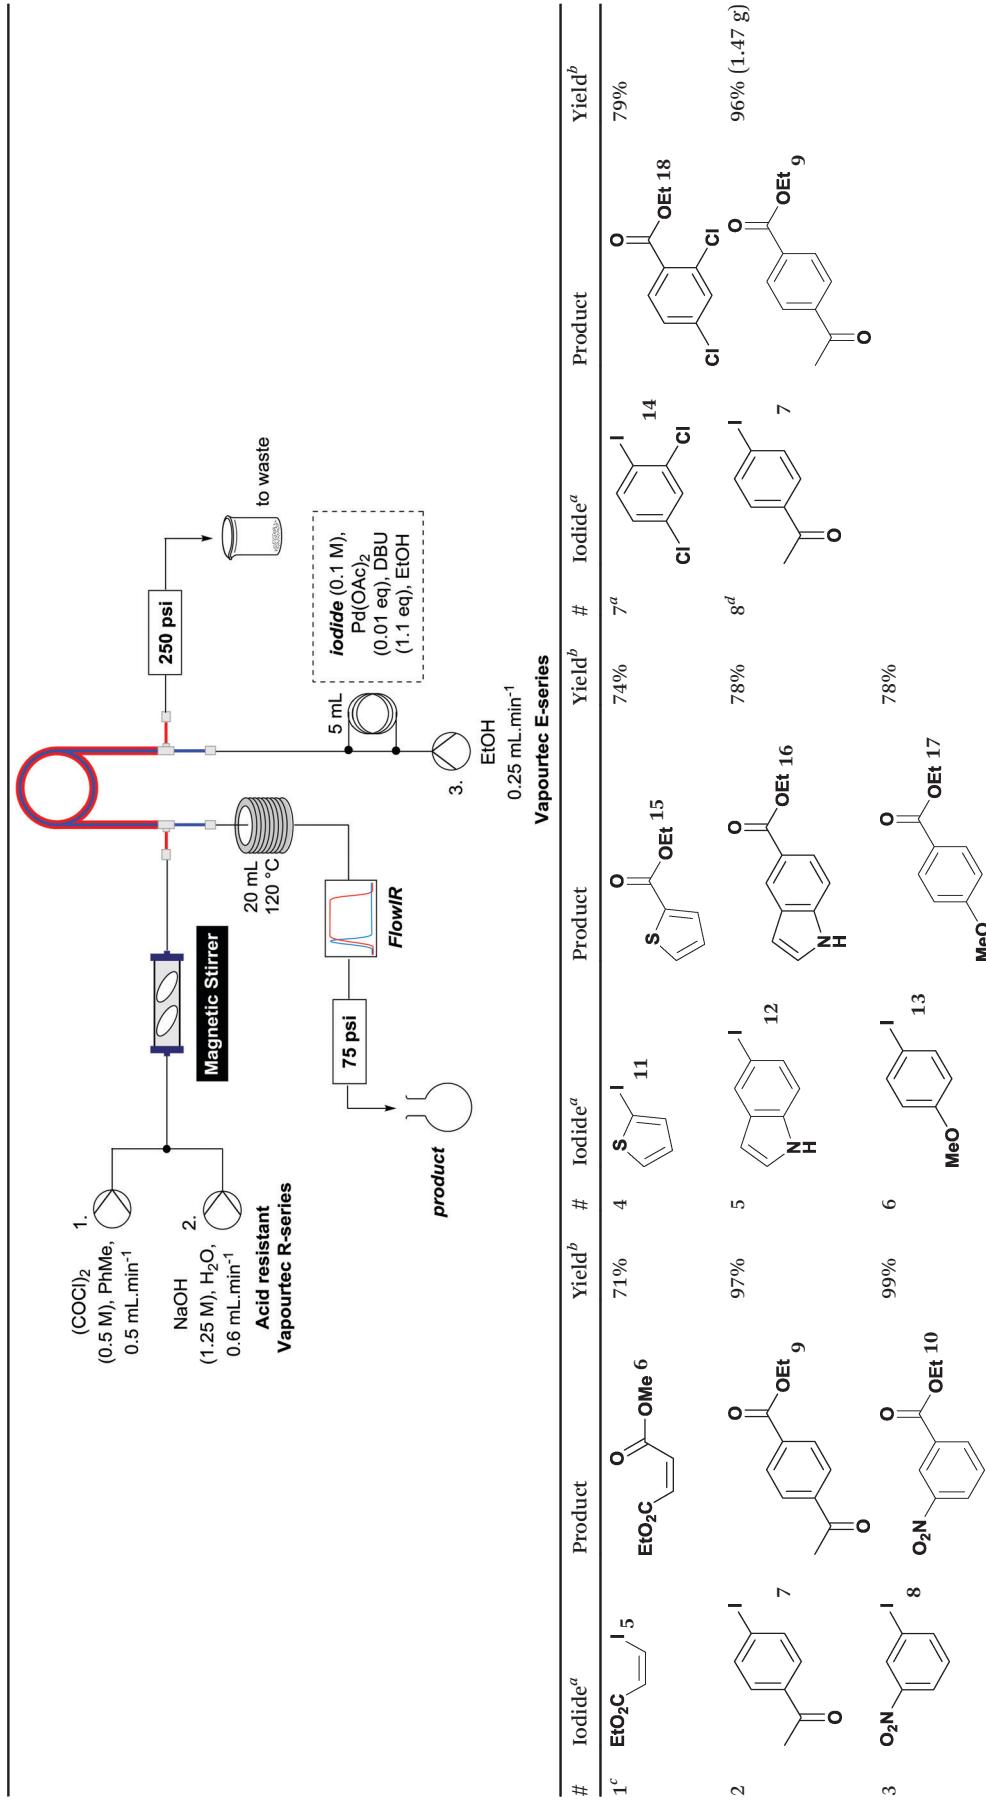
In the above article, Table 3 did not include a yield for entry 5. The correct information can be found in the new version of Table 3 below.

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.



^a Department of Chemistry, University of Cambridge, Lensfield Road, Cambridge, CB2 1EW, UK svl1000@cam.ac.uk

^b Department of Physics, Chemistry and Pharmacy, University of Southern Denmark, Campusvej 55, 5230 Odense M, Denmark. E-mail: ulven@sdu.dk

**Table 3** Alkoxy carbonylation of vinyl and aryl iodides with modified set up

^a All reactions were carried out on 0.5 mmol scale apart from #8 which was run continuously on 8 mmol scale (320 minutes). ^b Isolated yield. ^c Methanol was used as the solvent for pump 3, the reaction coil was heated to 25 °C and sample loop filled with iodide 5 (0.1 M), Pd(OAc)₂ (0.01 eq.), XantPhos (0.012 eq.), NEt₃ (1.5 eq.), H₂NNH₂ (0.3 eq.) and THF/MeOH (1:1).

^d Continuous flow reaction.