

CrossMark  
click for updatesCite this: *RSC Adv.*, 2017, 7, 3506

## Correction: Engineering-scale superlubricity of the fingerprint-like carbon films based on high power pulsed plasma enhanced chemical vapor deposition

Zhenbin Gong,<sup>ab</sup> Jing Shi,<sup>ab</sup> Wei Ma,<sup>a</sup> Bin Zhang<sup>a</sup> and Junyan Zhang<sup>\*a</sup>

DOI: 10.1039/c6ra90137a

www.rsc.org/advances

Correction for 'Engineering-scale superlubricity of the fingerprint-like carbon films based on high power pulsed plasma enhanced chemical vapor deposition' by Zhenbin Gong *et al.*, *RSC Adv.*, 2016, 6, 115092–115100.

An incorrect version of Fig. 3 was published; the corrected version is shown below:

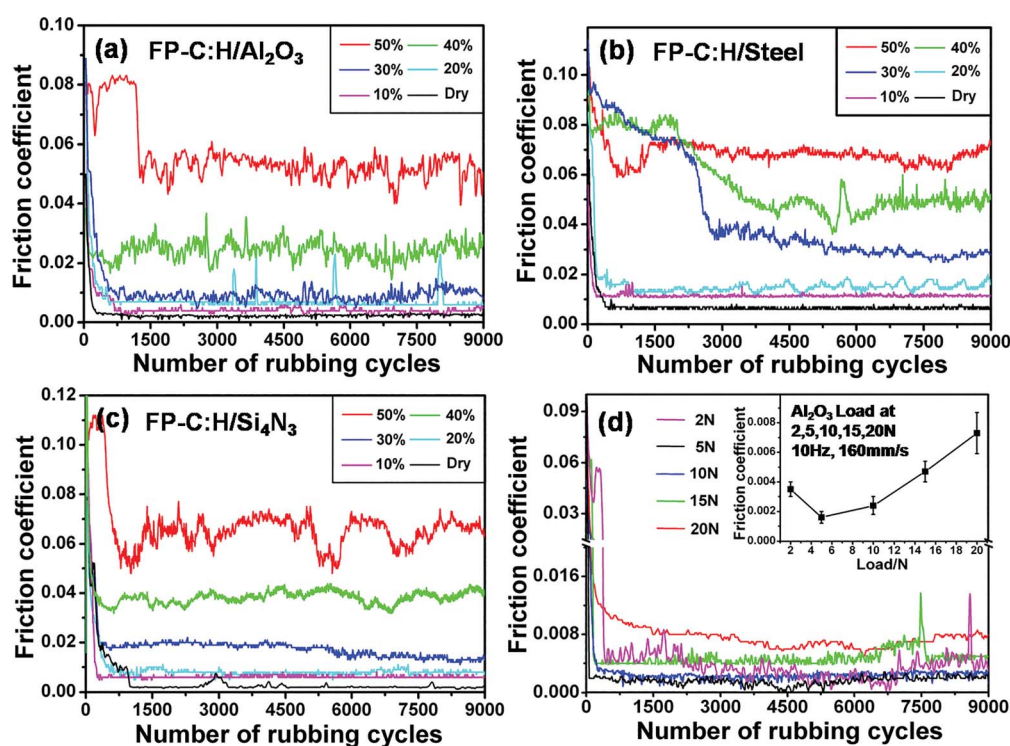


Fig. 3 (a–c) The friction coefficient curves as a function of rubbing cycles at different humidity against  $\text{Al}_2\text{O}_3$ ,  $\text{Si}_4\text{N}_3$ , and steel ball, respectively. (d) Friction coefficient curves of the FP-C:H films in a dry air atmosphere under a load from 2 N to 20 N, the inset shows the friction coefficient as a function of load.

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.

<sup>a</sup>State Key Laboratory of Solid Lubrication, Lanzhou Institute of Chemical Physics, Chinese Academy of Sciences, Lanzhou 730000, China. E-mail: zhangjunyan@licp.cas.cn

<sup>b</sup>University of Chinese Academy of Sciences, Beijing, 10049, China

