RSC Advances



PAPER

View Article Online
View Journal | View Issue



Cite this: RSC Adv., 2018, 8, 41491

Supported binary CuO_x -Pt catalysts with high activity and thermal stability for the combustion of NH_3 as a carbon-free energy source†

Saaya Kiritoshi,^a Takeshi Iwasa, ^D Kento Araki,^a Yusuke Kawabata,^a Tetsuya Taketsugu, ^D Satoshi Hinokuma ^D **ac and Masato Machida ^D *

Recently, NH₃ has been thought to be a renewable and carbon-free energy source. The use of NH₃ fuel, however, is hindered by its high ignition temperature and N₂O/NO production. To overcome these issues, in this study, the combustion of NH₃ over copper oxide (CuO_x) and platinum (Pt) catalysts supported on aluminium silicates ($3Al_2O_3 \cdot 2SiO_2$), aluminium oxides (Al_2O_3), and silicon oxides (SiO_2) were compared. To achieve high catalytic activity for the combustion of NH₃ and high selectivity for N₂ (or low selectively for N₂O/NO), conditions for the preparation of impregnated binary catalysts were optimised. With respect to the binary catalysts, sequentially impregnated CuO_x/Pt/Al₂O₃ exhibited relatively higher activity, N₂ selectivity, and thermal stability. From XRD and XAFS analyses, CuO_x and Pt in CuO_x/Pt/Al₂O₃ were present as CuAl₂O₄ and metallic Pt, respectively. Given that the combustion activity was closely associated with the Pt nanoparticle size, which was estimated from the Scherrer equation and the pulsed CO technique, highly dispersed Pt nanoparticles were crucial for the low-temperature light-off of NH₃. For single and binary catalysts, although NH (imide) deformation modes as a key species for N₂O production were detected by *in situ* FTIR spectral analysis, the band intensity of CuO_x/Pt/Al₂O₃ was less than those of CuO_x/Al₂O₃ and Pt/Al₂O₃. Therefore, CuO_x/Pt/Al₂O₃ exhibits high selectivity for N₂ in NH₃ combustion.

Received 25th September 2018 Accepted 27th November 2018

DOI: 10.1039/c8ra07969b

rsc.li/rsc-advances

Introduction

Recent studies have reportedly considered NH $_3$ to serve not only as a H $_2$ carrier material but also as a renewable, carbon-free energy source because of its high energy density (3160 W h L $^{-1}$) and negligible thermal NO $_x$ emission. Currently, NH $_3$ is industrially produced at a high pressure using N $_2$ (produced from air) and H $_2$ (produced from natural gas) by employing the Haber–Bosch process, which consumes a large amount of energy. However, the energy and costs associated with H $_2$ production and natural gas is 70–90% of that required for NH $_3$ production. Therefore, the low energy and costs that are associated with H $_2$

production along with the fact that it is a renewable energy source should be emphasised to ensure that the society utilises H₂ along with NH₃. As a proof-of-concept for using NH₃ as a fuel, an NH3-fuelled micro-gas turbine has been employed to demonstrate the potential of NH3-fired power plants at the Fukushima Renewable Energy Institute in Japan, as well as an NH3-fuelled industrial furnace.3 Compared to fossil fuels, however, NH₃ exhibits disadvantages of a high ignition temperature, low combustion rate, and N₂O/NO_x production. Therefore, to overcome these issues, it is imperative to develop a novel NH₃ combustion system. First, a catalytic NH₃ combustion system, which decreases the ignition temperature and N_2O/NO_x emissions, was developed. Previously, our group has successfully developed a catalytic NH3 combustion system and novel catalysts exhibiting high activity, N2 selectivity, and thermal stability.4 For example, copper oxides (CuOx) supported on Al2O3-based composite oxide materials (such as $10Al_2O_3 \cdot 2B_2O_3$ and $3Al_2O_3$ -·2SiO₂) exhibit high N₂ selectivity and thermal stability, whereas binary CuO_r and silver (Ag) supported on Al₂O₃ exhibit high activity and N2 selectivity.4 However, the former catalyst exhibits a low activity (ignition temperature at \sim 300 °C), while the latter catalyst exhibits low thermal stability (deactivation temperature at ~900 °C likely because of the low melting point of Ag).4 Therefore, it is imperative to develop catalysts to exhibit high activities and thermal stabilities for NH3 combustion.

[&]quot;Field of Environmental Chemistry and Materials, Division of Materials Science and Chemistry, Faculty of Advanced Science and Technology, Kumamoto University, 2-39-1 Kurokami, Chuo-ku, Kumamoto 860-8555, Japan. E-mail: hinokuma@kumamoto-u.ac.jp; Tel: +81-96-342-3653

^bDepartment of Chemistry, Faculty of Science, Hokkaido University, Sapporo 060-0810, Iapan

^{*}International Research Organization for Advanced Science and Technology, Kumamoto University, Japan

 $[\]dagger$ Electronic supplementary information (ESI) available: Calculation formulae, calculated thermodynamic Pt-PtOx phase equilibrium, XRD patterns, HAADF-STEM/EDX mapping images, product selectivities for the NH3–O2 and NH3–NO–O2 reactions, relationship between NH3 combustion activity and Pt particle size, NH3- and NO-TPD profiles. See DOI: 10.1039/c8ra07969b

On the other hand, binary systems comprising supported $\text{CuO}_x\text{-Ag,}^5$ $\text{CuO}_x\text{-Pt,}^6$ $\text{CuO}_x\text{-Au,}^7$ $\text{CuO}_x\text{-CeO}_2^8$ and $\text{-Li}_2\text{O}_3^8$ catalysts exhibiting a high performance for the selective catalytic oxidation of NH_3 ($\text{NH}_3\text{-SCO}$) have been previously reported. In particular, $\text{CuO}_x\text{-Pt}$ systems are expected to exhibit high thermal stability because of the high melting point of Pt (\sim 1770 °C). Recently, $\text{Sun } et \ al.$ have synthesised impregnated $\text{CuO}_x\text{-Pt/}$ ZSM-5 catalysts and reported that CuO_x on Pt species can lead to higher $\text{NH}_3\text{-SCO}$ performance compared to single catalysts. 6 On the other hand, Jabłońska has synthesised $\text{Al}_2\text{O}_3\text{-}$, $\text{TiO}_2\text{-}$, and $\text{ZrO}_2\text{-supported } \text{CuO}_x\text{-Pt}$, -Pd and -Rh catalysts 6 and found that the supported $\text{CuO}_x\text{-Pt}$ catalyst exhibits high activity and N_2 selectivity for $\text{NH}_3\text{-SCO}$. However, in these studies, NH_3 is considered to cause air pollution; therefore, the thermal

In this study, supported binary CuO_x -Pt catalysts were synthesised, and their catalytic properties for the combustion of NH $_3$ (as an energy source) at high reaction temperatures were examined. To achieve high catalytic activity for the combustion of NH $_3$, N $_2$ (low N $_2$ O/NO) selectivity and thermal stability, preparation conditions for impregnated binary catalysts were optimised. Moreover, the relationship between the local structure and catalytic properties for the combustion of NH $_3$ over supported CuO $_x$ -Pt catalysts was discussed.

stability is investigated at temperatures of less than 900 °C.

Experimental

RSC Advances

Catalyst preparation

3Al₂O₃·2SiO₂ (3A2S) of the catalyst support material was prepared by using an alkoxide method. According to previous studies, 4,9 Si(OC₂H₅)₄ (TEOS, Wako Pure Chemicals) was first dissolved in C₂H₅OH (Wako Pure Chemicals) at a concentration of 1 M at room temperature (RT). Second, after the addition of H₂O and HCl (Wako Pure Chemicals), the solution was stirred at 70 °C for 5 h, and a Si solution was prepared. Third, the alcohol was dehydrated. The H₂O and HCl concentrations were H₂O/ TEOS = $2 \text{ (mol mol}^{-1}\text{)}$ and HCl/TEOS = $0.1 \text{ (mol mol}^{-1}\text{)}$, respectively. Next, Al[OCH(CH₃)₂]₃ (AIP, Sigma-Aldrich) was subjected to reflux conditions and dissolved in (CH₃)₂-CHCH₂OH (Nacalai Tesque) to prepare an Al solution. The precursor solution was prepared by mixing the Al and Si solutions in a volume ratio of 3:2 at RT. H₂O was added, and the solution was stirred for 1 h to prepare the precursor solution. The precursor sols were dried at 110 °C for 48 h, affording xerogel precursor powders. These powders were pulverised and calcined at 600 °C for 3 h and finally at 1200 °C for 5 h in air. In addition, α-Al₂O₃ (Wako Pure Chemicals), γ-Al₂O₃ (JRC-ALO-8, Catalysis Society of Japan), SiO₂ (JRC-SIO-10, Catalysis Society of Japan), and CuO (Wako Pure Chemicals) were used as support materials.

Single and binary supported CuO_x (CuO loading of 6 wt%) and/or Pt (Pt loading of 2 wt%) catalysts were prepared by the co-impregnation (CuO_x -Pt) of an aqueous solution of $Cu(NO_3)_2$ (Wako Pure Chemicals) and $[Pt(NH_3)_2(NO_3)_2]$ (Tanaka Kikinzoku Kogyo), followed by drying and calcination at 600 °C for 3 h in air. In addition, the sequentially impregnated binary catalysts, *i.e.* Pt and subsequent CuO_x (CuO_x /Pt) and/or CuO_x and

subsequent Pt (Pt/CuO_x), were synthesised in a similar fashion. As $CuO_x/Pt/Al_2O_3$ exhibited a high catalytic activity for the combustion of NH_3 , physically mixed catalysts ($CuO + Pt/Al_2O_3$, $CuAl_2O_4 + Pt/Al_2O_3$, and $CuO_x/Al_2O_3 + Pt/Al_2O_3$) with the same composition ratios were also prepared. To evaluate their thermal stabilities and catalytic properties, the as-prepared catalysts were subjected to thermal aging at 900 °C for 100 h in air and/or at 1000 °C for 5 h in air.

Characterisation

Powder X-ray diffraction (XRD) patterns were recorded using monochromatic Cu Ka radiation (30 kV, 20 mA, Multiflex, Rigaku). The average size of the Pt particles was calculated by the XRD line broadening method by using the Scherrer equation.10 The chemical composition was determined by X-ray fluorescence (XRF; EDXL-300, Rigaku) measurements. Highangle annular dark-field scanning transmission electron microscopy (HAADF-STEM) and energy-dispersive X-ray spectroscopy (EDS) mapping images were recorded on a JEM-ARM200CF (JEOL) system. Brunauer-Emmett-Teller (BET) surface area (S_{BET}) values were calculated from the N₂ adsorption isotherms, which were recorded at −196 °C (Belsorp, Bel Japan, Inc.). Pt dispersion and particle size were determined by the pulsed CO technique (BELCAT-B, BEL Japan, Inc.) at 50 °C after O2 oxidation and subsequent H2 reduction at 400 °C according to previous studies.11 Pt dispersion and particle size were calculated by assuming hemispherical particles with the stoichiometric adsorption of CO on Pt at a CO: Pt ratio of 1:1. Cu K-edge and Pt L₃-edge X-ray absorption fine structure (XAFS) spectral analyses were carried out at BL9A of PF and BL01B1 of SPring-8. XAFS spectra were recorded in the transmission mode at RT using an ionisation chamber filled with N2 for the incident beam, another chamber filled with 75% N₂/Ar for the Cu K-edge and 50% N₂/Ar for Pt L₃-edge for the transmitted beam, and a Si(111) double-crystal monochromator. Reference samples (e.g. Cu₂O, CuO, CuAl₂O₄, and PtO₂) were mixed with boron nitride (BN) powder to achieve an appropriate absorbance at the edge energy, whereas the catalysts were used without mixing with BN. XAFS data were processed using the IFEFFIT software package (Athena and Artemis).

Catalytic NH₃ combustion tests

The catalytic combustion of NH₃ was performed in a flow reactor at atmospheric pressure. Catalysts (10-20 mesh, <0.3 mm thickness, 50 mg) were fixed in a quartz tube (OD: 6 mm, ID: 4 mm) with quartz wool at both ends of the catalyst bed. The temperature dependence of the catalytic activity was evaluated by heating the catalyst bed from RT to 900 °C at a constant rate of 10 °C min⁻¹ while a gas mixture containing 1.0% NH₃, 1.5% O₂ and He balance at 100 cm³ min⁻¹ (W/F = 5.0 \times 10⁻⁴ g min cm⁻³) was supplied. The O₂ excess ratio for NH₃ combustion was expressed as $\lambda = (pO_2/pNH_3)_{exp.}/(pO_2/pNH_3)$ stoichiom., where p denotes pressure. The $NH_3/N_2O/NO$, N_2 and NO₂ gas concentrations were analysed using a nondispersive infrared gas analyser (VA-3011, Horiba), chromatography (GC-Shimadzu) and chemiluminescence (NOA-7000.

Shimadzu) measurements. The ESI† provides the calculation formulae used to determine the concentration ratios.

In situ Fourier transform infrared (FTIR) spectra were recorded on a Nicolet 6700 spectrometer using a diffuse-reflectance reaction cell with a BaF₂ window connected to a gas supply and a heating system to enable measurements at atmospheric pressure. First, the catalysts were preheated in situ in flowing He at 400 °C for 30 min prior to each experiment. After pre-treatment, the temperature of the catalyst was decreased to 200 °C, followed by the subsequent purging of the cell with He and then filling with 0.3% NH₃/He mixed gas. Finally, FTIR spectra were recorded while the catalysts were maintained under a stream of NH₃/He.

Computational details

Paper

Spin-restricted density functional theory (DFT) computations were carried out for $\mathrm{NH_3/Pt_x}$ (x=13 and/or 20) at the M06 level using the def-SV(P) basis sets, with the 60-electron relativistic effective core potential for Pt, as implemented in TURBOMOLE under the resolution of the identity approximation. The model clusters of $\mathrm{Pt_{13}}$ with I_{h} symmetry and $\mathrm{Pt_{20}}$ with T_{d} symmetry having four (111) faces were locally optimised until imaginary frequencies were removed. One atop geometry for $\mathrm{NH_3-Pt_{13}}$ and three initial geometries for $\mathrm{NH_3-Pt_{20}}$ were considered, *i.e.* atop the (111) face; bridge-to-edge site; and atop the vertex site, respectively. These geometries were optimised until no imaginary frequencies were observed. The adsorption energy of $\mathrm{NH_3}$ on $\mathrm{Pt_x}$ was estimated as $E_{\mathrm{ads}} = E(\mathrm{NH_3}) + E(\mathrm{Pt_x}) - E(\mathrm{NH_3-Pt_x})$, where E(A) denotes the electronic energy of species A.

Results & discussion

Local structures of supported CuO_x and Pt catalysts

Fig. 1 shows the XRD patterns of sequentially impregnated binary (CuO_x/Pt) catalysts, because CuO_x/Pt/Al₂O₃ exhibited

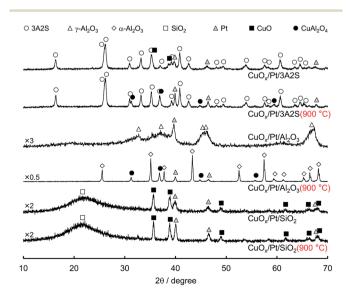


Fig. 1 $\,$ XRD patterns of sequentially impregnated catalysts before and after thermal aging 900 $^{\circ}\text{C}$ for 100 h in air.

higher activity, N2 (lower N2O/NO) selectivity, and thermal stability for the combustion of NH3 compared to all binary catalysts before and after thermal ageing at 900 °C (Table 1). ESI† shows the XRD patterns of the other catalysts. The XRD patterns of as-prepared CuO_x/Pt/3A2S and CuO_x/Pt/SiO₂ before and after aging revealed peaks corresponding to CuO, whereas peaks corresponding to CuAl2O4 were observed for CuOx/Pt/ 3A2S and CuO_r/Pt/Al₂O₃ (900 °C), possibly related to the solidstate reaction between γ-Al₂O₃ and CuO_x. Diffraction peaks for Cu species were not observed for as-prepared CuO_r/Pt/Al₂O₃, possibly related to the high dispersion of CuO_r. The Al₂O₃ phase for the binary catalysts was transformed from γ to α , and the diffraction peaks for Pt became sharper after thermal aging at temperatures of higher than 900 °C. Therefore, the growth of particles and sintering of Al₂O₃ and Pt are induced by thermal aging. Indeed, the Pt particle sizes calculated by the Scherrer equation increased with the aging temperature (Table 1). On the other hand, as peaks corresponding to CuO were observed for the binary catalysts prepared using α-Al₂O₃ (CuO_x/Pt/α-Al₂O₃) before and after aging, it was possibly difficult to form CuAl₂O₄ from the solid-state reaction between α -Al₂O₃ and CuO_x (ESI†).

Fig. 2 shows the normalised Cu K-edge X-ray absorption near-edge structure (XANES) spectra and k-space extended X-ray absorption fine structure (EXAFS) oscillations of the catalysts and the three reference compounds (Cu₂O, CuO and CuAl₂O₄, respectively). Cu K-edge XANES spectra and k-space EXAFS oscillations of CuO_x/Pt/3A2S (900 °C) and CuO_x/Pt/Al₂O₃ before and after thermal aging at 900 °C were similar to those of CuAl2O4, whereas those of CuOx/Pt/3A2S and CuOx/Pt/SiO2 before and after thermal aging at 900 °C were similar to those of CuO. In the XANES spectra of CuO_x/Pt/3A2S and CuO_x/Pt/SiO₂ before and after aging, the pre-edge (at ~8985 eV, corresponding to Cu^{2+} 1s \rightarrow 4p + ligand and Cu^{2+} 1s \rightarrow Cu^{2+} chargetransfer excitation)13 for CuO was observed. XAFS analyses were consistent with the XRD patterns of the catalysts. The Pt L₃-edge XAFS profiles of the catalysts and two references (i.e. Pt foil and PtO2, respectively) are also depicted in Fig. 3. For asprepared CuO_x/Pt/Al₂O₃, the XANES profile was slightly similar to that observed for PtO2. According to the calculated thermodynamic $Pt-PtO_x$ phase equilibrium (ESI†), PtO_2 and metallic Pt exhibited thermodynamic stability at RT and 600 °C, respectively. Therefore, Pt nanoparticles (especially, their surfaces) in CuO_x/Pt/Al₂O₃ are thought to be oxidised during the cooling process of calcination. By contrast, the XANES profiles of the other catalysts were similar to that of Pt foil (metallic Pt) as against the calculated phase equilibrium. This disagreement is supposedly caused by the calcination and/or thermal aginginduced sintering of metallic Pt nanoparticles in these catalysts; hence, the bulk metallic Pt particles are stable at RT.

Next, HAADF-STEM and EDS mapping images of sequentially impregnated $\text{CuO}_x/\text{Pt/Al}_2\text{O}_3$ (900 °C) were recorded (Fig. 4). From the HAADF-STEM image, dispersed nanoparticles with a bright contrast supported on Al_2O_3 particles (blue for Al) were observed, and the EDS mapping images revealed the presence of Pt (red). On the other hand, for the CuO_x species of $\text{CuO}_x/\text{Pt/Al}_2\text{O}_3$ (900 °C), the EDS mapping images revealed the presence of CuO_x aggregates (green). However, because the

				Selectivity at T_{90} $^a/\%$			Pt particle size/nm		Desorbed gas ^d /μmol m ⁻²		
Catalyst	Phase	T_{10} $^a/^{\circ}\mathrm{C}$	T_{90} $^a/^{\circ}\mathrm{C}$	N_2	N_2O	NO	$S_{\mathrm{BET}} / \mathrm{m}^2 \mathrm{g}^{-1}$	^b XRD	^c Pulsed CO	NH_3	NO
CuO _x /Pt/3A2S	CuO/Pt/3A2S	210	356	90	8	2	32		18		
CuO _x /Pt/3A2S (900 °C)	CuAl ₂ O ₄ /Pt/3A2S	203	344	89	10	1	27		50		
CuO _x /Al ₂ O ₃	$CuAl_2O_4/\gamma$ - Al_2O_3	303	476	92	6	2	149			1.3	0.050
CuO_x/Al_2O_3 (900 °C)	$CuAl_2O_4/\alpha$, γ - Al_2O_3	295	450	91	8	1	102			0.4	0.063
Pt/Al ₂ O ₃	Pt/γ - Al_2O_3	188	289	81	19	<1	156	11	11	0.6	0.051
Pt/Al ₂ O ₃ (900 °C)	Pt/ γ , θ -Al ₂ O ₃	213	266	87	12	<1	99	31	^e n. d.	2.0	0.140
CuO _x /Pt/Al ₂ O ₃	CuAl ₂ O ₄ /Pt/γ-Al ₂ O ₃	189	278	86	13	<1	139	15	5	1.6	0.064
CuO _x /Pt/Al ₂ O ₃ (900 °C)	$CuAl_2O_4/Pt/\alpha$ - Al_2O_3	220	339	86	13	1	14	33	176	1.5	0.444
CuO _x /Pt/SiO ₂	CuO/Pt/SiO ₂	234	316	93	7	<1	182	13	^e n. d.		
CuO _x /Pt/SiO ₂ (900 °C)	CuO/Pt/SiO ₂	301	456	96	<1	3	81	24	^e n. d.		

Table 1 Catalytic properties of supported catalysts before and after thermal aging at 900 °C for 100 h in air

overlap of the fluorescence lines of Pt-L and Cu-K, as denoted by the solid arrows in the overlaid image, a physical proximity between Pt and CuO_x nanoparticles in CuO_x/Pt/Al₂O₃ was supposed after aging at 900 °C. On the other hand, Pt particles with sizes larger than 200 nm were clearly observed for CuO_x/Pt/SiO₂ (900 °C) (ESI†).

Combustion properties of supported CuO_x and Pt catalysts

Fig. 5 shows the comparison of the temperature dependence on the selectivities of products obtained over supported CuO_x/Pt, CuO_x/Al₂O₃ and Pt/Al₂O₃ before and after thermal aging at 900 °C under O_2 excess conditions ($\lambda = 2$). ESI† shows those of the other catalysts. With respect to the supported CuOx/Pt catalysts before and after aging, CuOx/Pt/Al2O3 exhibited a comparatively higher catalytic NH3 combustion activity and N2 (lower N₂O/NO) selectivity. For CuO_x/Pt/Al₂O₃ and Pt/Al₂O₃ before and after aging, the light-off curves for NH3 were obtained at ~200 °C, whereas CuO_x/Al₂O₃ exhibited lower catalytic activity (T_{10} : ~300 °C). On the other hand, before and after aging, CuO_x/Pt/Al₂O₃ and CuO_x/Al₂O₃ exhibited lower NO selectivity compared to Pt/Al₂O₃ although NO selectivities for all catalysts were observed after the NH3 conversion reached \sim 90%. In contrast, the selectivity of N_2O over the catalysts before and after aging increased in the order of CuO_x/Al₂O₃ < $CuO_x/Pt/Al_2O_3$ < Pt/Al_2O_3 . Finally, $CuO_x/Pt/Al_2O_3$ exhibited higher N₂ selectivity. Therefore, binary CuO_x/Pt/Al₂O₃ renders synergistic effects of Pt (enhancing the NH₃-O₂ reaction) and CuO_x (increasing N₂ selectivity). To investigate the low NO selectivity of CuO_x/Pt/Al₂O₃ and CuO_x/Al₂O₃, an NH₃-NO-O₂ reaction test (0.8% NH₃, 0.2% NO, 1.4% O₂, He balance) was also performed (shown in ESI†). For the NH3-NO reaction, CuO_x/Pt/Al₂O₃ also exhibited higher activity compared to CuO_x/ Al₂O₃ and Pt/Al₂O₃. NH₃ was supposedly consumed not only by O₂ but also by NO, which was formed as an intermediate during the light-off of NH₃. However, the selectivity of N₂O for the NH₃-NO-O₂ reaction over CuO_x/Pt/Al₂O₃ was higher than that for the

combustion of NH_3 (Fig. 5), indicating that the N_2O is produced from the NH_3 -NO reaction.


For N2O production, on the other hand, according to the kinetic model for NH₃ oxidation, the elementary reaction of NH (imide) + NO \rightarrow N₂O + H exhibited high sensitivity for N₂O production.14 Moreover, for catalytic NH3 oxidation and NH3-NO reactions, NH was also regarded as a key species for N₂O production.15 Therefore, to verify the adsorption of NH on the catalysts, in situ FTIR spectra of NH3 adsorbed on the catalysts before and after aging were recorded at 200 °C (Fig. 6); this temperature is the approximate initiation temperature for NH₃ combustion (Fig. 5). As has been reported previously,15 FTIR bands were observed at 1250 and 1625 cm⁻¹, corresponding to the deformation modes of NH3 adsorbed on Lewis acid sites, for all catalysts. Moreover, for Pt/Al₂O₃ and CuO_r/Pt/Al₂O₃, a set of bands were slightly observed at 1395 and 1695 cm⁻¹, corresponding to the asymmetric and symmetric bending vibrations of NH₃ species on the Brønsted acid sites. Although the single band at 1458 cm⁻¹ corresponding to the NH (considered as a species for N₂O production) deformation modes was observed for all catalysts, the band intensity for CuOx/Pt/Al2O3 was less than that for Pt/Al₂O₃. As CuO_x/Pt/Al₂O₃ prevented the production of NO from the combustion of NH3 and the dissociative adsorption of NH3, the catalyst finally achieved high N2 selectivity.

Catalytic properties of supported CuOx and/or Pt

Table 1 summarises the catalytic properties of supported CuO_x/Pt , $\text{CuO}_x/\text{Al}_2\text{O}_3$ and $\text{Pt/Al}_2\text{O}_3$ before and after thermal aging at 900 °C, and ESI† shows those of the other catalysts. Catalytic activity was expressed in terms of the light-off temperature at which 10% conversion of NH₃ was achieved (T_{10}), and the product selectivities were evaluated at the reaction temperature at which 90% NH₃ conversion was achieved (T_{90}). ESI† shows the temperature dependence of the product selectivities for the combustion of NH₃ over the catalysts. For single catalysts supported on each material (*i.e.* 3A2S, Al₂O₃ and SiO₂), supported

^a Temperature at which NH₃ conversion reached 10% and 90%. ^b Calculated from XRD line broadening method. ^c Calculated from pulsed CO chemisorption. ^d Estimated by NH₃- and NO-TPD ranging from 50 °C to 500 °C. ^e The amount of CO chemisorption was not detected (n. d.).

Paper

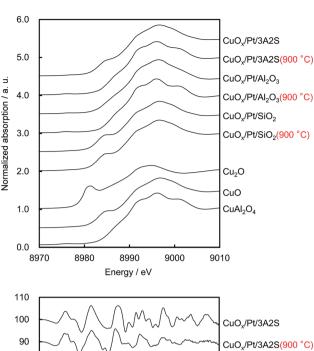

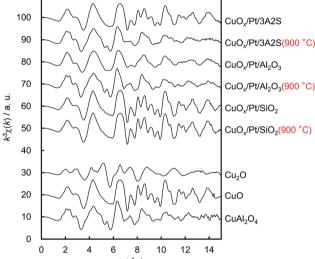


Fig. 2 Cu K-edge (upper) normalised XANES spectra and (lower) EXAFS oscillations of sequentially impregnated catalysts before and after thermal aging and three references (i.e. Cu₂O, CuO, and CuAl₂O₄, respectively).

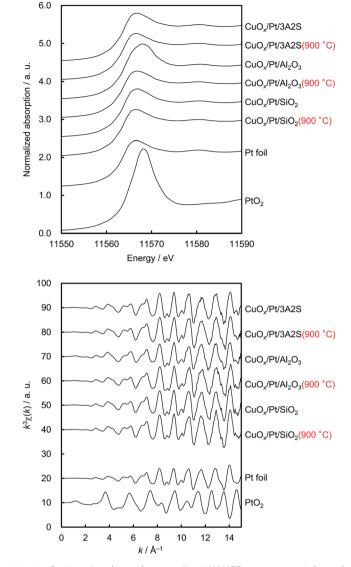


Fig. 3 Pt L_3 -edge (upper) normalised XANES spectra and (lower) EXAFS oscillations of sequentially impregnated catalysts before and after thermal aging and two references (i.e. Pt foil and PtO_2 , respectively).

 ${
m CuO}_x$ exhibited low activity and ${
m N}_2{
m O}/{
m NO}$ selectivities, whereas supported Pt exhibited high activity and ${
m N}_2{
m O}/{
m NO}$ selectivity (ESI†). On the other hand, binary supported catalysts exhibited the same high activity as the single supported Pt, albeit a slightly lower ${
m N}_2{
m O}/{
m NO}$ selectivity. As the combustion activity was closely associated with the Pt particle size, which was calculated by the Scherrer equation (plot shown in the ESI†), highly dispersed Pt nanoparticles supposedly played a key role in the low-temperature light-off of ${
m NH}_3$. In this study, for pulsed CO chemisorption, it is expected that CO is adsorbed not only on Pt but also on ${
m CuO}_x$ in case of binary system catalysts. ¹⁶ Therefore, the correlation between the ${
m NH}_3$ combustion activity (T_{10}) and the Pt particle size can be estimated using the XRD line broadening method by employing the Scherrer equation.

To elucidate the correlation between the activity and size of Pt nanoparticles, the adsorption energy ($E_{\rm ads}$) between NH₃ and Pt₁₃ and/or Pt₂₀ clusters (Pt–N) were estimated by DFT computations (Fig. 7). Compared with the Pt–N $E_{\rm ads}$ of the vertex for the Pt₂₀ (larger) cluster, that of the vertex for the Pt₁₃ (smaller) cluster was higher, indicating that NH₃ preferentially adsorbs on highly dispersed Pt nanoparticles as well as coordinatively unsaturated (cus) Pt atoms. Indeed, for the Pt₂₀ cluster, the Pt–N $E_{\rm ads}$ of three initial geometries (see inset in Fig. 7) increased in the order of atop < edge < vertex. Moreover, the bond distance of N–H in NH₃ adsorbed on Pt₁₃ was longer than that on Pt₂₀, suggesting that cus Pt exhibits high activity for the dissociation of the N–H bond in adsorbed NH₃. Compared with the activity of binary CuO_x–Pt catalysts prepared by co-impregnation, those of the sequentially impregnated CuO_x/Pt catalysts were higher

RSC Advances

200 nm

Cu-K

Overlay

Fig. 4 HAADF-STEM image and EDS mapping analysis of $\text{CuO}_x/\text{Pt}/\text{Al}_2\text{O}_3$ (900 °C). Red, green, and blue points denote the Pt-L, Cu-K, and Al-K fluorescence lines, respectively.

probably because Pt nanoparticles can be highly dispersed onto each support material without inhibition from the presence of CuO_x .

Among the CuO_x/Pt catalysts supported on various support materials, CuO_v/Pt/Al₂O₃ exhibited a relatively higher activity, N₂ selectivity, and thermal stability (Table 1). However, a significant decrease in S_{BET} was observed for CuO_x/Pt/Al₂O₃ (900 °C) (139 \rightarrow 14 m² g⁻¹) in comparison with that observed for CuO_x/Al₂O₃ (900 °C) and Pt/Al₂O₃ (900 °C). For this reason, first, it is considered that the significant decrease in specific surface area can be attributed to the phase transition of $(\gamma \rightarrow \alpha)$ Al₂O₃ as well as thermal aging at 900 °C. However, in case of only γ -Al₂O₃, the phase transformation to α -Al₂O₃ was observed at approximately 1200 °C.17 Next, however, according to a previous report related to the effects of divalent cation additives on the phase transition of $(\gamma \rightarrow \alpha)$ Al₂O₃, the additive Cu²⁺ species that coexist with γ-Al₂O₃ accelerates its phase transition to α-Al₂O₃ at a low temperature of 1200 °C, which can be attributed to the fact that CuAl₂O₄ is formed at a temperature of lower than 1200 °C.18 Indeed, in this study, α-Al₂O₃ was observed in CuO_x/Al₂O₃ after thermal aging at 900 °C (Table 1). Finally, it is probable that the additive and co-existing Pt also accelerates the formation of CuAl2O4 as well as the phase transition to α-Al₂O₃. Although no concrete data are available, a similar significant decrease of the specific surface area could be observed in both Cu-Al-O and Cu-Pt-Al-O system catalysts after thermal aging occurred at 1000 °C.19

Notably, the high performance for $\text{CuO}_x/\text{Pt}/\text{Al}_2\text{O}_3$ was maintained after thermal aging at 1000 °C despite the phase transition ($\gamma \to \alpha$) and decrease in the surface area. On the other hand, CuO_x/Pt supported on $\alpha\text{-Al}_2\text{O}_3$ exhibited slightly higher $\text{N}_2\text{O}/\text{NO}$

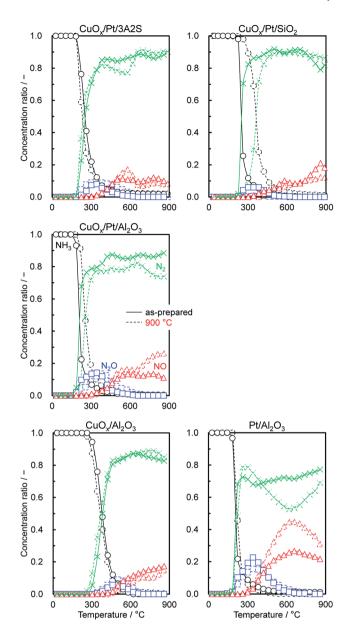


Fig. 5 Product selectivities for the catalytic combustion of NH₃ (NH₃– O_2) over catalysts before and after thermal aging in air at 900 °C for 100 h. Reaction conditions: 1.0% NH₃, 1.5% O_2 , $\lambda=2$, He balance, W/F = 5.0×10^{-4} g min cm⁻³.

selectivities compared to $\text{CuO}_x/\text{Pt}/\text{Al}_2\text{O}_3$ (using $\gamma\text{-Al}_2\text{O}_3$), the results of which can be explained from the difference in the CuO_x phase of CuO in $\text{CuO}_x/\text{Pt}/\alpha\text{-Al}_2\text{O}_3$ and CuAl_2O_4 in $\text{CuO}_x/\text{Pt}/\gamma\text{-Al}_2\text{O}_3$. Previously, our group has reported that supported CuAl_2O_4 exhibits a higher $\text{NH}_3\text{-NO}\text{-O}_2$ reaction activity to N_2 compared to supported CuO because supported CuAl_2O_4 exhibits a higher fraction of the Cu^{2+} active species for the reaction. Therefore, the trend for $\text{N}_2\text{O}/\text{NO}$ selectivities over $\text{CuO}_x/\text{Pt}/\alpha\text{-Al}_2\text{O}_3$ and $\text{CuO}_x/\text{Pt}/\text{Al}_2\text{O}_3$ can be explained in a similar manner. Moreover, physically mixed catalysts ($\text{CuO} + \text{Pt}/\text{Al}_2\text{O}_3$, $\text{CuAl}_2\text{O}_4 + \text{Pt}/\text{Al}_2\text{O}_3$ and $\text{CuO}_x/\text{Al}_2\text{O}_3 + \text{Pt}/\text{Al}_2\text{O}_3$) exhibited lower N_2 selectivity at high reaction temperatures ($\text{ca.} > 600 \, ^{\circ}\text{C}$) compared to binary catalysts (ESI†), indicating that highly dispersed Pt and proximate CuO_x particles

Paper

NH 1625 L-NH₃(S_{as}) 1580 NH₂(S_{as}) B-NH₃(S_{as} $\frac{1}{2}$ $\frac{1}$ $NH_2(\delta_{as})$ L: Lewis acid sites B: Brønsted acid sites 1458 Al₂O₃ CuO_v/Al₂O₃ CuO_x/Al₂O₃(900 °C) Absorbance / √ Pt/Al₂O₃ Pt/Al₂O₃(900 °C) CuO_v/Pt/Al₂O₃ CuO_x/Pt/Al₂O₃(900 °C) 1700 1500 1300 1100

Fig. 6 In situ FTIR spectra of NH_3 adsorbed on supports and catalysts before and after thermal aging in air at 900 °C for 100 h. The spectra were recorded at 200 °C in gas feeds of 0.3% NH_3 with He balance.

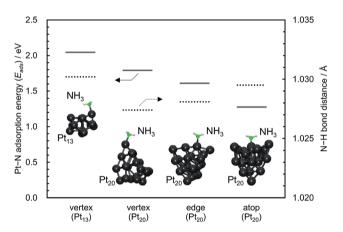


Fig. 7 Adsorption energy (E_{ads}) between NH $_3$ and Pt $_{13}$ and/or Pt $_{20}$ clusters (Pt $_1$) and bond distances of N $_1$ H in NH $_3$ adsorbed on Pt $_{13}$ and/or Pt $_{20}$ obtained by the DFT computations.

are required to achieve high N₂ selectivity for catalytic NH₃ combustion. On the other hand, Pt/CuO exhibited high N₂ selectivity, albeit low catalytic activity (ESI†), probably because of low Pt dispersion. To examine the acid and base properties of these catalysts, the amount of desorbed gas per surface area of the catalyst was estimated using NH₃- and NO-temperature-programmed desorption (TPD) over a range of 50–500 °C (ESI†). Table 1 summarises this data. For all catalysts after aging, the amount of desorbed NO increased noticeably, likely because of decreased surface area. However, before and after aging, CuO_x/Pt/Al₂O₃ exhibited relatively higher NH₃ and NO adsorption properties compared to CuO/Al₂O₃ and Pt/Al₂O₃. These results indicated that CuO_x/Pt/Al₂O₃ exhibits higher acidity and basicity compared to single supported catalysts; therefore, the reactivity of NH₃–NO to N₂ is enhanced on the CuO_x/Pt/Al₂O₃ surface.

Finally, the effects of CuO, Cu₂O and metallic Cu on the catalytic NH₃ combustion properties are discussed. ESI† denotes

the comparison of the temperature dependence on the selectivities of the products that were obtained when compared to those of the commercially available CuO, Cu2O and metallic Cu. The metallic Cu was prepared from CuO that was reduced at 400 °C for 30 min in 5% H₂/He because CuO can be reduced to metallic Cu at an approximate temperature of 300 °C, as demonstrated from the H2-TPR measurement.4 For observing the NH3 combustion activity, the light-off curve for CuO was obtained at approximately 300 °C; further, Cu₂O and metallic Cu exhibited lower activity when compared to that exhibited by CuO. Therefore, it can be considered that CuO (Cu²⁺ oxidation state) acts as an active site during the reaction. However, while considering the selectivities of the products, Cu2O and metallic Cu exhibited low N₂O/NO selectivities because their activities (NH₃ conversions) were observed to be low. In the O2-excess condition for NH3 combustion ($\lambda = 2.0$), it can be considered that the combustion over CuO_x catalysts proceeds because of redox cycling between CuO and Cu₂O.⁴ Further, the XRD patterns of CuO and Cu₂O before and after the reaction ($\lambda = 2.0$) also indicate redox cycling because the patterns of Cu₂O after the reaction revealed diffraction peaks corresponding to those of CuO (ESI†). In addition, based on our previous studies related to operando XAFS, similar redox behaviours could be observed in the supported CuO catalysts (CuOx/SiO2).4 Therefore, it can be assumed that the effect of metallic Cu on combustion is negligible.

Conclusions

In this study, binary CuO_x and Pt catalysts supported on 3A2S, Al_2O_3 and SiO_2 suppressed the production of N_2O/NO_x via the catalytic combustion of NH3 as a carbon-free energy source. Among the binary supported CuO_x and Pt catalysts, sequentially impregnated CuO_x/Pt catalysts tended to exhibit higher activity because Pt nanoparticles were highly dispersed onto each support material without inhibition due to the presence of CuO_x. Compared to sequentially impregnated CuO_x/Pt/3A2S and CuOx/Pt/SiO2, CuOx/Pt/Al2O3 exhibited high NH3 combustion activity, N2 selectivity, and thermal stability. Before and after aging, CuOx/Pt/Al2O3 was characterised as proximate CuAl₂O₄ and dispersed metallic Pt particles. As the combustion activity was closely associated with the Pt particle size, highly dispersed Pt nanoparticles were thought to play a key role in the low-temperature light-off of NH₃. For selectivity, the proximate CuAl₂O₄ in CuO_x/Pt/Al₂O₃ enhanced the NH₃-NO to N₂ reaction, and the catalyst prevented the dissociative adsorption of NH3 to NH, which was regarded as an intermediate species obtained during the N2O production. Therefore, CuOx/Pt/Al2O3 exhibits high N2 selectivity.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

This research was supported by JST, PRESTO (JPMJPR1344) and JSPS (18K14326). This work was partly supported by JST-Mirai

RSC Advances Paper

Program and the Advanced Characterization Platform of the Nanotechnology Platform Japan sponsored by the Ministry of Education, Culture, Sports, Science and Technology (MEXT), Japan. The XAFS experiments were performed at BL9A with the approval of PF, KEK (Proposal No. 2016G527), and at the BL01B1 of SPring-8 with the approval of JASRI (Proposal No. 2017A1050).

Notes and references

- 1 P. Glarborg, A. Jensen and J. Johnsson, Prog. Energy Combust. Sci., 2003, 29, 89-113.
- 2 (a) J. Andersson and J. Lundgren, Appl. Energy, 2014, 130, 484-490; (b) Y. Bicer, I. Dincer, C. Zamfirescu, G. Vezina and F. Raso, J. Cleaner Prod., 2016, 135, 1379-1395; (c) S. Giddey, S. Badwal, C. Munnings and M. Dolan, ACS Sustainable Chem. Eng., 2017, 5, 10231-10239.
- 3 (a) A. Hayakawa, T. Goto, R. Mimoto, T. Kudo and H. Kobayashi, Mech. Eng. J., 2015, 2, 14-00402; (b) R. Murai, R. Omori, R. Kano, Y. Tada, H. Higashino, N. Nakatsuka, J. Hayashi, F. Akamatsu, K. Iino and Y. Yamamoto, Energy Procedia, 2017, 120, 325-332.
- 4 (a) S. Hinokuma, et al., Chem. Lett., 2016, 45, 179-181; (b) S. Hinokuma, et al., J. Phys. Chem. C, 2016, 120, 24734-24742; (c) S. Hinokuma, et al., J. Phys. Chem. C, 2017, 121, 4188-4196; (d) S. Hinokuma, et al., J. Ceram. Soc. Jpn., 2017, **125**, 770–772; (e) S. Hinokuma, et al., Catal. Commun., 2018, 105, 48-51; (f) S. Hinokuma, et al., Catal. Today, 2018, 303, 2-7; (g) S. Hinokuma, et al., J. Catal., 2018, 361, 267-277.
- 5 (a) L. Gang, B. Anderson, J. van Grondelle, R. van Santen, W. van Gennip, J. Niemantsverdriet, P. Kooyman, A. Knoester and H. Brongersma, J. Catal., 2002, 206, 60-70; (b) M. Yang, C. Wu, C. Zhang and H. He, Catal. Today, 2004, 90, 263-267; (c) J. Lee, Y. Lim, B. Park, A. Adelodun and Y. Jo, Bull. Korean Chem. Soc., 2015, 36, 162-167.
- 6 (a) R. Burch and B. Southward, J. Catal., 2000, 195, 217–226; (b) R. Burch and B. Southward, Chem. Commun., 2000, 1115-1116; (c) H. Kusar, A. Ersson, M. Vosecky and S. Jaras, Appl. Catal., B, 2005, 58, 25-32; (d) G. Olofsson, A. Hinz and A. Andersson, Chem. Eng. Sci., 2004, 59, 4113-4123; (e) G. Olofsson, L. Wallenberg and A. Andersson, J. Catal., 2005, 230, 1-13; (f) M. Sun, S. Wang, Y. Li, Q. Wang, H. Xu and Y. Chen, J. Taiwan Inst. Chem. Eng., 2017, 78, 401-408; (g) M. Jabłońska, Catal. Commun., 2015, 70, 66-71.
- 7 S. Lin, A. Gluhoi and B. Nieuwenhuys, Catal. Today, 2004, 90, 3-14.
- 8 M. Lippits, A. Gluhoi and B. Nieuwenhuys, Catal. Today, 2008, 137, 446-452.
- 9 H. Suzuki, M. Shimizu, H. Kamiya, T. Ota and M. Takahashi, Adv. Powder Technol., 1997, 8, 311-323.

- 10 B. D. Cullity, Elements of X-RAY DIFFRACTION, Addison-Wesley Publishing Company, Inc., Philippines, 1978.
- 11 (a) M. Hatanaka, N. Takahashi, T. Tanabe, Y. Nagai, A. Suda and H. Shinjoh, J. Catal., 2009, 266, 182-190; (b) J. Anderson, R. Daley, S. Christou and A. Efstathiou, Appl. Catal., B, 2006, **64**, 189–200; (c) Y. Nagai, T. Hirabayashi, K. Dohmae, N. Takagi, T. Minami, H. Shinjoh and S. Matsumoto, J. Catal., 2006, 242, 103-109.
- 12 (a) Y. Zhao and D. G. Truhlar, Theor. Chem. Acc., 2008, 120, 215-241; (b) A. Schäfer, H. Horn and R. Ahlrichs, J. Chem. Phys., 1992, 97, 2571–2577; (c) D. Andrae, U. Häussermann, M. Dolg, H. Stoll and H. Preuss, Theor. Chim. Acta, 1990, 77, 123-141; (d) R. Ahlrichs, M. Bär, M. Häser, H. Horn and C. Kölmel, Chem. Phys. Lett., 1989, 162, 165-169; (e) TURBOMOLE, A development of University of Karlsruhe and Forschungszentrum Karlsruhe GmbH, 1989-2007, TURBOMOLE GmbH, since 2007, available from http:// www.turbomole.com; (f) K. Eichkorn, F. Weigend, O. Treutler and R. Ahlrichs, Theor. Chem. Acc., 1997, 97, 119-124.
- 13 (a) F. Giordanino, E. Borfecchia, K. Lomachenko, A. Lazzarini, G. Agostini, E. Gallo, A. Soldatov, P. Beato, S. Bordiga and C. Lamberti, J. Phys. Chem. Lett., 2014, 5, 1552-1559; (b) U. Deka, A. Juhin, E. Eilertsen, H. Emerich, M. Green, S. Korhonen, B. Weckhuysen and A. Beale, J. Phys. Chem. C, 2012, 116, 4809-4818.
- 14 Z. Tian, Y. Li, L. Zhang, P. Glarborg and F. Qi, Combust. Flame, 2009, 156, 1413-1426.
- 15 (a) S. Yang, Y. Liao, S. Xiong, F. Qi, H. Dang, X. Xiao and J. Li, J. Phys. Chem. C, 2014, 118, 21500-21508; (b) Y. Liu, T. Gu, X. Weng, Y. Wang, Z. Wu and H. Wang, J. Phys. Chem. C, 2012, 116, 16582-16592; (c) L. Darvell, K. Heiskanen, J. Jones, A. Ross, P. Simell and A. Williams, Catal. Today, 2003, 81, 681-692; (d) G. Busca, L. Lietti, G. Ramis and F. Berti, Appl. Catal., B, 1998, 18, 1-36; (e) J. Amores, V. Escribano, G. Ramis and G. Busca, Appl. Catal., B, 1997, 13, 45-58; (f) G. Ramis, L. Yi, G. Busca, M. Turco, E. Kotur and R. Willey, J. Catal., 1995, 157, 523-535; (g) B. Duffy, H. Curryhyde, N. Cant and P. Nelson, J. Catal., 1994, 149, 11 - 22.
- 16 (a) V. Dasireddy, B. Likozar and J. Valand, Appl. Catal., B, 2018, 237, 1044-1058; (b) S. Lambert, C. Cellier, P. Grange, J. Pirard and B. Heinrichs, J. Catal., 2004, 221, 335-346.
- 17 G. Busca, Catal. Today, 2014, 226, 2-13.
- 18 K. Okada, A. Hattori, T. Taniguchi, A. Nukui and R. Das, J. Am. Ceram. Soc., 2000, 83, 928-932.
- 19 M. Ferrandon, B. Ferrand, E. Bjornbom, F. Klingstedt, A. Neyestanaki, H. Karhu and I. Vayrynen, J. Catal., 2001, 202, 354-366.