Journal of Materials Chemistry A



CORRECTION

View Article Online
View Journal | View Issue



Cite this: J. Mater. Chem. A, 2018, 6, 13975

Received 28th June 2018 Accepted 28th June 2018

DOI: 10.1039/c8ta90157k

www.rsc.org/MaterialsA

Correction: Interface-engineered hematite nanocones as binder-free electrodes for high-performance lithium-ion batteries

Lei Wang,^a Kun Liang,^b Guanzhi Wang^b and Yang Yang^{*b}

Correction for 'Interface-engineered hematite nanocones as binder-free electrodes for high-performance lithium-ion batteries' by Lei Wang *et al., J. Mater. Chem. A,* 2018, DOI: 10.1039/c8ta03106a.

In the original manuscript, the SEM images used in the table of contents image, Fig. 1f and the insets of Fig. 1d and f were incorrect and were not clearly labelled. Correct versions of the figures are given below.




Table of Contents image

[&]quot;State Key Laboratory for Oxo Synthesis and Selective Oxidation, National Engineering Research Center for Fine Petrochemical Intermediates, Lanzhou Institute of Chemical Physics, Chinese Academy of Sciences, 730000 Lanzhou, China

^bNanoScience Technology Center, Department of Materials Science & Engineering, University of Central Florida, 4000 Central Florida Blvd, Orlando, Florida, 32816, USA. E-mail: Yang. Yang@ucf.edu

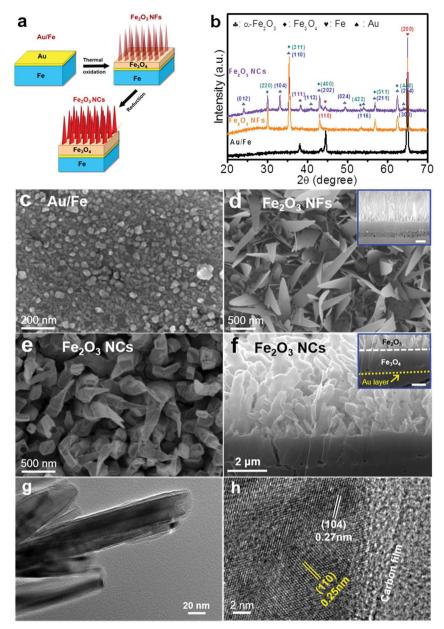


Fig. 1 (a) Schematic illustration of the fabrication of Fe_2O_3 NCs. (b) XRD patterns of Au/Fe, Fe_2O_3 NFs, and Fe_2O_3 NC samples. (c–f) Top and cross-sectional SEM images of (c) Au/Fe, (d) Fe_2O_3 NFs, and (e and f) Fe_2O_3 NCs. (g and h) TEM and HRTEM images of Fe_2O_3 NCs. The scale bars in the insets of (d and f) denote 1 μ m.

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.