

Cite this: *J. Mater. Chem. A*, 2018, 6, 23904

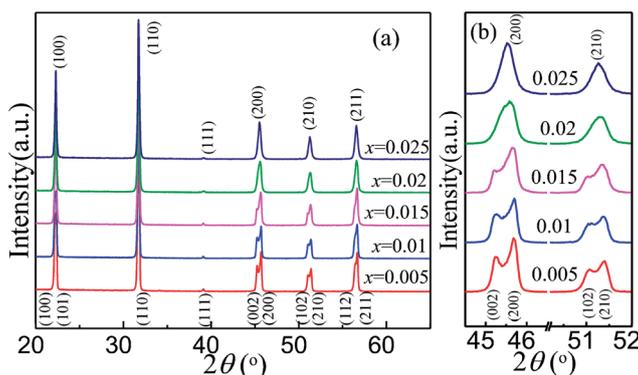
DOI: 10.1039/c8ta90255k

www.rsc.org/MaterialsA

Correction: A high temperature stable piezoelectric strain of KNN-based ceramics

Zhenyong Cen,^a Yu Huan,^b Wei Feng,^a Yan Yu,^a Peiyao Zhao,^a Lingling Chen,^a Chaoqiong Zhu,^a Longtu Li^a and Xiaohui Wang^{*a}Correction for 'A high temperature stable piezoelectric strain of KNN-based ceramics' by Zhenyong Cen et al., *J. Mater. Chem. A*, 2018, 6, 19967–19973.

The authors regret an error in the labelling of Miller indices in Fig. 3(b). The corrected version of Fig. 3 is shown below.

Fig. 3 Room-temperature XRD patterns of $(1-x)(0.96\text{KNNT}-0.04\text{BNKZ})-x\text{CZ}$ ceramics (a) $2\theta = 20-65^\circ$. (b) $2\theta = 44-53^\circ$.

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.

^aState Key Laboratory of New Ceramics and Fine Processing, School of Materials Science and Engineering, Tsinghua University, Beijing 100084, China. E-mail: wxh@tsinghua.edu.cn^bSchool of Material Science and Engineering, University of Jinan, Jinan 250022, China