# **RSC Advances**



PAPER

View Article Online

View Journal | View Issue



Cite this: RSC Adv., 2019, 9, 6169

# A facile synthetic route to tungsten diselenide using a new precursor containing a long alkyl chain cation for multifunctional electronic and optoelectronic applications†

Jahee Kim,‡<sup>ab</sup> Yi Rang Lim,‡<sup>ac</sup> Yeoheung Yoon,<sup>a</sup> Wooseok Song, <sup>Da</sup> Bo Keun Park,<sup>ab</sup> Jongsun Lim, <sup>D\*a</sup> Taek-Mo Chung\*<sup>ab</sup> and Chang Gyoun Kim\*<sup>ab</sup>

Single source precursors for coating and subsequent thermal decomposition processes enable a large-scale, low-cost synthesis of two-dimensional transition metal dichalcogenides (TMDs). However, practical applications based on two-dimensional TMDs have been limited by the lack of applicable single source precursors for the synthesis of p-type TMDs including layered tungsten diselenide (WSe<sub>2</sub>). We firstly demonstrate the simple and facile synthesis of WSe<sub>2</sub> layers using a newly developed precursor that allows improved dispersibility and lower decomposition temperature. We study the thermal decomposition mechanism of three types of  $(Cat^+)_2[WSe_4]$  precursors to assess the most suitable precursor for the synthesis of WSe<sub>2</sub> layers. The resulting chemical and structural exploration of solution-processed WSe<sub>2</sub> layers suggests that the  $(CTA)_2[WSe_4]$  may be a promising precursor because it resulted in the formation of high-crystalline WSe<sub>2</sub>. In addition, this study verifies the capability of WSe<sub>2</sub> layers for multifunctional applications in optoelectronic and electronic devices. The photocurrent of WSe<sub>2</sub>-based photodetectors shows an abrupt switching behavior under periodic illumination of visible or IR light. The extracted photoresponsivity values for WSe<sub>2</sub>-based photodetectors recorded at 0.5 V correspond to 26.3 mA W<sup>-1</sup> for visible light and 5.4 mA W<sup>-1</sup> for IR light. The WSe<sub>2</sub>-based field effect transistors exhibit unipolar p-channel transistor behavior with a carrier mobility of 0.45 cm<sup>2</sup> V<sup>-1</sup> s<sup>-1</sup> and an on-off ratio of ~10.

Received 3rd January 2019 Accepted 10th February 2019

DOI: 10.1039/c9ra00041k

rsc.li/rsc-advances

## Introduction

Layered two-dimensional (2D) transition metal dichalcogenides (TMDs) have opened new prospects for their potential applications owing to their distinctive electronic, optical, and catalytic properties that differ from their bulk counterparts. Unlike 2D graphene with a zero-overlap semimetal, TMDs possess a layer-dependent bandgap from 1.1 to 1.9 eV, which facilitates the realization of next-generation nanoelectronic devices, such as high performance field-effect transistors (FETs), logic circuits, photodetectors, gas sensors, spintronic devices, and memtransistors. Despite these extraordinary features, a major challenge for these practical applications based on semiconducting TMDs is the lack of a reliable and facile synthetic

route in large-scale TMDs with spatial homogeneity. The large-

scale TMDs need to be compatible with top-down lithographic fabrication processes, so they can realize device arrays with the same response. Thus far, early approaches, including mechanical and chemical exfoliation and chemical vapor deposition (CVD), have been implemented to produce atomically thin TMDs.10-13 However, these strategies are technically hindered for industrial applications due to their inability to synthesize large-area TMD films. To resolve this deficiency, an alternative synthetic route was suggested: the synthesis of molybdenum disulfides (MoS<sub>2</sub>), as the representative member of TMDs, was performed using well-designed two-step thermal decomposition processes of a (NH<sub>4</sub>)<sub>2</sub>MoS<sub>4</sub> single source precursor, thereby facilitating a simple, large-scale, and low-cost growth of MoS<sub>2</sub> layers that could be easily applied to plastic substrates. 14,15 Also, previous attempts achieved a facile synthesis of threedimensional binary and ternary TMD nanostructures by solvothermal routes.16-19 Unfortunately, it is widely recognized that the bottleneck of 2D TMDs in terms of their solution-processed growth is the lack of applicable and commercially-available single source precursors for the synthesis of p-type TMDs including layered tungsten diselenides (WSe<sub>2</sub>). WSe<sub>2</sub> is one of few p-type TMDs and has high carrier mobility, which is

<sup>&</sup>quot;Thin Film Materials Research Center, Korea Research Institute of Chemical Technology, Daejeon 305-600, Republic of Korea. E-mail: jslim@krict.re.kr

<sup>&</sup>lt;sup>b</sup>Department of Advanced Materials and Chemical Engineering, University of Science and Technology (UST), 217 Gajeong-ro, Yuseong-gu, Daejeon 34113, Republic of Korea <sup>c</sup>School of Electrical and Electronic Engineering, Yonsei University, 50 Yonsei-ro, Seodaemun-gu, Seoul 03722, Republic of Korea

<sup>†</sup> Electronic supplementary information (ESI) available: Data of TG-DTA-Mass spectroscopy. See DOI: 10.1039/c9ra00041k

<sup>‡</sup> These authors contributed equally to this work.

**RSC Advances** 

a prerequisite for applications in complementary logic circuits, gas sensors, and optoelectronics, because most of the TMDs have n-type semiconducting behavior.20 Although MoTe2 possesses p-type semiconducting conduction, this material is unstable in ambient conditions owing to a relatively small cohesive energy (12.01 eV).21 For the first time, we report the simple and facile synthesis of WSe2 layers using a newly developed precursor that gives improved dispersibility and lower decomposition temperature. In previous studies, (Cat<sup>+</sup>)<sub>2</sub>[WSe<sub>4</sub>] complexes containing (Ph<sub>4</sub>P)<sub>2</sub>[WSe<sub>4</sub>] and (Et<sub>4</sub>-N)<sub>2</sub>[WSe<sub>4</sub>] were synthesized.<sup>22,23</sup> Notably, there are crucial issues for adopting single source precursors to synthesize WSe2 layers: (i) "dispersibility" in organic solvents and (ii) "low decomposition temperature" are strictly necessary because the solution containing the precursors can be uniformly coated on desired substrates for the formation of atomically thin WSe2 layers and the low synthetic temperature allows the direct application to plastic substrates. We rationally designed an unprecedented precursor, (CTA)<sub>2</sub>[WSe<sub>4</sub>] with a long alkyl chain of cetyltrimethylammonium, for the synthesis of WSe2 layers to improve the dispersibility and decrease the decomposition temperature. To assess the most suitable precursor for the synthesis of WSe2 layers, we systematically explored the decomposition mechanism of newly developed (CTA)<sub>2</sub>[WSe<sub>4</sub>], (Ph<sub>4</sub>P)<sub>2</sub>[WSe<sub>4</sub>], and (Et<sub>4</sub>N)<sub>2</sub>[WSe<sub>4</sub>] and implemented the presynthesis of WSe2 nanoparticles (NPs) using the three types of precursors via thermal decomposition of (Cat<sup>+</sup>)<sub>2</sub>[WSe<sub>4</sub>] with oleylamine as a capping ligand.

# **Experimental section**

#### Synthesis of Na<sub>2</sub>Se<sub>4</sub>

A solid mixture of Na (0.25 g, 10 mmol) and Se (1.58 g, 20 mmol) was placed in a 100 mL side-armed flask equipped with a magnetic spin bar. The flask was also equipped with a bubbler that was charged with 30 mL of liquid ammonia in a dry ice/ acetone bath (-78 °C). The reaction mixture was stirred from -72 °C to room temperature to produce dry Na<sub>2</sub>Se<sub>4</sub> under an inert atmosphere.

#### Synthesis of $(Ph_4P)_2[WSe_4]$ and $(Et_4N)_2[WSe_4]$

(Ph<sub>4</sub>P)<sub>2</sub>[WSe<sub>4</sub>] and (Et<sub>4</sub>N)<sub>2</sub>[WSe<sub>4</sub>] were prepared by modifying the previously established methods. 18,19 (Ph4P)2[WSe4] and (Et<sub>4</sub>N)<sub>2</sub>[WSe<sub>4</sub>] were both synthesized in the same way. A solid mixture of  $Na_2Se_4$  (1.83 g, 5 mmol) and W(CO)<sub>6</sub> (1.76 g, 5 mmol) was placed into a 100 mL flask equipped with a cooling condenser. The reaction mixture was dissolved in 40 mL of N,Ndimethylformamide (DMF) and stirred at 90 °C for 60 min. After cooling to 70 °C, Ph<sub>4</sub>PCl (3.74 g, 10 mmol) or Et<sub>4</sub>NCl (1.66 g, 10 mmol) was added to the solution and the reaction was cooled down to room temperature with stirring for 30 min. The mixture was filtered to remove by-products, mainly NaCl. The filtrate was added 40 mL of tetrahydrofuran (THF) and the flask was placed in the freezer (-30 °C) for 24 h to grow a red colored crystalline solid for (Ph<sub>4</sub>P)<sub>2</sub>[WSe<sub>4</sub>] (2.20 g, 37%). Calcd for C<sub>48</sub>H<sub>40</sub>P<sub>2</sub>Se<sub>4</sub>W (1178.46): C, 48.9; H, 3.42. Found: C, 48.4; H,

3.40. IR (cm<sup>-1</sup>): 3045, 3002, 754, 723, 689, 526, 300. In addition, red crystalline solid (0.80 g, 21%) for (Et<sub>4</sub>N)<sub>2</sub>[WSe<sub>4</sub>] was collected at the bottom of the flask. Calcd for C<sub>16</sub>H<sub>40</sub>N<sub>2</sub>Se<sub>4</sub>W (760.18): C, 25.3; H, 5.30; N, 3.69. Found: C, 24.9; H, 5.10; N, 3.8. IR  $(cm^{-1})$ : 2974, 2920, 1440.47, 300.

#### Synthesis of (CTA)<sub>2</sub>[WSe<sub>4</sub>]

A solid mixture of  $Na_2Se_4$  (1.83 g, 5 mmol) and W(CO)<sub>6</sub> (1.76 g, 5 mmol) was placed in a 125 mL flask equipped with a cooling condenser. The reaction mixture was dissolved in 40 mL of DMF and allowed to stir at 90 °C for 60 min. After the mixture was cooled to 70 °C, cetyltrimethylammonium chloride (3.20 g, 10 mmol) was added to the solution followed by cooling down to room temperature with stirring for 30 min. The mixture was filtered to remove by-products, mainly NaCl. The filtrate was added to the excess amount of diethyl ether to precipitate. The precipitate was dissolved in THF and filtered, and the solvent was then removed under reduced pressure. A red crystalline solid (2.00 g, 37%) was eventually collected at the bottom of the flask. Calcd for C<sub>38</sub>H<sub>84</sub>N<sub>2</sub>Se<sub>4</sub>W (1068.77): C, 42.7; H, 7.92; N, 2.62. Found: C, 42.5; H, 7.90; N, 2.80. IR (cm<sup>-1</sup>): 3000, 2919, 2850, 1468, 301.

#### Solvothermal decomposition of (Cat<sup>+</sup>)<sub>2</sub>[WSe<sub>4</sub>]

A mixture of oleylamine (50 mL) and (Cat<sup>+</sup>)<sub>2</sub>[WSe<sub>4</sub>] (0.5 g) were placed in a 100 mL flask equipped with a cooling condenser connected with bubbler. The reaction mixture was allowed to stir at 300 °C for 12 h under an inert atmosphere. The resultant was cooled down to room temperature and the excess amount of toluene was added. Then, the mixture was centrifuged to obtain WSe<sub>2</sub> nanoparticles and washed three times with toluene to remove free oleylamine.

# Results and discussion

We synthesized the  $(Ph_4P)_2[WSe_4]$  and  $(Et_4N)_2[WSe_4]$  precursors by modifying previously established methods, as depicted in Fig. 1a and b.22 In the previous methods, K2Se3 was used as a starting material, whereas we adopted Na2Se4 as selenide source for reacting with the W(CO)6.23 In addition, we used (Ph<sub>4</sub>P)Cl and (Et<sub>4</sub>N)Cl, which both contain Cl<sup>-</sup> anions to capture for Na<sup>+</sup> cations in as-synthesized Na<sub>2</sub>WSe<sub>4</sub>. Based on hard-hard and soft-soft interaction mechanism, it preferably forms NaCl as a by-product when a compound having a Clanion is used rather than a compound having a Br<sup>-</sup> anion, such as (Ph<sub>4</sub>P)Cl and (Et<sub>4</sub>N)Cl. Furthermore, when we used K<sub>2</sub>Se<sub>3</sub> as a starting material, a K2Se2 by-product was inevitably formed, and it was difficult to separate it from the resultants for obtaining the pure products because it did not easily dissolve in organic solvents. In order to obtain purer products, we carefully utilized recrystallization using the Na2Se4. The reaction mechanism of the precursors for WSe2 is as follows:

$$Na + 2 Se \rightarrow Na_2Se_4$$
 (1)

$$W(CO)_6 + Na_2Se_4 \rightarrow Na_2[WSe_4] + 6 CO\uparrow$$
 (2)

Paper

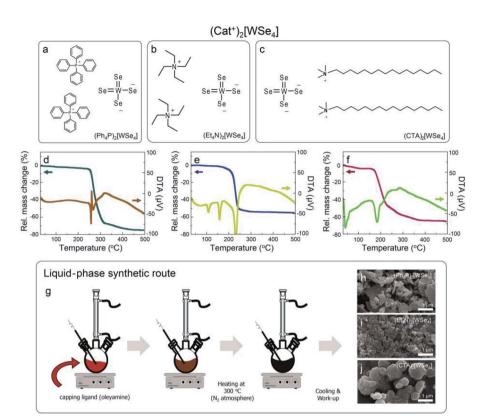


Fig. 1 Cationic tungsten selenide complexes,  $(Cat^+)_2[WSe_4]$ , (a)  $(Ph_4P)_2[WSe_4]$ , (b)  $(Et_4N)_2[WSe_4]$ , and (c)  $(CTA)_2[WSe_4]$ , (d–f) TG-DTA curves for the all tungsten selenide complexes. (g) Schematic diagram of solvothermal synthesis of  $WSe_2$  NPs in a solution phase using the all complexes at 300 °C and (h-j) their morphological features measured by SEM.

$$Na_2[WSe_4] + 2 (Cat^+)Cl \rightarrow (Cat^+)_2[WSe_4] + 2 NaCl,$$
  
(\* $(Cat^+): Ph_4P^+, Et_4N^+, and CTA^+)$  (3)

Based on this mechanism, we synthesized unprecedented (CTA)<sub>2</sub>[WSe<sub>4</sub>] using cetyltrimethylammonium salts (CTA<sup>+</sup>) with long alkyl groups as a precursor for the solution-processable synthesis of WSe2, as seen in Fig. 1c. Unlike the two wellknown precursors, it possesses long alkyl groups, which makes it possible to obtain high solubility in various organic solvents. Thus, it seems to be suitable as a precursor for the solution-based synthetic processes. For the synthesis of WSe<sub>2</sub> through the basis of thermal properties of the three compounds, thermogravimetric-differential thermal analysismass spectroscopic analysis (TG-DTA-Mass) was performed to understand the synthetic mechanism for WSe<sub>2</sub> (Fig. 1d-f). We examined thermal behaviors for all the samples from room temperature to 500 °C. First, (Ph<sub>4</sub>P)<sub>2</sub>[WSe<sub>4</sub>] was decomposed in the range of 260.4-270.6 °C, and it was clearly confirmed by the result of DTA that melting and decomposition of the compound occurs in this temperature region, as shown in Fig. 1d. The mass intensity at the region appears at 78 and 234 m/z, which correspond to the molecular weights for selenium and diphenyl selenide, respectively (Fig. S1†). We referred to mass spectrum of National Institute of Standards and Technology (NIST). The mass spectra of diphenyl diselenide showed 78 and 234 m/z exhibiting a similar isotope peaks. Furthermore, the residue

was found to be 25% at about 500 °C, which was similar to the ratio of WSe<sub>2</sub> (29%) in total molecular weight. A TGA curve of (Et<sub>4</sub>N)<sub>2</sub>[WSe<sub>4</sub>] showed endothermic peaks at 108 and 158 °C, and it was completely melted with decomposition at between 234.8 °C and 239.5 °C, as shown in Fig. 1e. The mass intensity appears at 101 and 218 m/z corresponding to the molecular weight of triethylamine and diethyl diselenide, respectively (Fig. S2†). The mass spectra of trimethylamine showed a same isotope peaks. In addition, the residue at 500 °C in the TGA result was estimated to be 45%, which corresponds to the ratio of WSe<sub>2</sub> in total molecular weight. In case of (CTA)<sub>2</sub>[WSe<sub>4</sub>], it showed endothermic peak at 40 °C and completely melted and decomposed at the temperature range of 183.8-196.0 °C, which is the lowest temperature comparing with the other two precursors, as displayed in Fig. 1f. The mass intensity appeared at 190 m/z, which coincided with the major peak of mass spectrum of dimethyl diselenide. However, the mass intensity observed at below 110 m/z could not be unambiguously confirmed. Because of the long alkyl groups of (CTA)<sub>2</sub>[WSe<sub>4</sub>], a variety of decomposition products could not be completely identified. Thus, it was considered that it was decomposed into several short alkyl chains at below than 110 m/z. The peak observed at 58 m/z in TG-DTA-Mass resulted from the major peak of cetyl dimethylamine. This was monitored mainly by the photoionization (PI) mode of the mass spectrometer with an weak energy intensity (10.2 eV) (Fig. S3†). The residue of (CTA)<sub>2</sub>[WSe<sub>4</sub>] at 500 °C was 34%, which is similar to the ratio of

**RSC Advances** 

WSe<sub>2</sub> in the total molecular weight (32%). Based on these results of the TG-DTA-Mass analysis, the mechanism of WSe<sub>2</sub> synthesis from (Cat<sup>+</sup>)<sub>2</sub>[WSe<sub>4</sub>] could be summarized as follows:

$$(Ph_4P)_2[WSe_4] \rightarrow 2 Ph_3P + Ph_Se_Se_Ph + WSe_2$$
 (4)

$$(Et4N)2[WSe4] \rightarrow 2 Et3N + Et-Se-Se-Et + WSe2$$
 (5)

$$(CTA)_2[WSe_4] \rightarrow 2 (cetyl)(Me)_2N + Me-Se-Se-Me + WSe_2 (6)$$

The mechanism of thermal decomposition for all the samples is described in eqn (4) to (6). Based on these results, we preliminarily synthesized WSe2 NPs by direct pyrolysis of (Cat<sup>+</sup>)<sub>2</sub>[WSe<sub>4</sub>] precursors in solution to assess the most suitable precursor for the synthesis of WSe<sub>2</sub> layers, as shown in Fig. 1g. Oleylamine is typically employed as a solvent and also acts as a capping ligand to prevent the aggregation of materials.24 In general, the use of specific surface capping ligands is the most important factor in producing thickness-controlled TMDs.25 Furthermore, the redox reaction occurs easily to form WSe<sub>2</sub>, since the electrons in (Cat<sup>+</sup>)<sub>2</sub>[WSe<sub>4</sub>] easily migrate between W and Se without the addition of an external reducing agent.26 The synthesis of WSe<sub>2</sub> with oleylamine was implemented at 300 °C for 12 h. Fig. 1h-j showed representative scanning electron microscopy (SEM) images of WSe<sub>2</sub> synthesized using (Ph<sub>4</sub>P)<sub>2</sub>- $WSe_4$ ,  $(Et_4N)_2[WSe_4]$  and  $(CTA)_2[WSe_4]$  precursors. In the rationally-designed (CTA)<sub>2</sub>[WSe<sub>4</sub>] precursor, uniform and larger particles were observed unambiguously. First, we compared the chemical and structural features of WSe2 NPs pre-synthesized using the three types of (Cat<sup>+</sup>)<sub>2</sub>[WSe<sub>4</sub>] precursors ((Ph<sub>4</sub>P)<sub>2</sub>[-WSe<sub>4</sub>], (Et<sub>4</sub>N)<sub>2</sub>[WSe<sub>4</sub>], and (CTA)<sub>2</sub>[WSe<sub>4</sub>]). The chemical identification of WSe2 NPs synthesized by a solvothermal synthetic route was conducted using X-ray photoelectron spectroscopy (XPS). XPS spectra were acquired with a normal emission geometry using conventional monochromatic Al Ka radiation  $(h\nu = 1486.6 \text{ eV})$ . Each spectrum was fitted with a Gaussian-Lorentzian function. The XPS W 4f and Se 3d core level spectra extracted from the as-synthesized WSe<sub>2</sub> NPs using (Ph<sub>4</sub>P)<sub>2</sub>[-WSe<sub>4</sub>] and after post-annealing at 500 and 600 °C, respectively, are displayed in Fig. 2a-f. Fig. 2a, c, and e reveal that the W 4f<sub>7/2</sub> and W 4f<sub>5/2</sub> doublet peaks corresponding to WSe<sub>2</sub> appear at binding energies ( $E_{\rm B}$ ) of 32.4 and 34.6 eV, respectively. The WSe<sub>3</sub>-related bonding states ( $E_{\rm B}=33.2$  and 35.4 eV), WO<sub>3</sub>related states ( $E_B = 36.1$  and 38.3 eV), and W  $5p_{2/3}$  ( $E_B = 37.5$  eV) are observed simultaneously. With adopting post-annealing and increasing the temperature, the intensity of WSe<sub>3</sub> peaks decreased markedly, presumably owing to the heat-driven deselenization process. WO<sub>3</sub>-related peaks is originated from the fact that the sample was easily oxidized when it was exposed to ambient conditions because of their low cohesive energy (15.45 eV) induced by a small difference in electronegativity between W and Se. However, the oxidation was effectively inhibited due to their high crystallinity. Fig. 2b, d, and f display the Se 3d core level spectra for WSe<sub>2</sub> NPs before and after postannealing, indicating that the intensity of WSe3-related bonding states ( $E_{\rm B} = 54.1$  and 54.9 eV) and Se-C bonding states  $(E_{\rm B}=55.4 \text{ and } 56.2 \text{ eV})$  decreased, whereas the WSe<sub>2</sub>-related

peaks ( $E_{\rm B}=54.7$  and 55.5 eV) were predominantly observed with increasing post-annealing temperature, which is in agreement with the W 4f core level spectra. The temperature evolution of W 4f and Se 3d core level spectra obtained from the WSe<sub>2</sub> NPs using (Et<sub>4</sub>N)<sub>2</sub>[WSe<sub>4</sub>] and (CTA)<sub>2</sub>WSe<sub>4</sub> precursors seemed to follow a similar trend, as displayed in Fig. 2g-r. However, it should be noted that WO<sub>3</sub>-related and WSe<sub>3</sub>-related peaks disappeared completely in the W 4f core level spectra for WSe<sub>2</sub> NPs synthesized using (CTA)<sub>2</sub>WSe<sub>4</sub>, which reflects its effective deselenization and crystallization presumably due to its lower decomposition temperature. To evaluate the crystallinity of WSe<sub>2</sub> NPs synthesized by the three types of precursors, Raman spectroscopy analysis was implemented, as shown in Fig. 2s-u. The Raman spectra were recorded at an excitation wavelength of 514 nm. Generally, degenerated E2g (in-plane vibration) and A<sub>1g</sub> (out-of-plane vibration) phonon modes reflected the existence of high-crystalline WSe2.27 However, the two phonon modes are absent for WSe2 NPs synthesized using the (Ph<sub>4</sub>P)<sub>2</sub>[WSe<sub>4</sub>] precursor before post-annealing, whereas the broad peak at  $\sim$ 250 cm<sup>-1</sup> is observed after the post-annealing at 500 °C and the intensity of the peak becomes higher with increasing post-annealing temperature. Conversely, there are degenerated  $A_{1g}$  and  $E_{2g}$  phonon modes of the WSe<sub>2</sub> NPs synthesized using (Et<sub>4</sub>N)<sub>2</sub>[WSe<sub>4</sub>] and (CTA)<sub>2</sub>[WSe<sub>4</sub>], regardless of the adoption of post-annealing. Astonishingly, the full widths at half maximum (FWHM) of the two phonon modes of WSe<sub>2</sub> using (CTA)<sub>2</sub>[WSe<sub>4</sub>] decreased unambiguously. This finding suggests that (CTA)<sub>2</sub>[WSe<sub>4</sub>] is a promising precursor because it yields the synthesis of high-crystalline WSe2. We carefully developed the optimal precursor for synthesis of the WSe<sub>2</sub> layer through preliminary studies of chemical and structural features of WSe<sub>2</sub> NPs using the three types of (Cat<sup>+</sup>)<sub>2</sub>[WSe<sub>4</sub>] precursors. To synthesize WSe<sub>2</sub> layers, a 0.5 wt% (CTA)<sub>2</sub>[WSe<sub>4</sub>] single source precursor was stirred in DMF at room temperature for 60 min, as displayed in Fig. 3a. The precursor solution was then dropcasted onto SiO2 (300 nm)/Si(001) substrates with UVstimulated hydrophilic treatment. After the drop-casting of the precursor solution, the samples were immediately annealed at 100 °C for 1 min to remove the solvent. During this procedure, the few-layered lamellar structure of (CTA)<sub>2</sub>[WSe<sub>4</sub>] is formed in the surface of SiO2 substrate. The formation of lamella structure on the surface can be mediated by the electrostatic attraction between (CTA)<sub>2</sub>[WSe<sub>4</sub>] and SiO<sub>2</sub>. In addition, chemical identification of the as-formed lamellar structure on SiO<sub>2</sub> was implemented by XPS, reflecting that the as-coated precursor was well-maintained under atmospheric conditions (Fig. S4†). The samples were located into the furnace, after which a two-step thermal decomposition process for the synthesis of WSe2 layers was implemented at 300 °C (1st Step) by introducing Ar (450 seem) for 30 min and subsequently annealed at 600 °C (2<sup>nd</sup> Step) under 450 sccm flow of Ar at a pressure of 3.5 torr for 30 min. These synthetic conditions were based on the optimized synthetic parameters for WSe<sub>2</sub> NPs. The surface morphology of the WSe<sub>2</sub> layers was confirmed by optical microscopy, as seen in Fig. 3b and c. Raman mapping was conducted to evaluate the uniformity of the WSe2 layers, as seen in Fig. 3d, with the result that  $I_{E_{2g}+A_{1g}}$  exhibited excellent

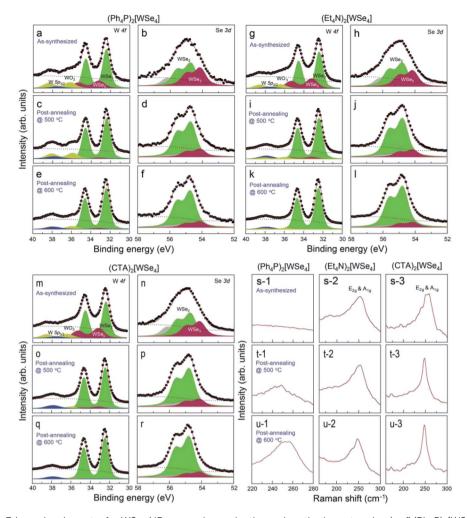


Fig. 2 XPS W 4f and Se 3d core level spectra for WSe $_2$  NPs grown by a solvothermal synthetic route using (a–f) (Ph $_4$ P) $_2$ [WSe $_4$ ], (g–l) (Et $_4$ N) $_2$ [WSe $_4$ ], (m–r) (CTA) $_2$ [WSe $_4$ ] before and after post-annealing at 500 °C and 600 °C. Representative Raman spectra with an excitation wavelength of 514 nm of WSe $_2$  NPs using (s-1, t-1, u-1) (Ph $_4$ P) $_2$ [WSe $_4$ ], (s-2, t-2, u-2) (Et $_4$ N) $_2$ [WSe $_4$ ], and (s-3, t-3, u-3) (CTA) $_2$ [WSe $_4$ ] before and after post-annealing at 500 °C and 600 °C.

homogeneity over large areas except for some small structural imperfections. The chemical characterization of the synthesized WSe2 layers was conducted by XPS. The survey spectrum reveals that W, Se, C, O, and Si-related peaks are observed, which implies the successful formation of WSe2 layers on a SiO<sub>2</sub>/Si substrate, as shown in Fig. 3e. Moreover, the intensity of C 1s peak decreases significantly after the formation of WSe<sub>2</sub> layers, which means that the long alkyl chain of (CTA)<sub>2</sub>[WSe<sub>4</sub>] is thermally decomposed. Fig. 3f exhibits the W 4f core level spectrum extracted from the WSe2 layers on SiO2/Si, which reveals the successful formation of WSe2 as confirmed by the presence of W 4f<sub>7/2</sub> and W 4f<sub>5/2</sub> bonding states without nonstoichiometric chemical states or oxidation states, which is in good agreement with the Se 3d core level spectrum, as displayed in Fig. 3g. Raman spectra with an excitation wavelength of 514 nm for the  $WSe_2$  layers display degenerated  $E_{2g}$  phonon and A<sub>1g</sub> phonon modes prominently, as seen in Fig. 3h. By comparing the Raman spectrum of WSe2 NPs using (CTA)2[-WSe<sub>4</sub>], a remarkable decrease in the FWHM of the Raman

modes can be adequately explained by the improvement in crystallinity induced by the formation of a two-dimensional structure. Additionally, the crystal structure of WSe2 synthesized by (CTA)<sub>2</sub>WSe<sub>4</sub> was explored by X-ray diffraction (XRD). The XRD patterns of WSe<sub>2</sub> were displayed (Fig. S5†). The distinct diffraction peaks were located at 13.4, 31.8, 41.1, and 55.7° corresponding to (002), (100), (006), and (008) 2H-WSe<sub>2</sub> crystal planes, respectively, in good agreement with a prior report on the crystal structure of 2H-WSe<sub>2</sub>.<sup>28</sup> In general, the synthesis of WSe<sub>2</sub> by a conventional chemical vapor deposition technique is implemented using co-evaporation of WO<sub>3</sub> and Se powder at higher reaction temperatures of 700-900 °C.<sup>29-31</sup> In this process, the volatile  $WO_{3-x}$  suboxide reduced by injecting  $H_2$  is effectively selenized, resulting in the formation of triangular- or hexagonal-shaped WSe2 flakes, which seems to be technically limited for the realization of the device arrays with the same response. We believe that our approach provides a feasible and reliable synthetic route for obtaining homogeneous WSe2 layers through simultaneous conversion of the single source precursor

RSC Advances Paper

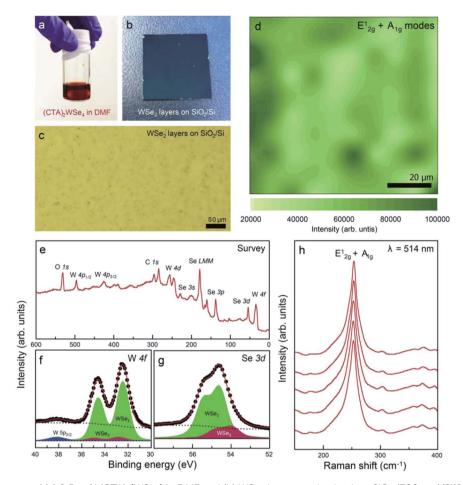


Fig. 3 Photographic images of (a) 0.5 wt% (CTA)<sub>2</sub>[WSe<sub>4</sub>] in DMF and (b) WSe<sub>2</sub> layers synthesized on SiO<sub>2</sub> (300 nm)/Si(001) using the precursor coating and subsequent thermal decomposition at 600 °C, (c) a optical microscopy image of the WSe<sub>2</sub> layers on SiO<sub>2</sub>/Si, (d) Raman  $E_{2g}^1$  and  $E_{2g}^1$  and  $E_{2g}^1$  map recorded with an excitation wavelength of 532 nm for the WSe<sub>2</sub> layers on SiO<sub>2</sub>/Si, (e) XPS survey, (f) W 4f, and (g) Se 3d core level spectra of the WSe<sub>2</sub> layers, (h) Raman spectra with an excitation wavelength of 514 nm for the WSe<sub>2</sub> layers. Each spectrum was taken from different regions of the sample.

at a relatively low temperature. To examine the photoelectrical properties of WSe2 layers synthesized by the two-step thermal decomposition process using (CTA)<sub>2</sub>WSe<sub>4</sub>, we fabricated WSe<sub>2</sub>based photodetectors, as illustrated in Fig. 4a. Metal evaporation with a shadow mask was employed to fabricate 100 nmthick Au electrodes. The channel length and width corresponded to 10 and 100 µm, respectively. The infrared (IR, 1064 nm wavelength, 100 mW cm<sup>-2</sup>) and visible (532 nm wavelength, 7.2 mW cm<sup>-2</sup>) light source were employed for measurement of the photoelectrical properties of the WSe<sub>2</sub>based photodetector. Fig. 4b and c display the time-dependent photoconductivity of the WSe2-based photodetector recorded for different bias voltages (0.1, 0.2, and 0.5 V) using visible and IR light sources and indicate the photocurrent with an abrupt switching behavior under periodic light illumination, regardless of the light sources. Based on these results, the response time (90% of the maximum photocurrent) and decay time (10% of the minimum photocurrent) at a 0.5 V bias voltage of the WSe<sub>2</sub>-based photodetectors using a visible light source were estimated to be 6.8 and 5.6 s, respectively, and the response and decay time of the WSe2-based photodetectors using an IR light source were 5.8 and 7.8 s, which are much greater than those of previously-reported values for solution-processed MoS2-based photodetectors.14 These results suggest that the WSe2 layers synthesized using (CTA)<sub>2</sub>WSe<sub>4</sub> may be an appropriate material to realize flexible broadband photodetectors. Fig. 4d shows a linear dependence of the photoresponsivity on the applied voltage for visible and IR light sources, which is the conventional optoelectronic behavior of photoconductors. In general, the photoresponsivity linearly depends on the illumination power or external applied voltage. When the electron-hole pair is formed under the illumination of the light source, the density of photoexcited electrons is proportional to the illumination power, and the Fermi velocity of the electrons contributing to the photocurrent may be influenced by external applied voltages. The extracted photoresponsivity for WSe2-based photodetectors recorded at 0.5 V corresponds to 26.3 mA W<sup>-1</sup> for visible light and 5.4 mA W<sup>-1</sup> for IR light. In addition, electrochemically-gated WSe2-based field effect transistors (FETs) were fabricated to evaluate the carrier transport properties, as depicted in Fig. 4e. The devices contain a top-gate configuration, where N,N-diethyl-N-methyl-N-(2-methoxyethyl)

Paper

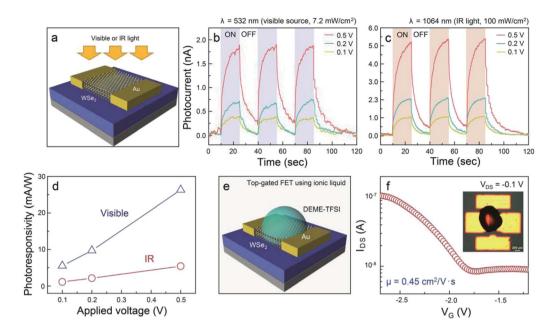


Fig. 4 (a) Schematic of a WSe<sub>2</sub>-based photodetector built on 300 nm-thick SiO<sub>2</sub>/Si with 100 nm-thick Au electrodes, time-dependent photocurrent generated by (b) visible and (c) IR light sources of the WSe<sub>2</sub>-based photodetector recorded for different bias voltages (0.1, 0.2, and 0.5 V), (d) the photoresponsivity plots for WSe<sub>2</sub>-based visible and IR photodetectors as a function of the applied voltage. (e) Schematic depiction of an electrochemically gated WSe<sub>2</sub>-based FET. (f) A transfer curve at  $V_{DS} = -1$  V for the WSe<sub>2</sub>-based FET. Inset indicates an optical microscopy image of the device structure.

ammonium bis(trifluoromethylsulfonyl)imide (DEME-TFSI) and 100 nm-thick Au were used as ionic liquid dielectric and electrodes, respectively. It is widely recognized that DEME-TFSI possesses a large electrochemical stability window (>3 V at room temperature).32 It should be noted that TMDs-based FETs with ionic liquid dielectrics provide a crucial route for achieving flexible, high-performance, and low power consumption devices. The channel length and width were 200 and 500 µm, respectively. Fig. 4f shows that a representative transfer curve at  $V_{\rm DS} = -0.1 \text{ V}$  for WSe<sub>2</sub>-based FETs reveals unipolar p-type channel behavior with an on-off current ratio and mobility of 10 and 0.45 cm<sup>2</sup> V<sup>-1</sup> s<sup>-1</sup>. Since previously-reported WSe<sub>2</sub>-based FETs have exhibited controversial hole-dominated, ambipolar, and electron-dominated transport behavior, this result paves the way for a universal and effective synthetic methodology for few p-type nanomaterials.33-35

# Conclusions

In summary, we proposed two crucial solutions for a promising precursor with high dispersibility and low decomposition temperature and a facile synthetic methodology to produce a large-area p-type WSe<sub>2</sub> with spatial homogeneity. In contrast to previously reported (Cat<sup>+</sup>)<sub>2</sub>[WSe<sub>4</sub>] complexes, a (CTA)<sub>2</sub>[WSe<sub>4</sub>] precursor with long alkyl chain of cetyltrimethylammonium enables the synthesis of high-crystalline WSe<sub>2</sub> layers, as confirmed by XPS and Raman spectroscopy. The optoelectrical and electrical properties of the WSe<sub>2</sub>-based devices consolidate the possibilities of the newly developed precursor and our synthetic route, which can be used in applications for

multifunctional devices, such as complementary logic circuits, gas sensors, and optoelectronic devices.

# Conflicts of interest

There are no conflicts to declare.

# Acknowledgements

This research was supported by a grant (2011-0031636) from the Center for Advanced Soft Electronics under the Global Frontier Research Program of the Ministry of Science, ICT and Future Planning, Korea, and a grant from the development of smart chemical materials for IoT devices project through the Korea Research Institute of Chemical Technology (KRICT) of Republic of Korea (SI1803). We would like to thank the Center for Chemical Analysis at the KRICT for using their facilities for solving the molecular structures.

## References

- Q. H. Wang, K. K. Zadeh, A. Kis, J. N. Coleman and M. S. Strano, *Nat. Nanotechnol.*, 2012, 7, 699–712.
- 2 P. Miro, M. Audiffred and T. Heine, *Chem. Soc. Rev.*, 2014, **43**, 6537–6554.
- 3 K. F. Mak, C. Lee, J. Hone, J. Shan and T. F. Heinz, *Phys. Rev. Lett.*, 2010, **105**, 136805.
- 4 S. Ghatak, A. N. Pal and A. Ghosh, *ACS Nano*, 2011, 5, 7707–7712
- 5 B. Radisavlijevic, M. B. Whitwick and A. Kis, *ACS Nano*, 2011, 5, 9934–9938.

**RSC Advances** Paper

- 6 O. L. Sanchez, D. Lembke, M. Kayci, A. Radenovic and A. Kis, Nat. Nanotechnol., 2013, 8, 497-501.
- 7 D. J. Late, Y. K. Huang, B. Liu, J. Acharya, S. N. Shirodkar, J. Luo, A. Yan, D. Charles, U. V. Waghmare, V. P. Dravid and C. N. R. Rao, ACS Nano, 2013, 7, 4879-4891.
- 8 T. Cao, G. Wang, W. Han, H. Ye, C. Zhu, J. Shi, Q. Niu, P. Tan, E. Wang, B. Liu and J. Feng, Nat. Commun., 2012, 3, 887.
- 9 V. K. Sangwan, H. S. Lee, H. Bergeron, I. Balla, M. E. Beck, K. S. Chen and M. C. Hersam, Nature, 2018, 554, 500.
- 10 H. Li, J. Wu, Z. Yin and H. Zhang, Acc. Chem. Res., 2014, 47, 1067-1075.
- 11 M. Chhowalla, H. S. Shin, G. Eda, L. J. Li, K. P. Loh and H. Zhang, Nat. Chem., 2013, 5, 263-275.
- 12 A. M. V. D. Zande, P. Y. Huang, D. A. Chenet, T. C. Berkelbach, Y. You, G. H. Lee, T. F. Heinz, D. R. Reichman, D. A. Muller and J. C. Hone, Nat. Mater., 2013, 12, 554-561.
- 13 X. Wang, H. Feng, Y. Wu and L. Jiao, J. Am. Chem. Soc., 2013, 135, 5304-5307.
- 14 Y. R. Lim, W. Song, J. K. Han, Y. B. Lee, S. J. Kim, S. Myung, S. S. Lee, K. S. An, C. J. Choi and J. Lim, Adv. Mater., 2016, 28,
- 15 Y. R. Lim, J. K. Han, S. K. Kim, Y. B. Lee, Y. Yoon, S. J. Kim, B. K. Min, Y. Kim, C. Jeon, S. Won, J. H. Kim, W. Song, S. Myung, S. S. Lee, K. S. An and J. Lim, Adv. Mater., 2018, 30, 1705270.
- 16 K. Guo, S. Cui, H. Hou, W. Chen and L. Mi, Dalton Trans., 2016, 45, 19458-19465.
- 17 K. Guo, F. Yang, S. Cui, W. Chen and L. Mi, RSC Adv., 2016, 6, 46523-46530.
- 18 S. Huang, W. Zhang, S. Cui, W. Chen and L. Mi, *Inorg. Chem.* Front., 2017, 4, 727-735.
- 19 W. Wei, L. Mi, S. Cui, B. Wang and W. Chen, ACS Sustainable Chem. Eng., 2015, 3, 2777-2785.
- 20 H. Fang, S. Chuang, T. C. Chang, K. Takei, T. Takahashi and A. Javey, Nano Lett., 2012, 12, 3788-3792.

- 21 J. Kang, S. Tongay, J. Zhou, J. Li and J. Wu, Appl. Phys. Lett., 2013, 102, 012111.
- 22 S. C. O'Neal and J. W. Kolis, J. Am. Chem. Soc., 1988, 110, 1971-1973.
- 23 Q. Zhang, M. Hong, W. Su, R. Cao and H. Liu, Polyhedron, 1997, 16, 1433-1437.
- 24 C. Altavilla, M. Sarno and P. Ciambelli, Chem. Mater., 2011, 23, 3879-3885.
- 25 W. Jung, S. Lee, D. Yoo, S. Jeong, P. Miro, A. Kuc, T. Heine and J. Cheon, J. Am. Chem. Soc., 2015, 137, 7266-7269.
- 26 Z. Xu, C. Shen, Y. Hou, H. Gao and S. Sun, Chem. Mater., 2009, 21, 1778-1780.
- 27 A. Mohammed, H. Nakamura, P. Wochner, S. Ibrahimkutty, A. Schulz, K. Muller, U. Starke, B. Stuhlhofer, G. Cristiani, G. Logvenov and H. Takagi, Appl. Phys. Lett., 2017, 111, 073101.
- 28 J. Wang, D. Rhodes, S. Feng, M. A. T. Nguyen, K. Watanabe, T. Taniguchi, T. E. Mallouk, M. Terrones and J. Zhu, Appl. Phys. Lett., 2015, 106, 152104.
- 29 J. Chen, B. Liu, Y. Liu, W. Tang, C. T. Nai, L. Li, J. Zheng, L. Gao, Y. Zheng, H. S. Shin, H. Y. Jeong and K. P. Loh, Adv. Mater., 2015, 27, 6722-6727.
- 30 J. Huang, L. Yang, D. Liu, J. Chen, Q. Fu, Y. Xiong, F. Lin and B. Xiang, Nanoscale, 2015, 7, 4193.
- 31 B. Liu, M. Fathi, L. Chen, A. Abbas, Y. Ma and C. Zhou, ACS Nano, 2015, 9, 6119-6127.
- 32 M. M. Perera, M. W. Lin, H. J. Chuang, B. P. Chamlagain, C. Wang, X. Tan, M. M. C. Cheng, D. Tomanek and Z. Zhou, ACS Nano, 2013, 7, 4449-4458.
- 33 H. Zhou, C. Wang, J. C. Shaw, R. Cheng, Y. Chen, X. Huang, Y. Liu, N. O. Weiss, Z. Lin, Y. Huang and X. Duan, Nano Lett., 2015, 15, 709-713.
- 34 W. Liu, J. Kang, D. Sarkar, Y. Khatami, D. Jena and K. Banerjee, Nano Lett., 2013, 13, 1983-1990.
- 35 S. Das and J. Appenzeller, Appl. Phys. Lett., 2013, 103, 103501.