Materials Horizons

ROYAL SOCIETY OF CHEMISTRY

CORRECTION

View Article Online
View Journal | View Issue

Open Access Article. Published on 16 July 2020. Downloaded on 12/4/2025 4:25:00 AM.
This article is licensed under a Creative Commons Attribution 3.0 Unported Licence.

Check for updates

Cite this: *Mater. Horiz.*, 2020, 7, 2460

Correction: Epoxy resin with exchangeable disulfide crosslinks to obtain reprocessable, repairable and recyclable fiber-reinforced thermoset composites

Alaitz Ruiz de Luzuriaga, Roberto Martin, Nerea Markaide, Alaitz Rekondo, Germán Cabañero, Javier Rodríguez and Ibon Odriozola*

DOI: 10.1039/d0mh90047h

rsc.li/materials-horizons

Correction for 'Epoxy resin with exchangeable disulfide crosslinks to obtain reprocessable, repairable and recyclable fiber-reinforced thermoset composites' by Alaitz Ruiz de Luzuriaga *et al.*, *Mater. Horiz.*, 2016, **3**, 241–247, DOI: 10.1039/C6MH00029K.

The authors have detected an error in the calculation of the activation energy and vitrimer temperature. In Fig. 1b, $\log \tau$ should be plotted on the y axis instead of $\ln \tau$. Due to this error, the calculated activation energy is incorrect and the energy should be multiplied by 2.3 ($1/\log e$). The correct activation energy is 126.5 KJ mol^{-1} and the correct calculated vitrimer temperature is 75 °C. The authors apologise for this error and state that this error does not affect any of the scientific findings and interpretations.

A detailed list of changes is provided as follows:

• The correct version of Fig. 1b is shown below

• On page 243, "From this equation, an activation energy (E_a) of 55 kJ mol^{-1} was calculated for the dynamic epoxy network 5. Such activation energy is lower than other reported systems…" should be changed to "From this equation, an activation energy (E_a) of 126 kJ mol^{-1} was calculated for the dynamic epoxy network 5. Such activation energy is similar to other reported systems…"

• On page 243, "For our dynamic epoxy system 5, the hypothetical T_v value obtained was −13 °C, which is well below its T_g (127 °C from DSC)." should be changed to "For our dynamic epoxy system 5, the hypothetical T_v value obtained was 75 °C, which is well below its T_g (127 °C from DSC)."

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.

Materials Division, IK4-CIDETEC Research Centre, Paseo Miramón 196, 20009 Donostia-San Sebastián, Spain. E-mail: iodriozola@cidetec.es; Fax: +34 943309136; Tel: +34 943309022

This journal is © The Royal Society of Chemistry 2020

Open Access Article. Published on 16 July 2020. Downloaded on 12/4/2025 4:25:00 AM.
This article is licensed under a Creative Commons Attribution 3.0 Unported Licence.

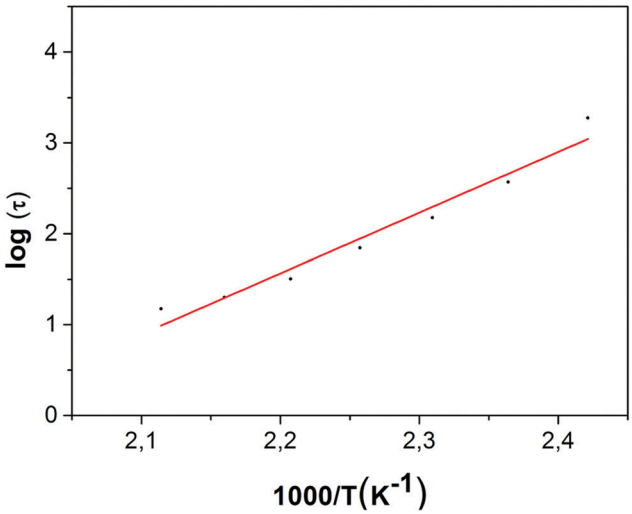

Fig. 1 (b) Fitting of the relaxation times to the Arrhenius' equation (R-square = 0.946).