



Cite this: *RSC Adv.*, 2020, 10, 11263

## Correction: Composition design, electrical properties, and temperature stability in $(1 - x)$ $\text{K}_{0.44}\text{Na}_{0.56}\text{Nb}_{0.96}\text{Sb}_{0.04}\text{O}_3 - x\text{Bi}_{0.45}\text{La}_{0.05}\text{Na}_{0.5}\text{ZrO}_3$ lead-free ceramics


Jian Ma,<sup>\*a</sup> Juan Wu<sup>a</sup> and Bo Wu<sup>\*b</sup>

DOI: 10.1039/d0ra90024a

[rsc.li/rsc-advances](http://rsc.li/rsc-advances)

Correction for 'Composition design, electrical properties, and temperature stability in  $(1 - x)$   $\text{K}_{0.44}\text{Na}_{0.56}\text{Nb}_{0.96}\text{Sb}_{0.04}\text{O}_3 - x\text{Bi}_{0.45}\text{La}_{0.05}\text{Na}_{0.5}\text{ZrO}_3$  lead-free ceramics' by Jian Ma *et al.*, *RSC Adv.*, 2018, 8, 29871–29878.

The authors regret that an incorrect version of Fig. 4 was included in the original article. The correct version of Fig. 4 is presented below.

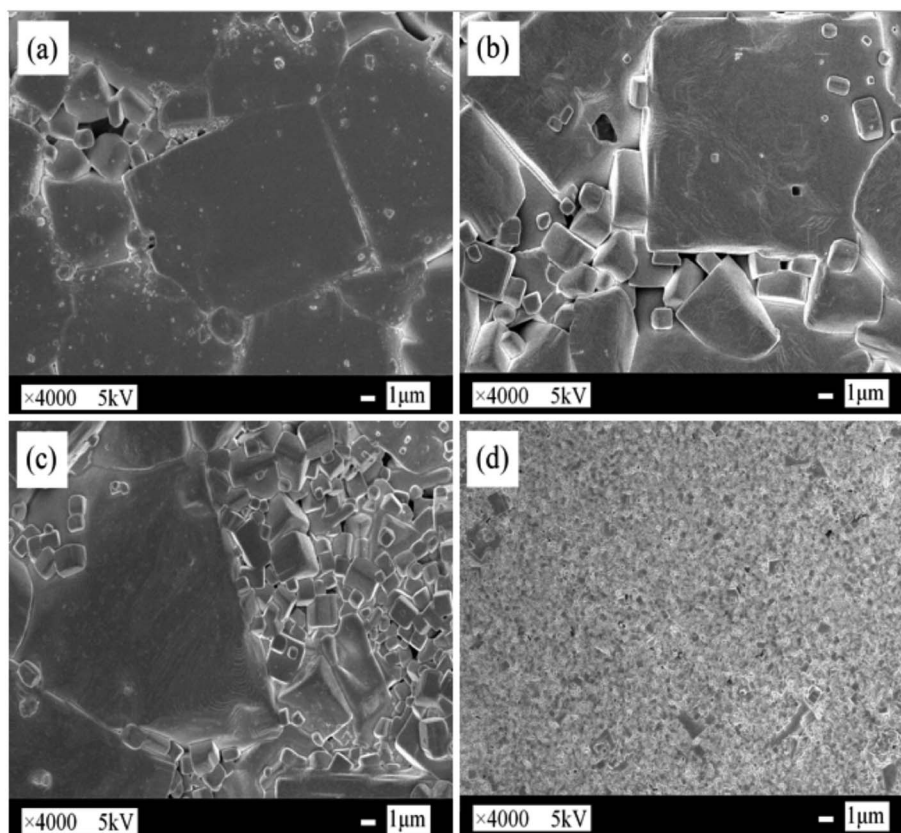

**Fig. 4** FE-SEM surface images of  $(1 - x)\text{K}_{0.44}\text{Na}_{0.56}\text{Nb}_{0.96}\text{Sb}_{0.04}\text{O}_3 - x\text{Bi}_{0.45}\text{La}_{0.05}\text{Na}_{0.5}\text{ZrO}_3$  ceramics with (a)  $x = 0$ , (b)  $x = 0.020$ , (c)  $x = 0.040$ , (d)  $x = 0.060$ .

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.

<sup>a</sup>Physics Department, Sichuan Province Key Laboratory of Information Materials, Southwest Minzu University, Chengdu 610041, P. R. China. E-mail: majian33@hotmail.com

<sup>b</sup>Sichuan Province Key Laboratory of Information Materials and Devices Application, Chengdu University of Information Technology, Chengdu 610225, P. R. China. E-mail: wubo7788@126.com

