

CORRECTION

[View Article Online](#)
[View Journal](#) | [View Issue](#)



Cite this: *J. Mater. Chem. A*, 2020, 8, 25443

Correction: Dual-defect surface engineering of bimetallic sulfide nanotubes towards flexible asymmetric solid-state supercapacitors

Ling Kang,^a Mengyao Zhang,^a Jian Zhang,^{*ad} Shude Liu,^{*b} Nan Zhang,^a Wenjing Yao,^d Yan Ye,^a Chen Luo,^a Zhiwei Gong,^{*c} Chaolun Wang,^a Xiaofeng Zhou,^a Xing Wu^a and Seong Chan Jun^b

DOI: 10.1039/d0ta90273j

rsc.li/materials-a

Correction for 'Dual-defect surface engineering of bimetallic sulfide nanotubes towards flexible asymmetric solid-state supercapacitors' by Ling Kang *et al.*, *J. Mater. Chem. A*, 2020, DOI: 10.1039/d0ta08979f.

The authors regret that an incorrect version of Fig. 5c was provided in the published article. The correct version of Fig. 5c is provided here:

^aShanghai Key Laboratory of Multidimensional Information Processing, East China Normal University, 500 Dongchuan Road, 200241 Shanghai, China. E-mail: jzhang@ee.ecnu.edu.cn; jzhang@ce.ecnu.edu.cn

^bSchool of Mechanical Engineering, Yonsei University, Seoul 120-749, South Korea. E-mail: lsdyy@yonsei.ac.kr

^cSchool of Physics and Electronic Science, East China Normal University, 500 Dongchuan Road, 200241 Shanghai, China. E-mail: zwgong@phy.ecnu.edu.cn

^dShanghai Institute of Intelligent Electronics Systems, Fudan University, Shanghai 200433, China



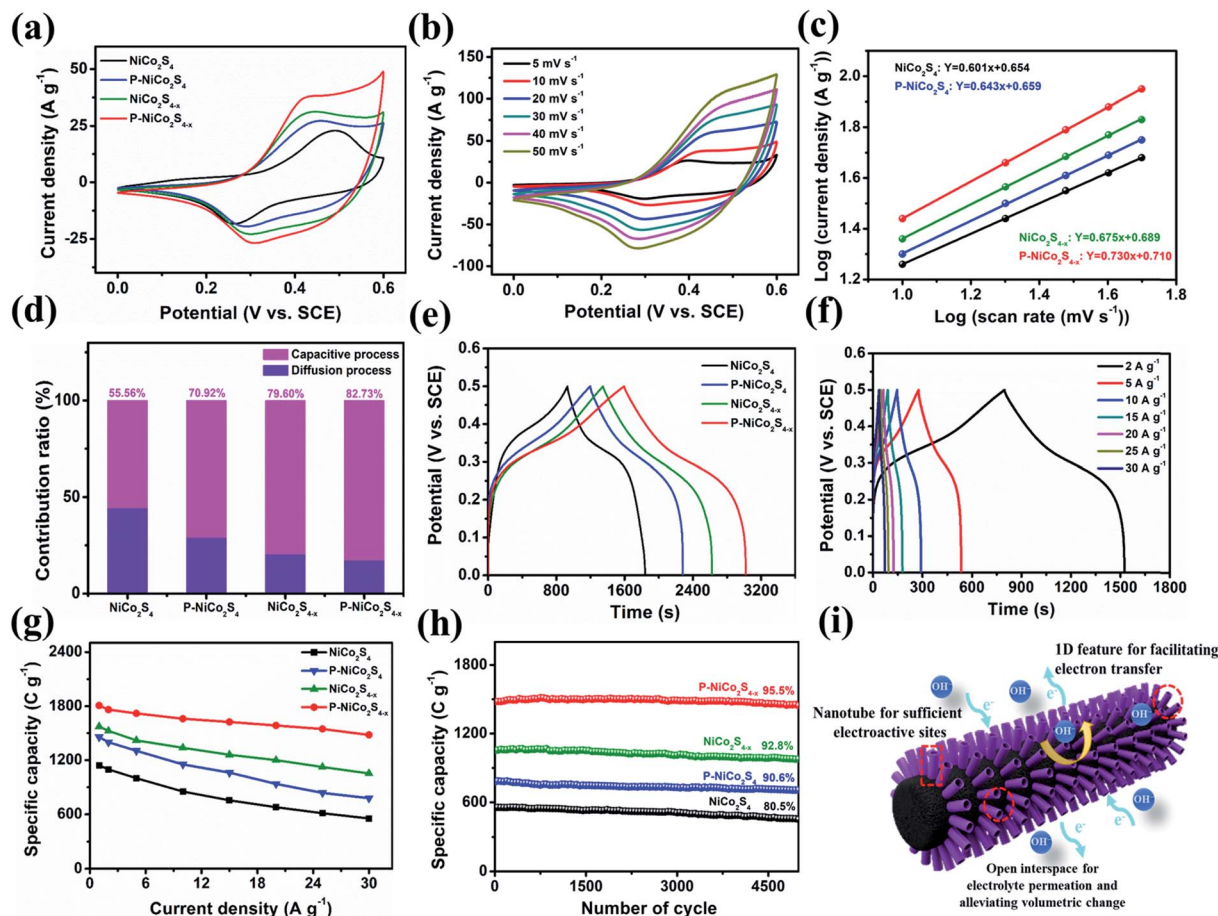


Fig. 5 (a) Comparison of the CV curves of NiCo_2S_4 , $\text{P-NiCo}_2\text{S}_4$, $\text{NiCo}_2\text{S}_{4-x}$, and $\text{P-NiCo}_2\text{S}_{4-x}$ at a scan rate of 10 mV s^{-1} . (b) CV curves of $\text{P-NiCo}_2\text{S}_{4-x}$ at different scan rates. (c) Determination of the b -values of NiCo_2S_4 , $\text{P-NiCo}_2\text{S}_4$, $\text{NiCo}_2\text{S}_{4-x}$ and $\text{P-NiCo}_2\text{S}_{4-x}$ from the current densities of cathodic peaks using the power law. (d) Histogram illustrating the ratio of capacitive and diffusive contributions to capacitance at 10 mV s^{-1} . (e) Comparison of the GCD curves of NiCo_2S_4 , $\text{P-NiCo}_2\text{S}_4$, $\text{NiCo}_2\text{S}_{4-x}$ and $\text{P-NiCo}_2\text{S}_{4-x}$ at a current density of 1 A g^{-1} . (f) GCD curves of $\text{P-NiCo}_2\text{S}_{4-x}$ obtained at different current densities. (g) Specific capacities obtained at various current densities. (h) Cycling performances of NiCo_2S_4 , $\text{P-NiCo}_2\text{S}_4$, $\text{NiCo}_2\text{S}_{4-x}$ and $\text{P-NiCo}_2\text{S}_{4-x}$ at a high current density of 30 A g^{-1} . (i) Schematic illustrating the structural advantages of $\text{P-NiCo}_2\text{S}_{4-x}$ nanotubes in terms of electrochemical reactivity.

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.