

CORRECTION

[View Article Online](#)
[View Journal](#) | [View Issue](#)



Cite this: *Nanoscale Adv.*, 2021, **3**, 5122

DOI: 10.1039/d1na90069b

rsc.li/nanoscale-advances

Correction: Hafnium–zirconium oxide interface models with a semiconductor and metal for ferroelectric devices

Kisung Chae,^{ab} Andrew C. Kummel^{*a} and Kyeongjae Cho^{*b}

Correction for 'Hafnium–zirconium oxide interface models with a semiconductor and metal for ferroelectric devices' by Kisung Chae *et al.*, *Nanoscale Adv.*, 2021, DOI: 10.1039/d1na00230a.

The authors regret that an incorrect version of Fig. 7 was included in the original article. The correct version of Fig. 7 is presented below.

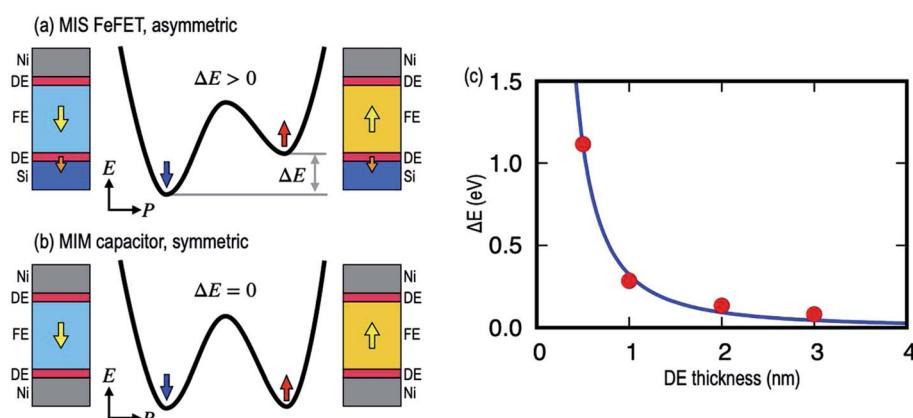


Fig. 7 Total energy landscape in MIM and MIS devices. Schematic diagram of energy landscapes as a function of polarization state for (a) an asymmetric MIS FeFET and (b) a symmetric MIM capacitor. (c) The energy difference (ΔE) as a function of DE thickness in MIS with the FE thickness fixed at 2 nm.

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.

^aDepartment of Chemistry and Biochemistry, University of California San Diego, La Jolla, CA, USA. E-mail: akummel@ucsd.edu

^bDepartment of Materials Science and Engineering, The University of Texas at Dallas, Richardson, TX, USA. E-mail: kjcho@utdallas.edu

