

Cite this: *Sustainable Energy Fuels*,
2021, 5, 6189

An integrated biorefinery to produce 5-(hydroxymethyl)furfural and alternative fuel precursors from macroalgae and spent coffee grounds†

André Prates Pereira,^a Timothy J. Woodman^b and Christopher J. Chuck^{ID}*^a

5-Hydroxymethylfurfural (HMF) is a promising platform chemical produced from the dehydration of C₆ sugars, that is a precursor for a range of renewable fuels and polymers. In this study, an integrated macroalgal biorefinery was designed to produce an array of products including HMF, hydrothermal liquefaction (HTL) biocrude and biochar. In this process two different species of macroalgae, *Ulva lactuca* and *Chorda filum*, were investigated and co-processed with spent coffee grounds to assess if such blends could be effectively used, with the spent coffee grounds mitigating for lower macroalgae availability throughout the year. *U. lactuca* and the spent coffee ground blends were effectively used in a biorefinery design for the production of HMF. Interestingly, blends yielded higher amounts of HMF (35–47 g per kg of dry biomass processed) than the separate components alone. This is presumably due to the elevated amount of C₆ sugars being available from the macroalgae, coupled with the presence of lipids from the coffee grounds. The lipids likely form a separate organic layer in the dehydration reaction, into which the HMF migrates after being formed in the aqueous fraction, halting further dehydration reactions to levulinic acid. The HTL on the resultant solids from dehydration yielded a relatively similar amount of biocrude (68–78 g per kg of dry biomass) compared to spent coffee grounds (SCG) (90 g per kg of dry biomass). However, the *C. filum* biorefinery yielded far lower biocrude and HMF, presumably due to the lower lipid and C₆ sugar content in this feedstock. Overall, an HMF biorefinery from macroalgae is plausible, with spent coffee grounds being a highly suitable material to make up for seasonal availability. However, the large difference in yields from macroalgal species demonstrates the importance of high lipid content, alongside higher C₆ sugar composition, in the macroalgal feedstock.

Received 27th July 2021
Accepted 31st October 2021

DOI: 10.1039/d1se01142a

rsc.li/sustainable-energy

Introduction

Macroalgae is a promising feedstock for the next generation of biorefineries as it does not compete with food crops, has a higher rate of carbon dioxide fixation than land crops,¹ has no freshwater requirement and is simple to process.² In addition, its cultivation can help to alleviate the eutrophication in seas and oceans and aid in carbon capture and sequestration.³ There are over 30 million tonnes currently cultivated worldwide,^{4,5} predominantly in China and India. The UK has one of the most extensive coastlines in Europe (approximately 12 500 km) and the ideal water temperature for seaweed production. These conditions and the underdeveloped market present a large opportunity for further development.⁶ There are a wide range of

seaweed species growing around the UK, that inevitably, have different properties and components depending on the type, habitat, cultivation method and harvest time.^{7,8} However, the predominant feature across almost all species are the elevated carbohydrate levels (65–75%).⁹

Several authors have demonstrated that macroalgae can be used in the hydrothermal liquefaction process.¹⁰ Raikova *et al.* presented a comprehensive study on a broad range of macroalgal species from the UK and the ideal hydrothermal liquefaction conditions to convert these into bio-crude and nutrient partition into the aqueous phase.¹¹ In a further study the authors also combined plastics present in the ocean with the macroalgae demonstrating that this led to a higher biocrude heating value.¹²

However, the use of macroalgae in an HTL-based industry presents two key issues. The first is the relatively low production of crude from the majority of species when compared to microalgae.¹³ This is primarily because of the elevated carbohydrates levels (relative to the more proteinaceous microalgae),

^aDepartment of Chemical Engineering, University of Bath, Bath BA2 7AY, UK. E-mail: c.chuck@bath.ac.uk

^bDepartment of Pharmacy & Pharmacology, University of Bath, Bath BA2 7AY, UK

† Electronic supplementary information (ESI) available. See DOI: 10.1039/d1se01142a



that predominantly breakdown into insoluble biochar, a lower quality fuel than the biocrude.^{14–16}

Indeed, the majority of research on macroalgal valorisation has focussed on the conversion of the carbohydrate fraction, mainly through fermentation to ethanol¹⁷ and alternative cellular products.¹⁸ However, the saccharides must first be extracted and processed into fermentable sugars. There are a high number of competing pathways for carbon in any fermentation and the breadth of sugars that any one organism would need to metabolise make these routes challenging. A simpler, more targeted approach, is the acid catalysed breakdown of the macroalgal saccharides to produce 5-hydroxymethyl furfural (HMF). HMF is a highly promising chemical building block, with a forecasted market of 61 million USD by 2024.^{19,20} Its production from carbohydrates and the potential to be converted into high value biofuels make this molecule an important intermediate between the carbohydrate and petroleum-based industry.²¹ In addition the chemical processing of biomass tends to have far lower capital costs than the biochemical processing of a similar size.²² HMF from biomass is usually produced through a sequence of steps: (1) depolymerisation of the feedstock macromolecules into sugars; (2) isomerisation of glucose to fructose; (3) acid-catalysed dehydration of fructose into HMF.²³ HMF has the potential to be converted into dimethylfuran (DMF), a biofuel with high energy density; and 2,5-furandicarboxylic acid (FDCA) a building block used in the production of polyethylene 2,5-furandicarboxylate (PEF), an emerging biobased polymer proposed to replace polyethylene terephthalate (PET).^{24,25} The production of HMF from macroalgae has been demonstrated including from isolated agar²⁶ and the red macroalga *Kappaphycus alvarezii*.²⁷ In the latter, Lee *et al.* demonstrated the production of glucose, galactose, levulinic acid and HMF from the red seaweed in an acid-catalysed hydrothermal process. The authors reached an HMF concentration of 3.02 g L⁻¹. Jeon and Park studied the optimal conditions for the production of glucose, galactose and levulinic acid from the red algae *Gelidium amansii*.²⁸ In one of their many different studied conditions, the highest HMF concentration achieved was 4.49 g L⁻¹ using an acid-catalysed hydrothermal process at 130 °C for 30 min. Similarly, Kholiya *et al.* described the extraction of agar/agarose from seaweed producing an aqueous extract followed by its conversion into HMF and levulinic acid.²⁹ In an alternative approach, Gonzales *et al.* demonstrated that HMF can be sequestered using granular activated carbon as an adsorbent from hydrolysates from lignocellulose and algal biomass.³⁰

Another key issue is the seasonal growth of macroalgae, which does not lend itself to an effective all year supply, thereby limiting the size or scope of a potential biorefinery.^{31–34} Recent studies have shown that blending with alternative biomass sources can be used to even out supply, and produce products all year round. For example, Jin *et al.* showed that co-liquefaction of microalgae and macroalgae was possible, and even increased the bio-crude energy heating value compared to when the feedstocks were processed separately.³⁵ Similarly, we recently demonstrated that microalgal seasonality can be effectively addressed by blending this feedstock with spent

coffee grounds (SCG) in periods where the microalgae production is lower during the colder parts of the year.³⁶ In this biorefinery set-up the saccharides were extracted and fermented before the resulting stillage was processed through HTL. Spent coffee grounds are a promising material for bioprocessing, which are available all year round, relatively stable to store, with the worldwide production of SCG being approximately 10 million tonnes in 2019.³⁷ The composition of SCG varies but, similarly to macroalgae, they contain high carbohydrates (42–55 w/w %) with a similar C₆ composition.³⁸ We recently demonstrated the suitability of producing HMF from spent coffee grounds in an integrated biorefinery design using an organosolv fractionation to isolate cellulose.²³

In this investigation therefore, we aimed to combine these approaches and address two fundamental issues impeding the development of macroalgal biorefineries. To this end, an integrated approach to increase the atom efficiency and produce both HMF and HTL products was demonstrated, co-processing the biomass with SCG to even out seasonality issues and allow steady production all year round.

Experimental

Materials

Spent coffee grounds were acquired from a local café at the University of Bath. A sample was weighed and placed in the oven at 60 °C. After two days the sample was weighed, and moisture content determined.

Ulva lactuca and *Chorda filum* were sampled from Broad-sands Beach, Paignton, UK. *Ulva lactuca* and *Chorda filum* were sampled on the 30/07/2019 and 05/08/2019, respectively. Both macroalgae were washed in freshwater, and freeze dried prior to storage.

In addition to the ‘pure’ feedstocks of *U. lactuca*, *C. filum* and spent coffee grounds, two blends were prepared for each macroalgae. The blend with 40% macroalga and 60% SCG simulates a season when there is less production of macroalgae (possibly winter – depending on the strain) and the blend with 60% macroalgae and 40% SCG simulate an intermediate season between maximum and minimum macroalgae production (possibly spring and/or autumn). Therefore, the seven feedstocks studied are as follows:

- Pure *Ulva lactuca* – UL.
- 60% UL + 40% SCG – UL_{0.6} + SCG_{0.4}.
- 40% UL + 60% SCG – UL_{0.4} + SCG_{0.6}.
- Pure spent coffee grounds – SCG.
- 40% *C. filum* + 60% SCG – CF_{0.4} + SCG_{0.6}.
- 60% *C. filum* + 40% SCG – CF_{0.6} + SCG_{0.4}.
- Pure *Chorda filum* – CF.

Acid dehydration

20 g (dry weight) of feedstock were added to a 300 mL Parr reactor (Parr Company Moline, IL, USA, 4560 mini reactors), followed by the addition of a mixture of 2% (w/w) sulphuric acid (from Sigma-Aldrich) in deionised water to make up a total of 100 g. The reactor and its contents were weighed before the



reaction. Agitation was initiated and the reactor heated to 155 °C, at which point the temperature was held for 15 minutes. The reaction mixture was cooled rapidly over 20 minutes using the in-built cooling system operating at −4 °C. The reactor and its contents were weighed to determine gas losses. All the seven feedstocks/scenarios studied were repeated at least three times and the standard deviation calculated.

HMF extraction

The solids from the reactor were separated through filtration. The HMF was extracted from the filtrate in a 500 mL separatory funnel, in a 100 mL using a mixture of dichloromethane (DCM) and 2-butanol (50 : 50 w/w %). Both phases (aqueous and organic phase containing the HMF fraction) were collected separately for further analysis. The recovery ratio of HMF in the extraction is calculated as follows:

$$R_{\text{HMF}} = \frac{C_{\text{HMF,org}} \times V_{\text{org}}}{C_{\text{HMF,org}} \times V_{\text{org}} + C_{\text{HMF,aq}} \times V_{\text{aq}}} \quad (1)$$

where $C_{\text{HMF,org}}$ and $C_{\text{HMF,aq}}$ are the concentration of HMF in the organic and aqueous fraction, respectively, in g L^{-1} . V_{org} and V_{aq} are the volume of the organic and aqueous fraction, respectively.

Second acid dehydration

The aqueous phase collected from the HMF extraction was combined with the solids obtained from filtration upstream from the original HMF extraction. This slurry was then added to the reactor, H_2SO_4 was added and the same reaction procedure was used under the same conditions to produce a further amount of HMF. The aqueous, organic and solids were separated following the procedure given above. The solid fraction was removed, washed in solvent and dried overnight in an oven at 40 °C to reduce moisture content to residual quantities before being used in the hydrothermal liquefaction.

Hydrothermal liquefaction (HTL)

HTL reactions were performed in a 50 mL stainless steel batch reactor, equipped with a pressure gauge, pressure relief valve and a needle valve. 3 g of dried solids were weighed, loaded and mixed with 15 g of deionised water into an HTL reactor. The reactor was sealed and placed in a furnace pre-heated to 800 °C. Temperature was closely monitored using a thermocouple until it reached 350 °C (approximately between 150 and 180 bar). At this temperature the reactor was removed from the furnace and left to cool. Gas phase was measured and collected from the needle valve (using water displacement technique). The contents were separated through a pre-weighed filter paper. The filtrate (aqueous phase) was poured through the funnel into a pre-weighed vial. The vial and the filtrate obtained were weighed for total aqueous fraction weight determination. An aliquot of the aqueous fraction was oven-dried at 60 °C to determine the aqueous fraction residue yield. The reactor and the filtered solids were then thoroughly washed (using the same filter paper) with chloroform into a pre-weighed round bottom flask until the filtrate ran clear. The chloroform was removed *in*

vacuo. On solvent removal, the flask was weighed and the bio-crude fraction gravimetric yield was obtained. Solids were dried in an oven at 60 °C. Filtered solids were weighed for biochar gravimetric yield determination.

Carbohydrates and levulinic acid analysis

Aqueous and organic fractions obtained after the first and second extractions were filtered and analysed for carbohydrate content using a high performance liquid chromatography (HPLC), from Agilent Technologies, equipped with an Aminex HPX-87H organic acids column (300 mm × 7.88 mm, Bio-Rad Laboratories) and a refractive index detector (RID) was used to quantify the carbohydrates in this study. 5 mM H_2SO_4 solution was used as mobile phase at a flow rate of 0.6 mL min^{-1} . Column was heated up to 65 °C. Mobile phase was prepared using sulphuric acid provided from Sigma-Aldrich.

HMF and furfural analysis

An HPLC (Agilent Technologies) equipped with a diode-array detector (DAD) and an Aminex HPX-87H column (300 mm × 7.88 mm, Bio-Rad Laboratories) was used in the HMF and furfural analysis on the aqueous and organic samples obtained after both extractions. The mobile phase (5 mM H_2SO_4 solution prepared in house using sulphuric acid provided from Sigma-Aldrich) was flowing at 0.6 mL min^{-1} . Column was heated up to 65 °C. DAD signal set at 280 nm.

Lipid analysis

Lipid composition was determined using ^1H nuclear magnetic resonance (NMR), detailed information is given in the ESI.†

Results and discussion

The biorefinery approach was designed to produce HMF from the C_6 sugar fraction in an acid dehydration. By using a strong acid such as H_2SO_4 , the cleaving of the biomass composite structure, the depolymerisation of polysaccharides into oligo and monosaccharides and the subsequent dehydration of these monomers into HMF is possible.³⁹ This process was followed by an extraction of the produced HMF, where the solvent (dichloromethane : 2-butanol (50 : 50 w/w %)) was recycled. The extracted stillage from this extraction was then fed into a second

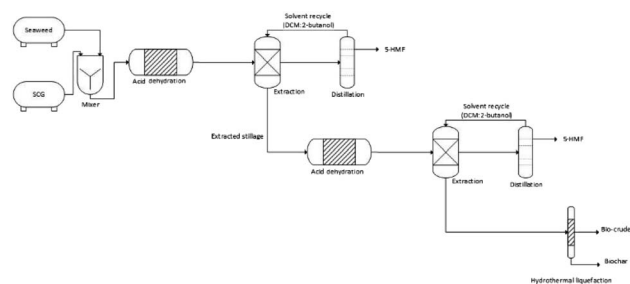


Fig. 1 Proposed process configuration of biorefinery for HMF production.



Table 1 Main monosaccharides content in the original feedstocks, data determined using the laboratory analytical procedure developed by Van Wycken and Laurens⁴¹

(%)	SCG	<i>U. lactuca</i>	<i>C. filum</i>
Glucose	20.1 ± 0.6	34.8 ± 1.7	5.7 ± 0.3
Galactose/mannose	22.6 ± 0.3	1.7 ± 0.2	0.5 ± 0.0
Arabinose	5.2 ± 0.6	9.1 ± 0.7	18.6 ± 0.7

acid dehydration to produce further HMF from the unused carbohydrates of the first reaction. The reactor effluent was subject to a second HMF extraction with the solvent being recycled. The resulting waste stream from the entire process was then submitted to hydrothermal liquefaction to produce biocrude and biochar (Fig. 1).

SCG and *U. lactuca* have a carbohydrate content of approximately 47.8% and 45.6%, respectively. Most of the carbohydrates present in these feedstocks were C₆ sugars (89% and 80% of the total carbohydrates, respectively – Table 1). Such results suggest that these feedstocks can have a high potential for conversion into HMF.^{23,40} On the other hand, *C. filum* has a 24.8% carbohydrate content, from which only 25% of the total carbohydrates were C₆ sugars.

Acid dehydration for HMF production

The initial sulphuric acid treatment depolymerised a portion of the saccharide feedstock, and some HMF production was observed. The SCG produced the most with, 2.69 g L⁻¹ produced, a yield of 2.8% from the saccharide portion. *U. lactuca* produced 1.76 g L⁻¹ (1.9%) whereas *C. filum* produced 0.24 g L⁻¹ (0.5%) Fig. 2a. Yields of 6.9% and 7.0% were achieved for UL_{0.6} + SCG_{0.4} and UL_{0.4} + SCG_{0.6}, respectively, while 6.7% and 3.9% were obtained for the blends of SCG with *C. filum* (CF_{0.4} + SCG_{0.6} and CF_{0.6} + SCG_{0.4}, respectively) (Table 2).

Interestingly, the blends of Ulva and SCG produced far more HMF than either of the raw materials when processed separately. This was also observed for blends of SCG and *C. filum*. This is potentially due to the macroalgal species having more glucose, which is more readily released than in SCG, while the far higher content of lipids in SCG forms an organic layer.^{9,38,42,43} It has been previously observed, that a biphasic system can increase stability and yields by partitioning HMF as it is formed away from the aqueous phase.⁴⁴ This is supported by a reduction of approximately 50% on the HMF produced from the blend when defatted SCG were used in the same series of experiments (Fig. 2c).

Apart from the *C. filum* system, all the other systems examined have low C₅ sugar content, and accordingly lower furfural production. The reactor effluent was analysed for carbohydrates (Fig. 2b), and still showed a relatively high content in carbohydrates (approximately 14–23 g L⁻¹ depending on feedstock). The analysis also showed that galactose/mannose is the monosaccharide most abundant in the SCG-rich feedstocks, while higher concentrations of glucose are observed in *U. lactuca*-rich feedstocks and arabinose and fucose in *C. filum*. Levulinic acid was also present in these slurries, mostly in the feedstocks

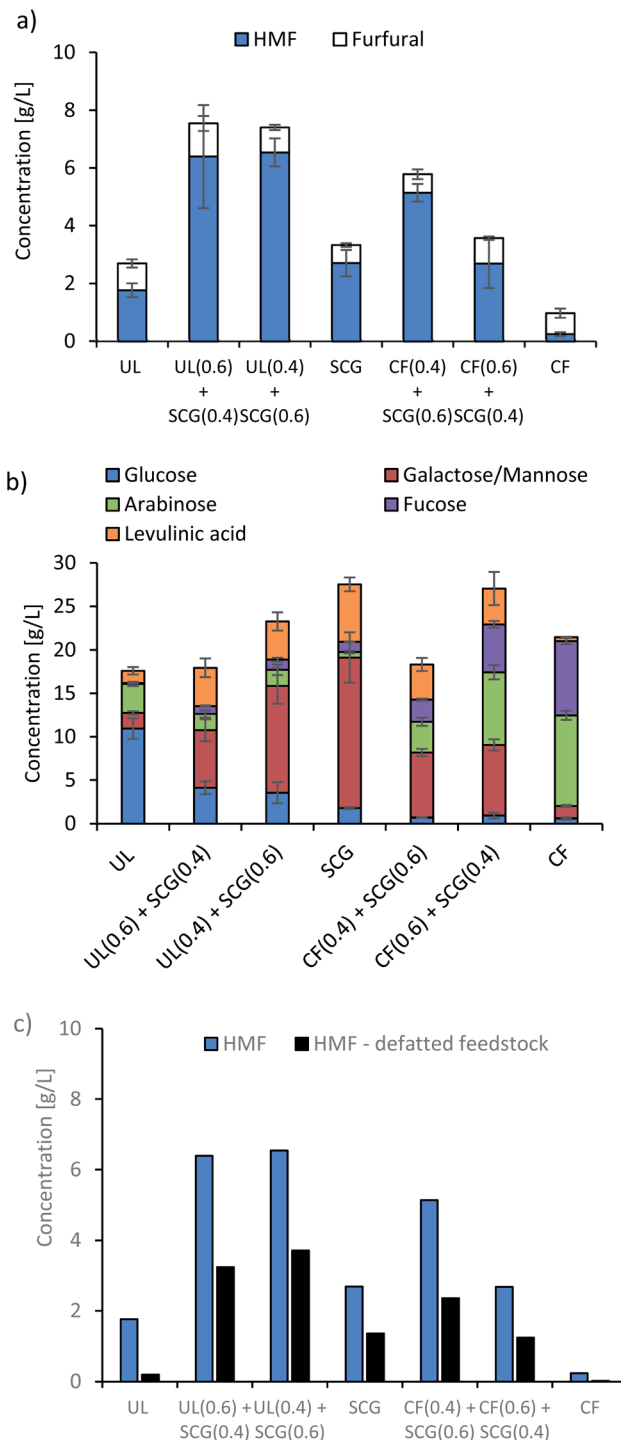


Fig. 2 (a) HMF and furfural production in 1st dehydration; (b) monosaccharides concentration after 1st dehydration; (c) comparison of the HMF produced when using the raw feedstocks and when using a defatted feedstock.

containing SCG, suggesting that there are significant levels of HMF to dehydrate with the systems containing lipids, with far less observed for the two macroalgae species on their own. The presence of such high concentrations of monosaccharides in this stream indicated that these can be further processed in a second acid dehydration to produce more HMF.



Table 2 HMF recovery yields of the various feedstocks and blends. Values obtained considering the theoretical carbohydrate content from literature and the HMF concentration obtained on the first dehydration

	UL	UL _{0.6} + SCG _{0.4}	UL _{0.4} + SCG _{0.6}	SCG	CF _{0.4} + SCG _{0.6}	CF _{0.6} + SCG _{0.4}	CF
HMF yield (%)	2.5	7.7	7.3	2.6	6.0	3.5	0.4
HMF recovery (%)	86.7	80.5	83.1	83.1	82.3	90.4	78.3

Prior to the second dehydration the organic fraction, containing HMF, was removed. This was to prevent further dehydration of the HMF product while also allowing for more HMF to migrate to the organic layer formed by the lipids. The extraction system, a mixture of DCM and 2-butanol in a ratio of 1 : 1, showed relatively high recovery ratios for the HMF – approximately 80 to 90% of the HMF was recovered into the extraction solvent, while the rest remained in the aqueous fraction (Table 2) this is similar to the results reported by Tan *et al.*⁴⁵

Subsequent acid dehydration to HMF

A second acid dehydration was undertaken on the combined solid and aqueous phase once the HMF had been removed. This

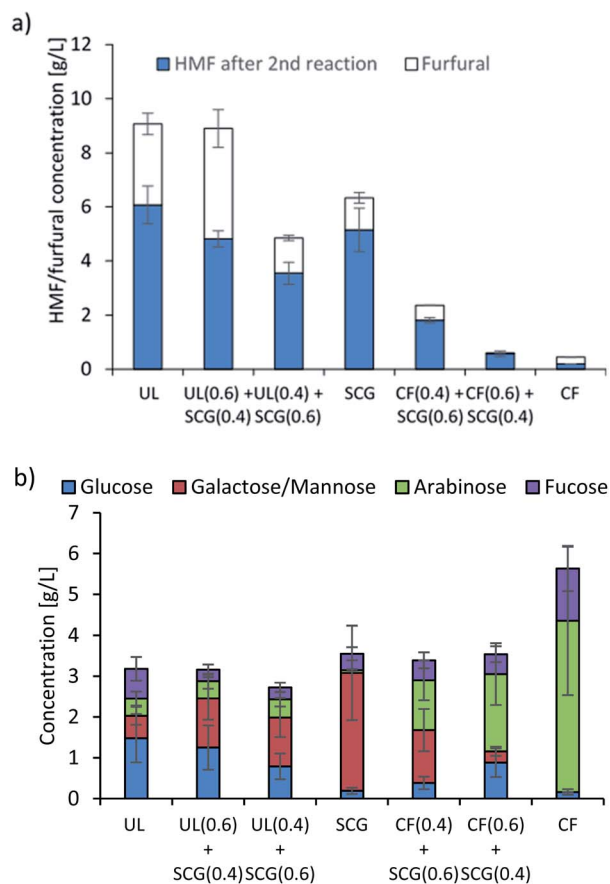


Fig. 3 (a) HMF and furfural concentration in the slurry after the second acid dehydration; (b) sugar concentration in the slurry after the second acid dehydration.

Table 3 Type and content of fatty acids found in the lipids in the extracted stillage after the second acid dehydration. MUFA stands for mono-unsaturated fatty acids. Analysis and quantification of fatty acids in *U. lactuca* and *C. filum* was difficult due to the low content of fatty acids in these samples. However, in addition to the fatty acids shown below, *C. filum* revealed the presence of an unusual component, most probably stearidonic acid

	Saturated	Mono unsaturated	Linoleic acid	Linolenic acid
UL	—	—	—	—
UL _{0.6} + SCG _{0.4}	58.60	4.10	30.92	6.38
UL _{0.4} + SCG _{0.6}	54.35	16.40	27.27	1.98
SCG	56.45	10.18	32.35	1.02
CF _{0.4} + SCG _{0.6}	63.67	0.10	30.75	5.48
CF _{0.6} + SCG _{0.4}	66.57	0.00	27.67	10.87
CF	—	—	—	—

led to higher production of HMF for the aqueous phase produced from the pure feedstocks of *U. lactuca* (6.1 g L⁻¹) and SCG (5.1 g L⁻¹), though the HMF from the *C. filum* (0.2 g L⁻¹) and blends of this macroalgae with SCG were greatly reduced (Fig. 3a). This is presumably because there is a large pool of glucose and mannose that can be dehydrated in the SCG and *U. lactuca* and far less in the *C. filum*. In addition, the lack of lipids in *C. filum* does not allow for a large production of HMF, similarly to what happened in the first dehydration. However, the HMF produced in the blends of *C. filum* is considerably lower than what was achieved in the first dehydration. This might be due to the low amounts of C₆ sugars left in solution after the first dehydration (b). When compared to the sugars present in solution after the second dehydration (b), sugars such as arabinose and fucose were barely consumed. The sugar analysis demonstrates that most of the glucose and mannose are consumed in the dehydration into HMF, while fucose and arabinose are somewhat more stable.

Lipid analysis

The streams of HMF (both after first and second dehydrations) and the stream of stillage after the second dehydration were analysed for lipid content. Lipids were only found in the stream of stillage after the second dehydration.

This demonstrated that no lipids were extracted with the HMF, which confirms the lipids form an organic phase in both acid dehydrations, corroborating the results obtained by Wang *et al.* and Prates Pereira *et al.*^{23,40} This double layer presumably allows for the HMF to move into the organic phase, once produced in the aqueous phase. The presence of lipids in the stillage after the second dehydration would also potentially allow for a lipid extraction prior to the HTL reaction. The extraction of the lipids as a product in a separate stream could add further value to this biorefinery approach. The analysis on the lipids present in the stillage after the second dehydration



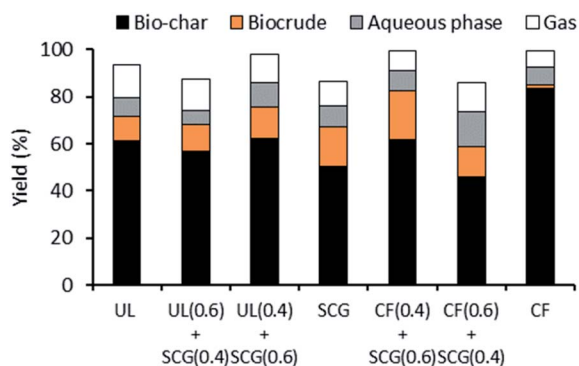


Fig. 4 Mass balance of the extracted stillage used in HTL reaction. Gravimetric yields calculated based on the dry weight of the extracted stillage fed into the reaction. Gas phase calculated assuming a 100% content in CO_2 , while the aqueous gravimetric yield was calculated considering the solids in this phase.

show a high content of saturated fatty acids as well as linoleic and linolenic acids (Table 3).

Hydrothermal liquefaction (HTL)

On the extraction of HMF, the resulting solid was converted into further products through hydrothermal liquefaction (Fig. 4). The *U. lactuca*, SCG and respective blends yielded relatively similar bio-crude and biochar yields, with a slight increase in biocrude with higher percentage of SCG in the blends. This is presumably due to the higher content of lipids in SCG, which is converted to biocrude in this process, as described by Madsen *et al.*⁴⁶ These results demonstrate that blends of *U. lactuca* with SCG can be used in an effective HTL process without substantial reduction in main product yields (biocrude and biochar).

The same trend was observed with SCG and *C. filum*, where a higher percentage of SCG in the blend associated with a higher biocrude yield. This is presumably due to the higher lipid content in SCG (converted into biocrude in HTL). On the other hand, the biochar yield increases with higher percentages of *C. filum*. This is presumably due to the breakdown of the carbohydrates not used in any of the dehydration processes and were broken down into biochar in the HTL. In contrast to *U. lactuca*, *C. filum* blends with SCG led to considerable differences in the biocrude and biochar yields. Therefore, if SCG were to be blended with *C. filum* in a biorefinery, the processes downstream to HTL would need to be prepared to handle different volumes of biocrude and biochar, depending on the season, thus on the percentages of the blends used.

Overall yields

The overall product yields were compared across the different blends and feedstocks (Table 4). The total HMF presented is the sum of the HMF extracted after the first and second dehydrations. Yields were extrapolated to 1 kg of dry biomass fed into the process. The biocrude and biochar amounts were calculated based on the amount of solids obtained after 2nd dehydration and on the HTL yields presented in Fig. 4. These were also extrapolated to 1 kg of dry biomass supplied to the entire system.

Table 4 Overall yield of the fuel products and precursors including total produced HMF, lipid production, biocrude and biochar from the proposed biorefinery, all values are given as kg per tonne and calculated on a dry ash free basis

	Total HMF [g kg _{biomass} ⁻¹]	Biocrude [g kg _{biomass} ⁻¹]	Biochar [g kg _{biomass} ⁻¹]	Mass all fuel products (%)	Mass all fuel products (DAF) (%)
UL	31.2	83.5	489.8	60.5	72.0
UL _{0.6}	46.6	78.2	390.2	51.5	57.3
+ SCG _{0.4}					
UL _{0.4}	35.3	67.6	314.2	41.7	45.0
+ SCG _{0.6}					
SCG	30.2	89.5	264.2	38.4	39.0
CF _{0.4}	28.3	109.7	355.5	49.4	51.9
+ SCG _{0.6}					
CF _{0.6}	13.1	77.5	230.5	32.1	34.4
+ SCG _{0.4}					
CF	1.5	14.6	757.2	77.3	86.1

A higher amount of HMF was produced from UL_{0.6} + SCG_{0.4} (46.6 g kg_{biomass}⁻¹) and UL_{0.4} + SCG_{0.6} (35.3 g kg_{biomass}⁻¹). These are the blends intended to replace *U. lactuca* in periods of intermediate and lower supply of this seaweed. However, when processed separately, *U. lactuca* and SCG only produce 31.2 and 30.2 g kg_{biomass}⁻¹, respectively, demonstrating that the blending of *U. lactuca* and SCG creates improved conditions for HMF production. A higher level of bio-crude was produced for the SCG (89.5 g kg_{biomass}⁻¹) presumably due to the higher content of lipids in this feedstock, though a similar conversion was observed for all biomass blends. However, the higher the percentages of *U. lactuca* in the blends, the higher the production of biochar. This is mainly due to the higher content of ash in the macroalgae. Overall, both UL_{0.6} + SCG_{0.4} and UL_{0.4} + SCG_{0.6} demonstrate that SCG is a good replacement of *U. lactuca* in periods of lower seaweed supply.

Unlike the *U. lactuca* blends, when taking both extractions into account, the highest level of HMF was produced from the SCG and the lowest from the *C. filum*. The blends of SCG and *C. filum* were proportional to this. Such low production of HMF from this macroalgae is due to the low content of C₆ sugars and lipids in this feedstock. This result has a high impact on the HTL results as the carbohydrates that were not dehydrated into HMF were then broken down into char, resulting in a high production of char of 757.2 g kg_{biomass}⁻¹. In addition to this, the low content of lipids in this feedstock led to a lower biocrude production (14.6 g kg_{biomass}⁻¹) when compared to SCG (89.5 g kg_{biomass}⁻¹).

Conclusions and future perspectives

In this study a biorefinery producing 5-(hydroxymethyl)furfural (HMF), biocrude and biochar from macroalgae and spent coffee



grounds blends was developed. *U. lactuca* was found to be a suitable species, containing elevated C₆ sugars that could be converted into HMF. Interestingly, the addition of spent coffee grounds increased the production substantially, in comparison to the macroalgae or spent coffee grounds alone. This was presumably due to the formation of a lipid layer in the aqueous phase that reduced the decomposition of HMF to levulinic acid. The stillage from the reaction was also further converted into fuel products through HTL, yielding 46.6 g kg⁻¹ HMF, 78.2 g kg⁻¹ biocrude, 390 g kg⁻¹ biochar in the optimised system. The same system with *C. filum* was less productive, presumably due to lower lipid and C₆ sugars in the macroalgae. The aim of this work was achieved as it demonstrates that an integrated HMF biorefinery is possible using *U. lactuca*, and that the addition of spent coffee grounds not only would allow all year round production, but could also increase the yield of specific target products, such as HMF and HTL products. Indeed, blending with spent coffee grounds has potential to improve process versatility making biomasses considered unsuitable alone (such as *Chorda filum*) into viable feedstocks. Furthermore, the current work demonstrates that the production of HMF can be performed in a single-step reaction rather than in three-steps as widely presented in the literature. Further perspectives to be considered in future work include the optimisation of the HMF production in the dehydration process. A techno-economic analysis is also suggested to determine the profitability of the second acid dehydration process, possibly a third acid dehydration to use the unused sugars, and the inclusion of a lipid extraction process upstream to the hydrothermal liquefaction.

Author contributions

André Prates Pereira: conceptualization, investigation, writing – original draft. Timothy J. Woodman: investigation, data curation, formal analysis. Christopher J. Chuck: conceptualization, supervision, writing – review and editing.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

We extend our thanks to Michael, Rosie and Archie Allen for supplying the *Ulva lactuca* and *Chorda filum* feedstocks used in this work, and to the University of Bath URS scheme for funding.

Notes and references

- M. R. Tabassum, A. Xia and J. D. Murphy, Potential of seaweed as a feedstock for renewable gaseous fuel production in Ireland, *Renewable Sustainable Energy Rev.*, 2017, **68**, 136–146, DOI: 10.1016/J.RSER.2016.09.111.
- E. S. Jones, S. Raikova, S. Ebrahim, S. Parsons, M. J. Allen and C. J. Chuck, Saltwater based fractionation and valorisation of macroalgae, *J. Chem. Technol. Biotechnol.*, 2020, **95**(8), 2098–2109, DOI: 10.1002/jctb.6443.
- K. Balina, F. Romagnoli and D. Blumberga, Seaweed biorefinery concept for sustainable use of marine resources, *Energy Procedia*, 2017, **128**, 504–511, DOI: 10.1016/J.EGYPRO.2017.09.067.
- The State of World Fisheries and Aquaculture 2012*, FAO, Italy, 2012.
- The State of World Fisheries and Aquaculture 2018*, FAO, Italy, 2018.
- E. Capuzzo and T. McKie, *Seaweed in the UK and Abroad - Status, Products, Limitations, Gaps and Cefas Role*, 2016.
- J. Murphy, B. Drog, E. Allen, J. Jerney, A. Xia and C. Herrmann, *A Perspective on Algal Biogas*, 2016, DOI: DOI: 10.13140/RG.2.1.4268.7127.
- F. Bunker, *Seaweeds of Britain and Ireland*, Wild Nature Press, Plymouth, UK, 2nd edn, 2017.
- T. A. Beacham, I. S. Cole, L. S. DeDross, *et al.* Analysis of seaweeds from South West England as a biorefinery feedstock, *Appl. Sci.*, 2019, **9**, 4456.
- S. Raikova, M. J. Allen and C. J. Chuck, Hydrothermal liquefaction of macroalgae for the production of renewable biofuels, *Biofuels, Bioprod. Biorefin.*, 2019, **13**(6), 1483–1504.
- S. Raikova, C. D. Le, T. A. Beacham, R. W. Jenkins, M. J. Allen and C. J. Chuck, Towards a marine biorefinery through the hydrothermal liquefaction of macroalgae native to the United Kingdom, *Biomass Bioenergy*, 2017, **107**, 244–253, DOI: 10.1016/j.biombioe.2017.10.010.
- S. Raikova, T. D. J. Knowles, M. J. Allen and C. J. Chuck, Co-liquefaction of macroalgae with common marine plastic pollutants, *ACS Sustainable Chem. Eng.*, 2019, **7**(7), 6769–6781, DOI: 10.1021/acssuschemeng.8b06031.
- M. Piccini, S. Raikova, M. J. Allen and C. J. Chuck, A synergistic use of microalgae and macroalgae for heavy metal bioremediation and bioenergy production through hydrothermal liquefaction, *Sustainable Energy Fuels*, 2019, **3**(1), 292–301.
- P. Biller and A. B. Ross, Potential yields and properties of oil from the hydrothermal liquefaction of microalgae with different biochemical content, *Bioresour. Technol.*, 2011, **102**(1), 215–225, DOI: 10.1016/j.biortech.2010.06.028.
- W. Yang, X. Li, Z. Li, C. Tong and L. Feng, Understanding low-lipid algae hydrothermal liquefaction characteristics and pathways through hydrothermal liquefaction of algal major components: Crude polysaccharides, crude proteins and their binary mixtures, *Bioresour. Technol.*, 2015, **196**, 99–108, DOI: 10.1016/j.biortech.2015.07.020.
- G. Yu, Y. Zhang, L. Schideman, T. L. Funk and Z. Wang, *Hydrothermal Liquefaction of Low Lipid Content Microalgae into Bio-Crude Oil*, 2011.
- M. Ghadiryanfar, K. A. Rosentrater, A. Keyhani and M. Omid, A review of macroalgae production, with potential applications in biofuels and bioenergy, *Renewable Sustainable Energy Rev.*, 2016, **54**, 473–481, DOI: 10.1016/j.rser.2015.10.022.
- F. Abeln, J. Fan, V. L. Budarin, *et al.*, Lipid production through the single-step microwave hydrolysis of macroalgae using the oleaginous yeast *Metschnikowia pulcherrima*, *Algal Res.*, 2019, **38**, 101411.



- 19 H. Zhao, J. E. Holladay, H. Brown and Z. C. Zhang, Metal Chlorides in Ionic Liquid Solvents Convert Sugars to 5-Hydroxymethylfurfural, *Science*, 2007, **316**(5831), 1597–1600, DOI: 10.1126/science.1141199.
- 20 National Science Foundation, *Breaking the Chemical and Engineering Barriers to Lignocellulosic Biofuels: Next Generation Hydrocarbon Biorefineries*, 2008.
- 21 M. Bicker, J. Hirth and H. Vogel, Dehydration of fructose to 5-hydroxymethylfurfural in sub- and supercritical acetone, *Green Chem.*, 2003, **5**(2), 280–284, DOI: 10.1039/B211468B.
- 22 A. H. Motagamwala, K. Huang, C. T. Maravelias and J. A. Dumesic, Solvent system for effective near-term production of hydroxymethylfurfural (HMF) with potential for long-term process improvement, *Energy Environ. Sci.*, 2019, **12**(7), 2212–2222.
- 23 A. Prates Pereira, T. J. Woodman, P. Brahmabhatt and C. J. Chuck, The optimised production of 5-(hydroxymethyl)furfural and related products from spent coffee grounds, *Appl. Sci.*, 2019, **9**, 3369.
- 24 Y. Roman-Leshkov, C. J. Barrett, Z. Y. Liu and J. A. Dumesic, Production of Dimethylfuran for Liquid Fuels from Biomass-Derived Carbohydrates, *Nature*, 2007, **447**, 982–985, DOI: 10.1038/nature05923.
- 25 F. A. Kucherov, E. G. Gordeev, A. S. Kashin and V. P. Ananikov, Three-Dimensional Printing with Biomass-Derived PEF for Carbon-Neutral Manufacturing, *Angew. Chem., Int. Ed.*, 2017, **56**(50), 15931–15935, DOI: 10.1002/anie.201708528.
- 26 B. Kim, J. Jeong, S. Shin, *et al.*, Facile Single-Step Conversion of Macroalgal Polymeric Carbohydrates into Biofuels, *ChemSusChem*, 2010, **3**(11), 1273–1275, DOI: 10.1002/cssc.201000192.
- 27 S.-B. Lee, S.-K. Kim, Y.-K. Hong and G.-T. Jeong, Optimization of the production of platform chemicals and sugars from the red macroalga, *Kappaphycus alvarezii*, *Algal Res.*, 2016, **13**, 303–310, DOI: 10.1016/j.algal.2015.12.013.
- 28 G.-T. Jeong and D.-H. Park, Production of Sugars and Levulinic Acid from Marine Biomass *Gelidium amansii*, *Appl. Biochem. Biotechnol.*, 2010, **161**(1), 41–52, DOI: 10.1007/s12010-009-8795-5.
- 29 F. Kholiya, M. R. Rathod, D. R. Gangapur, S. Adimurthy and R. Meena, An integrated effluent free process for the production of 5-hydroxymethyl furfural (HMF), levulinic acid (LA) and KNS-ML from aqueous seaweed extract, *Carbohydr. Res.*, 2020, **490**, 107953, DOI: 10.1016/j.carres.2020.107953.
- 30 R. R. Gonzales, Y. Hong, J. H. Park, G. Kumar and S. H. Kim, Kinetics and equilibria of U₂hydroxymethylfurfural (U₂HMF) sequestration from algal hydrolyzate using granular activated carbon, *J. Chem. Technol. Biotechnol.*, 2016, **91**, 1157–1163.
- 31 P. Malea, A. Chatziapostolou and T. Kevrekidis, Trace element seasonality in marine macroalgae of different functional-form groups, *Mar. Environ. Res.*, 2015, **103**, 18–26, DOI: 10.1016/j.marenvres.2014.11.004.
- 32 C. Lefèvre and D. Bellwood, Seasonality and dynamics in coral reef macroalgae: Variation in condition and susceptibility to herbivory, *Mar. Biol.*, 2010, **157**, 955–965, DOI: 10.1007/s00227-009-1376-x.
- 33 C. J. Fulton, M. Depczynski, T. H. Holmes, *et al.* Sea temperature shapes seasonal fluctuations in seaweed biomass within the Ningaloo coral reef ecosystem, *Limnol. Oceanogr.*, 2014, **59**(1), 156–166, DOI: 10.4319/lo.2014.59.1.0156.
- 34 R. Ferrari, M. Gonzalez-Rivero, J. C. Ortiz and P. J. Mumby, Interaction of herbivory and seasonality on the dynamics of Caribbean macroalgae, *Coral Reefs*, 2012, **31**(3), 683–692, DOI: 10.1007/s00338-012-0889-9.
- 35 B. Jin, P. Duan, Y. Xu, F. Wang and Y. Fan, Co-liquefaction of micro- and macroalgae in subcritical water, *Bioresour. Technol.*, 2013, **149**, 103–110, DOI: 10.1016/j.biortech.2013.09.045.
- 36 A. Prates Pereira, T. Dong, E. P. Knoshaug, N. Nagle, R. Spiller, B. Panczak, C. J. Chuck and P. T. Pienkos, An alternative biorefinery approach to address microalgal seasonality: blending with spent coffee grounds, *Sustainable Energy Fuels*, 2020, **4**(7), 3400–3408.
- 37 *Coffee: World markets and trade, 2019/20 Forecast Overview*, United States Department of Agriculture, Foreign Agricultural Service, December 2019.
- 38 J. Massaya, A. Prates-Pereira, B. Mills-Lampsey, J. Benjamin and C. J. Chuck, Conceptualization of a spent coffee grounds biorefinery: a review of existing valorisation approaches, *Food Bioprod. Process.*, 2019, **118**, 149–166.
- 39 F. Menegazzo, E. Ghedini and M. Signoretto, 5-Hydroxymethylfurfural (HMF) Production from Real Biomasses, *Molecules*, 2018, **23**(9), 2201, DOI: 10.3390/molecules23092201.
- 40 W. Wang, A. Mittal, H. Pilath, X. Chen, M. P. Tucker and D. K. Johnson, Simultaneous upgrading of biomass-derived sugars to HMF/furfural *via* enzymatically isomerized ketose intermediates, *Biotechnol. Biofuels*, 2019, **12**(1), 253, DOI: 10.1186/s13068-019-1595-4.
- 41 S. Van Wychen and L. M. L. Laurens, *Determination of Total Carbohydrates in Algal Biomass: Laboratory Analytical Procedure (LAP)*, 2016.
- 42 H. Yaich, H. Garna, S. Besbes, M. Paquot, C. Blecker and H. Attia, Chemical composition and functional properties of *Ulva lactuca* seaweed collected in Tunisia, *Food Chem.*, 2011, **128**(4), 895–901, DOI: 10.1016/j.foodchem.2011.03.114.
- 43 S. V. Khotimchenko, Fatty acids of brown algae from the Russian far east, *Phytochemistry*, 1998, **49**(8), 2363–2369, DOI: 10.1016/S0031-9422(98)00240-4.
- 44 J. M. R. Gallo, D. M. Alonso, M. A. Mellmer and J. A. Dumesic, Production and upgrading of 5-hydroxymethylfurfural using heterogeneous catalysts and biomass-derived solvents, *Green Chem.*, 2013, **15**(1), 85–90, DOI: 10.1039/C2GC36536G.
- 45 F. Liu, S. Sivorthaman and Z. Tan, Solvent extraction of 5-HMF from simulated hydrothermal conversion product, *Sustainable Environ. Res.*, 2014, **24**(2), 149–157.
- 46 R. B. Madsen, H. Zhang, P. Biller, A. H. Goldstein and M. Glasius, Characterizing Semivolatile Organic Compounds of Biocrude from Hydrothermal Liquefaction of Biomass, *Energy Fuels*, 2017, **31**(4), 4122–4134, DOI: 10.1021/acs.energyfuels.7b00160.

