Catalysis Science & Technology



PAPER View Article Online
View Journal | View Issue



Cite this: *Catal. Sci. Technol.*, 2022, **12**, 4243

Tuning the catalytic acidity in Al₂O₃ nanofibers with mordenite nanocrystals for dehydration reactions†

M. A. Rodriguez-Olguin, (1) ‡ R. N. Cruz-Herbert, ‡ H. Atia, M. Bosco, de E. L. Fornero, (1) df R. Eckelt, D. A. De Haro Del Río, * A. Aguirre, (1) * A. J. G. E. Gardeniers (1) * a and A. Susarrey-Arce (1) * a

Alumina (Al_2O_3) is one of the most used supports in the chemical industry due to its exceptional thermal stability, surface area, and acidic properties. Mesoscopic structured alumina with adequate acidic properties is important in catalysis to enhance the selectivity and conversion of certain reactions and processes. This study introduces a synthetic method based on electrospinning to produce Al₂O₃ nanofibers (ANFs) with zeolite mordenite (MOR) nanocrystals (hereafter, hybrid ANFs) to tune the textural and surface acidity properties. The hybrid ANFs with electrospinning form a non-woven network with macropores. ANF-HMOR, i.e., ANFs containing protonated mordenite (HMOR), shows the highest total acidity of ca. 276 µmol q⁻¹ as determined with infrared spectroscopy using pyridine as a molecular probe (IR-Py). IR-Py results reveal that Lewis acid sites are prominently present in the hybrid ANFs. Brønsted acid sites are also observed in the hybrid ANFs and are associated with the HMOR presence. The functionality of hybrid ANFs is evaluated during methanol dehydration to dimethyl ether (DME). The proof of concept reaction reveals that ANF-HMOR is the more active and selective catalyst with 87% conversion and nearly 100% selectivity to DME at 573 K. The results demonstrate that the textural properties and the acid site type and content can be modulated in hybrid ANF structures, synergistically improving the selectivity and conversion during the methanol dehydration reaction. From a broader perspective, our results promote the utilization of hybrid structural materials as a means to tune chemical reactions selectively.

Received 21st January 2022, Accepted 10th May 2022

DOI: 10.1039/d2cy00143h

rsc.li/catalysis

Introduction

Al₂O₃ in heterogeneous catalysis has been used to support alkali metals, noble metals, and metal oxides with a wide range of applications in biomass upgrading, the oil industry, and the automotive sector.¹⁻⁸ Such a wide range of applications is due to the various Al₂O₃ polymorphs, ^{9,10} each with unique properties, such as thermal stability, acidity, and high specific surface area, targeted for specific reactions. ¹¹⁻¹⁶ Besides the current synthetic approaches in Al₂O₃, ¹⁶⁻²⁴ structuring of mesoscopic scale Al₂O₃ remains a challenge. Typical methods to structure Al₂O₃ are extrusion, ⁸ injection molding, ²⁵ and 3D printing. ^{25,26} These methods aim to improve reaction rates *via* mass transfer and diffusivity by varying the Al₂O₃ geometries. Although such Al₂O₃ structures are often relevant in catalysis, sufficient attention should be paid to the chemical properties of Al₂O₃, such as the nature of the acid sites to promote acidity in structural acid catalysts.

Electrospinning is a convenient method that provides sufficient versatility to optimize chemical properties in structured materials.^{27–36} The method produces nanofiberlike structures formed during the withdrawal of a jet from a droplet subjected to an external electric field, which later is deposited over a collector plate for further treatment.^{37–39} Although the approach has been primarily used in the biomedical field,⁴⁰ it is increasingly used for energy storage,

^a Mesoscale Chemical Systems, MESA+ Institute, University of Twente, PO. Box 217, 7500AE, Enschede, The Netherlands. E-mail: j.g.e.gardeniers@utwente.nl, a.susarreyarce@utwente.nl

^b Universidad Autónoma de Nuevo León, Facultad de Ciencias Químicas, Pedro de Alba S/N, San Nicolás de los Garza, Nuevo León, 64455, Mexico. E-mail: david.dharodlr@uanl.edu.mx

^c Leibniz Institute for Catalysis, Albert-Einstein-Straße 29a, D-18059, Rostock, Germany

^d Instituto de Desarrollo Tecnológico para la Industria Química (INTEC), Universidad Nacional del Litoral, CONICET, Güemes 3450, S3000GLN, Santa Fe, Argentina. E-mail: aaguirre@santafe-conicet.gov.ar

^e Facultad de Ingeniería Química, Universidad Nacional del Litoral (UNL), Santiago del Estero 2829, Santa Fe, 3000, Argentina

^fFacultad de Ingeniería en Ciencias Hídricas, UNL, Ciudad Universitaria, Ruta Nacional № 168 - Km 472,4, 3000 Santa Fe, Argentina

 $[\]dagger$ Electronic supplementary information (ESI) available. See DOI: https://doi.org/10.1039/d2cy00143h

[‡] These authors contributed equally to this work.

energy conversion, and catalysis. 41-43 In the past, ceramic materials, including alumina, have been subject to modifications that have led them to have one-dimensional configurations, such as nanofibers. 44 arrangements have attracted attention due to the unique functionalities provided by nanofibers, for example, high mechanical strength, high surface-area/weight ratio, chemical composition, and stability. 44-46 Recently, M. A. Rodriguez-Olguin et al.43 demonstrated that the acid site content can be enhanced in ANFs. The authors use various aluminum precursors during electrospinning. From precursor assessment, aluminum di(sec-butoxide) acetoacetic ester chelate (ASB) is identified as an ideal precursor for obtaining ANFs with a large amount of weak strength Lewis medium acid sites Furthermore, ASB chelate promotes mesopores of 2-50 nm in size. 47-51 Macropores (i.e., >50 nm), especially relevant in catalysts, can also be observed between the fiber-tofiber interspaces. 43 From this perspective, it is fair to say that the benefit of nanofibers relies on their hierarchy having multiple levels of porosity that combine meso/

Similarly, multilevel porosity can be found in hierarchical catalysts, such as zeolites. Zeolites have pore sizes ranging from micropores to mesopores and macropores. 52-54 These pores are composed of Si and Al atoms coordinated with oxygen, forming channel networks of diverse sizes. However, if the zeolite pores are too small, the reaction might be diffusion or mass transport limited. Synthetic methods to increase the availability of meso/macropores have been established to reduce transport issues. A widely applied approach in zeolites is leaching.⁵⁵ However, leaching involves several synthetic steps that are composition and zeolite type dependent. An interesting alternative is providing structure to existing catalysts, such as zeolites. Zeolites are compatible with synthetic approaches, such as electrospinning.56-62 A key aspect of electrospinning is that it can facilitate the formation of macropores without limiting mesopore formation.43

Reports have demonstrated advantages for shaped zeolites as either single or hollow nanofibers. 56,57 This includes crystalline fibers of zeolite Y,58,59 ZSM-5,60,61 and SUZ-4.62 Other approaches used to structure zeolites involve templates or zeolite mixtures with more materials to create composites. For example, F. Ocampo et al. 63 developed a multimodal pore size distribution using a zeolite and a glass monolith. The authors demonstrate the HZSM-5/glass monolith functionality during n-hexane cracking. Following a similar concept, zeolite Y, MFI, or beta on α-SiC foams, carbon nanotubes, or TiO2 nanofibers have been synthesized and tested during a catalytic reaction.⁶⁴⁻⁶⁶ From the previous examples, MOR shaped as nanofibers or MOR composites within a nanofiber are limited but increasingly recognized as an effective way to enhance the conversion and selectivity in chemical reactions, such as CO2 methanation using a silica MOR composite.67

The rationale behind using MOR in structured materials as a composite is to find more dimensionally refined systems that allow easy access to molecules to adsorb, react and desorb over LASs and Brønsted acid sites (BASs). 68 This is the case for acid catalysts, widely used for alcohol dehydration reactions, such as methanol dehydration to DME. 69,70 An accepted mechanism for the mentioned reaction occurs with the adsorption of the alcohols over a LAS or BAS, and an adjacent LAS forming two species, which produce DME and water upon condensation.⁷¹ However, in this reaction, a tradeoff between the LAS and BAS strength has to be found because it can significantly alter methanol dehydration products.⁷² It is generally accepted that the DME synthesis preferably proceeds on a solid acid catalyst with weak and moderate acidic sites. For strong BASs commonly found in MOR, 73,74 a considerable amount of side-products can be formed. The products consist predominantly of hydrocarbons or coke, which affect the selectivity and lifespan of the catalyst. An alternative that can compensate for high BAS contents is a composite, for example, MOR with Al₂O₃ shaped as nanofibers. 75 Al₂O₃ (ref. 76-81) is a known catalyst used to dehydrate methanol and produce DME by following a proposed mechanism based purely on LASs. 82,83 From this perspective, a synergy between acid catalysts containing LASs and BASs has to be found to tune chemical reactions like DME synthesis selectively.

The present work synthesized nanofibers composed of amorphous Al₂O₃ and MOR with electrospinning. The synergy of MOR and amorphous Al₂O₃ is demonstrated by comparing hybrid ANFs with Al₂O₃ shaped as nanofibers. The added value of the structured fibers is assessed by comparing hybrid ANFs against Al₂O₃ and MOR without a nanofiber shape. Structural and morphological analysis indicates the presence of MOR in the ANFs. Textural analysis corroborates our findings, where a decrease in the surface area for hybrid fibers is observed. Furthermore, hybrid ANFs show the highest acidity as determined with IR-Py. The acid sites present in the hybrid ANFs are LASs and BASs, while for the control samples of Al₂O₃, only LASs have been found. The functionality of hybrid ANFs is assessed during methanol dehydration to DME as a proof of concept reaction. The results reveal a synergetic effect between Al2O3 and MOR in the nanofibers and demonstrate the added value of hybrid materials in chemical reactions.

Methodology

Microwave-assisted zeolite synthesis

Microwave-assisted hydrothermal synthesis was carried out to produce NaMOR nanocrystals. Colloidal silica (Ludox HS-40, 40% w/w, Aldrich), Al(OH)₃ (98%, Aldrich), and NaOH (98%, Sigma-Aldrich) were used as precursors to obtain an initial gel with a ratio of 6 NaOH:Al₂O₃:30 SiO₂:780 H₂O. In a typical run, 1.6 g of Al(OH)3 was dissolved in 2.2 g of NaOH (98%, Sigma-Aldrich) and 61 g of deionized water. Then, 11.4 g of colloidal silica was added until complete dissolution,

and 3 g of MOR nanocrystals from Zeolyst were used as seeds to enhance the crystallization rate. The resulting suspension was stirred for 1 h at 450 rpm. After, the obtained gel was placed in a Teflon autoclave that was put in a Milestone Flexiwave microwave. The crystallization conditions followed a ramp of 20 K min⁻¹ to reach 453 K and used 600 W as the maximum power for a synthesis time of 1 h. This strategy allows the reduction of the synthesis time that has traditionally been reported from 24-48 h. Finally, the material was recovered by filtration, washed to a pH lower than 9, and dried at 343 K for 24 h in air. The final Si/Al ratio as determined with EDX is 10.5 for all NaMOR nanocrystals, which are then used during the ionic exchange (see below).

Protonation of zeolite mordenite

The protonation of the NaMOR nanocrystals is followed by post-treatment using 1 M NH₄NO₃ (ACS grade, Sigma Aldrich) solution in deionized water. First, NaMOR nanocrystals were dispersed in NH₄NO₃ solution, 1 g of solid per 10 ml of solution, and stirred at 353 K for 2 h. Then, the material was washed and filtered once the time had elapsed. The product obtained was dried at 373 K in air for 12 h, and once the time has expired, the ion exchange was repeated 3 times. At the end of the ion exchanges, the samples were calcined at 773 K for 3 h in air. The material obtained was labeled HMOR.

Hybrid fiber synthesis

The hybrid ANFs containing either NaMOR or HMOR were by electrospinning using a electrospinning system from IME Technologies (The Netherlands). The IME system was operated utilizing a stainless-steel needle of 0.4 mm inner diameter at a separation distance of 12 cm from the aluminum collector plate. First, a mixture consisting of 4% p/v C₁₄H₂₇AlO₅ (ASB) technical grade from Alpha Aesar, polyvinylpyrrolidone (PVP, MW ~1300000), and 0.26% p/v t-octylphenoxypolyethoxyethanol (Triton ×100, Sigma-Aldrich) dissolved in ethanol (100% Tech. grade, BOOM B.V., The Netherlands) was used as the aluminum precursor solution to generate ANFs. To make the hybrid ANFs, the synthesized NaMOR or HMOR nanocrystals were incorporated into the ASB solution, reaching a final concentration of 0.33% p/v in each case. The prepared solutions were electrospun at environmental temperature and humidity using a potential of 18 kV at an 8 mL h⁻¹ infusion rate. After fiber deposition, all-fiber samples were dried in an oven at 353 K for 12 h to remove the excess solvent. Subsequently, they were calcined (Nabertherm LH 15/12) in air with a temperature ramp of 0.5 K min⁻¹ to 623 K for 3 h and then 1 K min⁻¹ until reaching 773 K for 4 h to ensure the production of amorphous alumina.43 Hereafter, the obtained hybrid ANFs are named ANF-NaMOR and ANF-HMOR for simplicity. It should be noted that commercial MOR (CBV 10A, Zeolyst) was also used following the previously described hybrid nanofiber preparation. Control samples of particulate alumina (Al₂O₃- NP) and particulate alumina containing HMOR (Al₂O₃-HMOR-NP) were prepared by dropcasting using the same ASB, NaMOR, HMOR precursor solutions in crucibles. These samples were annealed following the same procedure as ANF-NaMOR and ANF-HMOR samples.

Characterization

Morphological characterization

High-resolution (HR)-SEM images of samples were taken using a Zeiss MERLIN SEM microscope operated at 1.40 kV coupled with a high-efficiency secondary electron detector (HE-SE2). SEM-scanning transmission electron microscopy (STEM) was performed at 20 kV. Prior to STEM analysis, samples were sonicated in ethanol, which led to the fragmentation of the fibers into smaller fiber pieces.

Structural characterization

The crystalline structure of NaMOR and HMOR nanocrystals was analyzed with a Siemens (D5000, E04-0012 series) diffractometer, using CuK α radiation ($\lambda = 1.5418 \text{ Å}$) operated at 35 kV, 25 mA, in the 2θ range between 5 and 50°, employing a step size of 0.02° min⁻¹ and a step time of 4 s. The hybrid fibers were analyzed by X-ray powder diffraction (D2 PHASER, Bruker) using Cu K α radiation ($\lambda = 1.5418 \text{ Å}$) operated at 30 kV, 10 mA, in the 2θ range between 7 and 45°, employing a step size of 0.05° and a scan speed of 0.1° s⁻¹. A Si low background sample holder (Bruker) was used for the hybrid samples.

Chemical characterization

X-ray photoelectron spectroscopy (XPS) general survey analysis was performed with a Quantera SXM machine from Physical Electronics using monochromated Al Kα (1486.6 eV). All samples were fixed in a stainless-steel holder. A low energy electron flood gun was used to supply the missing photo- and Auger electrons. The electron binding energies were referenced to aliphatic carbon C 1s at 284.8 eV. The obtained peak analysis was made using the PHI Multipak V9.9.0.8 software (Physical Electronics, Inc.).

Textural analysis

The BET surface area, pore-volume, and pore diameter of the samples were determined from the nitrogen adsorption/ desorption isotherms at 77 K on a Micrometrics ASAP 2010 instrument. Before the measurement, each sample was evacuated at 473 K for 4 h. The pore size distributions were calculated from the desorption branch of the isotherm using the Barrett-Joyner-Halenda (BJH) model.⁵⁴

NH₃-TPD

To determine the total acidity properties of the samples, NH₃-TPD analysis was performed using a Micromeritics Autochem II 2910 instrument. Prior to NH₃ adsorption, 150 mg of the sample was loaded into a U-shaped quartz reactor

and heated from RT to 673 K with 10 K min⁻¹ in a flow of He (50 ml min⁻¹), held for 30 min at 673 K (to remove any adsorbed species on the surface). After that, the reactor was cooled to 373 K. The sample was saturated with 1% NH₃ in He (50 ml min⁻¹) for 120 min at 373 K, followed by helium flushing (50 ml min⁻¹) for 60 min at 373 K to remove physisorbed NH₃. The sample was then heated to 1073 K at a rate of 10 K min⁻¹ in He flowed (50 mL min⁻¹) and held at 1073 K for 30 min for NH3 desorption. The effluent gases were analyzed with a quadrupole mass spectrometer (Balzers Omnistar) using m/z = 15.

IR measurements and pyridine adsorption

The nature and strength of acid sites were determined through pyridine (Py) adsorption over the materials and subsequent temperature-programmed desorption (TPD-Py). The samples were analyzed with IR spectroscopy through in situ transmission on self-supported wafers (10–15 mg, 13 mm in diameter) pressed at 5 t cm⁻² (490 MPa). The wafers were placed in a Pyrex IR cell fitted with water-cooled NaCl windows. More details of the experimental setup can be found elsewhere.84 Before the adsorption experiments, each sample was pretreated in situ at 723 K (10 K min⁻¹) for 30 min under a N₂ flow (50 sccm), then cooled down to 303 K, and the reference IR spectra of the "clean wafer" were taken. The samples were exposed to a flow of N₂ containing evaporated Py. The physisorbed Py was further removed under flowing N2 until the spectra of the adsorbed Py remained stable (about 60 min). The thermal desorption of Py was measured from 303 K to 723 K with 5 K min⁻¹ in a flow of N₂ (50 ml min⁻¹). The spectra were acquired with a Nicolet Magna 550 FTIR spectrometer with a cryogenic MCT detector (4 cm⁻¹ resolution, 25 scans). The gas used in this study was high purity grade N2 (INDURA UHP 99.999%) and was further purified through molecular sieves (3 Å), and MnO/Al2O3 traps to remove water and oxygen impurities, respectively.

Catalytic test

The synthesized materials were tested for the dehydration of methanol to dimethyl ether (DME) between 423 and 723 K (heating ramp of 1 K min⁻¹) in a fixed bed glass tubular microreactor (i.d. = 5.3 mm). The reactor was loaded with 50 mg of catalyst diluted (1:5) with milled quartz (200 mesh). The methanol concentration was 7% v/v in Ar obtained from a gas saturator filled with pure methanol immersed into a thermostatic bath. The total flow rate was set to 20 mL min⁻¹, giving a weight hourly space velocity (WHSV) of 2.3 $g_{methanol}$ g_{cat}^{-1} h^{-1} . The pipelines were heated to prevent methanol and product condensation. Before the catalytic test, the samples were pretreated at 673 K under a flow of Ar (50 mL min⁻¹) for 1 h. The outlet gas stream was analyzed continuously with a mass spectrometer Prisma QMG220 (Pfeiffer). The following mass/charge signals were recorded:

2(H₂), 16 (CH₄), 18 (H₂O), 28 (CO), 29, 31 and 32 (methanol), 40 (Ar), 44 (CO₂), 45 (DME), and 58 and 59 (olefins).

Results and discussion

Hybrid ANFs containing MOR

The synthesis of the hybrid ANFs started by selecting the MOR crystallite size. Commercial NaMOR, which has an average crystallite size of 220 nm (Fig. S1a†), has been used during electrospinning. However, it is found that this leads to severe heterogeneity after annealing (Fig. S1b†). This heterogeneity is attributed to the relatively large (compared to the nanofiber dimensions) crystallite size of NaMOR, which upon annealing, promotes nanofiber instability leading to hybrid ANFs with an irregular shape (Fig. S1b†). In contrast to the commercial NaMOR, the synthesized NaMOR shown in Fig. S2† has smaller crystallite sizes ranging between 110 and 118 nm. The crystallite size is nearly half of the nanofiber diameter. From the results, small MOR crystallites can lead to less heterogeneity in ANFs, as shown in Fig. 1. In this figure, the hybrid ANFs (Fig. 1c and e) retain their nanofiber shape, similar to ANFs in Fig. 1a that show a non-woven fiber morphology. The estimated nanofiber diameters are 321 \pm 74 nm for ANFs, 315 \pm 120 nm for ANFs containing NaMOR (ANF-NaMOR), and 241 ± 76 nm for ANFs containing HMOR (ANF-HMOR).

A detailed structural analysis using dark-field STEM images is also presented in Fig. 1b, d and f to provide insights into the morphology of hybrid ANFs. From the images, less dense ANF nanofibers are found in Fig. 1b. The effect becomes evident at the edges of the ANFs, with small pore openings (see yellow arrows). In contrast, STEM images of ANF-NaMOR and ANF-HMOR in Fig. 1d and f show denser areas at the borders and center of the fiber structure, possibly due to MOR nanocrystals inside the fibers, which could act as a 'filler' material densifying the nanofibers. It should be noted that the high amount of broken fibers is due to the sonication used during specimen preparation for STEM. To this end, EDS mapping in Fig. S3† is used to verify the hybrid nanofiber constitution and generate insights into the MOR distribution by looking at the silicon Kα1 signal. The silicon signal has been found in the non-woven structure and specific densified areas.

The chemical composition at the surface of the hybrid ANFs from Fig. 1 is analyzed with XPS to determine the types of species present on the hybrid ANFs (Fig. S4 and Table S1†). In short, elemental analysis with XPS in Table S1† reveals the nitrogen presence in MOR. The results suggest that NH4+ has exchanged with NaMOR to form the acidic form of MOR after calcination. Temperature desorption carried out for HMOR demonstrates that at 773 K, NH₄+ could be retained at the catalyst.85 For temperature 823 K, the NH₄⁺ in the form of NH₃ has not been detected.⁸⁵ For ANF-HMOR in Table S1,† no nitrogen has been observed. NH3-TPD is carried out for ANF-NaMOR and ANF-HMOR to demonstrate an increase in acidity in ANF-HMOR, most

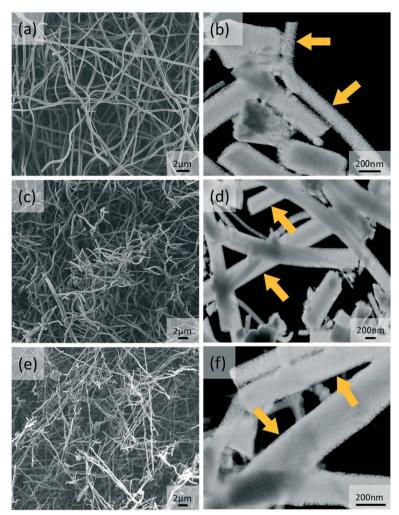


Fig. 1 SEM and dark-field STEM images of (a and b) ANFs, (c and d) ANF-NaMOR and (e and f) ANF-HMOR. The yellow arrows highlight the pore openings in the fibers.

probably from HMOR. In this case, ANF-NaMOR is used as a control. ANF-NaMOR has 112 µmol g⁻¹ NH₃ desorbed, whereas ANF-HMOR has 216 $\mu mol~g^{-1}$ NH $_3$ desorbed. The general survey of the nanofibers revealed only the presence of aluminum and oxygen. Therefore, we can ensure that neither the ANFs nor hybrid fibers contain impurities from the electrospun precursors. Additionally, to verify the MOR

content in ANFs, XRD is performed. The XRD patterns of NaMOR and HMOR nanocrystals and the hybrid ANFs are presented in Fig. 2. First, we investigate the crystallographic features of NaMOR before and after ion exchange with NH₄⁺. The XRD patterns of NaMOR and HMOR are presented in Fig. 2a. The XRD pattern for NaMOR shows diffraction peaks at $2\theta = 9.8^{\circ}$ (200), 13.5° (111), 19.7° (330), 22.3° (150), 25.7°

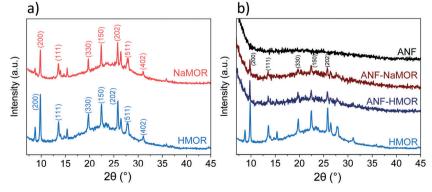


Fig. 2 XRD patterns of a) bare NaMOR and HMOR nanocrystals and b) ANFs, ANF-NaMOR, and ANF-HMOR.

Paper

(202), 26.4° (350), 27.7° (511), and 31.0° (402) which match with those for MOR in the MOR ($2\theta = 9.8^{\circ}$, 13.5° , 19.6° , 22.3°, 25.7°, 26.3°, 27.5°, and 30.9°).86-88 HMOR presents similar diffraction peaks to NaMOR ($2\theta = 9.8^{\circ}$, 13.5° , 19.7° , 22.4°, 25.7°, 26.4°, 27.7°, and 31°). No other crystallographic phases are observed for both samples. Fig. 2b compares the HMOR nanocrystals with ANF-NaMOR and ANF-HMOR hybrid fibers. In the same figure (Fig. 2b), the XRD pattern of the nanofibers is presented. No crystalline phase has been observed for the ANF sample, confirming the amorphous characteristic of ANFs. ANF-NaMOR and ANF-HMOR diffractograms present peaks that correspond to MOR (Fig. 2a). No other crystallographic phases for the hybrid ANFs are observed.

The effect of MOR has been observed in Fig. 1 with more densified hybrid nanofibers. The presence of MOR in the hybrid fibers became evident with the XRD analysis in Fig. 2. However, an essential aspect is understanding how MOR affects the surface area in the nanofibers. In Table 1, the total surface area of the nanofibers is presented. From the produced catalysts, ANFs possess the highest surface area (192 m 2 g $^{-1}$), followed by hybrid ANF-HMOR (121 m 2 g $^{-1}$) and ANF-NaMOR (107 m² g⁻¹). The reason for a reduced surface area for nanofibers is that NaMOR or HMOR might block the pore accessibility in ANFs. 54,89,90

To generate insights into the pore distribution for ANFs with and without MOR, the analysis of the BET isotherms is presented in Fig. 3. For ANFs, ANF-NaMOR, and ANF-HMOR in Fig. 3a, adsorption-desorption isotherms showed hysteresis loops in the multilayer step, which is associated with capillary condensation type IV isotherms for mesopores with H2 hysteresis according to the IUPAC classification.⁹¹ The hysteresis loop is characteristic of mesoporous materials with cage-like pores or pores with constrictions at the pore opening. 92,93 The pore distribution plots are presented in Fig. 3b and revealed a wide distribution of pore bodies, with a major pore width distribution around 6 nm for ANFs and hybrid ANFs with NaMOR and HMOR. Fig. 3b shows that ANFs have the highest mesopore and incremental pore volume, followed by ANF-HMOR and ANF-NaMOR. This indicates that MOR modifies the textural properties of ANFs by decreasing the number of pore bodies. The results agree with STEM images in Fig. 1b, d, and f.

Taking the results from the ANFs and hybrid ANFs together, the effect of structuring should be compared with

Table 1 Fiber diameter, surface area, pore size, and total acidity of ANFs, ANF-NaMOR, ANF-HMOR, Al₂O₃-NP, and Al₂O₃-HMOR-NP

Sample	Surface area (m² g ⁻¹)	Total acidity at 373 K (μ mol g ⁻¹)	Total acidity at 373 K (μmol m ⁻²)
ANFs	192	178	0.9
ANF-NaMOR	107	116	1.1
ANF-HMOR	121	276	2.3
Al ₂ O ₃ -NP	162	255	1.6
Al ₂ O ₃ -HMOR-NP	94	184	2.0

the same type of catalyst but without a nanofiber shape, as shown in Fig. S5.† The Al₂O₃-NP and Al₂O₃-HMOR-NP control samples have been produced using the same alumina and HMOR precursors. The total surface areas of Al₂O₃-NP and Al₂O₃-HMOR-NP are presented in Table 1. This table shows a decrease in the surface area of approximately 30 m² g⁻¹ for Al₂O₃-NP compared to the ANF counterpart. Similar results are observed for Al₂O₃-HMOR-NP and the hybrid ANF-HMOR. We hypothesize that the ANFs are less prone to sintering due to restriction of the growth of crystals in the fibers (by confinement) and thus present a higher surface area, as shown in Table 1. When comparing the BET isotherms, variations between Al₂O₃-NP or Al₂O₃-HMOR-NP are observed. In this case, the type IV adsorption-desorption isotherm shape with an H3 hysteresis loop has been found for Al₂O₃-NP and Al₂O₃-HMOR-NP (Fig. 3a). Here, the sharp increase at high P/P_0 (0.85–0.99) suggests the presence of aggregated slitshaped pores, which may originate from the interparticle voids. For isotherms with a hysteresis loop at high P/P_0 , it is likely to observe a wide pore size distribution, 94-97 as observed in the inset in Fig. 3b. The pore size corresponds to Al₂O₃-NP, and Al₂O₃-HMOR-NP is 9 nm, similar to the hybrid ANFs. These results might indicate that the hybrid ANFs also provide access for the diffusion of N2 molecules, most probably due to the fiber network.⁴³

Pyridine (Py) is used as a probe molecule to determine the nature of the acid sites (i.e., either LASs or BASs).98 In Fig. 4a and b, the FTIR spectra of Py adsorbed at 303 K are presented. The samples composed of alumina (mainly ANFs and Al₂O₃-NP), Al₂O₃-HMOR-NP, and hybrid alumina (ANF-NaMOR and ANF-HMOR) present an intense band at 1446, 1577, and 1614 cm⁻¹. In the case of MOR (NaMOR and HMOR) used for comparison, these peaks are weaker. These bands are attributed to Py adsorbed on LASs, produced by uncoordinated Al3+ or cation vacancies.99 The signal at 1545 cm⁻¹ corresponds to Py adsorbed on BASs (PyH⁺) (Fig. 4b). Among the MOR samples, only HMOR shows an IR band at 1545 cm⁻¹. This band confirms that HMOR, ANF-HMOR, and Al2O3-HMOR-NP contain BASs. The results help to validate the presence of HMOR in the ANFs. NaMOR and ANF-NaMOR do not reveal BASs, and thus, are not tested during DME production. Interestingly, it should be noted that for all samples, two peaks close to 1594 cm⁻¹ and 1491 cm⁻¹ are present and are assigned to hydrogen-bonded Py and Py adsorbed on both LASs and BASs. 100

We continued with Py-TPD analysis to determine the amount and the strength of LASs and BASs from Fig. 4. Py-TPD in Fig. 5 shows the LAS and BAS density (expressed in μmol g⁻¹) as a function of temperature, estimated using the 1446 cm⁻¹ and 1545 cm⁻¹ IR bands, where the band at 1446 cm⁻¹ is used to estimate the total amount of LASs. Several authors 101-103 showed that the integrated molar extinction coefficients of LASs do not depend on the nature of oxides, the structure, and the strength of acid sites. Therefore, Emeis's 101 averaged extinction coefficients of Py adsorption on LASs (2.22 cm μmol⁻¹) and BAS (1.67 cm μmol⁻¹) are used

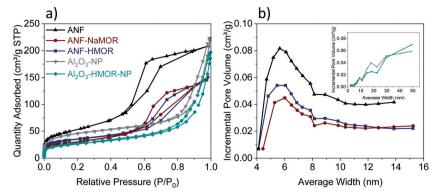


Fig. 3 (a) Adsorption-desorption isotherms and (b) pore size distribution for ANFs, ANF-NaMOR, ANF-HMOR, Al₂O₃-NP, and Al₂O₃-HMOR-NP.

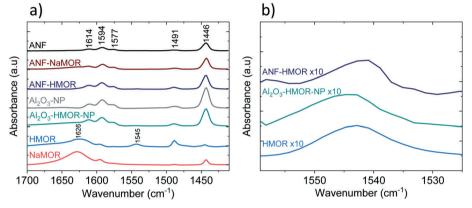


Fig. 4 FTIR spectra after Py adsorption at 303 K. a) Full Py range. b) Detailed Py spectra highlighting the BAS band.

to quantify the number of sites. For BASs, the IR band at 1545 cm⁻¹ is used for quantification.

From Fig. 5a, at 303 K, the hybrid ANF-HMOR has the highest LAS content. This can be correlated to the presence of HMOR. Contrary to ANF-HMOR, ANF-NaMOR shows the lowest LAS concentration, probably because the NaMOR blocks the acid sites of the nanofibers. Lastly, the LAS content remains also low in ANFs. In Fig. 5a, the experiments demonstrate that the LAS content in ANF-HMOR remains higher than that in Al₂O₃-NP, Al₂O₃-HMOR-NP, or MOR, as shown in Fig. 5b. A possible explanation for ANF-HMOR is that incorporating modifiers on alumina (e.g., HMOR) might promote dealumination, leading to the formation of multiple Al species. Along with HMOR, such Al species can increase the amount of LASs. 104,105 The results indicate that structured hybrid systems, such as ANF-HMOR, can achieve high acidity, even higher than unstructured acid catalysts (Fig. 5b). The rationale behind our observations is that the nanofiber structure can help densify the acid sites and provide better access to molecules (such as Py), which might be challenging in unstructured acid catalysts (Fig. S5†). Furthermore, Py-TPD reveals that Py desorbs relatively fast from LASs at low temperatures (300-350 K), indicating the presence of weak acid sites (Fig. 5a). At temperatures higher than 350 K, there is a slight decrease in Py desorption, most probably due to the presence of medium and strong acid sites.43 Interestingly, after 500 K, all the alumina-modified samples retain similar LASs, except for ANF-HMOR, where Py is still adsorbed at 700 K, suggesting the presence of strongly adsorbed Py species over LASs. The results in Fig. 5a and b (also shown in Table 1) confirm that hybrid ANF-HMOR is the most acidic catalyst (276 µmol g⁻¹), followed by ANFs (178 μ mol g⁻¹) and ANF-NaMOR (116 μ mol g⁻¹).

In Fig. 5c, HMOR presents the highest BAS density. Py starts desorbing at 400 K and remains adsorbed until 723 K, which means it has the highest Brønsted acid strength. Hybrid ANF-HMOR and Al₂O₃-HMOR-NP present lower BAS density due to the lower amount of HMOR. BASs disappear at 460 K in both cases, indicating that sites have a lower BAS strength. It is important to mention that although Py desorption occurs in Fig. 5, the acid sites remain present and can help to catalyze reactions, such as methanol dehydration to DME.

The amount of BASs and LASs for three different temperatures (303, 373, and 423 K) from Fig. 5 is shown in Table 2. In Table 2, ANF-HMOR has the highest acidity and LAS/BAS ratios at 303 K and 373 K, except at 423 K. At 423 K, the BAS content is slightly high for ANF-HMOR (9 μmol g⁻¹) and is reflected in Table 2. Overall, Fig. 5 shows that incorporating MOR in alumina modulates the acid site amount and nature.

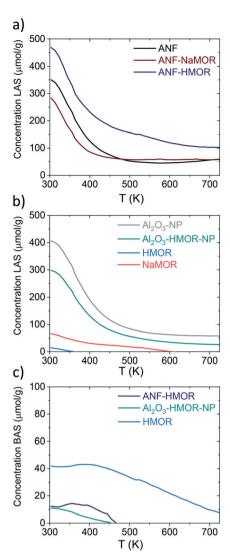


Fig. 5 Py-TPD for ANFs, ANF-NaMOR, ANF-HMOR, Al₂O₃-NP, Al₂O₃-HMOR-NP, HMOR, and NaMOR. In a and b) LASs (μ mol g⁻¹) and c) BASs (μ mol g⁻¹) are shown for various samples.

Methanol dehydration to DME

The methanol dehydration to DME is assessed as a proof of concept reaction to underline the functionality of the hybrid nanofibers. Fig. 6a shows the methanol conversion of ANFs, ANF-HMOR, Al₂O₃-NP, Al₂O₃-HMOR-NP, and HMOR over a temperature range of 423 and 673 K. From these catalysts,

HMOR starts converting the methanol at lower temperatures (<423 K) compared to Al₂O₃-NP and ANFs. However, for temperatures higher than 523 K, the alumina materials are very active and reach the equilibrium conversion at ca. 613 K (Al₂O₃-NP) and 648 K (ANFs). At 673 K, ca. 38% of conversion is reached for HMOR, while for Al₂O₃-NP and ANFs, the conversion is ca. 90%. Note that the measured conversion corresponds to the equilibrium conversion. The low conversion of HMOR can be related to the low amount of acid sites over the explored temperature range shown in Fig. 5 and 6a.

A comparison between Al₂O₃-NP and ANFs is also assessed. Al₂O₃-NP is more active than the ANFs, probably due to the higher amount of acid sites per weight of catalysts. Interestingly, the hybrid ANF-HMOR is more active than the Al₂O₃-NP and ANFs. This includes the light-off curves of ANF-HMOR and Al₂O₃-HMOR-NP, which are very similar. Such similarities include the methanol conversion temperature, which starts at 473 K and reaches the equilibrium conversion at ca. 598 K. However, variations in the DME signal intensity are observed in Fig. 6b for ANF-HMOR and Al₂O₃-HMOR-NP. In this case, the results indicate that ANF-HMOR is more selective (Table 3) to DME than the other acid catalysts.

It is then important to compare the conversion (Fig. 6a) and selectivity (Table 3) at 573 K for ANF, ANF-HMOR, Al₂O₃-NP, Al₂O₃-HMOR-NP, and HMOR. ANF-HMOR remains the highest in Fig. 6a and Table 3, followed by Al₂O₃-HMOR-NP, Al₂O₃-HMOR-NP, Al₂O₃-NP, and HMOR. The temperature at 50% conversion (T_{50}) and DME selectivity are also shown in the same table. Again, ANF-HMOR retains the lowest T_{50} and the highest conversion at 573 K and DME selectivity, followed by less selective acid catalysts such as Al₂O₃-HMOR-NP, ANFs, and Al₂O₃-NP. Interestingly, despite their lower conversion (Fig. 6a), the ANFs are more selective to DME than Al₂O₃-NP (Table 3), most probably due to the open structure network and the high surface area among the acid catalysts in Table 1. Furthermore, the apparent activation energy calculated from the rate of DME production vs. 1/T is shown in Table 3 to compare the catalyst performance further. The activation energy for the ANFs with (99 kJ mol⁻¹) and without (96 kJ mol⁻¹) HMOR presents slightly lower values than Al₂O₃-NP (108 and 110 kJ mol⁻¹). Our results show similar values to other catalysts in the literature. This entails conversion, selectivity, and activation energy.^{69,81,106}

Table 2 Calculated LASs, BASs, total acidity (μ mol g⁻¹), and LAS/BAS ratios for samples at various selected temperatures

<i>T</i> 303 K			373 K			423 K						
Sample	LAS	BAS	Total acidity	LAS/BAS	LAS	BAS	Total acidity	LAS/BAS	LAS	BAS	Total acidity	LAS/BAS
ANFs	351	_	351	_	178	_	178	_	95	_	95	
ANF-NaMOR	283	_	283	_	117	_	117	_	73	_	73	_
ANF-HMOR	469	12	481	38	276	14	290	20	204	9	213	23
Al ₂ O ₃ -NP	406	_	406		255	_	255	_	148	_	148	_
Al ₂ O ₃ -HMOR-NP	298	11	309	27	178	6	184	30	101	2	103	49
HMOR	14	42	56	0.33	_	43	43	_	_	42	42	_
NaMOR	66	_	66	_	37	_	37	_	27	_	27	_

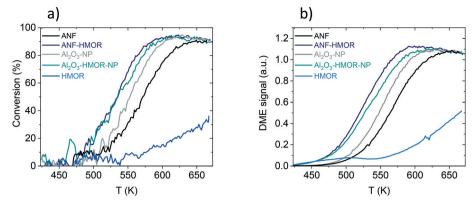


Fig. 6 a) Light off curves for methanol conversion. b) Light off curves for DME signal intensity.

Table 3 Methanol conversion (%) and DME selectivity

Sample	Methanol conversion (%) at 573 ^a K	DME selectivity (relative intensity) at 573 ^a K	Conversion at T_{50}^{a} (K)	DME selectivity (relative intensity) at T_{50}^{a} (K)	Apparent activation energy (kJ mol ⁻¹)
ANFs	46	1	573	0.9	96 ± 1
ANF-HMOR	87	1	534	1	99 ± 3
Al ₂ O ₃ -NP	72	0.9	553	0.8	110 ± 1
Al ₂ O ₃ -HMOR-NP	80	0.9	535	0.8	108 ± 4
HMOR	10	0.9	>673	_	84 ± 4

^a The results are derived from the light-off curves, where the experimental error is lower than 15%.

We then compare the acidity (Fig. 5 and Table 2) with the catalytic performance (Fig. 6 and Table 3) to generate insights into the ANF-HMOR synergy. It is generally accepted that the catalyst composition, surface area, porosity (i.e., pore size and its distribution), and surface acidity affect the performance of the methanol dehydration reaction to DME.⁷⁰ In this reaction, the catalytic activity depends on the surface acidic properties, such as the total number of acidic sites and their strength. Fig. S6† shows the number of acid sites (μ mol g⁻¹) and the T_{50} (K) as a function of the surface area (m² g⁻¹). Here, it is observed that the acid sites do not depend on the surface area, and it also does not directly influence the catalyst activity. Previous reports 70,107 showed that the catalytic activity could be correlated with the number of acidic sites; however, this behavior has not been observed but provides insight into other factors affecting activity.75

From the mechanistic point of view, methanol dehydration is considered a bimolecular reaction between two intermediates adsorbed on adjacent surface sites and requires the proximity of two acid sites with adequate acidity.81 Thus, increasing the acid site density leads to improved catalyst performance. This becomes evident in Fig. 7, which shows that the conversion increases with the acid site density (µmol m⁻²). The synergy between LASs and BASs produced by interfacial interaction also enhances the methanol dehydration rate. 108 Therefore, the addition of HMOR in the ANFs and Al₂O₃-NP modifies both the acid site density and the acid types by incorporating BASs, thus improving the catalyst performance.

In addition to the nature and strength of the acid sites, the textural properties, such as the surface area, porosity, and average pore diameter, can affect the catalytic performance in dehydration reactions. 69,81 The isotherms (Fig. 3b) suggest the presence of aggregated slitshaped pores, which may originate from the interparticle voids in Al₂O₃-NP and Al₂O₃-HMOR-NP. Additionally, they present a wide pore size distribution. In contrast, the pore size distribution plots revealed a wide distribution of pore bodies, with a major pore width distribution around 6 nm for ANFs and hybrid ANFs with NaMOR and HMOR.




Fig. 7 Conversion at 573 K as a function of the acid site density (umol m⁻²) at 303 K for the unstructured catalysts (HMOR, Al₂O₃-NP, and Al₂O₃-HMOR-NP) and nanofibers (ANFs and ANF-HMOR).

Furthermore, compared to the NPs that form agglomerates and lack structured macroporosity (Fig. S5†), the nanofibers present a lower diffusion length (d = 240-320 nm). This is expected due to the non-woven nanofiber structure that contains a macropore mesh.43 These differences in the average pore size, pore size distribution, and diffusion length may explain the variations in selectivity. In Al₂O₃-NP and Al₂O₃-HMOR-NP, the products could have a higher retention time leading to by-products, such as CO and hydrocarbons, thus decreasing the DME selectivity. Our results suggest that hierarchical structures like fibers and HMOR can enhance the chemical reaction selectivity synergistically.

Based on the catalytic tests used to highlight the hybrid nanofibers' functionality, we can conclude that a higher conversion of methanol to DME is achieved when samples contain high acid site densities and both types of acid sites (LASs and BASs). The presence of both types of acid sites provides synergy effects that positively influence the activity towards the methanol dehydration to DME. Additionally, the fiber morphology favors the DME selectivity. Further studies on ANF-HMOR materials could optimize the amount of BASs and LASs to maximize the conversion and selectivity under dehydration reaction conditions.

Conclusions

Hybrid ANFs with high acidity have been synthesized using electrospinning. Acid site tunability is possible in these nanofibers using MOR nanocrystals. The nanofibers have shown multilevel pore combinations, such as mesopores and macropores. IR-Py demonstrates the nature type and desorption strength of the acid sites in ANF-HMOR, which prevail between 423 and 673 K. The methanol dehydration reactions showed the advantage of ANF-HMOR synergistically contributing to the increase in methanol conversion and DME selectivity.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

The authors thank Jimmy A. Faria (Catalytic Processes and Materials (CPM), University of Twente) and Mark Smithers (MESA+ Institute, University of Twente) for their support. The research leading to the results in this report has received funding from the European Research Council (ERC) under the European Union's Horizon 2020 Research and Innovation Program (Grant agreement No. 742004). The authors are thankful for the financial support from the Consejo Nacional de Investigaciones Científicas y Técnicas (CONICET) PIP-2021-11220200100731CO. The authors also thank the Mexican Council for Science and Technology (CONACyT) for funding R. N. Cruz-Herbert postgraduate studies at UANL (932067).

References

- 1 S. Kiatphuengporn, A. Junkaew, C. Luadthong, S. Thongratkaew, C. Yimsukanan, S. Songtawee, T. Butburee, P. Khemthong, S. Namuangruk, M. Kunaseth and K. Faungnawakij, Green Chem., 2020, 22, 8572-8583.
- 2 X. Xu, H. Zhang, Y. Tong, Y. Sun, X. Fang, J. Xu and X. Wang, Appl. Surf. Sci., 2021, 550, 149316.
- 3 L. C. Buelens, V. V. Galvita, H. Poelman, C. Detavernier and G. B. Marin, Science, 2016, 354, 449-452.
- 4 D. Li, Y. Li, X. Liu, Y. Guo, C. W. Pao, J. L. Chen, Y. Hu and Y. Wang, ACS Catal., 2019, 9, 9671-9682.
- 5 C. Italiano, J. Llorca, L. Pino, M. Ferraro, V. Antonucci and A. Vita, Appl. Catal., B, 2020, 264, 118494.
- 6 H. Jeong, O. Kwon, B. S. Kim, J. Bae, S. Shin, H. E. Kim, J. Kim and H. Lee, Nat. Catal., 2020, 3, 368-375.
- 7 J. Ihli, R. R. Jacob, M. Holler, M. Guizar-Sicairos, A. Diaz, J. C. Da Silva, D. F. Sanchez, F. Krumeich, D. Grolimund, M. Taddei, W. C. Cheng, Y. Shu, A. Menzel and J. A. Van Bokhoven, Nat. Commun., 2017, 8, 1-10.
- 8 J. L. Williams, Catal. Today, 2001, 69, 3-9.
- 9 I. Levin and D. Brandon, J. Am. Ceram. Soc., 1998, 81, 1995-2012.
- 10 G. Busca, Catal. Today, 2014, 226, 2-13.
- 11 B. Kasprzyk-hordern, Adv. Colloid Interface Sci., 2004, 110(1-2), 19-48.
- 12 J. Ruiz and C. Jimenez-Sanchidrian, Curr. Org. Chem., 2007, 11, 1113-1125.
- 13 Z. Wang, T. Li, Y. Jiang, O. Lafon, Z. Liu, J. Trébosc, A. Baiker, J. P. Amoureux and J. Huang, Nat. Commun., 2020, 11, 1-9.
- 14 K. Motokura, M. Tada and Y. Iwasawa, J. Am. Chem. Soc., 2007, 129, 9540-9541.
- 15 B. Dhokale, A. Susarrey-Arce, A. Pekkari, A. Runemark, K. Moth-Poulsen, C. Langhammer, H. Härelind, M. Busch, M. Vandichel and H. Sundén, ChemCatChem, 2020, 12, 6344-6355.
- 16 Z. Zhang, R. W. Hicks, T. R. Pauly and T. J. Pinnavaia, J. Am. Chem. Soc., 2002, 124, 1592-1593.
- 17 P. Euzen, P. Raybaud, X. Krokidis, H. Toulhoat, J.-L. Le Loarer, J.-P. Jolivet and C. Froidefond, Porous aluminas, in Handbook of porous solids, ed. F. Schüth, K. S. W. Sing and J. Weitkamp, Wiley VCH, Weinheim, 2002, vol. 3, pp. 1591– 1677.
- 18 C. Morterra and G. Magnacca, Catal. Today, 1996, 27, 497-532.
- 19 J. M. McHale, A. Auroux, A. J. Perrotta and A. Navrotsky, Science, 1997, 277, 788-789.
- 20 M. D. Argyle, K. Chen, A. T. Bell and E. Iglesia, J. Catal., 2002, 208, 139-149.
- 21 X. Bokhimi, J. Sánchez-Valente and F. Pedraza, J. Solid State Chem., 2002, 166, 182-190.
- 22 G. Li, L. Hu and J. M. Hill, Appl. Catal., A, 2006, 301, 16-24.
- 23 C. Márquez-Alvarez, N. Žilková, J. Pérez-Pariente and J. Čejka, Catal. Rev.: Sci. Eng., 2008, 50, 222-286.

- 24 F. Rascón, R. Wischert and C. Copéret, Chem. Sci., 2011, 2, 1449-1456
- 25 C. Parra-Cabrera, C. Achille, S. Kuhn and R. Ameloot, Chem. Soc. Rev., 2018, 47, 209-230.
- 26 S. Danaci, L. Protasova, V. Middelkoop, N. Ray, M. Jouve, A. Bengaouer and P. Marty, React. Chem. Eng., 2019, 4, 1318-1330.
- 27 A. Mahapatra, B. G. Mishra and G. Hota, Ceram. Int., 2011, 37, 2329-2333.
- 28 C. Weidmann, K. Brezesinski, C. Suchomski, K. Tropp, N. Grosser, J. Haetge, B. M. Smarsly and T. Brezesinski, Chem. Mater., 2012, 24, 486-494.
- 29 X. Yang, C. Shao and Y. Liu, J. Mater. Sci., 2007, 42, 8470-8472.
- 30 A. F. Lotus, R. K. Feaver, L. A. Britton, E. T. Bender, D. A. Perhay, N. Stojilovic, R. D. Ramsier and G. G. Chase, Mater. Sci. Eng. B: Solid-State Mater. Adv. Technol., 2010, 167, 55-59.
- 31 A. F. Lotus, Y. C. Kang, J. I. Walker, R. D. Ramsier and G. G. Chase, Mater. Sci. Eng., B, 2010, 166, 61-66.
- 32 A. M. Azad, Mater. Sci. Eng., A, 2006, 435-436, 468-473.
- 33 W. Fu, Y. Dai, J. P. H. Li, Z. Liu, Y. Yang, Y. Sun, Y. Huang, R. Ma, L. Zhang and Y. Sun, ACS Appl. Mater. Interfaces, 2017, 9, 21258-21266.
- 34 X. Meng, W. Xu, Z. Li, J. Yang, J. Zhao, X. Zou, Y. Sun and Y. Dai, Adv. Fiber Mater., 2020, 2, 93-104.
- 35 H. Dai, J. Gong, H. Kim and D. Lee, Nanotechnology, 2002, 13, 674-677.
- 36 A. Stanishevsky, W. A. Brayer, P. Pokorny, T. Kalous and D. Lukáš, Ceram. Int., 2016, 42, 17154-17161.
- 37 A. H. Hekmati, A. Rashidi, R. Ghazisaeidi and J. Y. Drean, Text. Res. I., 2013, 83, 1452-1466.
- 38 R. Jaeger, H. Schönherr and G. J. Vancso, Macromolecules, 1996, 29, 7634-7636.
- 39 J. Doshi and D. H. Reneker, J. Electrost., 1995, 35, 151-160.
- 40 M. Tebyetekerwa and S. Ramakrishna, Matter, 2020, 2, 279-283.
- 41 S. Cavaliere, S. Subianto, I. Savych, D. J. Jones and J. Rozière, Energy Environ. Sci., 2011, 4, 4761-4785.
- 42 C. Eyovge, C. S. Deenen, F. Ruiz-Zepeda, S. Bartling, Y. Smirnov, M. Morales-Masis, A. Susarrey-Arce and H. Gardeniers, ACS Appl. Nano Mater., 2021, 4, 8600-8610.
- 43 M. A. Rodriguez-Olguin, H. Atia, M. Bosco, A. Aguirre, R. Eckelt, E. D. Asuquo, M. Vandichel, J. G. E. Gardeniers and A. Susarrey-Arce, J. Catal., 2022, 405, 520-533.
- 44 P. K. Panda, Trans. Indian Ceram. Soc., 2007, 66, 65-76.
- 45 X. Tang and Y. Yu, Ceram. Int., 2015, 41, 9232-9238.
- 46 J. Chandradass and M. Balasubramanian, J. Mater. Process. Technol., 2006, 173, 275-280.
- 47 R. Nass and H. Schmidt, J. Non-Cryst. Solids, 1990, 121, 329-333.
- 48 L. Ji, J. Lin, K. L. Tan and H. C. Zeng, Chem. Mater., 2000, 12, 931-939.
- 49 T. F. Baumann, A. E. Gash, S. C. Chinn, A. M. Sawvel, R. S. Maxwell and J. H. Satcher, Chem. Mater., 2005, 17, 395-401.

- 50 L. Zhang, J. C. C. Chan, H. Eckert, G. Helsch, L. P. Hoyer and G. H. Frischat, Chem. Mater., 2003, 15, 2702-2710.
- 51 S. Rezgui and B. C. Gates, Chem. Mater., 2002, 6, 2386-2389.
- 52 X. Y. Yang, G. Tian, L. H. Chen, Y. Li, J. C. Rooke, Y. X. Wei, Z. M. Liu, Z. Deng, G. Van Tendeloo and B. L. Su, Chem. -Eur. J., 2011, 17, 14987-14995.
- 53 S. Mitchell, A. B. Pinar, J. Kenvin, P. Crivelli, J. Kärger and J. Pérez-Ramírez, Nat. Commun., 2015, 6, 8633.
- 54 A. Susarrey-Arce, M. A. Hernández-Espinosa, F. Rojas-González, C. Reed, V. Petranovskii and A. Licea, Part. Part. Syst. Charact., 2010, 27, 100-111.
- 55 T. Li, J. Ihli, Z. Ma, F. Krumeich and J. A. Van Bokhoven, J. Phys. Chem. C, 2019, 123, 8793-8801.
- 56 J. Di, H. Chen, X. Wang, Y. Zhao, L. Jiang, J. Yu and R. Xu, Chem. Mater., 2008, 20, 3543-3545.
- 57 S. F. Anis, A. Khalil, Saepurahman, G. Singaravel and R. Hashaikeh, Microporous Mesoporous Mater., 2016, 236, 176-192.
- 58 S. F. Anis and R. Hashaikeh, Microporous Mesoporous Mater., 2016, 233, 78-86.
- 59 S. F. Anis, G. Singaravel and R. Hashaikeh, RSC Adv., 2018, 8, 16703-16715.
- 60 J. Liu, G. Jiang, Y. Liu, J. Di, Y. Wang, Z. Zhao, Q. Sun, C. Xu, J. Gao, A. Duan, J. Liu, Y. Wei, Y. Zhao and L. Jiang, Sci. Rep., 2014, 4, 7276.
- 61 S. Ivanova, B. Louis, M. J. Ledoux and C. Pham-Huu, J. Am. Chem. Soc., 2007, 129, 3383-3391.
- 62 S. Gao, X. Wang and W. Chu, Microporous Mesoporous Mater., 2012, 159, 105-110.
- 63 F. Ocampo, H. S. Yun, M. M. Pereira, J. P. Tessonnier and B. Louis, Cryst. Growth Des., 2009, 9, 3721-3729.
- 64 P. Losch, M. Boltz, K. Soukup, I. H. Song, H. S. Yun and B. Louis, Microporous Mesoporous Mater., 2014, 188, 99-107.
- 65 C. Pham-Huu, G. Winé, J. P. Tessonnier, M. J. Ledoux, S. Rigolet and C. Marichal, Carbon, 2004, 42, 1941-1946.
- 66 X. Ke, X. Zhang, H. Liu, S. Xue and H. Zhu, Chem. Commun., 2013, 49, 9866-9868.
- 67 I. Hussain, A. A. Jalil, N. S. Hassan, H. U. Hambali and N. W. C. Jusoh, Chem. Eng. Sci., 2020, 228, 115978.
- 68 Y. Tao, H. Kanoh, L. Abrams and K. Kaneko, Chem. Rev., 2006, 106, 896-910.
- 69 H. Bateni and C. Able, Catal. Ind., 2019, 11, 7-33.
- 70 J. Sun, G. Yang, Y. Yoneyama and N. Tsubaki, ACS Catal., 2014, 4, 3346-3356.
- 71 S. R. Blaszkowski and R. A. Van Santen, J. Am. Chem. Soc., 1996, 118, 5152-5153.
- 72 J. J. Spivey, Chem. Eng. Commun., 1991, 110, 123-142.
- 73 M. Ravi, V. L. Sushkevich and J. A. van Bokhoven, Chem. Sci., 2021, 12, 4094-4103.
- 74 Z. Cheng, S. Huang, Y. Li, K. Cai, Y. Wang, M. Wang, J. Lv and X. Ma, ACS Catal., 2021, 11, 5647-5657.
- 75 I. Takahara, M. Saito, M. Inaba and K. Murata, Catal. Lett., 2005, 105, 249-252.
- 76 F. Yaripour, F. Baghaei, I. Schmidt and J. Perregaard, Catal. Commun., 2005, 6, 147-152.

- 77 M. Ghavipour and R. M. Behbahani, J. Ind. Eng. Chem., 2014, 20, 1942-1951.
- 78 D. Liu, C. Yao, J. Zhang, D. Fang and D. Chen, Fuel, 2011, 90, 1738-1742.
- 79 A. I. Osman, J. K. Abu-Dahrieh, D. W. Rooney, S. A. Halawy, M. A. Mohamed and A. Abdelkader, Appl. Catal., B, 2012, 127, 307-315.
- 80 K. C. Tokay, T. Dogu and G. Dogu, Chem. Eng. J., 2012, 184, 278-285.
- 81 S. S. Akarmazyan, P. Panagiotopoulou, A. Kambolis, C. Papadopoulou and D. I. Kondarides, Appl. Catal., B, 2014, 145, 136-148.
- 82 J. F. DeWilde, H. Chiang, D. A. Hickman, C. R. Ho and A. Bhan, ACS Catal., 2013, 3, 798-807.
- 83 M. A. Christiansen, G. Mpourmpakis and D. G. Vlachos, ACS Catal., 2013, 3, 1965-1975.
- 84 S. R. Matkovic, M. Bosco, S. E. Collins and L. E. Briand, Appl. Surf. Sci., 2019, 495, 143565.
- 85 J. Aguado, D. P. Serrano, J. M. Escola and A. Peral, J. Anal. Appl. Pyrolysis, 2009, 85, 352-358.
- 86 H. M. Lankapati, D. R. Lathiya, L. Choudhary, A. K. Dalai and K. C. Maheria, ChemistrySelect, 2020, 5, 1193-1198.
- 87 P. Intarapong, S. Iangthanarat, P. Phanthong, Luengnaruemitchai and S. Jai-In, J. Energy Chem., 2013, 22, 690-700.
- 88 R. Cuevas-garcía, J. G. Téllez-romero, J. Ramírez, P. Sarabia-bañuelos and I. Puente-lee, Catal. 2021, 360, 63-71.
- 89 M. Dyballa, U. Obenaus, M. Blum and W. Dai, Catal. Sci. Technol., 2018, 8, 4440-4449.
- 90 M. Dyballa, D. K. Pappas, E. Borfecchia, P. Beato, U. Olsbye, K. P. Lillerud, B. Arstad and S. Svelle, Microporous Mesoporous Mater., 2018, 265, 112-122.

- 91 K. S. W. Sing, D. H. Everett, R. A. W. Haul, L. Moscou, R. A. Pierotti, J. Rouquerol and T. Siemieniewska, Pure Appl. Chem., 1985, 57, 603-619.
- 92 F. Hosseinzadeh and H. Sarpoolaky, J. Inorg. Organomet. Polym. Mater., 2019, 29, 1956-1971.
- 93 V. Antochshuk, M. Kruk and M. Jaroniec, J. Phys. Chem. B, 2003, 107, 11900-11906.
- 94 K. M. S. Khalil, *I. Colloid Interface Sci.*, 2007, 307, 172-180.
- 95 P. Zhu, P. Tian, Y. Liu, H. Pang, W. Gong, J. Ye and G. Ning, Microporous Mesoporous Mater., 2020, 292, 109752.
- 96 L. Ou, C. He, Y. Yang, Y. He and Z. Liu, Mater. Lett., 2005, 59, 4034-4037.
- 97 J. Aguado, J. M. Escola, M. C. Castro and B. Paredes, Microporous Mesoporous Mater., 2005, 83, 181-192.
- 98 E. P. Parry, J. Catal., 1963, 2, 371-379.
- 99 A. Piovano, E. Morra, M. Chiesa and E. Groppo, ACS Catal., 2017, 7, 4915-4921.
- 100 X. Liu, J. Phys. Chem. C, 2008, 112, 5066-5073.
- 101 C. A. Emeis, *I. Catal.*, 1993, 141, 347-354.
- 102 M. Tamura, K. I. Shimizu and A. Satsuma, Appl. Catal., A, 2012, 433-434, 135-145.
- 103 S. Khabtou, T. Chevreau and J. C. Lavalley, Microporous Mater., 1994, 3, 133-148.
- 104 R. J. Mikovsky and J. F. Marshall, J. Catal., 1976, 44, 170-173.
- 105 R. Van Borm, A. Aerts, M. F. Revniers, J. A. Martens and G. B. Marin, Ind. Eng. Chem. Res., 2010, 49, 6815-6823.
- 106 M. Xu, J. H. Lunsford, D. W. Goodman Bhattacharyya, Appl. Catal., A, 1997, 149, 289-301.
- 107 S. M. Kim, Y. J. Lee, J. W. Bae, H. S. Potdar and K. W. Jun, Appl. Catal., A, 2008, 348, 113-120.
- 108 L. Zeng, Y. Wang, J. Mou, F. Liu, C. Yang, T. Zhao, X. Wang and J. Cao, Int. J. Hydrogen Energy, 2020, 45, 16500-16508.