

## PAPER

View Article Online  
View Journal | View Issue



Cite this: *Environ. Sci.: Atmos.*, 2022, 2, 1041

# A laboratory study on the uptake of gaseous molecular iodine by clay minerals at different relative humidities†

Shuzo Kutsuna \* and Naoki Kaneyasu

Dry deposition of iodine is a crucial parameter for estimating the public health risk of radioiodine released in the Fukushima Dai-ichi nuclear power plant accident. We measured the uptake of molecular iodine ( $I_2$ ) by aqueous solutions and clay minerals in the laboratory to inform estimates of the ground surface resistance for  $I_2$  in dry deposition which photolysis limited to nighttime. We injected rectangular pulses of humidified air including  $I_2$  into a contactor holding samples of aqueous solutions and clay minerals and monitored  $I_2$  concentrations in air leaving the contactor to distinguish  $I_2$  loss from  $I_2$  adsorption. Uptake of  $I_2$  proceeded much more rapidly by aqueous ascorbic acid than by water; the former was limited by mass transfer in the gas-film layer. Uptake of  $I_2$  by clay samples was confirmed under dry conditions (20–80% relative humidity), which suggested that it contributed to the dry deposition of  $I_2$  onto soils as much as other processes such as reactions with organic matter. The surface resistance for  $I_2$  increased with repeated experiments on the same clay samples, reaching 240–670  $s\ m^{-1}$ , and its dependence on relative humidity differed from that for sulfur dioxide ( $SO_2$ ), a commonly used proxy for  $I_2$  in scaling methods. Reference values of surface resistance for  $SO_2$  above soils remain useful for estimating the resistance for  $I_2$  above vegetate surfaces at 80% RH in atmospheric transport and dispersion model calculations but may result in substantial errors at 20% RH unless organic matter in soils contributes to ground surface resistance for  $I_2$ .

Received 4th April 2022  
Accepted 13th June 2022

DOI: 10.1039/d2ea00039c

rsc.li/esatmospheres

## Environmental significance

Ground surface resistance for iodine is a crucial parameter in dry deposition for estimating the public health risk associated with accidental release of radioiodine from nuclear power plants. We conducted rectangular pulse experiments on the uptake of  $I_2$  by clay samples and confirmed  $I_2$  deposition on the clay samples. The deposition rates decreased with successive runs and remained finite through each set of experimental runs. The resultant ground surface resistances for  $I_2$  were greater than the resistances adopted in atmospheric model calculations which considered no difference between  $I_2$  and its photo-degradation products. The relative-humidity dependence was different between these resistances. Radioiodine dry deposition processes therefore need to be estimated separately before and after sunrise when  $I_2$  is released at night.

## 1. Introduction

Radioiodine-131 ( $^{131}I$ ), with a half-life of 8 days, is a major contributor to the public health risk associated with accidental release of radionuclides, because of its high short-term radiation levels and the tendency of iodine to concentrate in the thyroid gland.<sup>1</sup> The accident at the Fukushima Dai-ichi nuclear power plant following the 11 March 2011 Tohoku earthquake and tsunami released  $^{131}I$  into the atmosphere in several different forms, including molecular iodine ( $I_2$ ), methyl iodine ( $CH_3I$ ), and aerosol-form iodine such as cesium iodide ( $CsI$ ),<sup>2</sup>

which behave differently in the atmosphere. The atmospheric reaction and deposition processes of these species, in particular the deposition velocity, need to be known so that the emission source terms of radioiodine released in the accident and the inhaled internal dose of radioiodine in affected populations can be properly estimated by atmospheric transport and dispersion models<sup>2,3</sup> from limited field observations.<sup>4–6</sup>

Dry deposition of  $^{131}I$  has been studied in both field releases<sup>7–10</sup> and wind tunnel experiments<sup>11,12</sup> to investigate the transfer from the atmosphere to grass and other surrogate surfaces. Deposition velocities of radioiodine have also been calculated from field observations after the Windscale nuclear accident in 1957<sup>13</sup> and nuclear tests in the atmosphere.<sup>9</sup> Reported deposition velocities of elemental iodine or  $I_2$  onto various surfaces, however, vary from 0.02 to 26  $cm\ s^{-1}$ .<sup>14</sup> When dealing with atmospheric transport of radioiodine, the

National Institute of Advanced Industrial Science and Technology (AIST), 16–1 Onogawa, Tsukuba, Ibaraki 305 8569, Japan. E-mail: shuzo530@gmail.com

† Electronic supplementary information (ESI) available. See <https://doi.org/10.1039/d2ea00039c>




chemical form of iodine has to be considered explicitly. Because photolysis limits the lifetime of  $I_2$  to about 10 seconds,<sup>15,16</sup> most field studies on the release of  $I_2$  in daytime have reported the behavior of not  $I_2$  itself, but a mixture of iodine species produced through atmospheric reactions initiated by photolysis of  $I_2$ .<sup>16</sup> Similarly, in almost all models of the release of radioiodine from nuclear power plants, the species reported as  $I_2$  include not only molecular iodine but also other potential iodine species, such as HOI, produced by atmospheric reactions; we refer to this mixture as  $I_2^{\text{model}}$ . In the models applied to the Fukushima accident, deposition velocities of  $I_2^{\text{model}}$  over short vegetation are assumed to have constant values, such as  $0.3 \text{ cm s}^{-1}$ ,<sup>17</sup> or values similar to that of sulfur dioxide ( $SO_2$ ).<sup>3</sup> If dry deposition velocities of  $I_2$  differ greatly from these values, the dry deposition process of  $I_2^{\text{model}}$  needs to be estimated separately before and after sunrise when  $I_2$  is released at night.

In numerical models, the dry deposition process is commonly treated as a resistance model, which consists of a series of resistances.<sup>18</sup> The bulk surface resistance, which represents the transfer of substances at the level nearest to Earth's surface, is typically the most uncertain because it involves the atmospheric chemistry of each species over various surfaces, such as leaf cuticles and soils. The bulk surface resistance consists of stomatal resistance and non-stomatal resistance. For  $I_2$ , stomatal resistance is ignored because photolysis limits dry deposition of  $I_2$  to nighttime, when most plants close their stomata.<sup>19</sup> Non-stomatal resistance,  $R_{\text{ns}}$ , above vegetate surfaces is decomposed as

$$\frac{1}{R_{\text{ns}}} = \frac{1}{R_{\text{ac}} + R_{\text{g}}} + \frac{1}{R_{\text{cut}}} \quad (1)$$

where  $R_{\text{ac}}$  is the in-canopy aerodynamic resistance,  $R_{\text{g}}$  is the subsequent ground resistance, and  $R_{\text{cut}}$  is the resistance to cuticle uptake.<sup>20</sup> For surfaces without canopies, such as bare soil and open water,  $R_{\text{ac}}$  and  $R_{\text{cut}}$  are not applicable. When information on  $R_{\text{g}}$  and  $R_{\text{cut}}$  is limited, models commonly estimate these resistances by a scaling method, relying on an effective Henry's law coefficient or a half-redox potential as an index.<sup>20,21</sup> For  $I_2$ , however, effective Henry's law coefficients cannot be defined unless the aqueous concentration of  $I^-$  in the following reaction is assumed to be constant.



Given these considerations, we conducted a laboratory study of  $I_2$  uptake by various reactors, consisting of six different types of clay mineral particles and three different aqueous surfaces, to provide data for estimating  $R_{\text{g}}$  for  $I_2$  above soils. We used a rectangular pulse method<sup>22</sup> to distinguish loss of  $I_2$  from adsorption onto the reactor. This method can be conducted under lower-atmospheric conditions such as humidified air at 1 atm. The pulse method is useful for determining the loss rates for the reactors which tend to deactivate with exposure to  $I_2$  because it can control the exposure to  $I_2$  precisely at low concentration levels of  $I_2$ . As a disadvantage, it needs an estimate of mass-transfer resistances in gas-film layers above the solid or the liquid reactors for determination of the surface

resistance above the reactors. The clay samples consisted of five pure clay minerals and standard clay soil, and the aqueous surfaces were water, aqueous sulfuric acid, and aqueous ascorbic acid. In this paper we present surface resistances estimated from the experiment and resultant non-stomatal resistances and discuss their implications for calculations in atmospheric transport and dispersion models.

## 2. Methods

### 2.1 Materials

Molecular iodine (anhydrous, beads, 10 mesh, 99.999%) was purchased from Sigma-Aldrich. Sodium iodide (99.5%), 1/240 M standard aqueous potassium iodate ( $NaIO_3$ ) solution, 0.5 M standard aqueous sulfuric acid ( $H_2SO_4$ ) solution, L(+)-ascorbic acid (99.6%), and 1 M standard aqueous sodium hydroxide ( $NaOH$ ) solution were purchased from FUJIFILM Wako Chemicals. These reagents were used without further purification. Water was purified with an EMD Millipore Milli-Q Gradient A10 system ( $>18 \text{ M}\Omega \text{ cm}$ ). Synthetic air (an  $O_2$ - $N_2$  mixture, 1 : 4 volume ratio) and carbon dioxide gas ( $CO_2$ , 1.02% in synthetic air) were purchased from Takachiho Chemical Industrial Co., Ltd.

Pure clay minerals of kaolinite, halloysite, montmorillonite, allophane, and illite were purchased from Iwamoto Mineral. These were the same materials used in previous studies at our laboratory.<sup>23–25</sup> Clay powder of AgroMAT Clay Soil AG-1 (Lot No. S131024028, SCP Science) was purchased from GL Science Inc. The allophane and the illite samples were ground to reduce the particle size with a mortar machine. The other clay samples were used as purchased. The grain size of the samples ranged from several millimeters down to submillimeter sizes. Table 1 lists the Brunauer–Emmett–Teller (BET) surface areas of these samples. AgroMAT AG-1 contained organic matter by 3.7% in weight, based on the loss-on-ignition method.

### 2.2 Experimental setup

The experimental setup is shown schematically in Fig. 1. Each experimental run comprised preparation and injection of an  $I_2$ -air mixture of specified relative humidity (RH), passage of the mixture through a two-phase contact chamber (contactor), and analysis of the mixture leaving the contactor in an incoherent broad-band cavity-enhanced absorption spectroscopy (IBB-CEAS) instrument.<sup>26–28</sup> The method for injecting and flowing the gas mixture through the contactor was essentially the same as that reported for volatile organic compounds by the authors.<sup>22</sup> The gas flow was controlled with eight mass-flow controllers ( $d$  in Fig. 1) at rates listed in Table S1 in the ESI.† The gas mixtures flowed through perfluoroalkoxy alkane (PFA) tubes covered in black.

**2.2.1 Gas mixture preparation and injection.** About 5 g of  $I_2$  beads was placed in a PFA bottle (inner diameter, 25.4 mm) in the cavity of the aluminum block of an electronic dry bath (CTU-Mini, Taitec) set at 288.2 K (Fig. 1(a)–(c)). Synthetic air was introduced into the bottle to produce an  $I_2$ -air mixture that was further diluted with synthetic air to produce a mixture referred




Table 1 Properties of clay samples


	Kaolinite	Halloysite	Montmorillonite	Allophane	Illite	AgroMAT AG-1
Morphology	Thin sheets	Tubes	Thin sheets	Hollow spherules		
Structure	Crystalline (1 : 1)	Crystalline (1 : 1)	Crystalline (2 : 1)	Amorphous	Crystalline (2 : 1)	
Origin	Kawachi, Tochigi, Japan	New Zealand	Aterazawa, Yamagata, Japan	Kanuma, Tochigi, Japan	Fithian, Ill, USA	
BET area (m <sup>2</sup> g <sup>-1</sup> )	16	29	18	235	70	12
Others	Kanpaku kaolin	Metahalloysite	KUNIPIA-F, Na-type		API no. 35 <sup>a</sup>	200 mesh size

<sup>a</sup> Standard clay samples from the American Petroleum Institute, no. 35 (Fithian, Ill).

to hereafter as I<sub>2</sub>-air(o). As shown in the ESI,<sup>†</sup> the partial pressure of I<sub>2</sub> in I<sub>2</sub>-air(o),  $P_{\text{I}_2\text{-air(o)}}$ , was determined by bubbling I<sub>2</sub>-air(o) into 20 mL of 20 mM NaOH solution in an impinger (f) for a certain time period, followed by analysis of the solution with an ion chromatograph (Dionex ICS-2100, Thermo Fisher Scientific) for I<sup>-</sup> and IO<sub>3</sub><sup>-</sup> produced through



I<sub>2</sub>-air(o) was injected using a computer-controlled syringe pump (PSD/4, Hamilton Co.), comprising a  $1.25 \times 10^{-2} \text{ dm}^3$  glass gas-tight syringe (g) and a three-port ceramic valve (h), into the flow of a mixture of 400 ppmv CO<sub>2</sub> and humidified synthetic

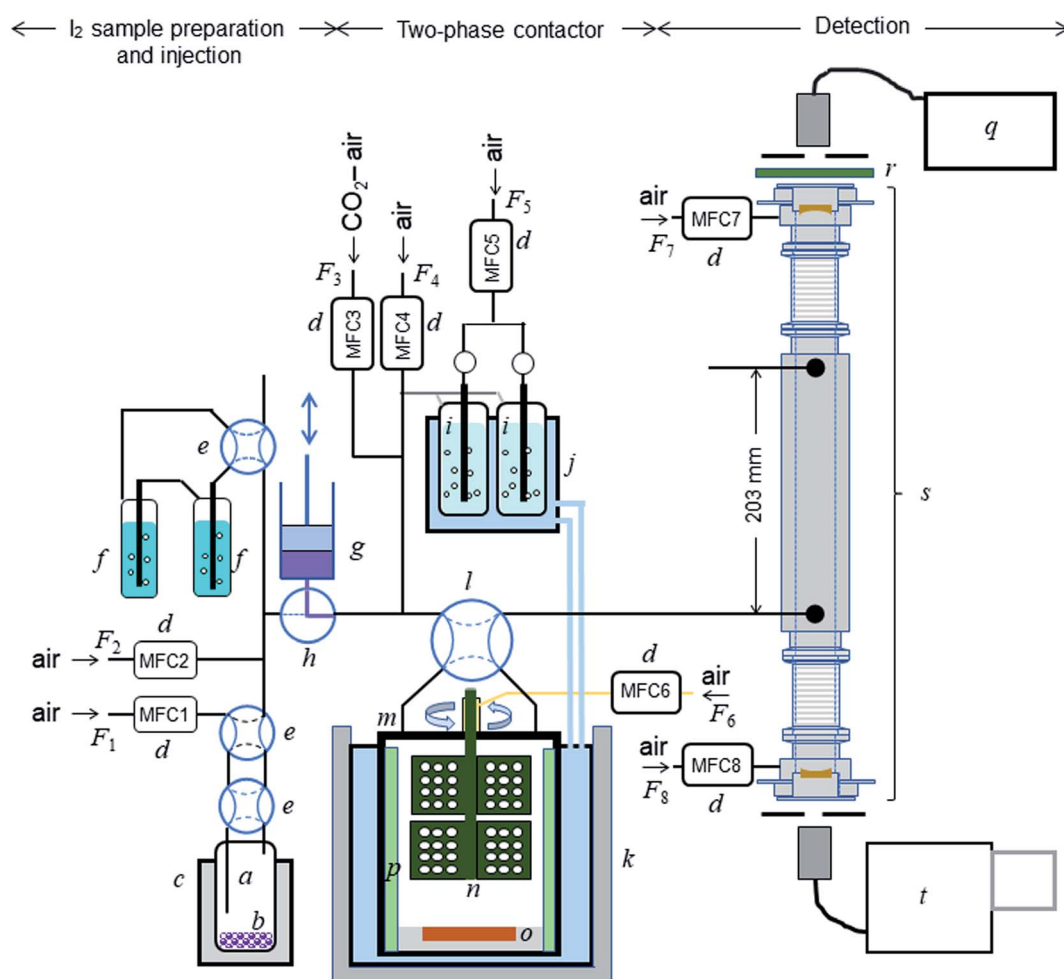

**Fig. 1** Schematic diagram of the experimental setup: (a) bottle containing I<sub>2</sub> beads (b); (c) electronic dry bath; (d) mass-flow controllers; (e) four-port valve; (f) impinger with 20 mM NaOH; (g) syringe pump; (h) three-port ceramic valve; (i) humidifier; (j) temperature-controlled water circulator; (k) stainless-steel water bath; (l) four-port valve; (m) contactor; (n) turbine for stirring the gas phase; (o) dish to hold samples; (p) baffles; (q) light source; (r) optical bandpass filter; (s) IBBCEAS measurement cavity; (t) spectrometer.



air (humidified at 283.2 K; (i) and (j)); the resulting I<sub>2</sub>-CO<sub>2</sub>-air mixture is hereafter referred to as I<sub>2</sub>-air(s). The syringe pump was shaded with aluminum foil to protect I<sub>2</sub> from photolysis. The syringe pump introduced I<sub>2</sub>-air(s) into the contactor as a rectangular pulse of I<sub>2</sub> (pulse width, 300 s; partial pressure,  $4 \times 10^{-7}$  or  $2 \times 10^{-7}$  atm).

**2.2.2 Two-phase contactor.** The contactor, a cylindrical PTFE vessel (Fig. 1(m); inner diameter, 81 mm; inner height, 80 mm), was almost fully submerged in a jacketed stainless-steel water bath (BT-80, SGI) (*k*) at 283.2 K; the temperature was maintained by circulating temperature-controlled water (NCB-2100, EYELA) through the jacket. Inside the contactor were a PTFE-coated stainless-steel turbine (*n*, Yamazaki Seisakusyo), a PTFE dish (80 mm in diameter and 5 mm high) with a central basin (*o*), and PTFE-coated stainless-steel baffles (*p*), leaving a remaining gas-phase volume of 0.390 dm<sup>3</sup>. The turbine consisted of two sets of three blades, arranged vertically and offset by 60°, with each blade containing 12 holes, and stirred the gas phase at 300 rpm. Synthetic air was slowly introduced into the contactor (*ca.*  $2.4 \times 10^{-5}$  dm<sup>3</sup> s<sup>-1</sup>) through the dead space between the contactor and the axis of the turbine using a mass-flow controller (MFC6 in Fig. 1) to prevent the sample gases from lingering there. The PTFE vessel, its PTFE lid, the support for the motor connected to the contactor, and the PTFE dishes were fabricated in our workshop. Fig. S1† shows the dimensions of the vessel, turbine, baffles, and dishes.

Aqueous solutions were set in dishes with deep basins (4 mm) of two different diameters (30 or 55 mm), and clay samples were set loosely in dishes with shallow (2 mm) basins with diameters of 35 or 55 mm. The ratios between the areas of the basin (*S*) and the floor of the contactor (*S<sub>c</sub>*), *S/S<sub>c</sub>*, were 0.137 or 0.461 for aqueous solutions and 0.187 or 0.461 for clay samples. The sample sizes depended on the *S/S<sub>c</sub>* as follows: aqueous samples were 2.8 mL for *S/S<sub>c</sub>* = 0.137 and 9.4 mL for *S/S<sub>c</sub>* = 0.461, and clay samples were 0.73 g for *S/S<sub>c</sub>* = 0.187 and 1.78 g for *S/S<sub>c</sub>* = 0.461. Before I<sub>2</sub>-air(s) was introduced into the contactor, the same gas mixtures without I<sub>2</sub> had flowed over each clay sample for >90 min under the same experimental conditions. A four-port PTFE valve (*l*) was used to direct I<sub>2</sub>-air(s) into the contactor.

**2.2.3 Detection and analysis.** After passing through the contactor, the gas mixture entered a PTFE cell (Fig. 1(s); inner diameter, 20 mm) for measuring I<sub>2</sub> in the IBBCEAS instrument. The inlet and outlet of the cell were 0.203 m apart, and its ends were equipped with plano-concave mirrors 25 mm in diameter with a 1.0 m radius of curvature (quoted reflectivity > 0.999 at 515 nm; Article 142831, Layertec), forming a stable optical cavity *ca.* 0.5 m long. To protect the mirrors from I<sub>2</sub> and reduce the residence time of the sample gas in the cell, synthetic air was purged over the mirrors at a constant flow rate (MFC7 and MFC8 in Fig. 1; F7 and F8 in Table S1†).

Light from a laser-driven broadband xenon light source ((*q*) Model EQ-99-FC, ENERGETIQ) was directed into the cavity through a fiber-coupled output, using a bandpass filter ((*r*) FF03-525/50-25, Semrock) to exclude light outside the wavelength range of interest (500–550 nm). The light output from the cavity was directed into a spectrograph ((*t*) M25-GTM, Bunko

Keiki) with a grating of 1200 grooves per mm equipped with a 1024 × 256 pixel CCD camera (DU420-OE, ANDOR). Full vertical binning was applied, providing 1024 superpixels. Spectra were recorded by averaging four spectra taken with exposure times of 1 s (total exposure time of 4 s).

### 2.3 Quantification of I<sub>2</sub>

In IBBCEAS measurements, the relationship between the spectra and the I<sub>2</sub> concentration in the cavity (Fig. 1(s)) is<sup>26</sup>

$$n_{I_2}\sigma_{I_2} = \frac{1 - R_m}{d_{\text{eff}}} \left( \frac{I_0}{I} - 1 \right) \quad (2)$$

where *n<sub>I2</sub>* and *σ<sub>I2</sub>* are the number density and absorption cross section, respectively, of I<sub>2</sub>; *R<sub>m</sub>* is the mirror reflectivity; *d<sub>eff</sub>* is the effective single-pass extinction path length of the I<sub>2</sub>-air mixture in the cell; and *I<sub>0</sub>* and *I* are the intensity of transmitted light recorded with synthetic air and I<sub>2</sub>-air(s), respectively, inside the cavity, with both gases containing CO<sub>2</sub> and water vapor. Letting *P<sub>out</sub>*(*t*) be the partial pressure of I<sub>2</sub> in the I<sub>2</sub>-air(s) leaving the contactor at time *t*, eqn (2) yields

$$P_{\text{out}}(t) = \frac{\frac{I_0}{I_{\text{out}}(t)} - 1}{\frac{I_0}{I_{\text{in}}(t)} - 1} \times P_{\text{in}} \quad (3)$$

where *I<sub>out</sub>*(*t*) is the *I* value at time *t* for I<sub>2</sub>-air(s) leaving the contactor, *I<sub>in</sub>*(*t*) is the *I* value at time *t* for I<sub>2</sub>-air(s) not passing through the contactor when the partial pressure of I<sub>2</sub> is *P<sub>in</sub>*, and *P<sub>in</sub>* is the partial pressure of I<sub>2</sub> in I<sub>2</sub>-air(s) corresponding to the peak height of the rectangular input pulse. *P<sub>in</sub>* is calculated from the partial pressure of I<sub>2</sub> in I<sub>2</sub>-air(o), *P<sub>in-o</sub>*, using

$$P_{\text{in}} = \frac{F_s}{F_s + F_3 + F_4 + F_5} \times P_{\text{in-o}} \quad (4)$$

where *F<sub>s</sub>* is the flow rate of I<sub>2</sub>-air(o) from the syringe pump and *F<sub>3</sub>*, *F<sub>4</sub>*, and *F<sub>5</sub>* are the flow rates of CO<sub>2</sub>-air, air, and humidified air, respectively, from the mass-flow controllers (Fig. 1; Table S1†). As shown in Section S1.2 in the ESI,† *P<sub>in-o</sub>* was experimentally determined to be  $7.1 \pm 0.2$  Pa on the basis of ion chromatography analysis of I<sup>-</sup> and IO<sub>3</sub><sup>-</sup> in 20 mM NaOH solutions that had captured I<sub>2</sub> from I<sub>2</sub>-air(o). Letting *P<sub>0</sub>* be the value of *P<sub>in</sub>* in our experiments, when 12.5 mL of I<sub>2</sub>-air(o) was injected in 300 s at a flow rate *F<sub>s</sub>* of  $4.17 \times 10^{-5}$  dm<sup>3</sup> s<sup>-1</sup>, *P<sub>0</sub>* was 41 mPa, yielding a concentration of 0.40 ppmv.

For the clay sample, eight measurements of I<sub>2</sub> in I<sub>2</sub>-air(s) passing through the contactor were typically made for the same sample, when the value of *P<sub>in</sub>* was set at *P<sub>0</sub>* for the first, third, fifth, and seventh measurements and at 0.5*P<sub>0</sub>* for the second, fourth, sixth, and eighth measurements. For the aqueous solutions, two measurements were made for the same sample with the value of *P<sub>in</sub>* set at *P<sub>0</sub>*. The input pulse width of I<sub>2</sub>-air(s) was 300 s for all the measurements. In each measurement, the pulse was injected into the contactor at 89 s after the acquisitions on IBBCEAS started. The value of *I<sub>0</sub>* in eqn (2) and (3) was taken as the average of 10 spectra recorded 7–47 s before injecting I<sub>2</sub>-air(s) into the contactor. Calibration pulses of I<sub>2</sub>-air(s) not passing through the contactor were measured with the





input pulse height set at  $P_0$ ,  $0.8P_0$ ,  $0.6P_0$ , or  $0.5P_0$  before each series and  $P_0$  or  $0.5P_0$  after each series.

The absorption spectra of  $I_2$  at the wavelength range of 500–550 nm had both gradual absorption and strongly varying absorption and the latter was used to determine  $P_{out}(t)$ . The  $(I_0/I_{in}(t) - 1)$  spectrum was fitted by a polynomial of order 19.<sup>28</sup> This smooth function was subtracted to yield a strongly varying residual spectrum: an illustrative example is shown in Fig. S2.† After the spectra of both  $(I_0/I_{in}(t) - 1)$  and  $(I_0/I_{out}(t) - 1)$  had been given this treatment, a principal component regression was applied to the residual spectra from  $(I_0/I_{out}(t) - 1)$  to obtain a time series of  $I_2$  concentrations while the residual spectra from  $(I_0/I_{in}(t) - 1)$  were used as calibration spectra. The regression was carried out, assuming one factor, by using the FACT chemometric toolbox in Scilab software.<sup>29,30</sup> No  $H_2O$  absorption features were detected around 505 nm as a 6v polyad overtone,<sup>28</sup> and hence the influence of water vapor was expected to be negligible (Fig. S2c†).

Returning to eqn (2), let  $l_{eff}$  represent the effective pathlength in IBBCEAS, calculated from  $d_{eff}/(1 - R_m)$  (Fig. S2d†). Values of  $l_{eff}$  and  $R_m$  were approximately 600 m and 0.9997, respectively, in the wavelength range of 520–530 nm. The value of  $n_{I_2}$  was taken as 28 mPa ( $6.9 \times 10^{12}$  molecules per  $cm^3$ ) under the assumption that the additional flows over the mirrors (at flow rates of F7 + F8) diluted the  $I_2$ -air(s) in the detection cell, yielding a  $d_{eff}$  value of 0.20 m. The values of  $\sigma_{I_2}$  were interpolated by using previously reported values.<sup>31,32</sup> The partial pressure of  $I_2$  observed at time  $t$ ,  $P_m(t)$ , is related to  $P_{out}(t)$  based on

$$\frac{dP_m(t)}{dt} = \frac{F_{out}}{\tau_m(F_{out} + F_{add})} \{P_{out}(t) - P_{out}(t - \tau_m)\} \quad (5)$$

where  $F_{out}$  is the total flow rate at 298.2 K of  $I_2$ -air(s);  $F_{add}$  is the flow rate of air added to the IBBCEAS cell (assumed equal to F7 + F8);  $\tau_m$  is the residence time of  $I_2$  in the cell from

$$\tau_m = \frac{V_m}{F_{out} + F_{add}} \quad (6)$$

where  $V_m$  is the partial volume of the cell ( $6.28 \times 10^{-2} dm^3$  with an effective length  $d_{eff}$  of 0.20 m). This yields a value of 6.1 s for  $\tau_m$ .

## 2.4 Data analysis

**2.4.1 residence ratios of  $I_2$ .** The residence ratio  $x_{out}$  of  $I_2$  at time  $t$  is defined as

$$x_{out}(t) = \frac{P_{out}(t)}{P_0} \quad (7)$$

The measured residence ratio  $x_m$  of  $I_2$  at time  $t$  is given by

$$x_m(t) = \frac{P_m(t)}{P_{0m}} \quad (8)$$

where  $P_{0m}$  is the partial pressure of  $I_2$  for a pulse height when  $P_{in}$  is  $P_0$ :

$$P_{0m} = \frac{F_{out}}{F_{out} + F_{add}} P_0 \quad (9)$$

Substituting eqn (8) and (9) into eqn (5), we get

$$\frac{dx_m(t)}{dt} = \frac{1}{\tau_m} \{x_{out}(t) - x_{out}(t - \tau_m)\} \quad (10)$$

Values of  $x_m(t)$  are approximately given by

$$x_m(t) \approx \frac{x_{out}(t) + x_{out}(t - \tau_m)}{2} \quad (11)$$

Combining eqn (10) and (11) yields

$$\frac{dx_m(t)}{dt} = \frac{2}{\tau_m} \{x_{out}(t) - x_m(t)\} \quad (12)$$

**2.4.2 Rectangular input pulse signals.** Let  $f_m(t)$  represent  $x_m(t)$  observed in  $I_2$ -air(s) not passing through the contactor. The time series of  $f_m(t)$  were nonlinearly fitted using

$$f_m(t) = a_2 + \frac{a_1 - a_2}{1 + \left(\frac{t}{a_3}\right)^{a_4}} \quad (0 \leq t \leq 300) \quad (13)$$

$$f_m(t) = \frac{b_1}{1 + \left(\frac{t - 300}{b_2}\right)^{b_3}} + b_4 \exp\{-b_5(t - 300)\} + b_6 \exp\{-b_7(t - 300)\} + b_8 \exp\{-b_9(t - 300)\} \quad (t > 300) \quad (14)$$

where the parameters  $a_i$  ( $i = 1-4$ ) and  $b_i$  ( $i = 1-9$ ) determined from the experimental data by nonlinear regression are regulated to ensure continuity of  $f_m(t)$  at 300 s as follows:

$$a_2 + \frac{a_1 - a_2}{1 + \left(\frac{300}{a_3}\right)^{a_4}} = b_1 + b_4 + b_6 + b_8 \quad (15)$$

If calculated values of  $f_m(t)$  are less than zero,  $f_m(t)$  is defined to be zero. Table S3† lists the values of  $a_i$  and  $b_i$ . As seen on the bottom row in Table S3,† the peak height of the rectangular input pulse ( $P_{in}$ ) is a constant value ( $P_0$  or  $0.5P_0$ ) within 1% and 3%, respectively, for  $P_{in} = P_0$  and  $0.5P_0$  at 20–96% RH. Fig. 2 shows the time series of  $f_m(t)$  curves fitted to the experimental data obtained at each RH value (see Fig. S3† for plots of the underlying data).

Unlike a previous study using the rectangular pulse method,<sup>22</sup> the adsorption processes examined here had a nonlinear relationship between rates and concentrations; hence,  $f_m(t)$  could not be used as an input pulse in simulations to optimize parameters related to loss and adsorption of  $I_2$  by clay samples in the contactor. Therefore, the input pulse signal in the simulation,  $f(t)$ , was approximated on the basis of eqn (12) using

$$f(t) = f_m(t) + \frac{\tau_m}{2} \frac{df_m(t)}{dt} \quad (16)$$



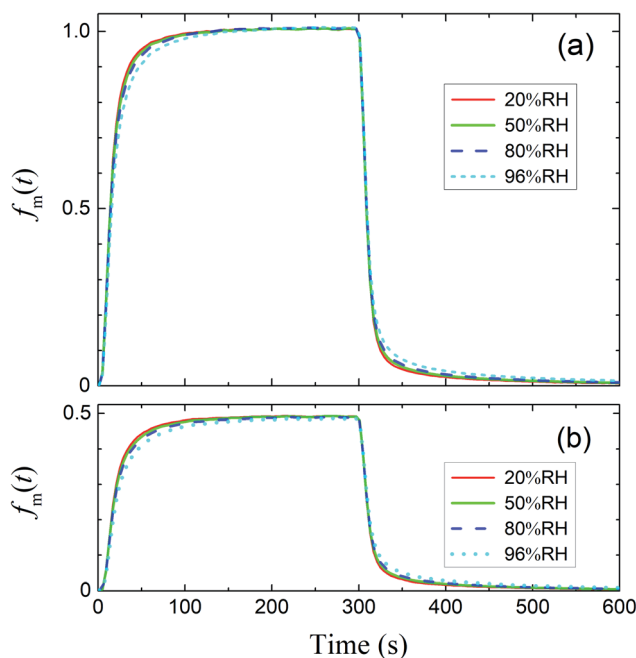


Fig. 2  $f_m(t)$  determined experimentally at four values of RH (a) when  $P_{in}$  is  $P_0$  ( $4 \times 10^{-7}$  atm) and (b) when  $P_{in}$  is  $0.5P_0$  ( $2 \times 10^{-7}$  atm).

**2.4.3 First-order rate constants with respect to the concentration of gaseous  $I_2$  for uptake on surfaces.** The loss rate of  $I_2$  by uptake on surfaces such as clay samples,  $U(t)$ , is calculated using

$$\frac{dP_{out}(t)}{dt} = \frac{1}{\tau_c} \times (P_0 f(t) - P_{out}(t)) - A_{np} U(t) \quad (17)$$

where  $P_0 f(t)$  is the time series of  $I_2$  in the input pulse,  $A_{np}$  is a unit conversion factor, and  $\tau_c$  is the residence time of  $I_2$ -air(s) in the contactor:

$$\tau_c = \frac{V_c}{F_{out}} \frac{T_0}{T} \quad (18)$$

where  $V_c$  is the volume ( $3.90 \times 10^{-1}$  dm<sup>3</sup>) and  $T$  is the temperature (283.2 K) of the contactor;  $T_0$  is 298.2 K. Eqn (17) is then rewritten as

$$U(t) = \frac{1}{A_{np}} \left\{ \frac{P_0 f(t) - P_{out}(t)}{\tau_c} - \frac{dP_{out}(t)}{dt} \right\} \quad (19)$$

From eqn (12), (16) and (19),  $U(t)$  can be expressed in terms of  $f_m(t)$  and  $x_m(t)$ , as shown in the ESI,<sup>†</sup> using

$$U(t) = \frac{P_0}{A_{np}} \times \left( \frac{f_m(t) - x_m(t)}{\tau_c} - \frac{\tau_m}{2\tau_c} \frac{dx_m(t)}{dt} + \frac{\tau_m}{2\tau_c} \frac{df_m(t)}{dt} - \frac{\tau_m}{2} \frac{d^2 x_m(t)}{dt^2} - \frac{dx_m(t)}{dt} \right) \quad (20)$$

Here, values of  $f_m(t)$  and  $df_m(t)/dt$  were calculated from eqn (13), and values of  $dx_m(t)/dt$  and  $d^2 x_m(t)/dt^2$  were obtained for each value of  $x_m(t)$  by quadratic curve fitting of five data points from  $(t - 8)$  to  $(t + 8)$ . The first-order rate constant for uptake of

$I_2$  on the surface with respect to  $x_{out}(t)$  at time  $t$ ,  $k_{1-a}(t)$ , is given from eqn (12) using

$$k_{1-a}(t) = \frac{\frac{f_m(t) + \frac{\tau_m}{2} \frac{df_m(t)}{dt}}{\tau_c} - \frac{\tau_m}{2} \frac{d^2 x_m(t)}{dt^2} - \frac{dx_m(t)}{dt}}{x_m(t) + \frac{\tau_m}{2} \frac{dx_m(t)}{dt}} - \frac{1}{\tau_c} \quad (21)$$

If uptake of  $I_2$  on the contactor is negligibly small, the deposition rate at time  $t$ ,  $k_{g-a}(t)$  in cm s<sup>-1</sup>, is then

$$k_{g-a}(t) = k_{1-a}(t) \times \frac{S_c}{S} \times h_c = \left( \frac{\frac{f_m(t) + \frac{\tau_m}{2} \frac{df_m(t)}{dt}}{\tau_c} - \frac{\tau_m}{2} \frac{d^2 x_m(t)}{dt^2} - \frac{dx_m(t)}{dt}}{x_m(t) + \frac{\tau_m}{2} \frac{dx_m(t)}{dt}} - \frac{1}{\tau_c} \right) \times \frac{S_c}{S} \times h_c \quad (22)$$

where  $h_c$  is the height of the contactor (7.5 cm). Values of  $k_{g-a}(t)$  are related not only to loss but also to adsorption of  $I_2$  on the samples. The apparent surface resistance for  $I_2$  above the surface,  $R_{g-a}(t)$ , is the reciprocal of  $k_{g-a}(t)$ :

$$R_{g-a}(t) = \frac{1}{k_{g-a}(t)} \quad (23)$$

**2.4.4 Parameter fitting by simulations to estimate surface resistance for  $I_2$ .** The parameters related to  $I_2$  uptake on surfaces were determined by a simulation in which the parameters were fitted to reproduce the time series of  $x_m(t)$  by using the parameter-fitting routine of FACSIMILE software (MCPA Software Ltd., UK).<sup>22</sup> It is briefly described in Section 3.

## 3. Results and discussion

### 3.1 Blank experiments


Blank experiments were run in which  $I_2$ -air(s) flowed through the contactor with no samples at each value of RH. These assumed perfect mixing of the gas phases and that no loss or adsorption of  $I_2$  occurred in the contactor:

$$\frac{dx_{out}(t)}{dt} = \frac{1}{\tau_c} \times (f(t) - x_{out}(t)) \quad (24)$$

Here,  $f(t)$  is calculated from  $f_m(t)$  using eqn (16), and  $x_{out}(t)$  is related to  $x_m(t)$  by eqn (12).

The measured time series (Fig. 3) showed that  $x_m(t)$  before and after 300 s was smaller and larger, respectively, than the dashed curve representing the simulation results, which showed that  $I_2$  was reversibly adsorbed on the inner wall of the contactor. This reversible adsorption of  $I_2$  increased with increasing RH.



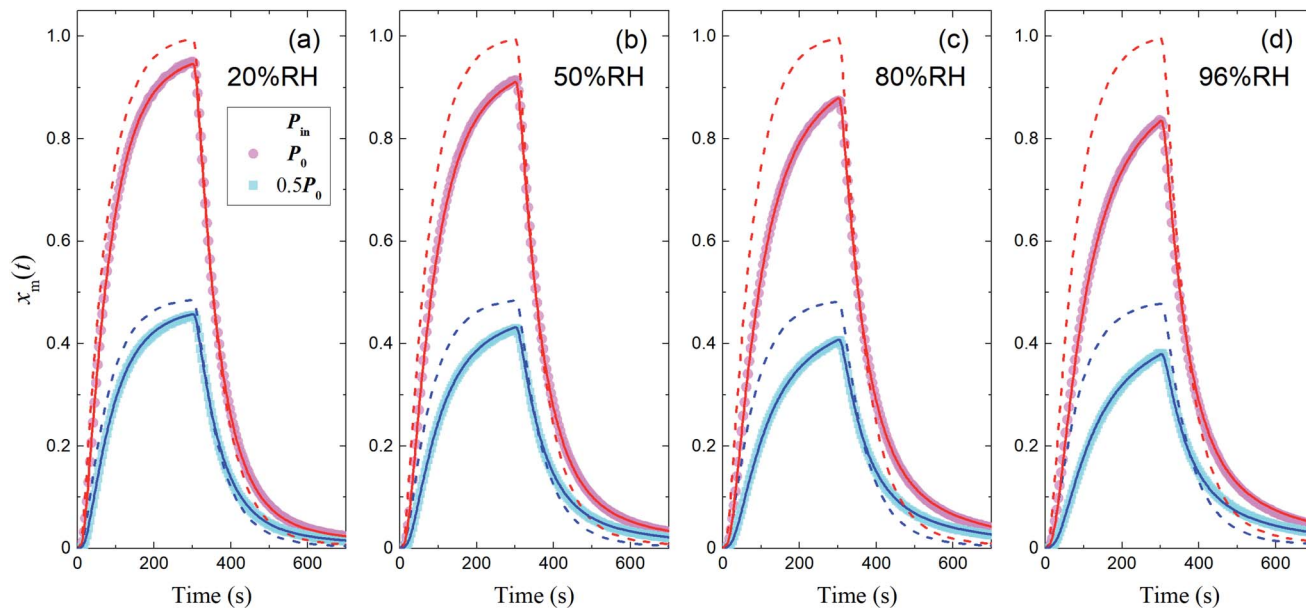

**Fig. 3** Time series of  $x_m(t)$  for  $I_2$  in blank experiments at four RH values.  $P_{in}$  was  $P_0$  ( $4.0 \times 10^{-7}$  atm; pink circles) or  $0.5P_0$  ( $2.0 \times 10^{-7}$  atm; blue squares), the temperature was 283.2 K, and  $F_{out}$  was (a)  $7.315 \times 10^{-3}$ , (b)  $7.281 \times 10^{-3}$ , (c)  $7.302 \times 10^{-3}$ , and (d)  $7.369 \times 10^{-3}$   $dm^3 s^{-1}$ . Dashed curves are the simulation results without loss or adsorption of  $I_2$  (from eqn (24)) and solid curves are fitted to the experimental results using eqn (26)–(28).

The apparent uptake rates of  $I_2$  by the contactor decreased with time, although the gas-phase concentrations of  $I_2$  increased (Fig. S4†). This result suggests that the uptake occurred as an initial rapid stage followed by a slow stage, as documented for the sorption of volatile organic compounds on soil particles.<sup>33</sup>  $I_2$  was readily adsorbed on the contactor walls, then transformed to internal surfaces, such as pores, at a slower rate. Thus our simulation assumed Freundlich-type adsorption of  $I_2$  on the contactor walls (eqn (25)) and a reversible transformation of  $I_2$  between the surface and internal sites:

$$y_b(t) = K_{bads} x_{out}(t)^{1/N} \quad (25)$$

where  $y_b(t)$  is the amount of  $I_2$  on the wall surface;  $K_{bads}$  and  $N$  are parameters of Freundlich adsorption equilibrium and  $N$  is 2 here, and

$$\frac{dx_{out}(t)}{dt} = \frac{1}{\tau_c} \times (f(t) - x_{out}(t)) - k_{bm} \times \left\{ x_{out}(t) - \left( \frac{y_b(t)}{K_{bads}} \right)^N \right\} \quad (26)$$

$$\frac{dy_b(t)}{dt} = A_{bpn} k_{bm} \times \left\{ x_{out}(t) - \left( \frac{y_b(t)}{K_{bads}} \right)^N \right\} - k_{bf} y_b(t) + k_{bb} z_b(t) \quad (27)$$

$$\frac{dz_b(t)}{dt} = k_{bf} y_b(t) - k_{bb} z_b(t) - k_{bl} z_b(t) \quad (28)$$

where  $k_{bm}$  is the mass-transfer coefficient of  $I_2$  between the gas phase and the wall surface;  $k_{bf}$  and  $k_{bb}$  are first-order forward and backward rate constants, respectively, for the transport of adsorbents between surface and internal sites in the wall;  $k_{bl}$  is

a first-order rate constant for  $I_2$  loss in the internal sites;  $z_b(t)$  is the amount of  $I_2$  in the internal sites; and  $A_{bpn}$  is a unit conversion factor. Simulations using eqn (12) and eqn (26)–(28) were conducted to simultaneously reproduce the observed time series of  $x_m(t)$  with values of  $K_{bads}$ ,  $k_{bf}$ ,  $k_{bb}$ , and  $k_{bl}$  as common parameters for each value of RH while a value of  $k_{bm}$  is a common parameter for all data.

The solid curves in Fig. 3 show  $x_m(t)$  values from the simulation that minimized the residual sum of squares (RSS); the observed data were satisfactorily reproduced. The values determined for each parameter are listed in Table S4,† which also lists mole ratios of  $I_2$  loss. In the blank experiments, the loss ratio of  $I_2$  increased from 2.7% to 12.6% with increasing RH for  $P_0$  as  $P_{in}$  and from 2.2% to 15.6% for  $0.5P_0$  as  $P_{in}$ . Langmuir-type adsorption of  $I_2$  on the contactor also reproduced the  $x_m(t)$  time series (Table S5†), but the Freundlich-type equation fitted the data with a smaller RSS, as shown in the ESI.† The parameters determined at each RH value (Table S4†) were used to estimate  $k_{1-a}(t)$  and simulate  $x_m(t)$  in the other experiments.

### 3.2 Uptake of $I_2$ by aqueous solutions

In the time series of  $x_m(t)$  in  $I_2$ -air(s) after passage through the contactor with dishes holding 2.8 mL of water, 1 mM aqueous sulfuric acid, or 1 mM or 10 mM aqueous ascorbic acid in small basins ( $S/S_c$ , 0.138), maximum values of  $x_m(t)$  for water and sulfuric acid were both  $\sim 5\%$  smaller than those of the blank, and values for ascorbic acid were  $\sim 40\%$  smaller than those of the blank (Fig. 4). The similar time series for water and sulfuric acid suggests that the water surface was saturated with undissociated  $I_2$  under the experimental conditions such that the uptake of  $I_2$  was controlled by aqueous-phase diffusion of  $I_2$ .




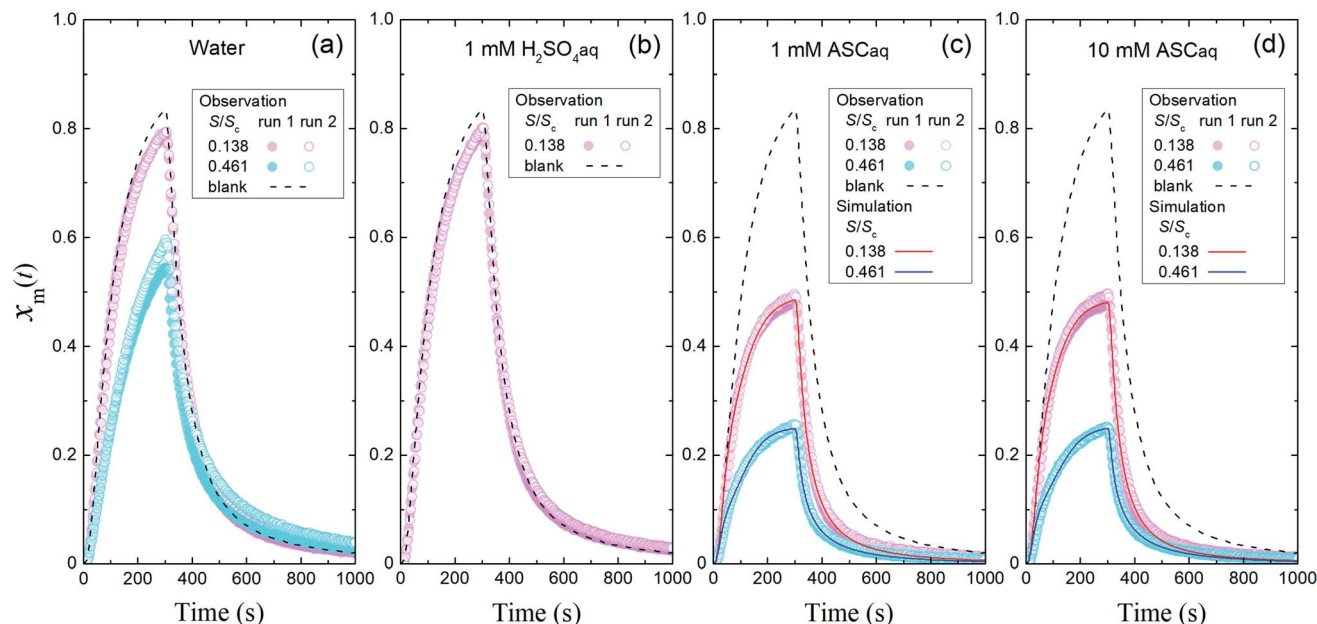


Fig. 4 Time series of  $x_m(t)$  in  $I_2$ -air(s) ( $P_{in}$ ,  $4.0 \times 10^{-7}$  atm) after passage through the contactor over (a) water, (b) 1 mM aqueous sulfuric acid ( $H_2SO_{4(aq)}$ ), (c) 1 mM aqueous ascorbic acid (ASC(aq)), and (d) 10 mM ASC(aq). Blank runs are shown as dashed curves. Pink symbols are the results for 2.8 mL of solution in the small basin ( $S/S_c$ , 0.137) of the contactor dish, and blue symbols are the results for 9.4 mL of solution in the large basin ( $S/S_c$ , 0.461). The red and blue curves are the simulation results obtained by using eqn (S11)–(S13).†

The dissociation ratio in reaction (R1) was estimated at 16% under the experimental conditions (283 K; pH, 5.6 for water in equilibrium with 400 ppmv  $CO_2$ ; partial pressure of  $I_2$ ,  $3.2 \times 10^{-7}$  atm) according to

$$\frac{[HOI]}{[I_2]} = \frac{[I^-]}{[I_2]} = \sqrt{\frac{K_a}{K_H P_{I_2} [H^+]}} \quad (29)$$

where  $K_a$  is the dissociation constant of reaction (R1) at 283 K,  $K_H$  is the Henry's law constant of  $I_2$  at 283 K, and  $P_{I_2}$  is the partial pressure of  $I_2$  (see the ESI†). In contrast, in ascorbic acid,  $I_2$  was reduced to  $I^-$  based on



and  $I_2$  uptake proceeded much faster than in water. With the reported rate constant for reaction (R3) of  $1.2 \times 10^5 \text{ M}^{-1} \text{ s}^{-1}$  at 20 °C,<sup>34</sup> the lifetime of  $I_2$  with respect to reaction (R3) in 10 mM ascorbic acid is estimated at about  $10^{-3}$  s at 20 °C, which is two orders of magnitude shorter than that of  $I_2$  with respect to hydrolysis in reaction (R1).<sup>35</sup> In this solution,  $I_2$  thus reacts dominantly with ascorbic acid. However, the similar time series of  $x_m(t)$  for 1 mM and 10 mM ascorbic acid (Fig. 4c and d) suggests that the rate-limiting step is not the aqueous reaction but mass transfer in the gas-film layer, as described by two-film layer theory. We estimated the resistance for  $I_2$  for mass transfer in the gas-film layer above ascorbic acid, or  $R_{g-cont-w}$ , under the experimental conditions from the  $k_{1-a}(t)$  values and simulations for 10 mM ascorbic acid, and as discussed below, we were able to compare them with the corresponding uptake coefficients ( $\gamma$ ) of  $I_2$  estimated from previously published data.

Fig. 4 also shows the time series of  $x_m(t)$  for experiments with 9.4 mL of liquid in the contactor dish with a large basin ( $S/S_c$ , 0.461). Loss rates of  $I_2$  through uptake on the surface,  $U(t)$ , were calculated during the injection period (13–289 s) using eqn (20). After 50 s, these values decreased with time for water and the blank but were almost constant for 10 mM ascorbic acid (Fig. 5a). Because the gas-phase concentration of  $I_2$  increased with time, the rate constants  $k_{1-a}(t)$  calculated using eqn (21) decreased with time (Fig. 5b). The  $k_{1-a}(t)$  value for uptake by the contactor (Table S6†) was subtracted from the rate constants, and the remainders were used to calculate deposition rates,  $k_{g-a}(t)$ , using eqn (22) (Fig. 5c).

The rate constant  $k_{1-a}$  and the deposition rate  $k_{g-a}$  were defined as the average of 10 data points of  $k_{1-a}(t)$  and  $k_{g-a}(t)$ , respectively, from 253–289 s and the surface resistance  $R_{g-a}$  was determined to be the reciprocal of  $k_{g-a}$ . When the  $k_{1-a}(t)$  value for the blank with  $P_0$  as  $P_{in}$  was subtracted from the rate constants in the first experimental run, the  $k_{g-a}$  values in 10 mM ascorbic acid were  $0.91 \pm 0.03 \text{ cm s}^{-1}$  for the small basin and  $0.85 \pm 0.01 \text{ cm s}^{-1}$  for the large basin, yielding  $R_{g-a}$  values of  $109 \text{ s m}^{-1}$  and  $118 \text{ s m}^{-1}$ , respectively. Values of  $k_{1-a}$ ,  $k_{g-a}$ , and  $R_{g-a}$  were estimated similarly for all of the aqueous solutions (Table S6†).

Simulations were carried out to distinguish the uptake of  $I_2$  by ascorbic acid and the contactor (Section S6-3 in the ESI†). Letting  $k_m$  be the mass-transfer coefficient of  $I_2$  in the gas-film layer above ascorbic acid, values of  $k_m$  are thus estimated to be  $0.91 \pm 0.01 \text{ cm s}^{-1}$  and  $0.78 \pm 0.01 \text{ cm s}^{-1}$  for the small and large basins, respectively (errors at 90% confidence level). These values are approximately equal to the estimated values of  $k_{g-a}$ . Overall,  $R_g$  is estimated to be  $120 \pm 5 \text{ s m}^{-1}$  from 16 data of  $R_{g-a}$ .





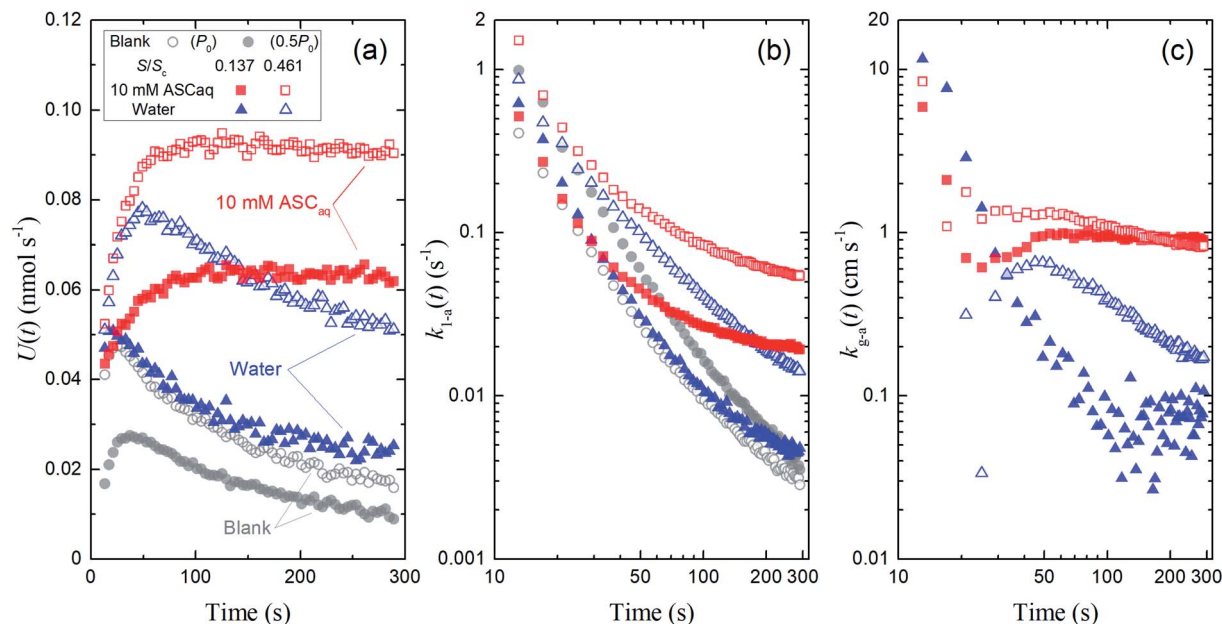


Fig. 5 Time series of (a) loss rates of  $\text{I}_2$  by uptake on surfaces,  $U(t)$ , (b) their apparent first-order rate constants,  $k_{1-a}(t)$ , and (c) their apparent deposition rates,  $k_{g-a}(t)$  in blanks and the first experimental run for 10 mM ascorbic acid and water in small basins ( $S/S_c = 0.138$ , closed symbols) and large basins ( $S/S_c = 0.461$ ; open symbols). Red square symbols represent the results for ascorbic acid, blue triangle symbols represent the results for water, and gray circle symbols represent the results for blank (open circles,  $P_0$  at  $P_{\text{in}}$  at 96% RH; closed circles,  $0.5P_0$  at  $P_{\text{in}}$  at 96% RH; the former was taken as the blank to obtain  $k_{g-a}(t)$  values here).

a for 1 mM and 10 mM ascorbic acid (Table S6†). Errors represent the standard deviation.

Referring to the reported physicochemical properties of  $\text{I}_2$ ,<sup>34,36–38</sup> we estimate the uptake coefficients ( $\gamma$ ) of  $\text{I}_2$  at  $2.6 \times 10^{-3}$  for 10 mM ascorbic acid and  $1.0 \times 10^{-3}$  for 1 mM ascorbic acid (Section S6.4. in the ESI†). In this estimate,  $10^{-2}$  was adopted as the accommodation coefficient of  $\text{I}_2$ .<sup>36</sup> In the absence of the gas-film transfer limitation, the  $R_g$  values for  $\text{I}_2$  above ascorbic acid would be  $10 \text{ s m}^{-1}$  and  $26 \text{ s m}^{-1}$ , respectively (the ESI†). These values are much smaller than the  $R_g$  values obtained here; this supports our experimental finding that the  $R_g$  value of  $120 \text{ s m}^{-1}$  is the resistance for mass transfer of  $\text{I}_2$  in the gas-film layer above aqueous surfaces ( $R_{g\text{-cont-w}}$ ). This value of  $R_{g\text{-cont-w}}$  was used as the resistance for mass transfer of  $\text{I}_2$  in the gas-film layer above clay samples in Section 3.3.

Fig. 4 and 5 suggest that uptake of  $\text{I}_2$  by water differed with basin size, probably because of a difference in aqueous-phase turbulence between them. We did not obtain surface resistance for  $\text{I}_2$  above water. As seen in eqn (29), dissociation of  $\text{I}_2$  in water occurs much more strongly in the atmosphere than that observed here because the partial pressure of  $\text{I}_2$  is very low, and  $\text{I}_2$  uptake on aqueous surfaces in the atmosphere is determined not only by turbulence near surface water but also by hydrolysis in reaction (R1).<sup>36</sup> For ascorbic acid, because the leaf apoplast contains ascorbic acid, reaction (R3) is expected to proceed in the leaf interior, where  $\text{O}_3$  is taken up by ascorbic acid.<sup>39</sup> However, this will happen only in the small number of plants that open their stomata at night.<sup>19</sup>

### 3.3 Uptake by clay samples

**3.3.1 Loss and adsorption ratios of  $\text{I}_2$ .** The first of our experiments with a flow of  $\text{I}_2$ -air(s) over the clay samples was conducted at 80% RH and yielded  $x_m(t)$  values that were definitely smaller than those of the blank experiment (Fig. 6). For each clay sample,  $x_m(t)$  was smaller in the large basins than in the small basins. These results showed that  $\text{I}_2$  was deposited on the clay samples and removed from the gas phase. Uptake of  $\text{I}_2$  by clay samples probably involved irreversible adsorption of  $\text{I}_2$  in micropores of clay minerals because of the relatively large size of  $\text{I}_2$ , as reported for  $\text{I}_2$  uptake by active carbons.<sup>40</sup> This decrease of  $x_m(t)$  varied among the clay samples, but the variation was small compared to that of the BET surface areas of the samples (Table 1). Fig. S5 and S6† show the results for 20% RH and 50% RH, respectively.

Loss ratios of  $\text{I}_2$  were defined as  $\Delta Q_{\text{loss}}/Q_{\text{in}}$ , where  $\Delta Q_{\text{loss}} = Q_{\text{in}} - Q_{\text{out}}$ ,  $Q_{\text{in}}$  was the amount of  $\text{I}_2$  entering the contactor, and  $Q_{\text{out}}$  was the integrated amount of  $\text{I}_2$  observed at 0–1709 s in  $\text{I}_2$ -air(s) leaving the contactor. Loss ratios of  $\text{I}_2$  decreased over successive runs for every clay sample. The decrease was greatest after run 1 (Fig. 7). Loss ratios decreased with increasing RH from 20% RH to 80% RH for all runs of allophane and for runs 3–7 of illite and kaolinite. This dependence on RH tended to strengthen as runs were repeated. Loss ratios for montmorillonite, halloysite, and Agromat AG-1 decreased between 20% RH and 50% RH and increased between 50% RH and 80% RH. However, the latter increase was also evident in the blank experiments. This relative-humidity dependence is discussed in Section 3.3.3 (see eqn (40)).



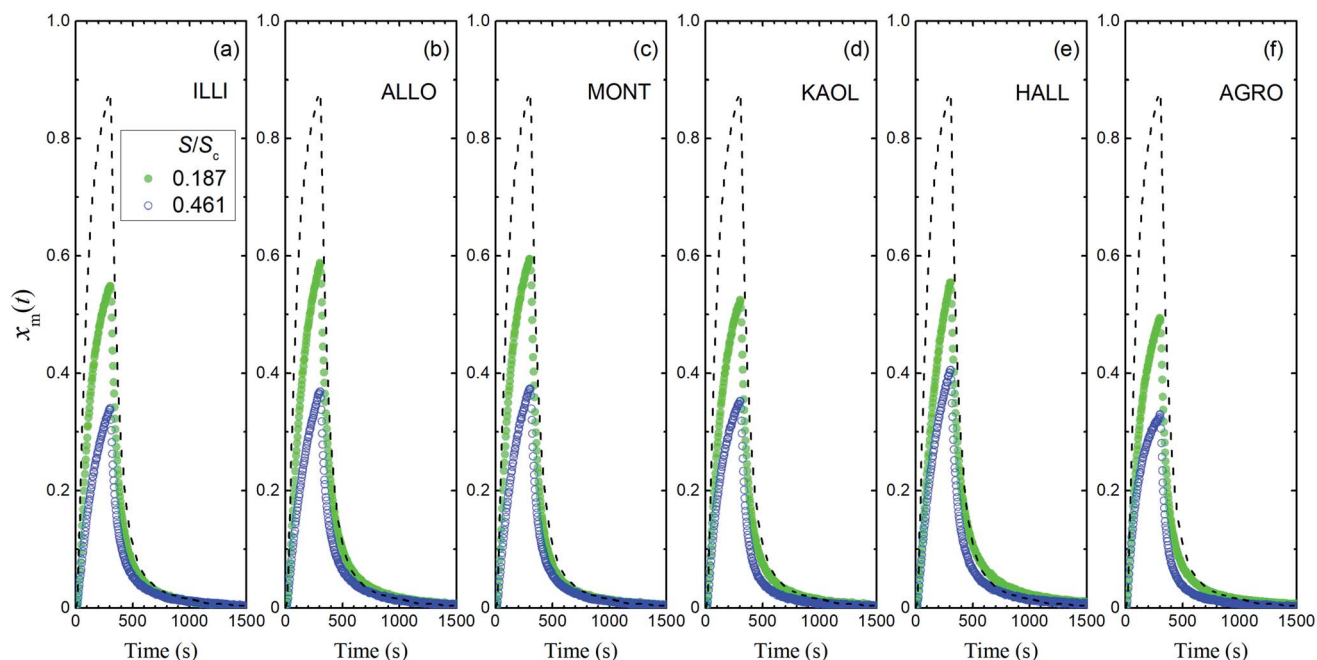


Fig. 6 Time series of  $x_m(t)$  in  $I_2$ -air(s) ( $P_{in}$ ,  $4.0 \times 10^{-7}$  atm) after passage through a contactor containing (a) illite, (b) allophane, (c) montmorillonite, (d) kaolinite, (e) halloysite, or (f) AgroMAT AG-1 in run 1 at 80% RH in small basins ( $S/S_c$ , 0.187; sample, 0.73 g; green closed symbols) and large basins ( $S/S_c$ , 0.461; sample, 1.78 g; blue open symbols). Dashed curves show time series of  $x_m(t)$  in blank experiments at 80% RH.

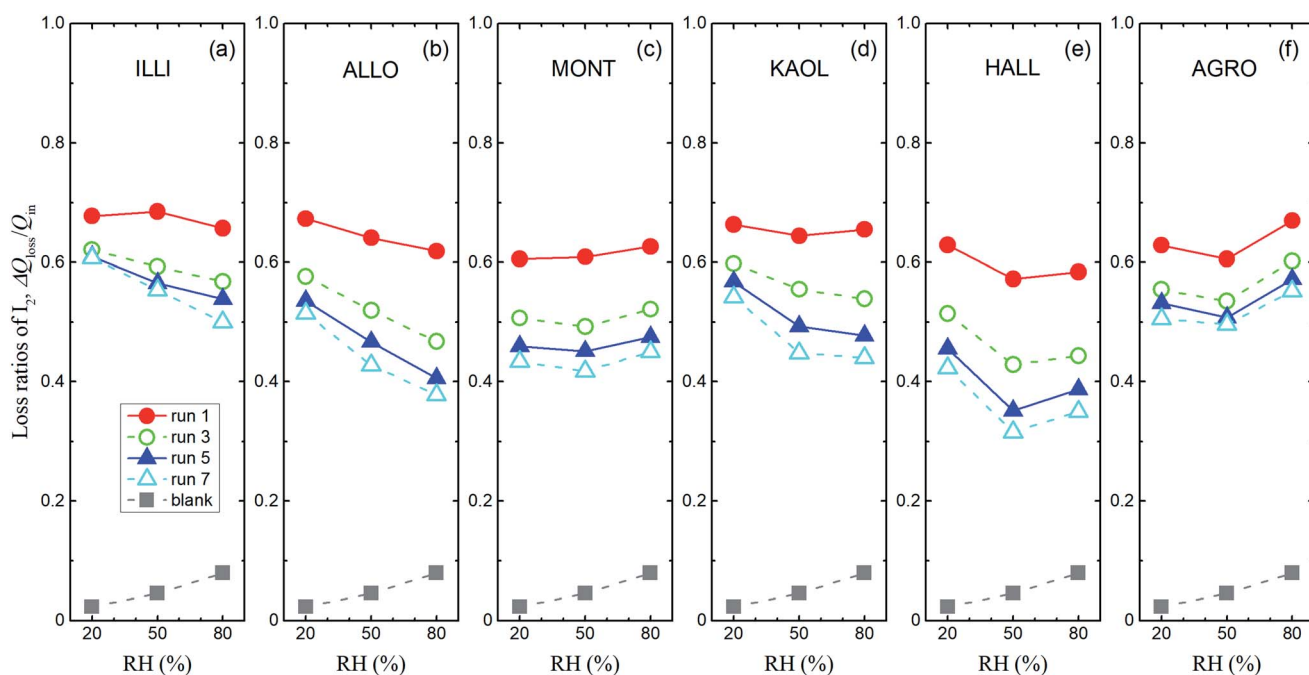


Fig. 7 Loss ratios of  $I_2$ ,  $\Delta Q_{loss}/Q_{in}$  versus RH for  $I_2$ -air(s) mixtures flowing over large basins of (a) illite, (b) allophane, (c) montmorillonite, (d) kaolinite, (e) halloysite, and (f) AgroMAT AG-1 samples in odd-numbered runs ( $P_{in}$ ,  $4.0 \times 10^{-7}$  atm). Gray squares show  $\Delta Q_{loss}/Q_{in}$  in blank experiments with  $P_0$  as  $P_{in}$ .

Fig. 8 shows the time series of  $x_m(t)$  in odd-numbered runs for kaolinite at 80% RH along with the same profiles normalized to the maximum ( $x_{m-max}$ ) in each run to bring out changes in the profile shape with successive runs. The monotonic decrease

with successive runs of the ratios of the integrated amount of  $I_2$  during the injection period (0–300 s) to that after 300 s meant that there was an increase in the ratio of  $I_2$  adsorption to  $I_2$  loss. Fig. 9 shows stacked column charts of  $\Delta Q_{loss}/Q_{in}$  and  $\Delta Q_{ads}/Q_{in}$

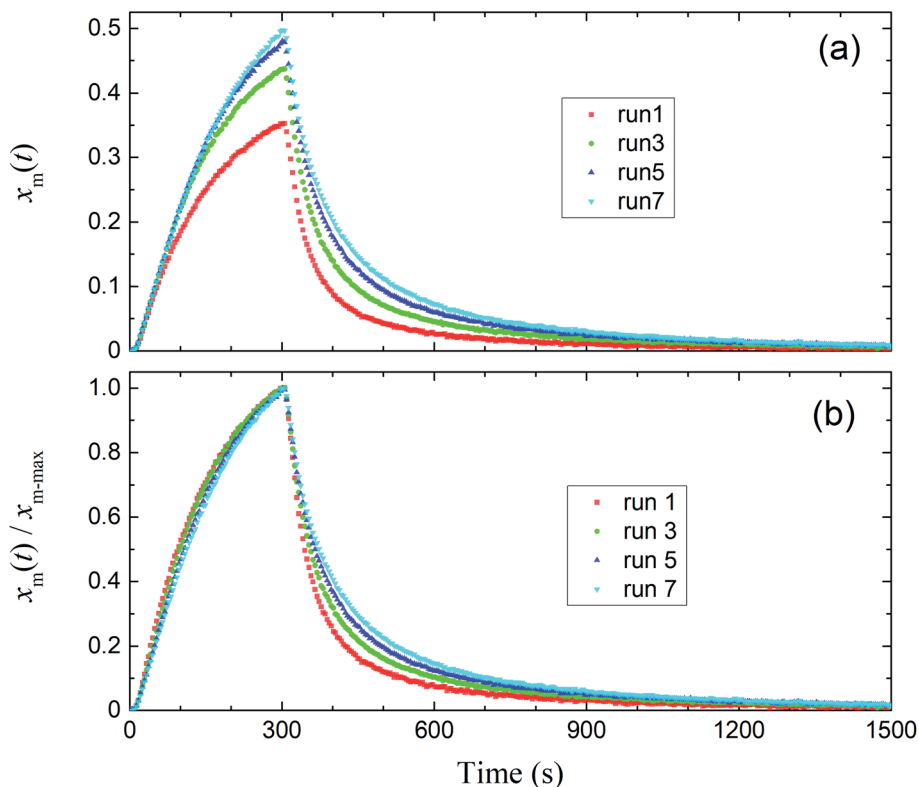


Fig. 8 (a) Time series of  $x_m(t)$  in  $I_2$ -air(s) for odd-numbered runs with kaolinite in the small basin at 80% RH ( $P_{in}$ ,  $4.0 \times 10^{-7}$  atm). (b) Normalized time series from (a).

for odd-numbered runs with each clay sample at 80% RH.  $\Delta Q_{ads}$  is the amount of  $I_2$  reversibly adsorbed on the clay samples and was defined as  $\Delta Q_{ads} = Q_{aft} - Q_{300} - Q_{saft}$  where  $Q_{aft}$  is the integrated amount of  $I_2$  observed at 301–1709 s in  $I_2$ -air(s) leaving the contactor,  $Q_{300}$  is the amount of gaseous  $I_2$  in the contactor at 300 s, and  $Q_{saft}$  is the integrated amount of  $I_2$  in  $I_2$ -air(s) entering the contactor at 301–1709 s (Fig. 2).  $\Delta Q_{loss}$  decreased and  $\Delta Q_{ads}$  increased with successive runs; the sum of  $\Delta Q_{loss}$  and  $\Delta Q_{ads}$ , which represented the amount of  $I_2$  accommodated by clay samples, remained almost constant or decreased more slowly than  $\Delta Q_{loss}$  with successive runs. This behavior could be explained by using a two-stage model with two kinds of active sites on the surface and in the interior for loss of  $I_2$ . One kind was consumed on the surface, and the other retained its activity in the interior for uptake of  $I_2$ , as shown in Section 3.3.3. Similar behavior of  $\Delta Q_{loss}/Q_{in}$  and  $\Delta Q_{ads}/Q_{in}$  over successive runs was observed at 20% RH and 50% RH and for even-numbered runs (Fig. S7–S11†).

**3.3.2 Apparent surface resistance for  $I_2$ .** We calculated  $I_2$  loss rates through surface uptake  $U(t)$ , the rate constants  $k_{1-a}(t)$ , and the deposition rates  $k_{g-a}(t)$  during the injection period (13–289 s) for each run of the clay experiments at the two basin sizes. Fig. 10 shows the results of runs 1 and 5 with illite at 80% RH. We then used a procedure analogous to our procedure for the aqueous solutions (Section 3.2) to obtain the apparent surface resistance,  $R_{g-a}$ , above the clay samples (Tables S8–S13) as described in Section S7.3 in the ESI.†

If  $R_{g-cont}$  is the resistance for mass transfer of  $I_2$  in the gas-film layer above clay samples in the contactor, the surface resistance for  $I_2$  above clay samples,  $R_{g-a-clay}$ , is given by

$$R_{g-a-clay} = R_{g-a} - R_{g-cont} \quad (30)$$

The  $R_{g-cont-w}$  value above ascorbic acid ( $120 \pm 5 \text{ s m}^{-1}$ ; Section 3.2) was taken as the value of  $R_{g-cont}$  in eqn (30). Fig. 11 shows the  $R_{g-a-clay}$  values thus calculated from the average of  $R_{g-a}$  values for each clay sample with the  $R_{g-cont-w}$  value.

However, as is apparent in Tables S8–S13,† the values of  $R_{g-a}$  for all clay samples in even-numbered runs ( $P_{in}$ ,  $0.5P_0$ ) are apparently smaller than the  $R_{g-a}$  values in odd-numbered runs ( $P_{in}$ ,  $P_0$ ), except for run 1. This pattern suggests that there was a systematic error in the determination of  $R_{g-a}$ . This error was probably caused by the fact that the degree of decrease in  $k_{1-a}(t)$  with time differed between even-numbered and odd-numbered runs because the values of  $P_{in}$  differed and because the differences varied between each run and blank. To reduce these errors, the mass-transfer processes of  $I_2$  in a gas-film layer above clay samples need to be formulated and then taken into account in a simulated calculation to reproduce the decrease of  $I_2$  uptake rates with time and to distinguish between  $I_2$  uptake on clay samples and uptake on the wall surfaces of the contactor (blank). The parameters obtained in the simulation were used to estimate  $I_2$  uptake rates at the low concentrations of  $I_2$  that might be found in the atmosphere.



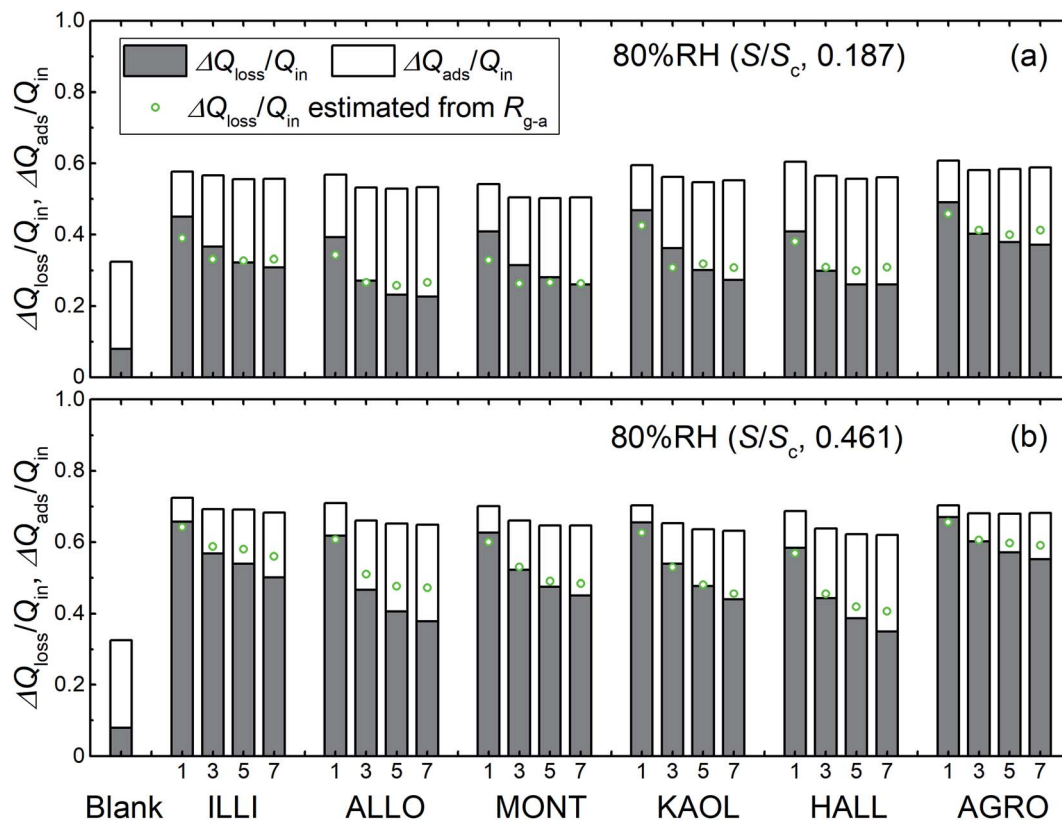


Fig. 9 Loss ratios ( $\Delta Q_{\text{loss}}/Q_{\text{in}}$ , grey columns) and adsorption ratios ( $\Delta Q_{\text{ads}}/Q_{\text{in}}$ , white columns) of  $\text{I}_2$  for blank and odd-numbered runs with each clay sample, (a) in small basins ( $S/S_c$ , 0.187) and (b) in large basins ( $S/S_c$ , 0.461), at 80% RH ( $P_{\text{in}}$ ,  $4.0 \times 10^{-7}$  atm). Green circles represent loss ratios,  $\Delta Q_{\text{loss}}/Q_{\text{in}}$ , calculated from  $R_{g-a}$  (Tables S8–S13†) with eqn (S21).†

**3.3.3 Simulation of  $\text{I}_2$  uptake by clay samples.** The simulation was conducted on the basis of a two-stage model in which the uptake of  $\text{I}_2$  by clay samples occurred *via* an initial stage of rapid sorption onto surface sites followed by a stage of slow sorption onto interior sites such as the mesopores and the micropores of clay samples. Such a two-stage process has been documented for the sorption of volatile organic compounds on soil particles.<sup>33</sup> Kinetics of adsorption on porous solids such as clay particles in the gas phase and in liquid phase has been investigated on the basis of intraparticle diffusion models or surface reaction models.<sup>33,41,42</sup> Statistical rate theory also approached adsorption/desorption kinetics for homogeneous and heterogeneous solid surfaces.<sup>41</sup> We used a surface reaction model assuming homogeneous surfaces. This model was simple but could reproduce the time series of  $x_m(t)$  in consecutive runs as shown below.

For the first stage, as mentioned in the previous section, we assumed that the mass-transfer rates of the  $\text{I}_2$  in the gas-film layer above the clay samples were represented by a time-dependent function of  $k_m(t)$  that took positive values for the mass transfer from the gas to surfaces and negative values for the reverse transfer. This scenario is analogous to a model for gas-film layer diffusion followed by Langmuir-type adsorption (see the ESI†) and takes the form

$$\frac{dx_{\text{out}}(t)}{dt} = \frac{1}{\tau_c} \times (f(t) - x_{\text{out}}(t)) - \frac{S}{S_c h_c} k_m(t) \times x_{\text{out}}(t) - k_{\text{bm}} \times \left\{ x_{\text{out}}(t) - \left( \frac{y_b(t)}{K_{\text{bads}}} \right)^2 \right\} \quad (31)$$


$$k_m(t) = k_{\text{ma}} \times \frac{x_{\text{out}}(t) - \frac{\theta(t)}{1 - \theta(t)} \frac{1}{K_{\text{ads}}}}{x_{\text{out}}(t)} \quad (32)$$

where  $K_{\text{ads}}$  is the equilibrium coefficient for the adsorption of  $\text{I}_2$  onto clay samples, and  $k_{\text{ma}}$  is a parameter needed to determine  $k_m(t)$ ; it is noteworthy that  $k_{\text{ma}}$  may take larger values than the actual mass-transfer rates of  $\text{I}_2$  in the gas-film layer. Here,  $\theta(t)$  is the fractional coverage on the surface, that is,  $q_t/q_\infty$ , where  $q_t$  and  $q_\infty$  denote the amount of  $\text{I}_2$  adsorbed at time  $t$  and when the clay surface is fully saturated, respectively.

For the second stage, some of the adsorbed  $\text{I}_2$  is assumed to transfer between the surface and the interior sites and some is lost. As described in Section 3.3.1, the loss ratios of  $\text{I}_2$  decreased over successive runs for every clay sample. The decrease was greatest after run 1 and remained finite through each set of experimental runs. This pattern suggests different kinds of active sites for loss of  $\text{I}_2$ . We hence assumed that there were two kinds of active sites: one kind was consumed on the surface, and the other retained its activity in the interior for uptake of  $\text{I}_2$  as follows:





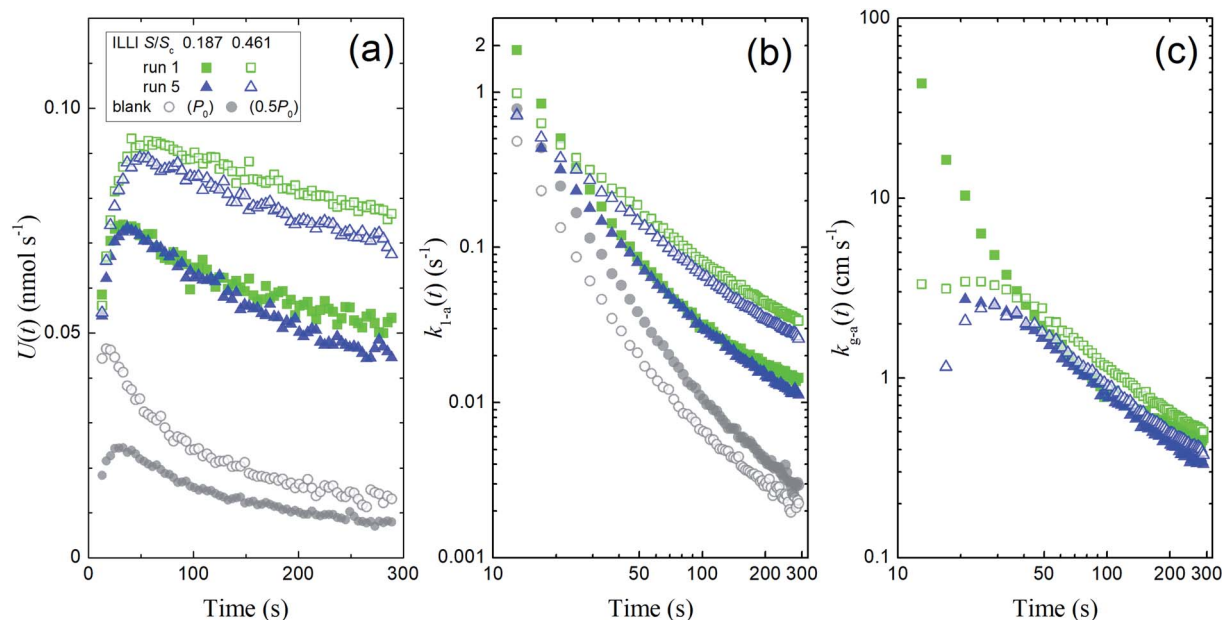

**Fig. 10** Plots calculated from the experimental results during  $\text{I}_2$  injection over illite at 80% RH showing (a) loss rates of  $\text{I}_2$  by surface uptake,  $U(t)$ , (b) the apparent first-order rate constants  $k_{1-a}(t)$ , and (c) the apparent deposition rates  $k_{g-a}(t)$  in blank experiments and in runs 1 and 5 with small basins ( $S/S_c$ , 0.187; closed symbols) and large basins ( $S/S_c$ , 0.461; open symbols). Green squares indicate the results in run 1, blue triangles indicate the results in run 5, and grey circles indicate the results for the blank run (open circles,  $P_{\text{in}} = P_0$ ; closed circles,  $P_{\text{in}} = 0.5P_0$ ). The  $k_{1-a}(t)$  value for the blank with  $P_{\text{in}} = 0.5P_0$  was subtracted from each value of  $k_{1-a}(t)$ , and the difference was used to calculate the  $k_{g-a}(t)$  value.

$$\frac{d\theta(t)}{dt} = \frac{B_{\text{pn}}}{q_{\infty}} \times k_{\text{m}}(t) \times \left( x_{\text{out}}(t) - \frac{\theta(t)}{1 - \theta(t)} \frac{1}{K_{\text{ads}}} \right) - k_{\text{f}} \times \left( \theta(t) - \frac{\varphi(t)}{K_{\text{pads}}} \right) - k_{\text{loss-s}}(t)\theta(t) \quad (33)$$

$$\frac{d\varphi(t)}{dt} = k_{\text{f}} \times \left( \theta(t) - \frac{\varphi(t)}{K_{\text{pads}}} \right) - k_{\text{loss-p}}\varphi(t) \quad (34)$$

where  $k_{\text{f}}$  is the first-order rate constant for the transfer of adsorbents from the surface to the interior sites of the clay samples,  $K_{\text{pads}}$  is the equilibrium constant of  $\text{I}_2$  between the surface and the interior,  $\varphi(t)$  is the number of the interior sites into which  $\text{I}_2$  has been transformed as a fraction of  $q_{\infty}$ ,  $B_{\text{pn}}$  is a conversion factor used to convert units,  $k_{\text{loss-p}}$  is the first-order rate constant for loss of  $\text{I}_2$  in the interior sites that retain their activity regardless of  $\text{I}_2$  loss. Here,  $k_{\text{loss-s}}(t)$  is the time-dependent, first-order rate constant for loss of  $\text{I}_2$  in the surface sites and is represented by

$$k_{\text{loss-s}}(t) = k_{\text{ls0}} \times \frac{n_{\text{ls}}(t)}{N_{\text{ls0}}} \quad (35)$$

where  $k_{\text{ls0}}$  is the first-order rate constant for  $\text{I}_2$  loss for fresh clay samples at the active sites that are lost per loss of  $\text{I}_2$ , and  $N_{\text{ls0}}$  and  $n_{\text{ls}}(t)$  are the numbers of these active sites as a fraction of  $q_{\infty}$  for fresh clay samples and for clay samples exposed to  $\text{I}_2$ -air(s) during time  $t$ , respectively. Assuming that the decrease of  $n_{\text{ls}}(t)$  is equal to the loss of  $\text{I}_2$ , it follows that

$$\frac{dn_{\text{ls}}(t)}{dt} = -k_{\text{ls0}} \times \frac{n_{\text{ls}}(t)}{N_{\text{ls0}}} \theta(t) \quad (36)$$

Simulations using eqn (31)–(36) together with eqn (12), (27) and (28) were conducted to simultaneously reproduce the time series of  $x_{\text{m}}(t)$  for runs 1–5 for the same clay sample in two experimental sets, one set with small basins and another with large basins for each clay sample (Fig. S12–S17†). The simulation was conducted with common values of the parameters  $k_{\text{ma}}$ ,  $K_{\text{ads}}$ ,  $k_{\text{f}}$ ,  $k_{\text{loss-p}}$ ,  $k_{\text{ls0}}$ , and  $N_{\text{ls0}}$  for both experimental sets and with a parameter  $q_{\infty}$  that varied between the sets. Fig. 12 shows the result for montmorillonite samples at 80% RH. The observed time-series of  $x_{\text{m}}(t)$  were reproduced by the simulation. The active sites for  $\text{I}_2$  loss on the surface decreased with successive runs and almost all sites were lost at the end of run 5. The observed data were similarly reproduced by the simulation for all clay samples (Fig. S12–S17†). The values of the parameters obtained in the simulation are listed in Table S14.† The residual sums of squares, RSS, for allophane and kaolinite samples at 20% RH were larger than those for the other samples. Values of  $k_{\text{f}}$  decreased with increasing relative humidity for all clay samples (Table S14†). This decrease was consistent with the scenario that a water film formed in the interior, which increased with relative humidity and decreased surface areas in shale clay,<sup>43</sup> reduced rates for the transfer of  $\text{I}_2$  between the surface and the interior of clay samples.

The corresponding equilibrium constant,  $K_{\text{pads}}$ , decreased with increasing RH between 50% and 80% for illite, allophane, and kaolinite samples while it increased or remained almost constant for montmorillonite, halloysite, and AgroMAT AG-1 samples. It suggested that the water film might destabilize  $\text{I}_2$  on the surface and in the interior to almost the same extent for the latter three clay samples since  $K_{\text{pads}}$  was the equilibrium



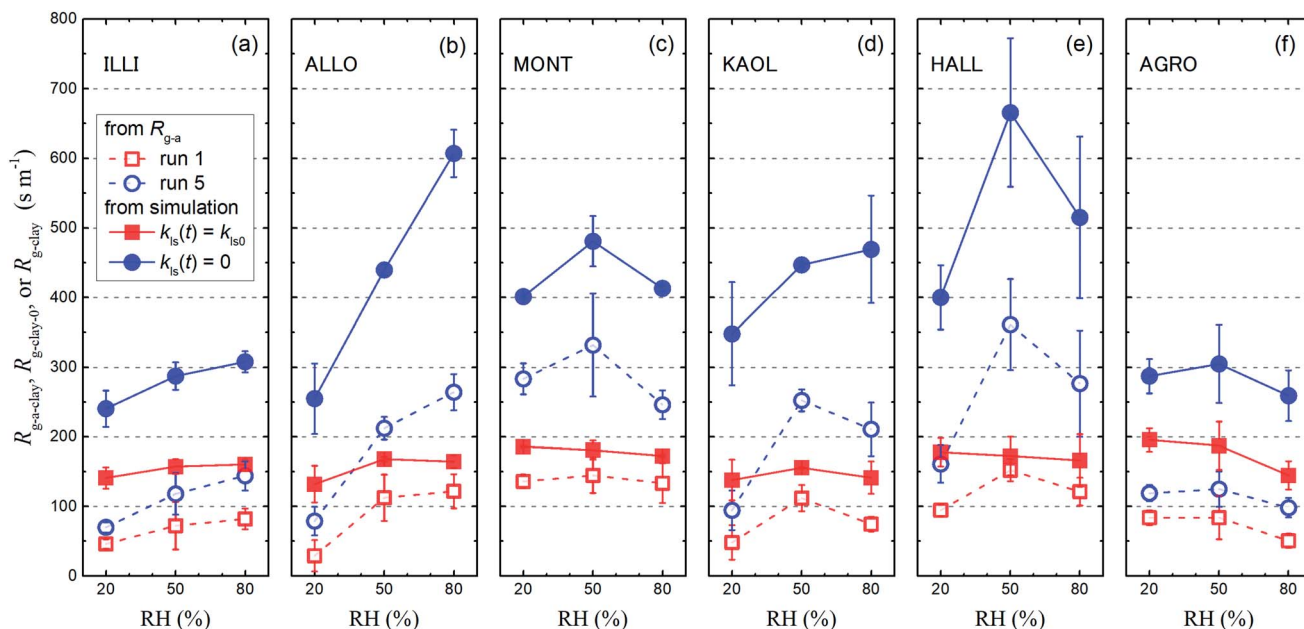


Fig. 11 Resistance for  $I_2$  above clay samples of  $R_{g-a-clay}$ ,  $R_{g-clay-0}$ , and  $R_{g-clay}$  at 20% RH, 50% RH, and 80% RH. The  $R_{g-a-clay}$  values (open symbols) were calculated with eqn (30) by subtracting the  $R_{g-cont-w}$  value ( $120 \text{ s m}^{-1}$ ) from the average of the  $R_{g-a}$  values with small and large basins for each clay sample in run 1 (red squares) and run 5 (blue circles) (Tables S8–S13†). Values of  $R_{g-clay-0}$  (red closed squares) and  $R_{g-clay}$  (blue closed circles) were calculated with eqn (38) and eqn (40), respectively, using the values of parameters obtained in the simulation (Table S14†). Error bars are standard deviations of the two values: one is calculated for the results with the small basins and the other is calculated for the results with the large basins.

constant of  $I_2$  between the surface and the interior of clay samples. This equal destabilization might be the reason that the loss ratios for the latter three clay samples increased with RH between 50% and 80% (Fig. 7 and 11) as discussed below (see eqn (40)).

When uptake of  $I_2$  proceeded at a constant rate at low concentrations of  $I_2$  such as the concentrations in the atmosphere, we calculated the uptake rate  $k_{g0}$  of  $I_2$  by fresh clays with eqn (37) (see the ESI†)

$$k_{g0} = \frac{\frac{q_{\infty}}{B_{pn}} k_{\text{loss-s}}(t)}{\frac{1}{K_{\text{ads}}} + \frac{1}{\frac{k_{\text{ma}}}{K_{\text{pads}} k_{\text{loss-p}}} + \frac{k_{\text{ma}}}{k_{2f}}} + \frac{k_{\text{loss-s}}(t)}{k_{\text{ma}}}} + \frac{\frac{q_{\infty}}{B_{pn}}}{\frac{q_{\infty}}{B_{pn}} \frac{1}{k_{\text{ma}}} + \frac{1}{K_{\text{ads}} k_{\text{f}}} + \frac{1}{K_{\text{ads}} K_{\text{pads}} k_{\text{loss-p}}} + \frac{k_{\text{loss-s}}(t)}{k_{\text{ma}} k_{\text{f}}} \left( \frac{k_{\text{f}}}{K_{\text{pads}} k_{\text{loss-p}}} + 1 \right)} \quad (37)$$

Because the term  $k_{\text{ma}}^{-1}$  on the right side of eqn (37) corresponds to mass transfer in a gas-film layer, the surface resistance above fresh clays,  $R_{g-clay-0}$ , is represented by

$$R_{g-clay-0} = \left( \frac{\frac{q_{\infty}}{B_{pn}} K_{\text{ads}} k_{\text{loss-s}}(t) + \frac{1}{\frac{1}{K_{\text{ads}} k_{\text{f}}} + \frac{1}{K_{\text{ads}} K_{\text{pads}} k_{\text{loss-p}}}}}{\frac{q_{\infty}}{B_{pn}}} \right)^{-1} \quad (38)$$

We assumed that  $k_{\text{loss-s}}(t) = 0$  for clays in the environment because surface active sites might be consumed by exposure to

naturally-occurring  $I_2$  and other species. For clays with  $k_{\text{loss-s}}(t) = 0$ , the uptake rate  $k_g$  of  $I_2$  by the clays and the surface resistance for  $I_2$  above the clays,  $R_{g-clay}$ , are given by eqn (39) and (40), respectively, from eqn (37) and (38).

$$k_g = \frac{\frac{q_{\infty}}{B_{pn}}}{\frac{q_{\infty}}{B_{pn}} \frac{1}{k_{\text{ma}}} + \frac{1}{K_{\text{ads}} k_{\text{f}}} + \frac{1}{K_{\text{ads}} K_{\text{pads}} k_{\text{loss-p}}}} \quad (39)$$

$$R_{g-clay} = \frac{B_{pn}}{q_{\infty}} \frac{1}{K_{\text{ads}} k_{\text{f}}} + \frac{B_{pn}}{q_{\infty}} \frac{1}{K_{\text{ads}} K_{\text{pads}} k_{\text{loss-p}}} \quad (40)$$

Values of  $k_{g0}$ ,  $R_{g-clay-0}$ ,  $k_g$ , and  $R_{g-clay}$  were calculated from the values of the parameters obtained in the simulation (Table S14†). The calculated values of  $R_{g-clay-0}$  and  $R_{g-clay}$  are plotted in Fig. 11. The  $R_{g-clay-0}$  values were greater than the  $R_{g-a-clay}$  values for run 1 and the difference was about  $100 \text{ s m}^{-1}$  for illite and AgroMAT-AG-1 samples. The implication is that the value of  $R_{g-cont}$  in eqn (30) was overestimated. It is possible that the value of

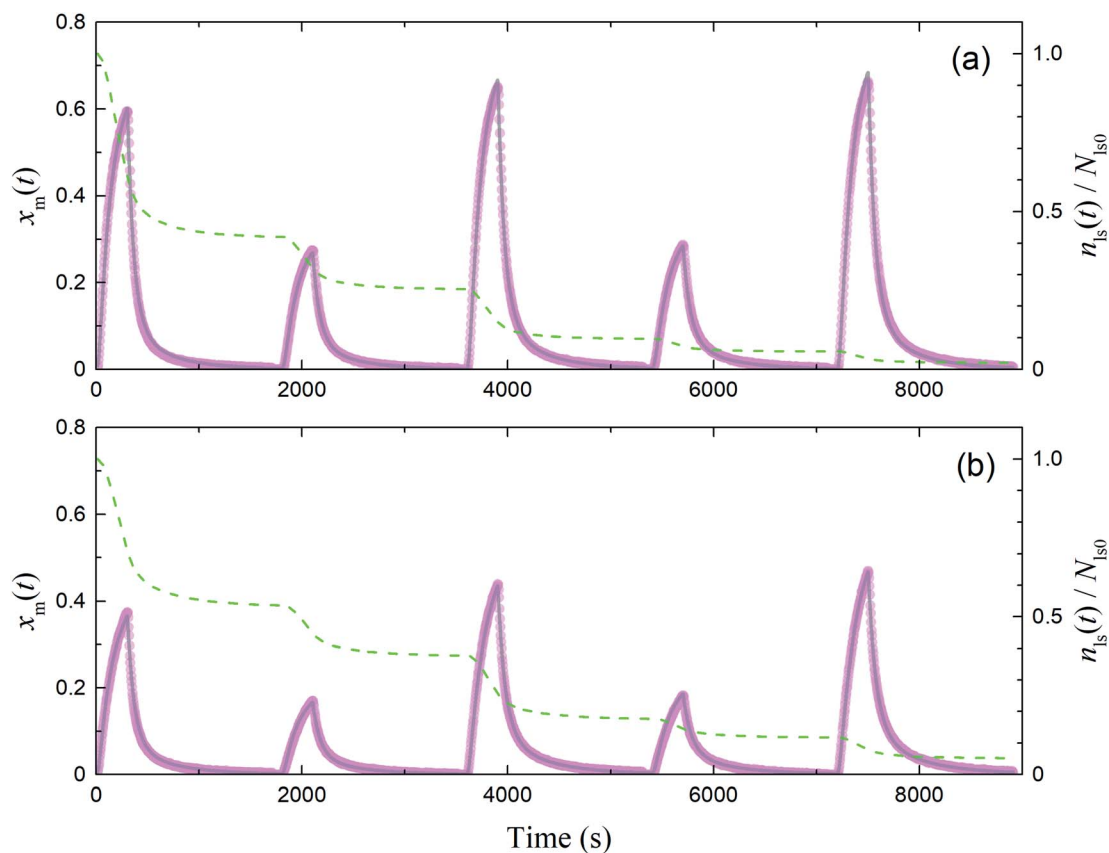


Fig. 12 Time series of  $x_m(t)$  in  $I_2$ -air(s) observed (pink circles) and simulated (grey curves) in runs 1–5 with each montmorillonite sample at 80% RH in (a) small basins ( $S/S_c$ , 0.187) and (b) large basins ( $S/S_c$ , 0.461). Green dashed curves indicate the time series of residence ratios of active sites for  $I_2$  loss,  $n_{ls}(t)/N_{ls0}$ . Temporal duration of each run was about 1700 s and there were several minutes between runs; however, each panel shows plots of all data from runs 1–5 in consecutive 1800 s intervals for convenience.

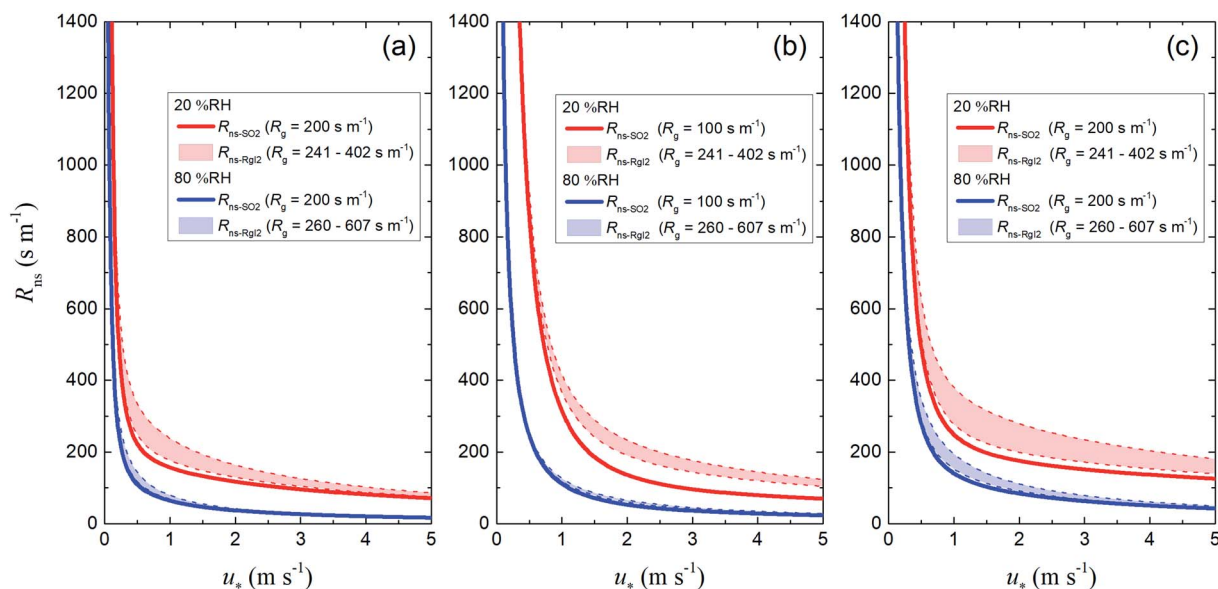


Fig. 13 Plots of non-stomatal surface resistance,  $R_{ns}$ , against friction velocity,  $u_*$ , at 20% RH (red) and 80% RH (blue) if  $R_g$  is the reference value for  $SO_2$  (solid curves,  $R_{ns-SO_2}$ ) or the  $R_{g-clay}$  value for  $I_2$  (dashed curves,  $R_{ns-Rgl2}$ ) for (a) short grass and forbs, (b) evergreen broadleaf trees, and (c) deciduous broadleaf trees. For the deciduous broadleaf tree LUC, LAI is 0.5, the reference value of LAI in March (see the ESI†).

$R_{g\text{-cont}}$  was smaller than the value of  $R_{g\text{-cont-w}}$  because the surface roughness of clay samples decreased resistance to mass transfer in the gas-film layer. For the same reason, the  $R_{g\text{-clay}}$  values were greater than the  $R_{g\text{-a-clay}}$  values for run 5. This also resulted from the fact that, even at the end of the injection period in run 5,  $k_{1\text{-a}}(t)$  did not decrease to a constant value which corresponded to the value expressed using eqn (40).

Fig. S18 and S19† show the plots of  $B_{\text{ng}}/q_{\infty}/K_{\text{ads}}$ ,  $r_1$ , and  $r_2$  against RH for each clay sample in small basins (Fig. S18†) and large basins (Fig. S19†) where  $r_1$  and  $r_2$  are the first term and the second term, respectively, in the right of eqn (40). Fig. S18 and S19† show that values of  $B_{\text{pn}}/q_{\infty}/K_{\text{ads}}$  decreased with RH between 50% and 80% for all clay samples. It meant that the adsorption of  $\text{I}_2$  on the surfaces of clay samples increased with increasing RH. Hence if  $k_f$ ,  $K_{\text{pads}}$ , and  $k_{\text{loss-p}}$  were constant,

values of  $r_1$  and  $r_2$  would decrease with increasing RH and the loss ratios would increase for all clay samples. However,  $r_1$  or  $r_2$  or both increased with increasing RH for illite, allophane, and kaolinite samples because  $K_{\text{pads}}$  decreased with increasing RH. In contrast, values of  $K_{\text{pads}}$  increased or remained almost constant and the loss ratios increased with increasing RH between 50% and 80% for montmorillonite, halloysite, and AgroMAT AG-1. It suggested that relative humidity might destabilize  $\text{I}_2$  in the interior more than on the surface for the former three clay samples and to almost the same extent as on the surface for the latter three clay samples. This difference might come from the difference in pH values of the water film in the interiors and buffering capacity against absorption of  $\text{CO}_2$  among the clay samples.

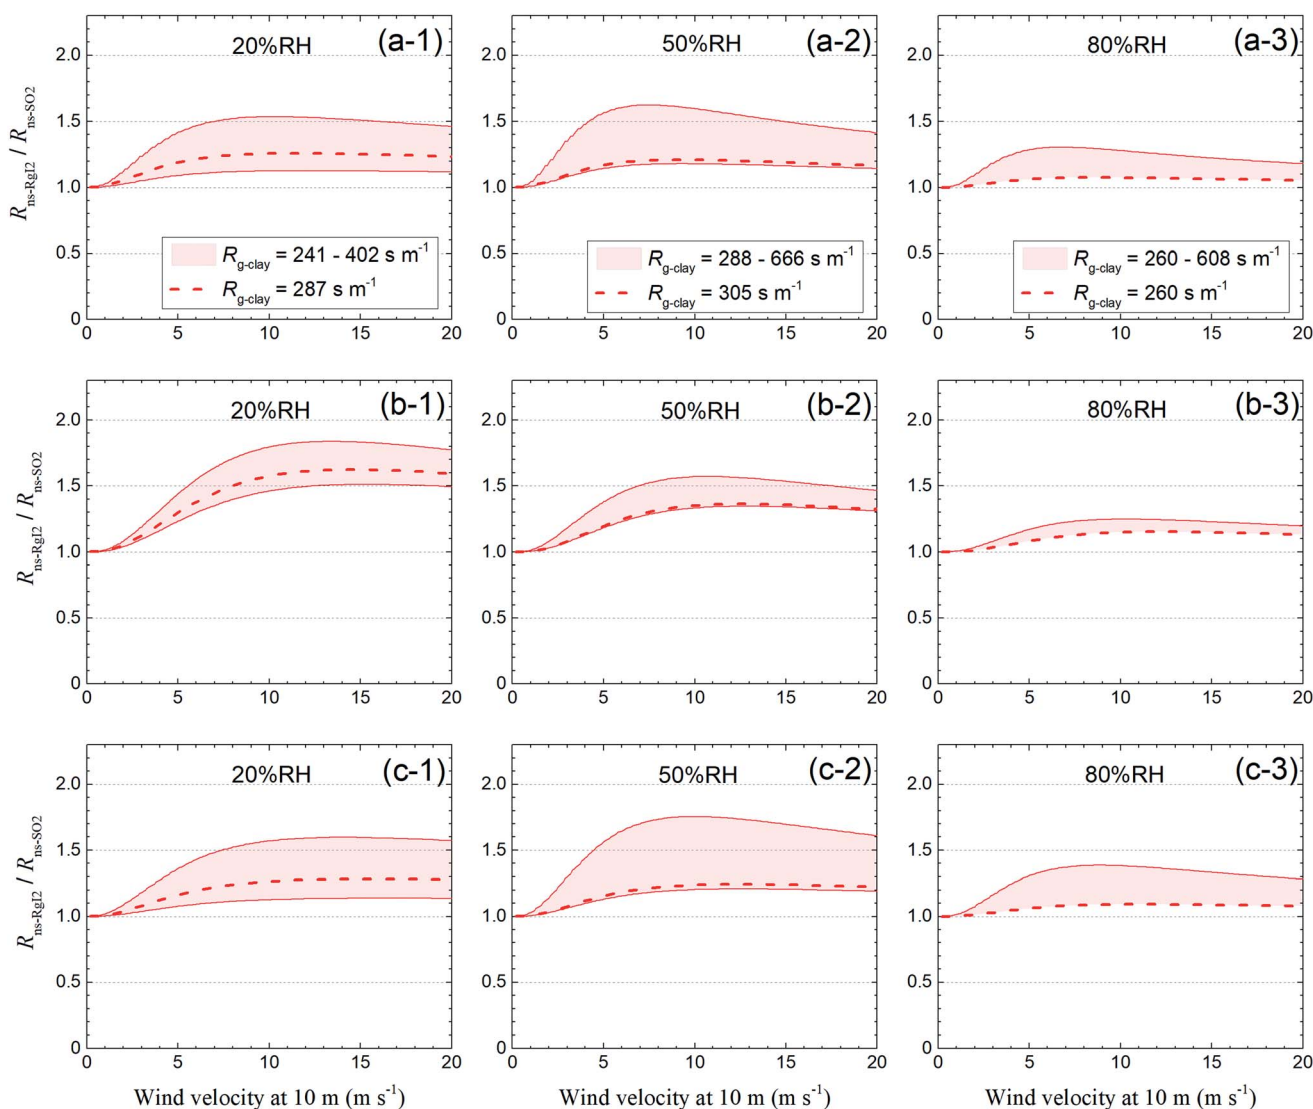


Fig. 14  $R_{\text{ns-Rgl2}}/R_{\text{ns-SO}_2}$  versus wind velocity at 10 m of height at (1) 20% RH, (2) 50% RH, and (3) 80% RH for (a) short grass and forbs, (b) evergreen broadleaf trees, and (c) deciduous broadleaf trees. Red regions indicate values calculated from the range of the  $R_{g\text{-clay}}$  values. Dashed curves indicate values calculated from the  $R_{g\text{-clay}}$  values above the AgroMAT AG-1 sample. The reference values of  $R_g$  for  $\text{SO}_2$  are  $100 \text{ s m}^{-1}$  for evergreen broadleaf tree LUCs and  $200 \text{ s m}^{-1}$  for the other LUCs. For deciduous broadleaf tree LUCs, roughness length,  $z_0$ , is set at 0.4 m and LAI is 0.5, the reference value of LAI in March (see the ESI†).



Values of  $R_{g\text{-clay}}$  for all samples reached 241–402 s m<sup>-1</sup> at 20% RH, 288–666 s m<sup>-1</sup> at 50% RH, and 260–608 s m<sup>-1</sup> at 80% RH. These values were equal to a value of 330 s m<sup>-1</sup>, which corresponded to a deposition velocity of 0.3 cm s<sup>-1</sup> in atmospheric model calculations for  $I_2^{\text{model}}$ , within a factor of two. However, if the clay content in soils, such as 10–20% in weight,<sup>44,45</sup> was taken into account, the surface resistance for  $I_2$  with respect to uptake by clay minerals further exceeded the values used in the atmospheric models. We used the  $R_{g\text{-clay}}$  values calculated from eqn (40) to estimate non-stomatal bulk surface resistance in dry deposition (Section 3.4).

### 3.4 Influence of $I_2$ uptake by clay minerals on non-stomatal resistance for $I_2$ above ground surfaces

We estimated non-stomatal resistance for  $I_2$  above ground surfaces ( $R_{\text{ns}}$ ) with eqn (1) using the  $R_g$  values for  $I_2$  above the clay minerals that we examined. The values of  $R_{\text{ac}}$  and  $R_{\text{cut}}$  in eqn (1) have been expressed as functions of friction velocity ( $u_*$ ) and the leaf area index (LAI), both of which have been specified for each land use category (LUC) for dry and wet conditions.<sup>20</sup> Because the RH range in this study (20–80% RH) fell within the range of dry conditions, we calculated  $R_{\text{ac}}$  and  $R_{\text{cut}}$  values under dry conditions with eqn (41) and (42), respectively:

$$R_{\text{ac}} = \frac{R_{\text{ac0}} \text{LAI}^{1/4}}{u_*^2} \quad (41)$$

$$R_{\text{cut}} = \frac{R_{\text{cut0}}}{e^{0.03\text{RH}} \text{LAI}^{1/4} u_*} \quad (42)$$

where  $R_{\text{ac0}}$  is the reference value for in-canopy aerodynamic resistance specific to each LUC and  $R_{\text{cut0}}$  is the reference value for cuticle resistance under dry conditions specific to both depositing species and the LUC. Table S16† lists reference values of  $R_{\text{ac0}}$ ,  $R_{\text{cut0}}$  for  $\text{SO}_2$ ,  $R_g$  for  $\text{SO}_2$ , and LAI for three LUCs (short grass and forbs, evergreen broadleaf trees, and deciduous broadleaf trees).<sup>20</sup>

For soils in each LUC, we calculated  $R_{\text{ns}}$  values (1) using the reference value of  $R_g$  for  $\text{SO}_2$  as the ground surface resistance ( $R_{\text{ns-SO}_2}$ ) and (2) using the  $R_{g\text{-clay}}$  values for  $I_2$  above the clay samples as ground surface resistance ( $R_{\text{ns-RgI}_2}$ ). Fig. 13 shows plots of these resistances against  $u_*$  at 20% RH and 80% RH. The  $R_{\text{ns-RgI}_2}$  values were calculated from the minimum and maximum  $R_{g\text{-clay}}$  values for  $I_2$  for all the clay samples. Values of  $R_{\text{ns-RgI}_2}$  consistently exceeded those of  $R_{\text{ns-SO}_2}$ ; the difference between them was smaller at 80% RH than at 20% RH because the  $R_{\text{cut}}$  values for  $\text{SO}_2$  decreased with increasing RH, as seen in eqn (42), and  $R_{\text{ns}}$  was thereby more strongly controlled by  $R_{\text{cut}}$  than by  $R_g$  (eqn (1)).

Fig. 14 shows the ratio of these two resistances ( $R_{\text{ns-RgI}_2}/R_{\text{ns-SO}_2}$ ) for each LUC at 20% RH, 50% RH, and 80% RH against wind velocity at a height of 10 m ( $u_{10}$ ), which was calculated by relating  $u_{10}$  to  $u_*$  with eqn (S37).† For the short grass and forb LUCs, the  $R_{\text{ns-RgI}_2}/R_{\text{ns-SO}_2}$  ratios at  $u_{10} = 5 \text{ m s}^{-1}$  were approximately 1.1–1.4 at 20% RH, 1.1–1.6 at 50% RH, and 1.1–1.3 at 80% RH, whereas the values of  $R_{g\text{-clay}}$  were approximately 1.2–3.3 times the reference value of  $R_g$  for  $\text{SO}_2$  above soils in this

LUC (200 s m<sup>-1</sup>). For the evergreen broadleaf tree LUC, the dependence of the  $R_{\text{ns-RgI}_2}/R_{\text{ns-SO}_2}$  ratios on wind velocity was greater than for the short grass and forb LUCs because the roughness length was longer in the former than in the latter. The  $R_{\text{ns-RgI}_2}/R_{\text{ns-SO}_2}$  ratios at  $u_{10} = 10 \text{ m s}^{-1}$  were approximately 1.5–1.8 at 20% RH, 1.3–1.6 at 50% RH, and 1.1–1.2 at 80% RH whereas the values of  $R_{g\text{-clay}}$  were approximately 2.4–6.6 times the reference value of  $R_g$  for  $\text{SO}_2$  above soils in this LUC (100 s m<sup>-1</sup>). For the deciduous broadleaf tree LUC, the  $R_{\text{ns-RgI}_2}/R_{\text{ns-SO}_2}$  ratios at  $u_{10} = 10 \text{ m s}^{-1}$  were approximately 1.1–1.6 at 20% RH, 1.2–1.8 at 50% RH, and 1.1–1.4 at 80% RH. Fig. 14 also shows the  $R_{\text{ns-RgI}_2}/R_{\text{ns-SO}_2}$  ratios calculated from the  $R_{g\text{-clay}}$  values above the AgroMAT AG-1 sample (dashed curves). Values of this ratio at 80% RH were as much as 1.2 for all LUCs. Values of this ratio became greater at lower relative humidity and the values at 20% RH were as much as 1.6 for the evergreen broadleaf tree LUC and as much as 1.3 for the other LUCs. The change in  $R_{\text{ns}}$  by switching the  $R_g$  values between  $I_2$  and  $\text{SO}_2$  in the scaling method could thus be appreciable at 20% RH.

## 4. Conclusion

We used the rectangular pulse method with an IBBCEAS instrument to determine uptake rates of  $I_2$  by aqueous solutions and clay particles in a gas mixture of 400 ppmv  $\text{CO}_2$  and humidified air at 283 K. Uptake of  $I_2$  proceeded much more rapidly by aqueous ascorbic acid than by water; the former was limited by mass transfer in the gas-film layer. Reactions of  $I_2$  with ascorbic acid were expected to proceed in the leaf interior. However, this would happen only in the small number of plants that open their stomata at night.

Uptake of  $I_2$  by clay particles was confirmed at 20–80% RH. Uptake rates of  $I_2$  varied among the clay samples, but the variation was small compared to that of the BET surface areas of the samples. Uptake rates of  $I_2$  decreased with successive runs and remained finite through each set of experimental runs. These finite rates decreased with increasing relative humidity from 20% RH to 80% RH for illite, allophane, and kaolinite samples. This dependence on relative humidity was different from that for  $\text{SO}_2$ , a commonly used proxy for  $I_2$  in scaling methods. Ratios of  $I_2$  loss and adsorption decreased and increased, respectively, with the exposure time of clay samples to  $I_2$  and their changes were largest during the initial periods after exposure to  $I_2$ . Confirmation of the uptake of  $I_2$  by clay minerals at 20–80% RH suggested that it contributed to the dry deposition of  $I_2$  on soils as much as other processes such as reactions of  $I_2$  with organic matter. Uptake of  $I_2$  by clay samples probably proceeded through irreversible adsorption of  $I_2$  in micropores of clay minerals, as reported for  $I_2$  uptake by active carbons.<sup>40</sup>

The time-series of  $I_2$  were reproduced in the simulation by assuming a two-stage process. The parameters obtained in the simulation were used to estimate  $I_2$  uptake rates at low concentrations of  $I_2$  that might be found in the atmosphere. For fresh clay samples, the surface resistance for  $I_2$  above them was smaller than that for  $I_2^{\text{model}}$  above soils applied to atmospheric model calculations, such as 200 s m<sup>-1</sup>. For clay samples having been exposed to a gas mixture of  $I_2$ , the surface resistance,



however, exceeded the values used in atmospheric models. Further excess was expected by taking into account the clay content in soils. For vegetated surfaces such as those near the Fukushima Dai-ichi nuclear power plant, the change in  $R_{ns}$  by switching the  $R_g$  values between  $I_2$  and  $SO_2$  in the scaling method was smaller at 80% RH than at 20% RH, and it could be appreciable at 20% RH. For vegetated surfaces, switching the  $R_g$  values between  $I_2$  and  $SO_2$  in the scaling method thus remained useful for estimating the dry deposition velocity of  $I_2$  at 80% RH, but it might result in substantial errors for the surface resistance at 20% RH, unless surface resistance for  $I_2$  above soils is controlled by other processes such as reactions of  $I_2$  with organic matter in soils. This suggested that the dry deposition processes of  $I_2$  or  $I_2^{model}$  needed to be estimated separately before and after sunrise when  $I_2$  was released at night.

In the blank experiments (Section 3.1), the loss and adsorption of  $I_2$  on inert surfaces (PTFE wall surfaces) increased with increasing RH. This pattern was similar to the pattern of  $R_{cut}$  for  $SO_2$ , as expected from eqn (42). As seen in Fig. 13,  $R_{ns}$  values above vegetated surfaces at 80% RH were determined mostly by  $R_{cut}$  rather than by  $R_g$ . The estimate of  $R_{cut}$  for  $I_2$  was thus important for evaluating the dry deposition velocity of  $I_2$  at night. A study on  $R_{cut}$  was, however, beyond the scope of this work. Although we did not explicitly drive dry deposition velocities in this study, the surface resistance data we obtained can be used in series-resistance models of dry deposition embedded in atmospheric transport and dispersion models to assess the human risk of radioiodine.

## Author contributions

The laboratory experiments and simulated calculations were performed by SK. The manuscript was written through the contributions of all authors. All authors have given approval to the final version of the manuscript.

## Conflicts of interest

There are no conflicts of interest to declare.

## Acknowledgements

We thank Dr Zheng-Ming Wang (AIST) for providing data on the BET surface area of AgroMAT Clay Soil AG-1. This work was supported by the Japan Society for the Promotion of Science (grant number JP18K11633).

## References

- 1 WHO, *Health Effects of the Chernobyl Accident and Special Health Care Programmes*, Geneva, 2006.
- 2 G. Katata, M. Chino, T. Kobayashi, H. Terada, M. Ota, H. Nagai, M. Kajino, R. Draxler, M. C. Hort, A. Malo, T. Torii and Y. Sanada, Detailed source term estimation of the atmospheric release for the Fukushima Daiichi Nuclear Power Station accident by coupling simulations of an atmospheric dispersion model with an improved deposition scheme and oceanic dispersion model, *Atmos. Chem. Phys.*, 2015, **15**, 1029–1070.
- 3 Y. Morino, T. Ohara and M. Nishizawa, Atmospheric behavior, deposition, and budget of radioactive materials from the Fukushima Daiichi nuclear power plant in March 2011, *Geophys. Res. Lett.*, 2011, **38**, L00G11.
- 4 K. Saito, I. Tanihata, M. Fujiwara, T. Saito, S. Shimoura, T. Otsuka, Y. Onda, M. Hoshi, Y. Ikeuchi, F. Takahashi, N. Kinouchi, J. Saegusa, A. Seki, H. Takemiya and T. Shibata, Detailed deposition density maps constructed by large-scale soil sampling for gamma-ray emitting radioactive nuclides from the Fukushima Dai-ichi Nuclear Power Plant accident, *J. Environ. Radioact.*, 2015, **139**, 308–319.
- 5 H. Tsuruta, Y. Moriguchi and T. Nakajima, Dynamics of atmospheric  $^{131}I$  in radioactive plumes in eastern Japan immediately after the Fukushima accident by analysing published data, *Sci. Rep.*, 2019, **9**, 13240.
- 6 Y. Muramatsu, H. Matsuzaki, C. Toyama and T. Ohno, Analysis of  $^{129}I$  in the soils of Fukushima Prefecture: preliminary reconstruction of  $^{131}I$  deposition related to the accident at Fukushima Daiichi Nuclear Power Plant (FDNPP), *J. Environ. Radioact.*, 2015, **139**, 344–350.
- 7 A. C. Chamberlain and R. C. Chadwick, Deposition of airborne radioiodine vapor, *Nucleonics*, 1953, **11**, 22–25.
- 8 A. C. Chamberlain, A. E. J. Eggleton, W. J. Megaw and J. B. Morris, Behaviour of iodine vapour in air, *Discuss. Faraday Soc.*, 1960, **30**, 162–169.
- 9 A. C. Chamberlain and R. C. Chadwick, Transport of iodine from atmosphere to ground, *Tellus*, 1966, **18**, 226–237.
- 10 O. Telly Bah, D. Hebert, O. Connan, L. Solier, P. Laguionie, D. Bourlès and D. Maro, Measurement and modelling of gaseous elemental iodine ( $I_2$ ) dry deposition velocity on grass in the environment, *J. Environ. Radioact.*, 2020, **219**, 106253.
- 11 A. C. Chamberlain, CXXI. Experiments on the deposition of iodine 131 vapour onto surfaces from an airstream, *London, Edinburgh Dublin Philos. Mag. J. Sci.*, 1953, **44**, 1145–1153.
- 12 M. D. Allen and R. D. Neff, Measurements of deposition velocity of gaseous elemental iodine on water, *Health Phys.*, 1975, **28**, 707–715.
- 13 N. G. Stewart and R. N. Crooks, Long-range travel of the radioactive cloud from the Accident at Windscale, *Nature*, 1958, **182**, 627–628.
- 14 G. A. Sehmel, Particle and gas dry deposition: A review, *Atmos. Environ.*, 1980, **14**, 983–1011.
- 15 A. Saiz-Lopez and J. M. C. Plane, Novel iodine chemistry in the marine boundary layer, *Geophys. Res. Lett.*, 2004, **31**, L04112.
- 16 A. Saiz-Lopez, J. M. C. Plane, A. R. Baker, L. J. Carpenter, R. von Glasow, J. C. Gómez Martín, G. McFiggans and R. W. Saunders, Atmospheric chemistry of iodine, *Chem. Rev.*, 2012, **112**, 1773–1804.
- 17 G. Katata, M. Ota, H. Terada, M. Chino and H. Nagai, Atmospheric discharge and dispersion of radionuclides during the Fukushima Dai-ichi Nuclear Power Plant accident. Part I: Source term estimation and local-scale



- atmospheric dispersion in early phase of the accident, *J. Environ. Radioact.*, 2012, **109**, 103–113.
- 18 M. L. Wesely and B. B. Hicks, Some factors that affect the deposition rates of sulfur dioxide and similar gases on vegetation, *J. Air Pollut. Control Assoc.*, 1977, **27**, 1110–1116.
  - 19 R. C. Musselman and T. J. Minnick, Nocturnal stomatal conductance and ambient air quality standards for ozone, *Atmos. Environ.*, 2000, **34**, 719–733.
  - 20 L. Zhang, J. R. Brook and R. Vet, A revised parameterization for gaseous dry deposition in air-quality models, *Atmos. Chem. Phys.*, 2003, **3**, 2067–2082.
  - 21 M. L. Wesely, Parameterization of surface resistances to gaseous dry deposition in regional-scale numerical models, *Atmos. Environ.*, 1989, **23**, 1293–1304.
  - 22 S. Kutsuna and N. Kaneyasu, Henry's law constants and hydration equilibrium constants of n-hexanal and their temperature dependence as determined by the rectangular pulse method, *Chem. Eng. Sci.*, 2021, **239**, 116639.
  - 23 S. Kutsuna, K. Takeuchi and T. Ibusuki, Laboratory study on heterogeneous degradation of methyl chloroform ( $\text{CH}_3\text{CCl}_3$ ) on aluminosilica clay minerals as its potential tropospheric sink, *J. Geophys. Res.: Atmos.*, 2000, **105**, 6611–6620.
  - 24 S. Kutsuna, L. Chen, K. Nohara, K. Takeuchi and T. Ibusuki, Heterogeneous decomposition of  $\text{CHF}_2\text{OCH}_2\text{CF}_3$  and  $\text{CHF}_2\text{OCH}_2\text{C}_2\text{F}_5$  over various standard aluminosilica clay minerals in air at 313 K, *Environ. Sci. Technol.*, 2002, **36**, 3118–3123.
  - 25 S. Kutsuna, L. Chen, K. Ohno, N. Negishi, K. Takeuchi, T. Ibusuki, K. Tokuhashi and A. Sekiya, Laboratory study on heterogeneous decomposition of methyl chloroform on various standard aluminosilica clay minerals as a potential tropospheric sink, *Atmos. Chem. Phys.*, 2003, **3**, 1063–1082.
  - 26 S. E. Fiedler, A. Hese and A. A. Ruth, Incoherent broad-band cavity-enhanced absorption spectroscopy, *Chem. Phys. Lett.*, 2003, **371**, 284–294.
  - 27 R. A. Washenfelder, A. O. Langford, H. Fuchs and S. S. Brown, Measurement of glyoxal using an incoherent broadband cavity enhanced absorption spectrometer, *Atmos. Chem. Phys.*, 2008, **8**, 7779–7793.
  - 28 C. Bahrini, A.-C. Grégoire, D. Obada, C. Mun and C. Fittschen, Incoherent broad-band cavity enhanced absorption spectroscopy for sensitive and rapid molecular iodine detection in the presence of aerosols and water vapour, *Opt. Laser Technol.*, 2018, **108**, 466–479.
  - 29 FACT (Free-Access Chemometric Toolbox) under SCILAB, <https://atoms.scilab.org/toolboxes/FACT>, accessed April, 2022.
  - 30 SCILAB, <https://www.scilab.org>, accessed April, 2022.
  - 31 P. Spietz, J. Gómez Martín and J. P. Burrows, Effects of column density on  $\text{I}_2$  spectroscopy and a determination of  $\text{I}_2$  absorption cross section at 500 nm, *Atmos. Chem. Phys.*, 2006, **6**, 2177–2191.
  - 32 H. Keller-Rudek, G. K. Moortgat, R. Sander and R. Sörensen, The MPI-Mainz UV/VIS Spectral Atlas of Gaseous Molecules of Atmospheric Interest, *Earth Syst. Sci. Data*, 2013, **5**, 365–373.
  - 33 F. A. Morrissey and M. E. Grismer, Kinetics of volatile organic compound sorption/desorption on clay minerals, *J. Contam. Hydrol.*, 1999, **36**, 291–312.
  - 34 A. E. Burgess and J. C. Davidson, Kinetics of the Rapid Reaction between Iodine and Ascorbic Acid in Aqueous Solution Using UV-Visible Absorbance and Titration by an Iodine Clock, *J. Chem. Educ.*, 2014, **91**, 300–304.
  - 35 M. Eigen and K. Kustin, The Kinetics of Halogen Hydrolysis, *J. Am. Chem. Soc.*, 1962, **84**, 1355–1361.
  - 36 A. Takami, T. Kondo, A. Kado and S. Koda, The uptake coefficient of  $\text{I}_2$  on various aqueous surfaces, *J. Atmos. Chem.*, 2001, **39**, 139–153.
  - 37 W. Eguchi, M. Adachi and M. Yoneda, Dependency of partition equilibrium of iodine between air and aqueous solution containing sodium hydroxide upon temperature and concentration, *J. Chem. Eng. Jpn.*, 1974, **6**, 389–396.
  - 38 C. R. Reid, J. M. Prausnitz and B. E. Poling, *The Properties of Gases and Liquids*, 5th edn, McGraw-Hill, New York, 1987.
  - 39 U. Pöschl and M. Shiraiwa, Multiphase chemistry at the atmosphere–biosphere interface influencing climate and public health in the Anthropocene, *Chem. Rev.*, 2015, **115**, 4440–4475.
  - 40 S. K. Bhatia, F. Liu and G. Arvind, Effect of pore blockage on adsorption isotherms and dynamics: Anomalous adsorption of iodine on activated carbon, *Langmuir*, 2000, **16**, 4001–4008.
  - 41 W. Rudzinski and W. Plazinski, Studies of the kinetics of solute adsorption at solid/solution interfaces: On the possibility of distinguishing between the diffusional and the surface reaction kinetic models by studying the pseudo-first-order kinetics, *J. Phys. Chem. C*, 2007, **111**, 15100–15110.
  - 42 L. Largitte and R. Pasquier, A review of the kinetics adsorption models and their application to the adsorption of lead by an activated carbon, *Chem. Eng. Res. Des.*, 2016, **109**, 495–504.
  - 43 D. Feng, X. Li, X. Wang, J. Li, F. Sun, Z. Sun, T. Zhang, P. Li, Y. Chen and X. Zhang, Water adsorption and its impact on the pore structure characteristics of shale clay, *Appl. Clay Sci.*, 2018, **155**, 126–138.
  - 44 J. Koarashi, M. Atarashi-Andoh, T. Matsunaga, T. Sato, S. Nagao and H. Nagai, Factors affecting vertical distribution of Fukushima accident-derived radiocesium in soil under different land-use conditions, *Sci. Total Environ.*, 2012, **431**, 392–401.
  - 45 K. Fujii, N. Yamaguchi, N. Imamura, M. Kobayashi, S. Kaneko and M. Takahashi, Effects of radiocesium fixation potentials on  $^{137}\text{Cs}$  retention in volcanic soil profiles of Fukushima forests, *J. Environ. Radioact.*, 2019, **198**, 126–134.

