

Cite this: *Energy Environ. Sci.*,
2022, 15, 4389

A comparative analysis of the efficiency, timing, and permanence of CO₂ removal pathways†

Solene Chiquier,^{id}^{ab} Piera Patrizio,^{ab} Mai Bui,^{id}^{ab} Nixon Sunny^{ab} and
Niall Mac Dowell^{*ab}

Carbon dioxide removal (CDR) is essential to deliver the climate objectives of the Paris Agreement. Whilst several CDR pathways have been identified, they vary significantly in terms of CO₂ removal efficiency, elapsed time between their deployment and effective CO₂ removal, and CO₂ removal permanence. All these criteria are critical for the commercial-scale deployment of CDR. In this study, we evaluate a set of archetypal CDR pathways—including afforestation/reforestation (AR), bioenergy with carbon capture and storage (BECCS), biochar, direct air capture of CO₂ with storage (DACCS) and enhanced weathering (EW)—through this lens. We present a series of thought experiments, considering different climates and forest types for AR, land types, *e.g.* impacting biomass yield and (direct and indirect) land use change, and biomass types for BECCS and biochar, capture processes for DACCS, and rock types for EW. Results show that AR can be highly efficient in delivering CDR, up to 95–99% under optimal conditions. However, regional bio-geophysical factors, such as the near-term relatively slow and limited forest growth in cold climates, or the long-term exposure to natural disturbances, *e.g.* wildfires in warm and dry climates, substantially reduces the overall CO₂ removal efficiency of AR. Conversely, BECCS delivers immediate and permanent CDR, but its CO₂ removal efficiency can be significantly impacted by any initial carbon debt associated with (direct and indirect) land use change, and thereby significantly delayed. Biochar achieves low CDR efficiency, in the range of 20–39% when it is first integrated with the soil, and that regardless of the biomass feedstock considered. Moreover, its CO₂ removal efficiency can decrease to –3 to 5% with time, owing to the decay of biochar. Finally, as for BECCS, DACCS and EW deliver permanent CO₂ removal, but their CO₂ removal efficiencies are substantially characterized by the energy system within which they are deployed, in the range of –5 to 90% and 17–92%, respectively, if currently deployed. However, the CDR efficiency of EW can increase to 51–92% with time, owing to the carbonation rate of EW.

Received 29th March 2022,
Accepted 31st August 2022

DOI: 10.1039/d2ee01021f

rsc.li/ees

Broader context

Following COP26, carbon dioxide removal (CDR) is increasingly being recognised by national governments and the climate community as an integral part of 2050 net zero strategies. Owing to a combination of inherent characteristics and regional variations, *e.g.* climates, biomass yields, local energy systems, each CDR pathway is characterized by a distinctive CO₂ removal efficiency, timing—required for any pathway to effectively remove the CO₂ from the atmosphere, and permanence. With growing public and private efforts directed towards CDR, the competition for natural and financial resources in crucial activities, such as food production, energy supply and emission mitigation, will inevitably increase. As a result, CDR options will inevitably be scrutinized for their potential to deliver sufficient, permanent and timely CO₂ removal. To this end, this study presents a comparative analysis of each CDR pathway in terms of their potential climate change mitigation benefits and identifies options that can provide a meaningful contribution towards net-zero carbon emission targets. The findings of this work could potentially guide the strategy for CDR deployment globally.

1. Introduction

The Paris Agreement aims at keeping global warming to well-below 2 °C and pursuing efforts to limit it to 1.5 °C.¹ Owing to the relationship between cumulative anthropogenic CO₂ emissions and the increase in global mean temperature,^{2–4} achieving these climate change mitigation goals requires

^a Centre for Environmental Policy, Imperial College London, UK.

E-mail: niall@imperial.ac.uk; Tel: +44 (0)20 7594 9298

^b Centre for Process Systems Engineering, Imperial College London, UK† Electronic supplementary information (ESI) available. See DOI: <https://doi.org/10.1039/d2ee01021f>

that global net CO₂ emissions be reduced to zero at some point.^{5–7}

Since the close of COP26, many national and international governments, including the United Kingdom (UK), the European Union (EU), Japan, and South Korea, have committed to legally-binding 2050 net-zero targets, while others, such as China and India, are set to do so by the second half of this century.^{8,9}

Achieving these goals entails the rapid decarbonization of the energy systems, combined with the scale up of carbon dioxide removal (CDR) technologies to offset residual emissions from hard-to-abate sectors, such as aviation and agriculture. Whilst the role of CDR has been extensively discussed by the international community, explicit CDR targets remain absent from all newly or re-submitted Nationally Determined Contributions (NDCs), with some exceptions related to the agriculture, and the land use, land-use change and forestry (LULUCF) sectors.^{10,11}

Crucially, the reliance on CDR is expected to increase over time, as (a) most governments are not on track with their 2030 and/or long-term NDCs,¹² and (b) existing NDCs are insufficient to achieve most recent net zero commitments.^{8,13} Thus, it will be vital to deploy CDR as efficiently as possible—maximizing CO₂ removal with the minimum use of resources. To do so, careful consideration of the time required for CO₂ removal to be impactful, *i.e.*, the time lapse between the deployment of any CDR pathway and its effective CO₂ removal, and of the time over which it will remain impactful, *i.e.*, permanence, is necessary. Importantly, CO₂ removal must be clearly, comprehensively and consistently defined and assessed, as first suggested by Tanzer and Ramirez,¹⁴ and further emphasized by Terlouw *et al.*¹⁵

There is a vast range of CDR pathways that can be categorised by Earth system (*e.g.*, land or ocean), storage medium (*e.g.*, geological formations, minerals, vegetation, soils and sediments, or even buildings), but also by removal process (*e.g.*, land-based biological, ocean-based biological, geochemical or chemical). The most prominent are (1) bioenergy with carbon capture and storage (BECCS), (2) direct air capture of CO₂ from ambient air by engineered chemical reaction (DACCS), (3) afforestation/reforestation (AR) to fix atmospheric carbon in biomass and soils, (4) enhanced weathering of minerals (EW), and (5) converting biomass to biochar.^{16,17} Ocean-based biological CDR pathways, *e.g.* blue carbon or ocean fertilisation, have also received some attention, but their CDR potential remain uncertain or even controversial.^{16,18} Finally, alternative CDR pathways have also started to be proposed, *e.g.* CO₂ mineralisation or biochar in the cement industry,^{19–21} with some being at demonstration or even commercialization stage.^{22,23} However, their technical feasibility and regional/global scale-up potential are still scarcely assessed.^{24,25} Overall, these pathways all have the potential to generate net negative CO₂ emissions, but differ significantly in terms of CO₂ removal efficiency, timing, and permanence. In this study, these characteristics are defined as follows:

- CO₂ removal efficiency: the fraction of CO₂ captured that is permanently removed from the atmosphere, once the GHG emissions arising along the supply chain have been accounted for;

- Timing: the period of time from the deployment of a CDR pathway, *e.g.* tree planting, or mineral spreading, to its effective CO₂ removal impact; and

- Permanence: the potential for CO₂ removal to be sustained for a sufficient period of time to deliver climate repair.

Owing to differences across these key characteristics, the CO₂ removal potential of different archetypal CDR pathways varies with location and evolves with time. For each archetypal CDR pathway, the CO₂ removal potential also varies with the configuration deployed. For example, the CO₂ removal potential associated with EW is contingent on the type and particle size of minerals that are applied to soil (*i.e.*, configuration-specific), in addition to other characteristics including soil pH and temperature (*i.e.*, region-specific).^{26–28} The CO₂ removal potential of biochar depends on the biomass feedstock considered, pyrolysis conditions and soil characteristics.²⁹ Finally, Fajardy *et al.*³⁰ shows that (direct and indirect) land use change, *i.e.* (I)LUC, can significantly impact the CO₂ removal efficiency and time to removal of BECCS.

Timing is particularly crucial in the climate repair impact of different CDR pathways. For instance, in the case of AR, forest sinks require a certain period of time to be established and then saturate within a period of decades to centuries. In the case of EW, the time required for mineral carbonation to proceed to completion can range from a few months to many years, or even decades.^{31,32} However, quantitative comparisons of the timing of CO₂ removal for a comprehensive range of CDR pathways remain a lacuna in the literature.

Permanence has been increasingly discussed in the literature. Herzog *et al.*³³ originally defined an economic framework for valuing temporary sinks and quantified the economic consequences on carbon price and discount rate. More recently, Bednar *et al.*³⁴ proposed intertemporal instruments to provide the basis for widely applied carbon taxes and emission trading systems to finance a net-negative carbon economy. However, permanence is, overall, considered in isolation, *i.e.*, without making the connection to CO₂ removal efficiency or timing. Yet, because (a) CO₂ uptakes can be immediate, *e.g.* for DACCS, or initially slow, *e.g.* forest growth for AR or carbonation process for EW, (b) CO₂ sinks can saturate, *e.g.* AR, and (c) predictable/unpredictable CO₂ releases can occur, *e.g.* decay process for biochar or natural disturbances for AR, the CO₂ removal efficiency of all CDR pathways is inherently intertwined with their timing and permanence.

Moreover, in the IPCC^{6,35,36} and other carbon accounting frameworks,^{37,38} there is a convention of equating CO₂ removal with a duration greater than 100 years as being permanent. However, from a physical science perspective, CO₂ persists in the atmosphere for much longer—on the order of tens of thousands of years.^{39,40} Thus, removing CO₂ over one century is not equivalent to permanent CO₂ removal.

Whilst temporary CO₂ removal can have some climate repair value when deployed as a mechanism to ‘buy time’ before deploying permanent CO₂ removal⁴¹—arguably, temporary CO₂ removal can limit climate damage by delaying, reducing, and flattening CO₂ levels, and temperature overshoots⁴⁰—this is invariably gambling on the future. If peak warming has



occurred by the time of reversal of the temporary CO₂ sink, then the temporary CO₂ removal has had a positive impact on climate change. However, if peak warming has not yet occurred, or if temperatures have not sufficiently reduced, then the temporary CO₂ removal could well have a negative impact, overall increasing the risk of reducing and/or delaying climate change mitigation. Thus, for temporary CO₂ removal to be of equivalent climate repair value to permanent CO₂ removal, it requires continuous maintenance of that CO₂ sink, or subsequent replacement by permanent CO₂ removal. This could well be difficult to ensure in practice.

Finally, in any commercial-scale deployment of CDR, there will be a normal commercial imperative to recoup the associated investment as soon as possible. Whilst this is, in principle, feasible with BECCS and DACCS, the same is not true for many alternative CDR pathways, *e.g.* AR, biochar or EW. There is an important need to (a) understand and make the distinction between the cost of CO₂ stored and the cost of CO₂ permanently removed, and (b) appropriately value the climate repair benefits of the different CDR pathways, *i.e.* permanent *vs.* temporary, and immediate *vs.* delayed. As the service that should be remunerated is the permanent removal of CO₂ from the atmosphere,^{14,15} it is difficult to imagine *ex ante* payments where the period between deploying the CDR pathway, *e.g.* exposing a carbonatable material to the atmosphere for EW, and its impactful removal of CO₂, is significant. If nothing else, the monitoring, reporting and verification (MRV) costs associated with understanding the marginal degree of carbonation in any given year could be significant, and possibly prohibitive.

The remainder of this paper is structured as follows. In Section 2, we identify the main sources of CO₂ leakage across the CDR value chain of a non-exhaustive set of CDR pathways—AR, BECCS, biochar, DACCS and EW—, and we compare their CDR efficiencies over 100 years. In Section 3, we assess the time required for each CDR pathway to provide CO₂ removal beyond the Paris Agreement's 2100 timeframe, *i.e.* over 1000 years. Finally, we conclude in Section 4.

2. Life cycle CO₂ removal efficiency

In this section, we perform a comparative analysis of the CO₂ removal efficiency of a non-exhaustive set of CDR pathways,[‡] and discuss their key challenges. The aim of this analysis is to provide important insights to policymakers, potential investors, technology developers and purchasers, on the key factors that influence the CO₂ removal efficiency of different archetypal CDR pathways. Note that, whilst the key factors that influence the CO₂ removal efficiency of each of these CDR pathways are identified here, the amount of associated CO₂ emissions is highly region-specific (*i.e.*, climates, bio-geophysical factors, carbon intensity of the energy systems), and configuration-specific (*i.e.*, configurations of the different archetypal CDR

[‡] Whilst this study focuses on 5 archetypal CDR pathways, it is important to note that the concept of CDR efficiency introduced here can be, in principle, applied to any other CDR pathway, subject to sufficient data availability.

pathways deployed). Results should therefore be interpreted as such. Also note that climate change is expected to modify the CO₂ removal efficiency of the different archetypal CDR pathways presented here, by disrupting all the systems (*e.g.*, environmental, energy, economic or social) on which our society depends. However, given (1) the urgency to deploy CDR immediately to future scales that will be consistent with the Paris Agreement, and (2) the complexity of climate models, and the difficulty to predict comprehensively and accurately the impacts of climate change on these systems, and subsequently on the CO₂ removal efficiency of CDR pathways over time, climate change is, here, not accounted for, although recommended for further research.

Here, we define CDR efficiency, η^{CDR} , considering the amounts of CO₂ stored and CO₂ leaked over the supply chain *via*:

$$\eta^{\text{CDR}} = \frac{\text{CO}_2^{\text{Stored}} - \text{CO}_2^{\text{Leaked}}}{\text{CO}_2^{\text{Stored}}} \quad (1)$$

It is important to note that this is a deliberately simple presentation of the CDR efficiency concept. In practice, the rate of CO₂ uptake/capture or CO₂ release/leakage may well vary over the lifetime of a given CDR project, as, *e.g.* the broader energy system is decarbonized. Thus, this metric should be evaluated in the same way as the well-known levelized cost of electricity.

2.1. Afforestation/reforestation (AR)

Afforestation/reforestation (AR) (see Fig. 1) can generate net negative CO₂ emissions, as growing forests remove CO₂ from the atmosphere *via* photosynthesis and store it in living biomass, dead organic matter, and soils.^{42,43} Additional CO₂ emissions also arise from forestry activities associated with the establishment and the ongoing management of forests. As such, only when the net balance of CO₂ emissions by forests is negative—and remains so over time—do forests contribute to mitigating climate change by acting as a CO₂ sink.

The first challenge with AR is the inherently slow and limited growth of forests. The CO₂ sequestration rate of forests increases very slowly initially as the forests are in their establishment phase. Within less than a century, the sequestration

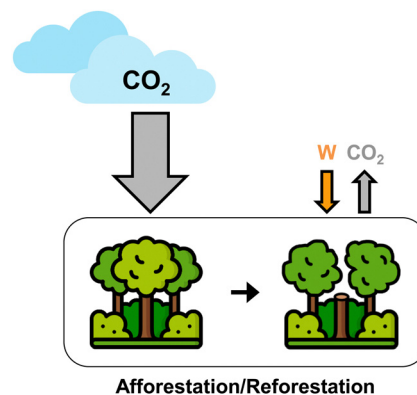


Fig. 1 Value chain of afforestation/reforestation (AR) and associated forest management. Grey arrows (CO₂) account for CO₂ uptake, *i.e.*, capture, and release, *i.e.*, emissions. Orange arrows account for the energy consumption.



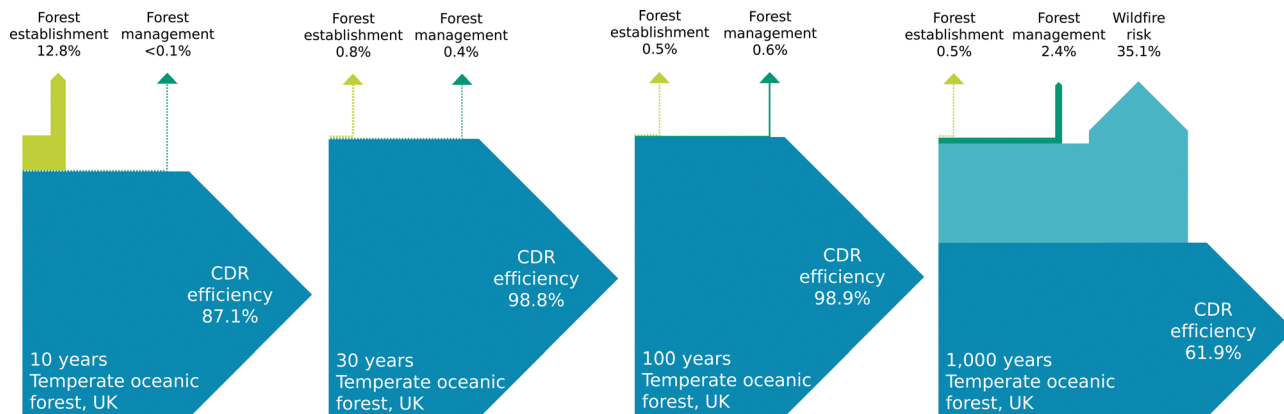


Fig. 2 Sankey diagrams showing the CO₂ removal efficiency of AR, deployed in 2020, over different periods of time in the UK.

rate decreases to zero once the forests finally reach maturity—the CO₂ sink of forests is essentially saturated (see SM.2, ESI[†]). Consequently, the overall CO₂ removal potential of AR is inherently constrained by land availability, and extensive land-use competition could be expected with other land-based CDR pathways^{44,45} and other sectors, *e.g.* food and bio-fuels.

Forests are also subject to a wide range of anthropogenic disturbances, *e.g.* harvest or deforestation, and natural disturbances, *e.g.* wildfires, pests, droughts or windstorms.^{46–49} Natural disturbances pose the greatest challenge to AR owing their scale and inherent unpredictability.⁵⁰ Importantly, they are highly climate- and region-specific, and their frequency will increase with climate change.¹⁶ In this study, the risk of wildfires is accounted for, used as a proxy for any natural disturbances, and reduces AR's CO₂ removal efficiency over time. This is further detailed in SM.2 (ESI[†]). Note that, recognising the broader range of disturbances of which AR, but also other CDR pathways, are subject to and that are not explicitly evaluated here, a more comprehensive analysis could well be extended to consider other risks, *e.g.* geo-political.

As shown in Fig. 2, the permanence, and thus efficiency, of CDR delivered by AR, illustrated here for the UK,[§] is a strong function of time.⁴¹ Importantly, the CO₂ removal efficiency of AR is negligibly impacted by forestry activities, even over 1000 years or more. At most, results show that the CO₂ emissions associated with the forest establishment reduce the CDR efficiency of AR by 13% if we consider only the first decade. This is because the CO₂ sequestration potential of AR is still very low at this stage. Then, over several decades to a millennium, the CO₂ emissions associated with forest management activities reduce the CDR efficiency of AR by only 1–3%. Importantly, whilst AR is highly efficient at removing CO₂ from the atmosphere—peaking at 99%—it still takes between 50–100 years to reach its maximum CO₂ removal potential, which coincides with the saturation of the forest CO₂ sink. Forward planning is therefore necessary, as well as sustained management to prevent CO₂ from being returned to atmosphere.

§ In the UK, temperate oceanic forests are predominant—88% of the land cover⁸¹—with 49% broadleaves and 51% conifers.⁸²

Ultimately, the key factor that reduces the CO₂ removal efficiency of AR is the increasing risk of natural CO₂ reversal over time—up to 35% over a millennial time period in the UK (see Fig. 2). When the risk of wildfires starts reducing AR's CO₂ removal efficiency, and by how much, differ from a climate to another. It is directly related to the probability and severity of wildfires. This is further discussed in Section 3.

Overall, the CO₂ removal efficiency of AR, although very high, is only temporary, due to the increasing risk of (natural and anthropogenic) disturbances over the long term. Given the negligible impact of forestry operations on CO₂ removal efficiency over time, intensifying the management of forests, as well as monitoring the CO₂ sink will contribute to reduce some risks, *e.g.* wildfires. However, not all natural disturbances can be anticipated and may well be completely unpredictable, *e.g.* pests or disease. Nor can they be entirely controllable and of minimum impact on the CO₂ sink of forests.

This introduces the challenge of managing temporary CO₂ sinks, such as with AR, in the long term. If their management in the future is ultimately deemed unfeasible or unnecessary, *e.g.* investors find it unlikely to be economically and financially viable, or future climate policy focuses primarily on adaptation as opposed to mitigation, this might translate into an effective subsidy for pollution in the near term. Thus, this is essentially a restatement of the “moral hazard” concern, which can only be addressed with rigorous standards for climate repair *via* CDR, such that the CDR deployed fully compensates for the damage done by the initial emission of CO₂ to the atmosphere, and that over timescales consistent with stabilising the Earth's carbon cycle.

2.2. Bioenergy with carbon capture and storage (BECCS)

Bioenergy with carbon capture and storage (BECCS) (see Fig. 3) refers to the combination biomass-based energy, with the capture and geological storage of associated CO₂ emissions. Upstream CO₂ emissions including (I)LUC, biomass cultivation, harvest, processing, and transport, and downstream CO₂ emissions associated with the capture, transport and storage of CO₂, can be a challenge with BECCS and must be carefully accounted for.

Importantly, depending on the BECCS conversion pathway, the percentage of biogenic carbon that is captured and



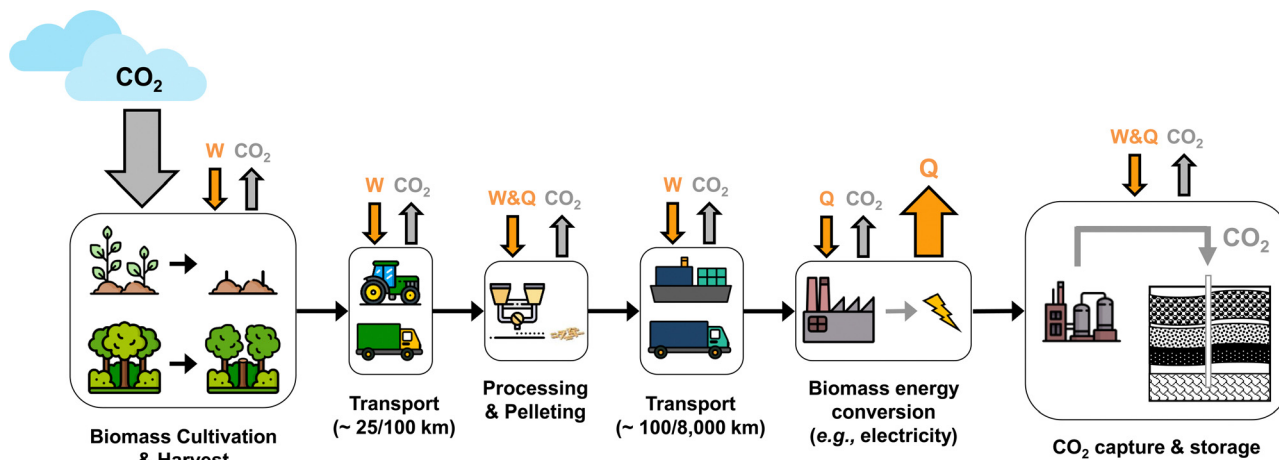


Fig. 3 Value chain of bioenergy and carbon capture and storage (BECCS). Local biomass is assumed to be transported *via* road over short distances (*i.e.*, 100 km), whereas imported biomass can be transported *via* ship over longer distances, *e.g.* approximately 8000 km for biomass imported from the South-East of the USA to the UK. Grey arrows (CO_2) account for CO_2 uptake and leakage across the value chain. Orange arrows account for the energy consumption/production, *i.e.*, W is power, and Q is heat.

sequestered can vary significantly.⁵¹ This obviously directly impacts CO_2 removal efficiency. For example, the conversion of biomass to biofuels *via* fermentation or gasification processes split the bio-carbon into two portions; process carbon that is available for capture and storage, and product carbon that is ultimately emitted to atmosphere. Biofuels pathways are limited to capture rates of approximately 66–71% in the case of FT biodiesel and bioethanol, respectively,^{52,53} whereas electricity or hydrogen BECCS pathways typically capture up to 90–95% of the bio-carbon.^{54–56} Note that algae could also be considered as an alternative biomass feedstock, both for biofuel or electricity BECCS (the latter referred as ABECCS in the literature⁵⁷). Thus, when considering the optimal use of biomass, one needs to carefully consider which is more important, carbon removal or energy service, with recent work by Fajardy *et al.*⁵⁸ implying that the carbon removal service is ultimately most valuable. Hereafter, in this study, we assume BECCS to be a bioelectricity pathway.

As shown in Fig. 4, the CO_2 removal efficiency of BECCS over a 100 year time period ranges between 62.5–86% and varies with the type of land, *i.e.* (I)LUC, and biomass feedstock considered for bioenergy production, as well as the configuration of the biomass supply chain, *i.e.* transport distances and mode (road and sea). Usually, upstream activities are responsible for the largest share of CO_2 emissions.

The CO_2 emissions associated with biomass cultivation and processing reduced CO_2 removal efficiency by 3–27%. Owing to the variation in moisture content at harvest and energy required for drying, ligno-cellulosic biomass accounts for a significantly greater release of CO_2 than of herbaceous biomass.

Thus, the carbon removal efficiency of BECCS pathways can vary substantially as a function of the biomass source and the impact of (I)LUC, with CDR efficiencies in the approximate range of 69–85%.

2.3. Biochar

Biochar (Fig. 5) is a recalcitrant, carbon rich material produced *via* pyrolysis. Once applied on soil, the biochar acts as a soil-

amendment additive, with the soil acting as a CO_2 sink, thus generating negative CO_2 emissions. During the pyrolysis, approximately half of bio-carbon is retained to the solid bio-char, while the remaining bio-carbon is emitted as volatile and gaseous organic compounds, *i.e.* bio-oil and syngas, during pyrolysis.⁵⁹

However, over time, much of the carbon content of the biochar is returned to the atmosphere, with decay rates ranging from a few decades to several centuries.^{29,59–61} Woolf *et al.*²⁹ suggested that between 54–84% of the carbon content of biochar is stable over a time period of 100 years, but only 6–35% over 1000 years. The biochar decay rate is a function of both its composition, *i.e.* the molar hydrogen to organic carbon ratio $\text{H}/\text{C}_{\text{org}}$ of biochar,^{29,61,62} and soil characteristics, *i.e.* soil temperature.^{29,60} This is discussed further in SM.4 (ESI[†]). In the UK, the average soil temperature is approximately 11 °C, thereby the permanence of biochar equals to 70% over 100 years and is reduced to 12% over 1000 years.

Finally, the yield of biochar, bio-oil and syngas vary as a function of the pyrolysis process employed. The choice of pyrolysis process also leads to different biochar properties, and thus, different biochar decay rates.^{29,59} For the purposes of this study, we assume that the process is optimized for higher biochar production, *i.e.* slow pyrolysis at 350/450 °C (see SM.4, ESI[†]).

Fig. 6 shows the CO_2 removal efficiency of biochar for different types of biomass and land in the UK, deployed in 2020, and over a 100 year time period. The key factor that reduces the CDR efficiency of biochar is the pyrolysis yield, *i.e.* the mass of biochar produced per unit of dry mass of biomass used as a feedstock. Biochar yield is approximately 40% for slow-pyrolysis.⁶³ Combined with biochar C content ranging between 57–75%,⁶⁴ this results in approximately 50% of the CO_2 being sequestered in the biochar.

The CO_2 emissions associated with the release of labile carbon contained in the biochar also reduce its CO_2 removal



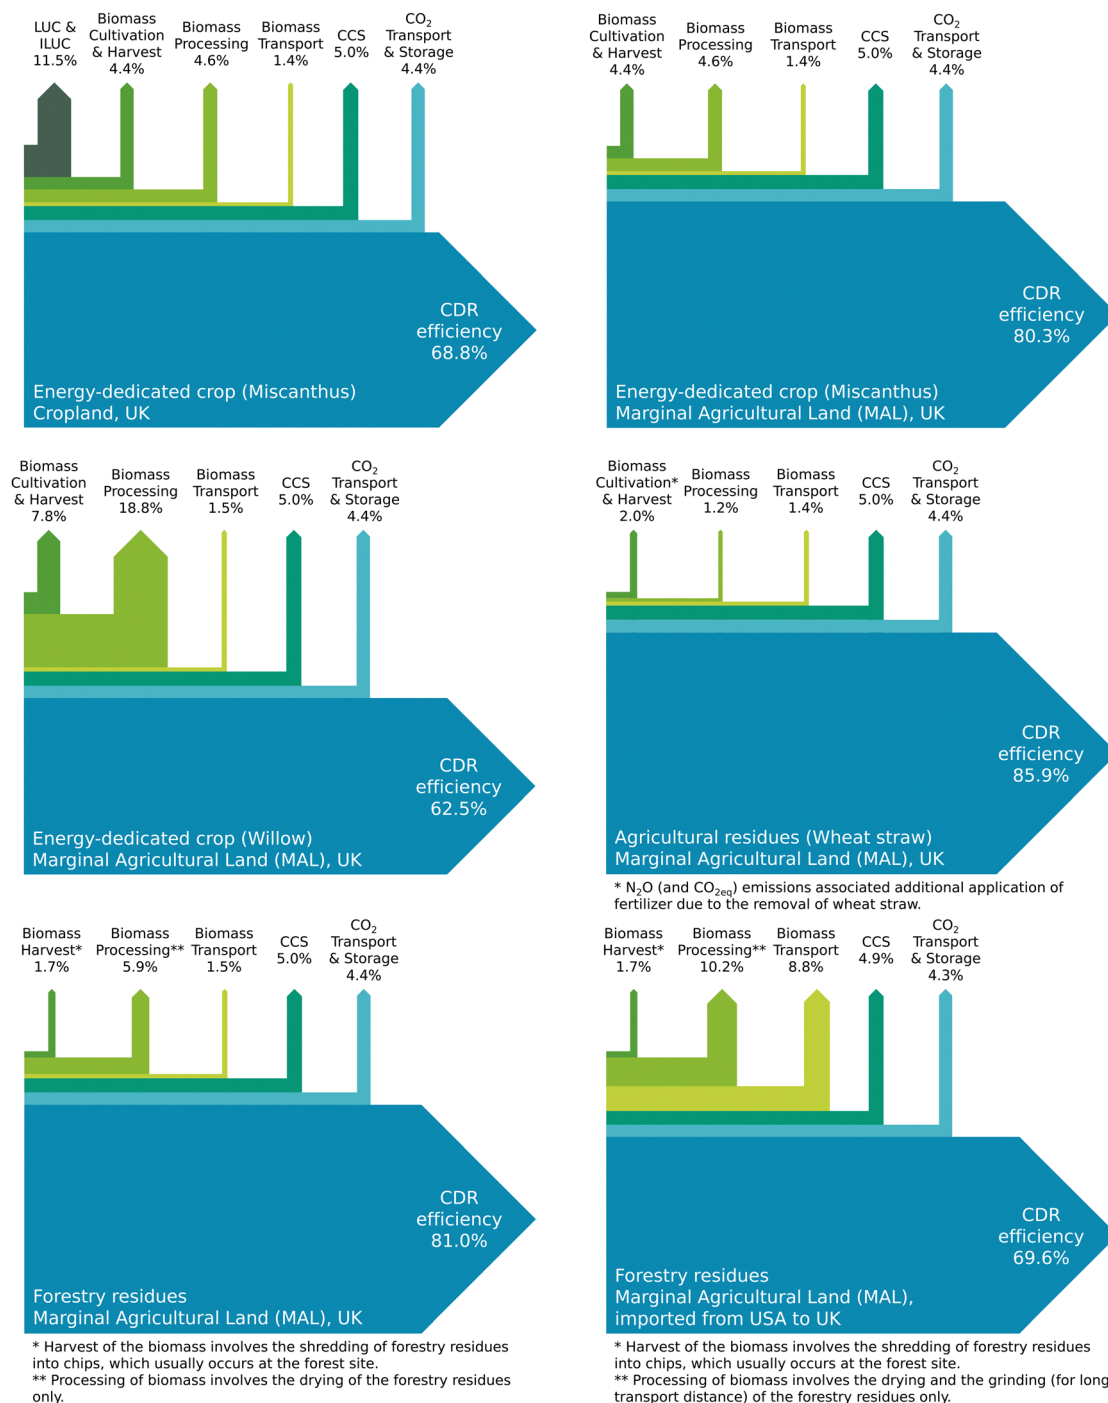


Fig. 4 Sankey diagrams showing the CO₂ removal efficiency of BECCS for different types of biomass cultivated on different types of land, and for different transport modes and distances, deployed in 2020, and over 100 years in the UK. Local energy-dedicated crops, agricultural residues and forest residues are transported over 100 km *via* road, whereas imported forest residues from the South-East of the USA are transported over 8000 km *via* road and sea.

efficiency by a further 14–18%, based on the UK scenario over 100 years.

Finally, similarly to BECCS, (I)LUC can significantly reduce biochar CDR efficiency by 11.5%, as shown by the Sankey (Fig. 6) for biochar produced from energy-dedicated crops cultivated on existing cropland. Thus, the overall carbon removal efficiency of biochar is observed to be in the range of

16–38% on a centennial timescale, and reduced further to –3 to 5% over a millennium.

2.4. Direct air capture of CO₂ with storage (DACCS)

Direct air capture of CO₂ with storage (DACCS) refers to technologies that directly separate CO₂ from the atmosphere



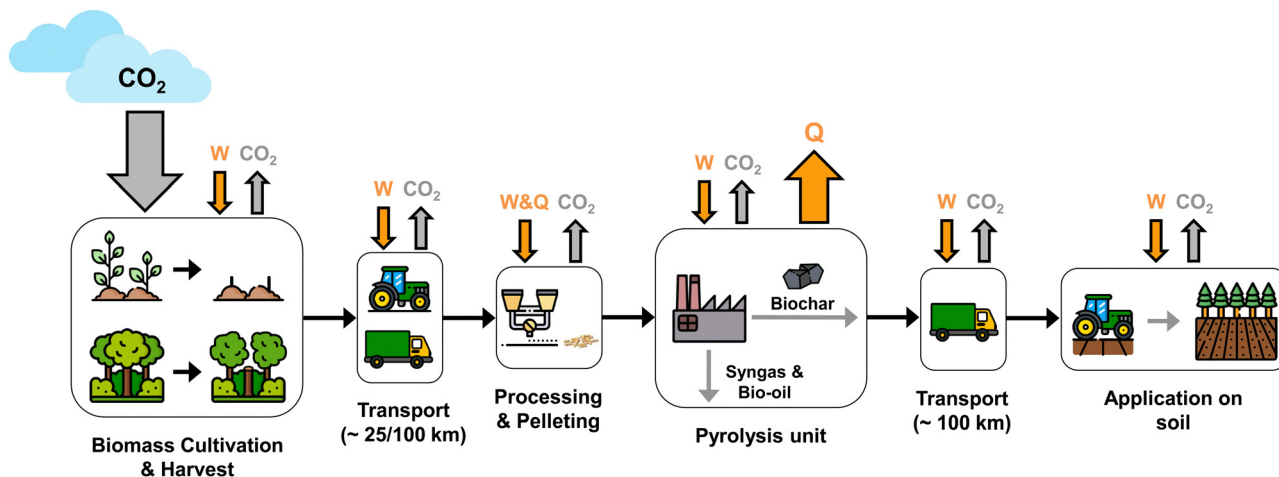


Fig. 5 Value chain of biochar. Biomass is transported over short distances *via* road (*i.e.*, 25/100 km) and is used for the production of biochar. Then, biochar is transported over short distances *via* road (*i.e.*, 100 km).

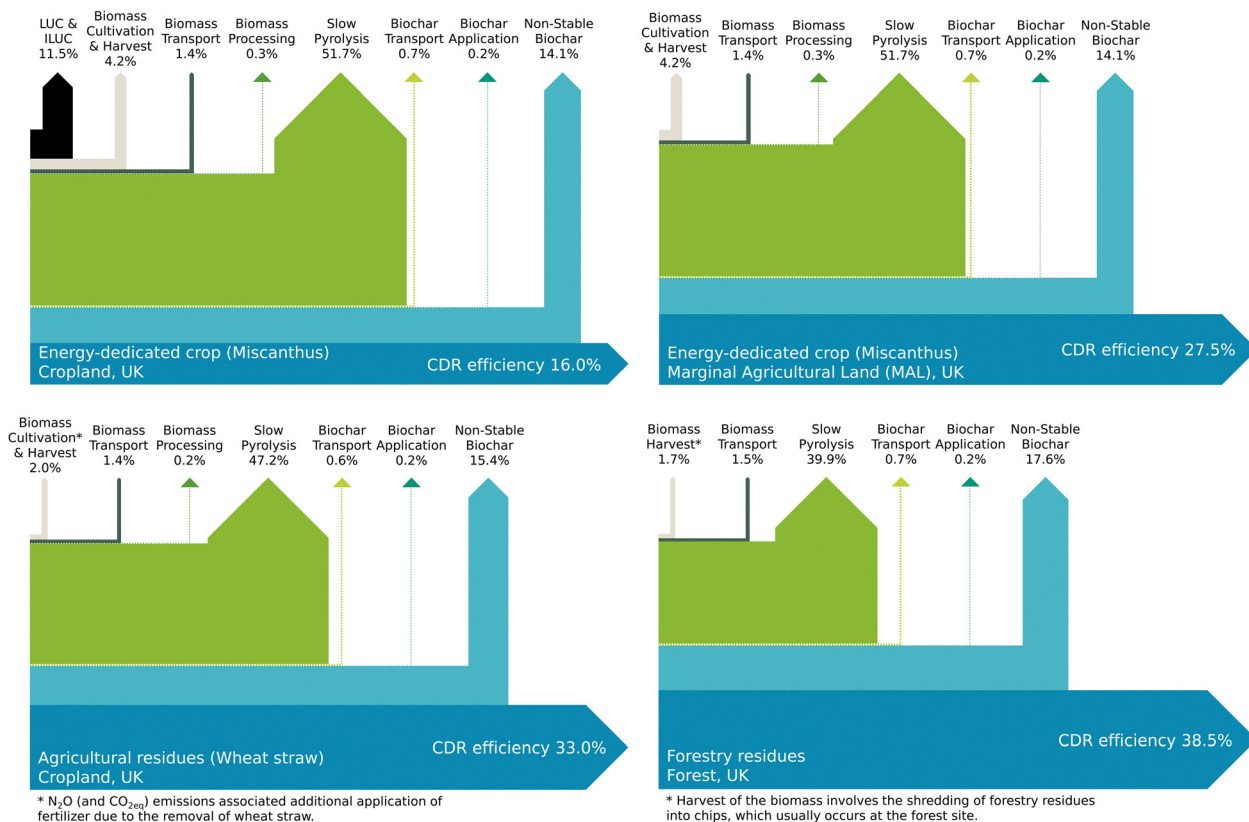


Fig. 6 Sankey diagrams showing the CO₂ removal efficiency of biochar for different types of biomass and land, deployed in 2020, and over 100 years in the UK. Energy-dedicated crops and agricultural residues are transported over 25 km whereas forest residues are transported over 100 km. Biochar is then transported over 100 km. Over 100 years, we assume that 70% of biochar carbon (C) content is still sequestered in the UK.

and geologically sequester it, thus generating negative emissions (see Fig. 7).

A key challenge with DACCS is the processing of large volumes of diluted CO₂ in ambient air, resulting in high energy requirements.⁶⁵ In particular, due to the large air flows, DACCS requires a significant amount of electricity to run the fans and

pumps, as well as the CO₂ compression and transportation.⁶⁶ Thermal energy of various qualities is also required for DAC technologies that involve sorbent regeneration.^{67,68} Whilst not capturing CO₂ from directly from the air, emerging approaches such as seawater mineralisation processes significantly smaller volumes—water contains 150 times more CO₂ than air per unit



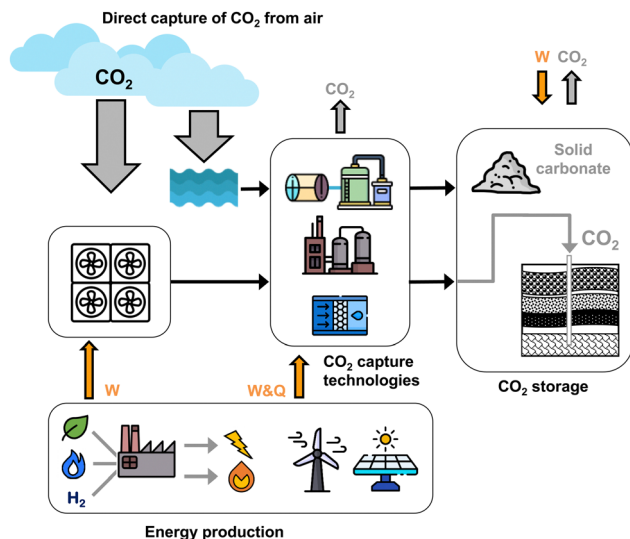


Fig. 7 Value chain of direct air capture and CO₂ storage (DACCS).

volume—and produces a solid carbonate, thus, avoiding the need for CO₂ compression & storage. As carbon depleted seawater is understood to equilibrate with the atmosphere within one year, this can be considered a promising form of indirect air capture.

As shown in Fig. 8, the CDR efficiency of DACCS over a 100 year time period, when assuming its immediate deployment, *i.e.* the carbon intensity of the current (2020) UK energy system, ranges between 52–80%. It is a function of the electricity and thermal energy requirements, which differ with each type of DAC technology (see SM.5, ESI†). Liquid solvent and solid sorbent DACCS use a combination of heat and electricity, where the use of this energy reduces DACCS's CDR efficiency by 16–19%. The seawater mineralisation DACCS only uses electricity for the electrochemical mineralisation process, which reduces the CDR efficiency of DACCS by 45%. Overall, the decarbonisation of the energy sector will play a significant role in improving the climate repair value of DACCS over the century. Importantly,

in the UK, the CO₂ leakages associated with the use of energy is within similar range for both liquid solvent and solid sorbent DACCS archetypes. However, the former relies on high-grade heat, so far provided with natural gas, whereas the later relies on low-grade heat only, which can be entirely provided with electricity. Considering the complexity of international geo-political relations, when and if possible, energetic independence should also be taken into consideration.

2.5. Enhanced weathering (EW)

Enhanced weathering (EW) accelerates the natural process of mineral carbonation (see Fig. 9). However, the carbonation process that sequesters CO₂ into the rocks is not immediate, with carbonation rates ranging from a few months to a few decades.^{26,27,69,70} In this study, we assume that between 21–100% of the rocks used have been weathered in the UK over a 100 year-period, depending on the rock type (basalt or dunite) and particle size in the range of 10 or 50 μm. The carbonation rate of EW is a function of a combination of mineral composition, particle size, and soil temperature and pH. This is discussed further in SM.6 (ESI†).

The supply chain is also a key challenge with EW, with CO₂ emissions resulting from the excavation of rocks from mineral formations, rock grinding, transport, and the application to the land. Moreover, owing to the limited sequestration potential per unit mass of rock—maximum CO₂ sequestration potentials of basalt and dunite rocks are ~0.2 and ~0.9 t CO₂ per t rock, respectively – very large amount of carbonatable material are required. Consequently, the overall CO₂ removal potential of EW is inherently constrained by rock availability and extraction potential.

As illustrated in Fig. 10, the CO₂ removal efficiency of EW can decrease by up to 24% owing to carbon leakage during the process of crushing and grinding the rocks. However, as the energy requirements for rock size reduction and the carbonation rate are both a function of the rock type (different mineral compositions) and targeted particle size, there is, in fact, a

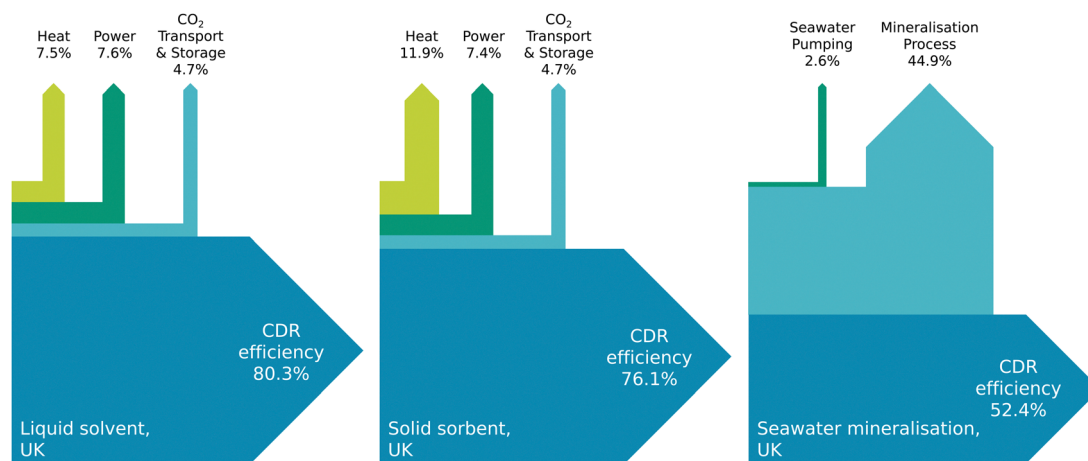


Fig. 8 Sankey diagrams showing the CO₂ removal efficiency of different DACCS technologies in the UK. Current energy carbon intensities, *i.e.* electricity and natural gas are considered. Over 100 years, it is assumed that 0.005% of CO₂ has leaked from geological CO₂ reservoirs.^{7,57}



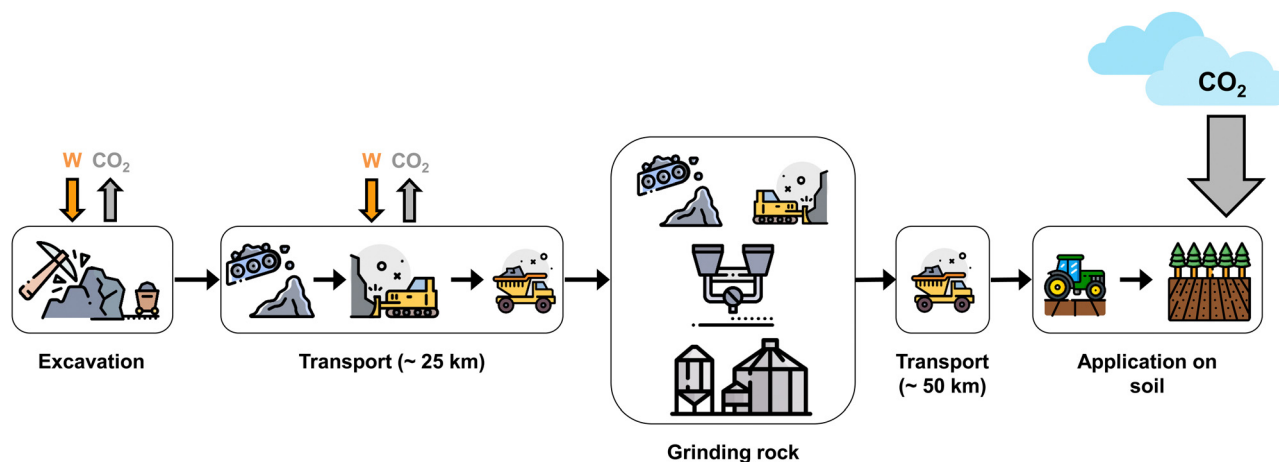


Fig. 9 Value chain of enhanced weathering (EW). Rocks are transported over short distances via road (i.e., 100 km) before being applied on soil.

trade-off between increased CO₂ emissions associated with targeting smaller particle sizes and the increased carbonation rate. For a rock size of 10 μm, 77% of the basalt and 100% of the dunite are weathered in the UK over 100 years. If particle size increases to 50 μm, only 21% of basalt and 91% of dunite are

weathered over 100 years. Therefore, smaller rock size reaches maximum CO₂ sequestration potential faster, thereby increasing CDR efficiency of EW. Conversely, targeting a smaller particle size requires more energy and results in more CO₂ emissions, thus reducing EW's CDR efficiency. Producing rock

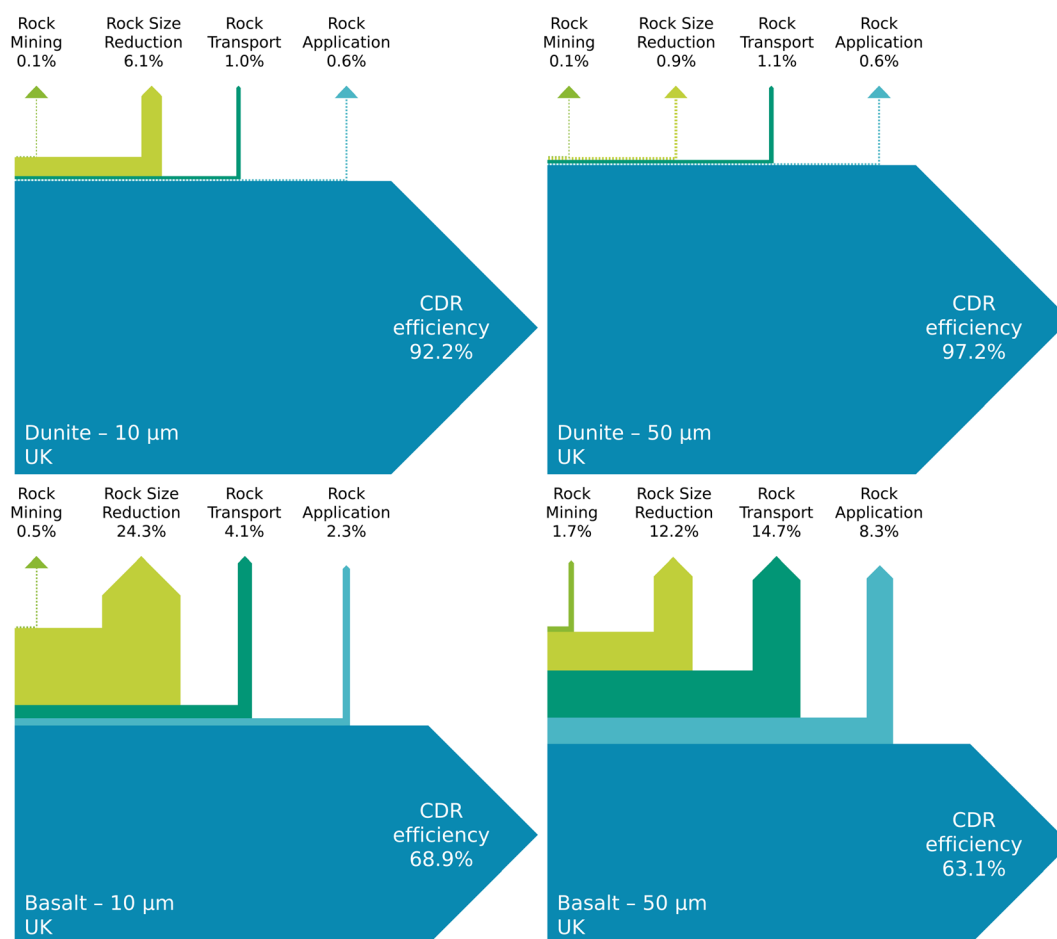


Fig. 10 Sankey diagrams showing the CO₂ removal efficiency of EW for alkaline rocks such as basalt and dunite over 100 years in the UK. Rocks are ground to 10 or 50 μm particle sizes and transported over 100 km before application to soil. The sequestration potential of EW over 100 years varies between 21% and 100% of the maximum potential of the rock, depending on the type and size of the rock.



particles of 10 μm consumes about 180 kW h per t rock,^{26,71} whereas producing 50 μm particles only consumes 25 kW h per t rock. For basalt rocks, results show that smaller 10 μm particles are more efficient than 50 μm (69% *versus* 63%). In contrast, for dunite rocks, 10 μm particles are less efficient than 50 μm (92% *versus* 97%), owing to the higher maximum CO₂ sequestration potential achieved with dunite rocks.

Finally, whilst it is also possible to use alkaline industrial waste as a feedstock for carbonation processes, it will important to consider potential health and environmental hazards posed by the distribution of this material on the land, *e.g.* toxicity.^{72,73} These factors should also be carefully considered when evaluating EW projects as a CDR strategy around the world.

Overall, the CO₂ removal efficiency of EW pathways is strongly influenced by the rock type and particle size. Similarly to DACCS, the decarbonisation of the energy sector will play a significant role in improving the climate repair value of EW.

3. Timing & permanence

As discussed in Section 2, the CO₂ removal efficiency of different archetypal CDR pathways can vary significantly with location, configurations, and importantly with time. In this section, the CO₂ removal efficiency of each archetypal pathway is illustrated over a 1000 year time period, so that to assess the impact of time. Here, we use 5 archetypal regions/climates to illustrate location-specific effects, *e.g.* climates, bio-geophysical factors or carbon intensity of the energy systems:

- Brazil (Rio de Janeiro) – tropical rainforests;
- China (Shaanxi) – temperate mountain systems (not far from the green belt);
- EU (UK) – temperate oceanic and boreal coniferous forests;
- India (Madhya Pradesh) – tropical shrubland (20% of the country); and
- USA (Louisiana) – subtropical humid forests.

3.1. Afforestation/reforestation (AR)

Fig. 11 shows the evolution of AR's CO₂ removal efficiency over 1000 years for different climates and regions (*i.e.* for different risks of wildfires). An important metric is the carbon break-

even time—the time it takes for AR to capture enough atmospheric CO₂ to compensate for the CO₂ emissions associated with forest establishment and management operations, and achieve net CO₂ removal from the atmosphere. As can be observed, AR's carbon break-even time is around 5 years in all climates and regions. Similarly, AR's CO₂ removal efficiency increases to more than 95% in less than 30 years across all climates and regions. Therefore, although AR is highly efficient to generate negative CO₂ emissions, it is not immediate due to the time required for forests to grow.

Moreover, in the long term (>100 years), the increasing risk of wildfires reduces the CO₂ removal efficiency of AR. Results show that the warmer the climate, the greater the rate of reduction of AR CO₂ removal efficiency. Further, forests in dryer climates are observed to have reduced CO₂ sequestration potential are (see SM.2, ESI[†]). For example, Brazil and India are both tropical climates, but Brazil is mainly dominated by rainforests, which is typically more humid than the shrublands which dominate India. The maximum CO₂ sequestration potential of AR is around 710 t CO₂ per ha in Brazil and 170 t CO₂ per ha in India. Therefore, although CDR efficiencies of AR start decreasing at the same time and rate for both Brazil and India, Brazil is more efficient to generate CO₂ removal than India over a 1000 year time period (36% *versus* 31%). Conversely, in boreal coniferous forests, such as in the North of the UK, the risk of wildfire is negligible owing to relatively low temperatures and humidity typically associated with the boreal climate.

However, it is also important to note that the CDR potential of AR also decreases with colder climates. For instance, the maximum CO₂ sequestration potential of boreal forests in the UK is only around 120 t CO₂ per ha, which is 5.7 times less than that of Brazilian rainforests. Furthermore, AR in boreal climates can potentially increase local warming, due to albedo effects, which could offset any temperature decrease achieved from carbon sequestration.⁷⁴ Thus, all these factors should be carefully considered when evaluating AR projects as part of a climate repair strategy around the world.

3.2. Bioenergy with carbon capture and storage (BECCS)

Due to the inherent reliability of geological reservoirs,⁷⁵ BECCS is considered a permanent CO₂ sink. In the near-term (Fig. 12),

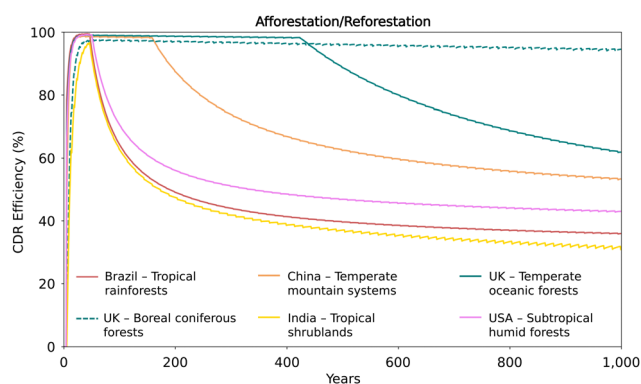


Fig. 11 Evolution of the CO₂ removal efficiency of AR over 1000 years for different climates and regions.

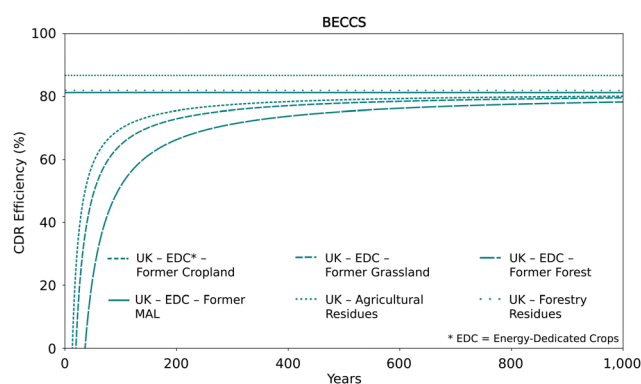


Fig. 12 Evolution of the CO₂ removal efficiency of BECCS over 1000 years for different types of biomass feedstock and land.



its CO₂ removal efficiency is mainly a function of biogeophysical factors, *i.e.* the type of land and biomass used for bioenergy (see Section 2.2). Since forestry or agricultural residues have no (I)LUC effects (see SM.2, ESI[†]), BECCS using these feedstocks has an immediate and constant CDR efficiency of 81–87%, which is in line with observations in Fig. 4.

However, for feedstocks grown on former cropland, grassland or forest, the carbon debt initiated by land conversion for biomass production, *i.e.* (I)LUC, needs to be paid off before the BECCS pathway can generate net negative CO₂ emissions.³⁰ This carbon break-even time depends on the type of land that has been converted.^{76–78} As shown in Fig. 12, payback periods range from 14 to 36 years for former cropland, or natural forest, respectively, resulting in CO₂ removal efficiencies ranging between 52% to 70% over the first 100 years, compared to 78–80% over 1000 years. Thus, the socio-economic viability of BECCS pathways as a CDR strategy using biomass associated with substantial (I)LUC is highly dubious.

3.3. Biochar

Fig. 13 shows the evolution of biochar's CDR efficiency over a 1000 year time period for different types of biomass feedstocks and different regions. As explained in Section 2, the pyrolysis yield (40% in the case of slow pyrolysis) has a major impact on the CDR efficiency of biochar, which ranges between 19–38% over 100 years, depending on the type of biomass feedstock used. However, due to the decay of biochar over time, this range reduces to below 5% over a millennium. In tropical climates, such as Brazil, where biochar's decay rates are accelerated owing to higher soil temperatures (see SM.4, ESI[†]), the CO₂ emissions resulting from the biochar supply chain exceed the amount of CO₂ sequestered in the biochar after a period of about 550 years. Thus, the overall CDR efficiency of biochar becomes negative, *i.e.* the pathway emits more CO₂ into the atmosphere than the amount removed. Thus, the viability of biochar-based CDR pathways is even more dubious than that of BECCS. Given their potential competition for land and biomass feedstock, and considering the impact of time on long-term permanence, BECCS pathways are more efficient than biochar pathways.

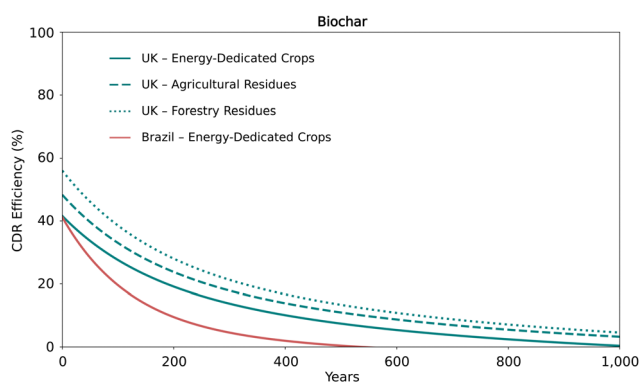


Fig. 13 Evolution of the CO₂ removal efficiency of biochar over 1000 years for different types of biomass feedstock in different regions.

3.4. Direct air capture of CO₂ with storage (DACCS)

Similarly to BECCS, DACCS is a permanent CDR pathway. However, the CDR efficiency of DACCS is significantly influenced by the carbon intensity of the energy used, which varies with DAC technology and region. Solid sorbent and liquid solvent DACCS use heat and electricity, whereas seawater mineralisation DACCS only utilises electricity. As the current CO₂ emissions intensities of the heat supply and electricity grid vary with region, the CDR efficiency of DACCS differs for each country and technology type, as shown in Fig. 14.

Importantly, the CDR efficiency of DACCS increases as these energy systems decarbonise over time. The CO₂ emissions intensity of electricity is assumed here to reduce to net zero by 2050, following the trajectory of the IPCC P2 illustrative option⁷⁹ (see SM.1, ESI[†]). For solid sorbent and seawater mineralisation DACCS pathways, the increase in CDR efficiency is directly proportional to the rate of decarbonisation of the electricity grid. Particularly, when zero carbon energy is available, the seawater mineralisation option achieves a CDR efficiency of 100% owing to the direct formation of a solid carbonate, which avoids leakage of CO₂.

The CO₂ emissions intensity of heat is another important factor, as shown for liquid solvent DACCS pathways using natural gas and hydrogen. If we assume that natural gas steam methane reforming (SMR) in combination with CCS will be the least-cost option for low carbon hydrogen in the near term, and account for the upstream carbon leakage associated with this option,⁸⁰ the liquid solvent hydrogen-based DACCS has the lowest CDR efficiency for the first 50 years. But as this carbon leakage is reduced to zero over time, the CDR efficiency of this pathway increases. Once the broader energy system is fully decarbonised, all DACCS are observed to reach a CDR efficiency of approximately 100% (assuming 0.005% CO₂ leakage during transport and storage over a 100 year period⁷⁵).

Thus, the climate repair value of DACCS, *via* CDR, will disproportionately increase relative to the other CDR pathways as time goes by. Similarly, the near-term value of DACCS (and

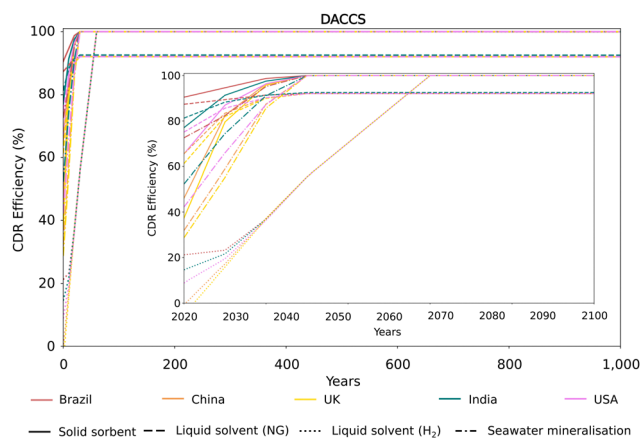


Fig. 14 Evolution of the CO₂ removal efficiency of DACCS over 1000 years for different regions and DACCS archetypes.



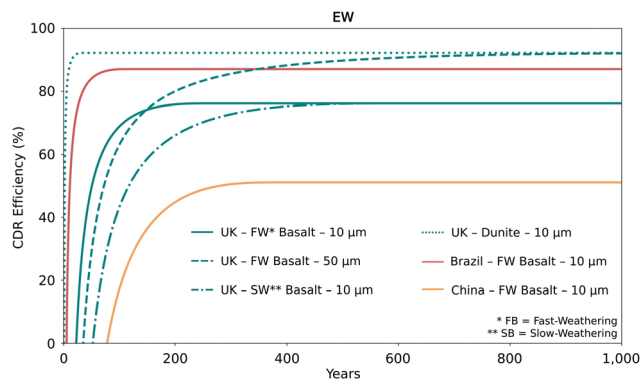


Fig. 15 Evolution of the CO₂ removal efficiency of EW over 1000 years for different alkaline rock characteristics (*i.e.*, type, composition, or size) and different regions.

other) CDR options which is powered by zero carbon power, *e.g.* nuclear or renewable energy, is also significant.

3.5. Enhanced weathering (EW)

As shown in Fig. 15, owing to the time between producing carbonatable materials, *i.e.* when energy is used and carbon emitted, and effectively removing CO₂ from the atmosphere, the CDR efficiency of EW steadily increases over time until its maximum CO₂ sequestration potential is reached. As rocks increasingly weather over time, the negative CO₂ emissions generated by EW is permanent.²⁸

The maximum and long-term CDR efficiency of EW results from a combination of factors, including: the rock type-specific CO₂ sequestration potential, the energy use of alongside the rocks supply chain, particularly for grinding, and associated CO₂ emissions (*e.g.*, 10 μm rather than 50 μm), and the carbon intensity of the region of deployment (*e.g.* the carbon intensity of the energy mix is lower in Brazil and higher in China).

Therefore, over a period of 1000 years, once the rocks are fully weathered, the maximum CDR efficiency of EW can range between 51% and 92%.

However, in the near-term, the carbon break-even time of EW can range between 5–77 years, depending on the carbon intensity of the energy used for the supply chain and the type of rock. For example, it only takes 5 years for fast-weathering basalt deployed in Brazil to become carbon negative, whereas it takes 77 years in China, owing to China's highly carbon intensive energy mix. In the UK, it only takes a few months for dunite to provide CDR, whereas slow- and fast-weathering basalts will take up to 35 and 52 years, respectively.

4. Discussion & conclusion

Large-scale CDR will be indispensable in delivering the 1.5–2 °C objectives of the Paris Agreement, as well as in achieving intermediate net-zero targets. Owing to the intrinsic characteristics and differences of CDR pathways, the degree to which they can deliver permanent CDR in a time and resource efficient way vary significantly.

We find that AR can be highly efficient to remove CO₂ from the atmosphere (up to 95–99%)—the CO₂ leakage associated with the establishment and the ongoing management of forests is negligible in comparison to the CO₂ sequestration potential of AR, and that even over millennial time period. However, similarly to other nature-based solutions, *e.g.* peatland conservation/restoration or agroforestry, the CO₂ removal potential, and thus carbon removal efficiency, of AR increases very slowly owing to the time that forests require to grow before any CO₂ removal is achieved, and is saturated once forests reach maturity. Moreover, owing to the increasing risk of unpredictable natural and anthropogenic disturbances, *e.g.* weather events such as wildfires or deforestation, the permanence of AR's CO₂

Table 1 Summary of key characteristics for each CDR pathway. CDR efficiency ranges, as calculated here for different archetypal CDR pathways, when deployed in 2020, are indicated over time periods of 100 years and 1000 years. For DACCS pathways, CDR efficiency ranges are also indicated when such pathways are deployed later this century, *i.e.* assuming decarbonised energy systems

CDR pathway	CO ₂ removal efficiency		Timing (Is CDR immediate? If not, why?)	Permanence (Is CDR permanent? If not, why?)	
	Over 100 years	Over 1000 years (Is CDR efficient? Why?)			
AR	63–99%	31–95%	Very high Forest establishment & management has a negligible impact on CDR efficiency	Decades Forest growth takes time	Very low Owing to the risk of natural disturbances, such as wildfires or weather events
BECCS	52–87%	78–87%	Moderate to high Biomass supply chain emissions	Immediate to decades (I)LUC change effects	High/very high Permanent CO ₂ storage in geological reservoirs
Biochar	20–39%	–3 to 5%	Low Pyrolysis (conditions with low biochar yield), biomass supply chain emissions	Immediate The carbon of biochar is relatively stable and sequestered in soil	Low/very low Decay rate of biochar reduces stored carbon over time
DACCS ^a	–5 to 90% (92–100%)	–5 to 90% (92–100%)	Moderate to high CO ₂ intensity of the energy consumed	Immediate CO ₂ capture from the air/ocean	Very high Permanent CO ₂ storage in geological reservoirs
EW	17–92%	51–92%	Moderate to high Rock supply chain emissions	Immediate to decades Carbonation rate (residence time)	High/very high Chemical reactions permanently store carbon in rock minerals

^a Considering current and future decarbonised energy systems.



removal decreases with time, hence concurrently reducing CO₂ removal efficiency of AR.

Conversely, BECCS, biochar or EW rely on more sophisticated supply chains than AR, resulting in potentially substantial CO₂ leakage, and therefore reducing their CO₂ removal efficiencies. Biochar is found to be highly inefficient owing to the low pyrolysis yield for biochar, resulting in almost half of the biogenic CO₂ being emitted back into the atmosphere. Although biochar can provide immediate CDR, its CO₂ removal efficiency decreases within decades or centuries due to its decay rate and can ultimately have a negative impact on the climate.

We find that BECCS is more efficient at removing CO₂ from the atmosphere than biochar, owing to its higher CO₂ capture rate and high permanence of the CO₂ stored in geological reservoirs. However, both BECCS and biochar are subject to potential (I)LUC effects, which can delay CDR by a few years to a few decades.

Similarly to BECCS, both DACCS and EW deliver permanent CDR, with DACCS storing in geological reservoirs, and EW in rocks. However, for both pathways, we find that the CO₂ removal efficiency is greatly reduced by the carbon intensity of the energy used for either sorbent regeneration/seawater mineralisation in the case of DACCS, and for crushing and grinding rocks in the case of EW. EW's CO₂ removal efficiency increases within months to decades owing to its carbonation rate and can ultimately have a positive impact on the climate. This is summarised in Table 1.

Thus, whilst the importance CO₂ removal in meeting the Paris Agreement's objectives remains unchallenged, the role and value of each individual CDR pathway in contributing durably and in a time- and resource-efficient manner to these objectives will be observed to vary substantially with the biogeophysical, broader energy system, and socio-political contexts within which it will be deployed across the world.

Author contributions

N. M. D. and S. C. conceived the study; S. C. carried out the calculations, designed the figures and led the writing; with P. P., M. B., N. S. and N. M. D. contributing to the text.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

S. C. and N. S. would like to acknowledge funding from the European Union's Horizon 2020 research and innovation programme under grant agreement no. 869192. P. P. acknowledges support received by the CO2RE Hub, funded by the Natural Environment Research Council (Grant Ref: NE/V013106/1). M. B. would like to acknowledge funding from the Research Councils UK (RCUK) under grants NE/P019900/1 (Comparative assessment and region-specific optimisation of GGR) and EP/

T033940/1 (Multiphysics and multiscale modelling for safe and feasible CO₂ capture and storage). N. S. also acknowledges funding from the European Commission under Project No. 271498 in the Horizon 2020 program, ACT Grant Agreement No. 691712.

References

- 1 United Nations Framework Convention on Climate Change (UNFCCC), Adoption of the Paris Agreement, Paris, 2015.
- 2 A. H. MacDougall and P. Friedlingstein, *J. Clim.*, 2015, **28**, 4217–4230.
- 3 H. D. Matthews, N. P. Gillett, P. A. Stott and K. Zickfeld, *Nature*, 2009, **459**, 829–832.
- 4 K. Zickfeld, M. Eby, H. Damon Matthews and A. J. Weaver, *Proc. Natl. Acad. Sci. U. S. A.*, 2009, **106**, 16129–16134.
- 5 J. Rogelj, A. Popp, K. V. Calvin, G. Luderer, J. Emmerling, D. Gernaat, S. Fujimori, J. Strefler, T. Hasegawa, G. Marangoni, V. Krey, E. Kriegler, K. Riahi, D. P. Van Vuuren, J. Doelman, L. Drouet, J. Edmonds, O. Fricko, M. Harmsen, P. Havlík, F. Humpenöder, E. Stehfest and M. Tavoni, *Nat. Clim. Change*, 2018, **8**, 325–332.
- 6 Intergovernmental Panel on Climate Change, *Global Warming of 1.5 °C. An IPCC Special Report on the impacts of global warming of 1.5 °C above pre-industrial levels and related global greenhouse gas emission pathways, in the context of strengthening the global response to the threat of climate change*, Press, 2018.
- 7 D. Huppmann, J. Rogelj, E. Kriegler, V. Krey and K. Riahi, *Nat. Clim. Change*, 2018, **8**, 1027–1030.
- 8 Climate Analytics and New Climate Institute, Glasgow's 2030 credibility gap: net zero's lip service to climate action - Warming Projections Global Update, 2021.
- 9 United Nations Framework Convention on Climate Change (UNFCCC), Nationally determined contributions under the Paris Agreement, Glasgow, 2021.
- 10 S. L. Lewis, C. E. Wheeler, E. T. A. Mitchard and A. Koch, *Nat.*, 2019, **568**, 25–28.
- 11 L. and D. (FELD) A. T. The Food and Land Use (FOLU) Coalition and the Food, Environment, *From Global Commitments to National Action: A Closer Look at Nationally Determined Contributions from a Food and Land Perspective*, 2021.
- 12 Climate Analytics and New Climate Institute, Countries|Climate Action Tracker, <https://climateactiontracker.org/countries/>, (accessed 10 February 2022).
- 13 A. Geiges, A. Nauels, P. Yanguas Parra, M. Andrijevic, W. Hare, P. Pfliegerer, M. Schaeffer and C. F. Schleussner, *Earth Syst. Dyn.*, 2020, **11**, 697–708.
- 14 S. E. Tanzer and A. Ramirez, *Energy Environ. Sci.*, 2019, 0–16.
- 15 T. Terlouw, C. Bauer, L. Rosa and M. Mazzotti, *Energy Environ. Sci.*, 2021, **14**, 1701–1721.
- 16 S. Fuss, W. F. Lamb, M. W. Callaghan, J. Hilaire, F. Creutzig, T. Amann, T. Beringer, W. De Oliveira Garcia, J. Hartmann, T. Khanna, G. Luderer, G. F. Nemet, J. Rogelj, P. Smith, J. V. Vicente, J. Wilcox, M. Del Mar Zamora Dominguez and J. C. Minx, *Environ. Res. Lett.*, 2018, **13**, 063002.



- 17 G. F. Nemet, M. W. Callaghan, F. Creutzig, S. Fuss, J. Hartmann, J. Hilaire, W. F. Lamb, J. C. Minx, S. Rogers and P. Smith, *Environ. Res. Lett.*, 2018, **13**, 063003.
- 18 A. Strong, S. Chisholm, C. Miller and J. Cullen, *Nat.*, 2009, **461**, 347–348.
- 19 L. Rosa, V. Becattini, P. Gabrielli, A. Andreotti and M. Mazzotti, *Resour., Conserv. Recycl.*, 2022, **184**, 106436.
- 20 H. Ostovari, L. Müller, F. Mayer and A. Bardow, *J. Cleaner Prod.*, 2022, **360**, 131750.
- 21 S. Gupta, H. W. Kua and C. Y. Low, *Cem. Concr. Compos.*, 2018, **87**, 110–129.
- 22 CarbonCure's Sustainable Concrete Solution - Concrete Technology Reducing Carbon Impact, <https://www.carboncure.com/>, (accessed 30 June 2022).
- 23 Biocrete – a carbon negative concrete - Snøhetta, <https://snohetta.com/project/558-biocrete-a-carbon-negative-concrete>, (accessed 30 June 2022).
- 24 T. Strunge, P. Renforth and M. Van der Spek, *Commun. Earth Environ.*, 2022, **3**, 1–14.
- 25 M. Legan, A. Ž. Gotvajn and K. Zupan, *J. Environ. Manage.*, 2022, **309**, 114704.
- 26 P. Renforth, *Int. J. Greenhouse Gas Control*, 2012, **10**, 229–243.
- 27 L. L. Taylor, J. Quirk, R. M. S. Thorley, P. A. Kharecha, J. Hansen, A. Ridgwell, M. R. Lomas, S. A. Banwart and D. J. Beerling, *Nat. Clim. Change*, 2016, **6**, 402–406.
- 28 D. J. Beerling, E. P. Kantzas, M. R. Lomas, P. Wade, R. M. Eufrazio, P. Renforth, B. Sarkar, M. G. Andrews, R. H. James, C. R. Pearce, J. F. Mercure, H. Pollitt, P. B. Holden, N. R. Edwards, M. Khanna, L. Koh, S. Quegan, N. F. Pidgeon, I. A. Janssens, J. Hansen and S. A. Banwart, *Nature*, 2020, **583**, 242–248.
- 29 D. Woolf, J. Lehmann, S. Ogle, A. W. Kishimoto-Mo, B. McConkey and J. Baldock, *Environ. Sci. Technol.*, 2021, **55**, 14795–14805.
- 30 M. Fajardy and N. Mac Dowell, *Energy Environ. Sci.*, 2017, **10**, 1389–1426.
- 31 S. Fuss, W. F. Lamb, M. W. Callaghan, J. Hilaire, F. Creutzig, T. Amann, T. Beringer, W. de Oliveira Garcia, J. Hartmann, T. Khanna, G. Luderer, G. F. Nemet, J. Rogelj, P. Smith, J. L. V. Vicente, J. Wilcox, M. del Mar Zamora Dominguez and J. C. Minx, *Environ. Res. Lett.*, 2018, **13**, 063002.
- 32 P. Smith, R. S. Haszeldine and S. M. Smith, *Environ. Sci.: Processes Impacts*, 2016, **18**, 1400–1405.
- 33 H. Herzog, K. Caldeira and J. Reilly, *Clim. Change*, 2003, **59**, 293–310.
- 34 J. Bednar, M. Obersteiner, A. Baklanov, M. Thomson, F. Wagner, O. Geden, M. Allen and J. W. Hall, *Nature*, 2021, **596**, 377–383.
- 35 Intergovernmental Panel on Climate Change, *Climate Change 2014: Mitigation of Climate Change. Contribution of Working Group III to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*, Cambridge University Press, 2014.
- 36 Intergovernmental Panel on Climate Change, *Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change*, Cambridge, 2021.
- 37 Z. Parisa, M. Nova and G. Vermeer, *Forests and Carbon A Guide for Buyers and Policymakers*, 2020.
- 38 C. Ebert, S. Osman, H. Raven, J. Remucal, S. Wescott and B. Zavariz, *Soil Enrichment Protocol*, 2020.
- 39 D. Archer, *J. Geophys. Res., C: Oceans Atmos.*, 2005, **110**, 1–6.
- 40 A. Lyngfelt, D. J. A. Johansson and E. Lindeberg, *Int. J. Greenhouse Gas Control*, 2019, **87**, 27–33.
- 41 V. Scott, R. S. Haszeldine, S. F. B. Tett and A. Oschlies, *Nat. Clim. Change*, 2015, **5**, 419–423.
- 42 S. Chiquier and N. Mac Dowell, *Greenhouse Gas Removal Technologies - Energy and Environment Series*, Royal Society of Chemistry, 2022.
- 43 H. Aalde, P. Gonzalez, M. Gytarsky, T. Krug, W. A. Kurz, S. Ogle, J. Raison, D. Schoene, N. H. Ravindranath, N. G. Elhassan, L. S. Heath, N. Higuchi, S. Kainja, M. Matsumoto, M. J. S. Sánchez and Z. Somogyi, *Agriculture, Forestry and Other Land Use – IPCC Guidelines for National Greenhouse Gas Inventories*, 2006, vol. 4.
- 44 P. Smith, P. J. Gregory, D. van Vuuren, M. Obersteiner, P. Havlik, M. Rounsevell, J. Woods, E. Stehfest and J. Bellarby, *Philos. Trans. R. Soc., B*, 2010, **365**, 2941–2957.
- 45 T. W. R. Powell and T. M. Lenton, *Energy Environ. Sci.*, 2012, **5**, 8116–8133.
- 46 W. R. L. Anderegg, A. T. Trugman, G. Badgley, C. M. Anderson, A. Bartuska, P. Ciais, D. Cullenward, C. B. Field, J. Freeman, S. J. Goetz, J. A. Hicke, D. Huntzinger, R. B. Jackson, J. Nickerson, S. Pacala and J. T. Randerson, Climate-driven risks to the climate mitigation potential of forests, *Science*, 2020, **368**, 1327.
- 47 I. Thompson, B. Mackey, S. McNulty and A. Mosseler, *Forest Resilience, Biodiversity, and Climate Change: a synthesis of the biodiversity/resilience/stability relationship in forest ecosystems*, 2009.
- 48 W. M. Hammond, A. P. Williams, J. T. Abatzoglou, H. D. Adams, T. Klein, R. López, C. Sáenz-Romero, H. Hartmann, D. D. Breshears and C. D. Allen, *Nat. Commun.*, 2022, **13**, 1–11.
- 49 N. G. Ulanova, *For. Ecol. Manage.*, 2000, **135**, 155–167.
- 50 C. S. Galik and R. B. Jackson, *For. Ecol. Manage.*, 2009, **257**, 2209–2216.
- 51 M. Fajardy and N. Mac Dowell, *Greenhouse Gas Removal Technologies - Energy and Environment Series*, Royal Society of Chemistry, 2022.
- 52 IEAGHG, *Biorefineries with CCS*, 2021.
- 53 P. Patrizio, M. Fajardy, M. Bui and N. Mac Dowell, *iScience*, 2021, **24**, 102765.
- 54 M. Bui, D. Zhang, M. Fajardy and N. Mac Dowell, *Int. J. Hydrogen Energy*, 2021, **46**, 15298–15321.
- 55 L. Rosa, D. L. Sanchez and M. Mazzotti, *Energy Environ. Sci.*, 2021, **14**, 3086–3097.
- 56 L. Rosa and M. Mazzotti, *Renewable Sustainable Energy Rev.*, 2022, **157**, 112123.
- 57 C. M. Beal, I. Archibald, M. E. Huntley, C. H. Greene and Z. I. Johnson, *Earth's Future*, 2018, **6**, 524–542.



- 58 M. Fajardy, J. Morris, A. Gurgel, H. Herzog, N. Mac Dowell and S. Paltsev, *Global Environ. Change*, 2021, **68**, 102262.
- 59 A. Cowie, D. Woolf, J. Gaunt, M. Brandão, R. Anaya, D. Rosa and A. Cowie, *Biochar. Environ. Manage.*, 2019, 795–826.
- 60 Y. Fang, B. Singh, B. P. Singh and E. Krull, *Eur. J. Soil Sci.*, 2014, **65**, 60–71.
- 61 J. Wang, Z. Xiong and Y. Kuzyakov, *GCB Bioenergy*, 2016, **8**, 512–523.
- 62 S. Bakshi, C. Banik and D. A. Laird, *Sci. Rep.*, 2020, **10**, 13082.
- 63 A. Tisserant and F. Cherubini, *Land*, 2019, **8**, 179.
- 64 D. Woolf, J. E. Amonette, F. A. Street-Perrott, J. Lehmann and S. Joseph, *Nat. Commun.*, 2010, **1**, 56.
- 65 K. Z. House, A. C. Baclig, M. Ranjan, E. A. van Nierop, J. Wilcox and H. J. Herzog, *Proc. Natl. Acad. Sci. U. S. A.*, 2011, **108**, 20428–20433.
- 66 R. Socolow, M. Desmond, R. Aines, J. Blackstock, O. Bolland, T. Kaarsberg, N. Lewis, M. Mazzotti, A. Pfeffer, K. Sawyer, J. Sirola, B. Smit and J. Wilcox, *Direct Air Capture of CO₂ with Chemicals: A Technology Assessment for the APS Panel on Public Affairs*, 2011.
- 67 M. Fasihi, O. Efimova and C. Breyer, *J. Cleaner Prod.*, 2019, **224**, 957–980.
- 68 D. W. Keith, G. Holmes, D. St. Angelo and K. Heidel, *Joule*, 2018, **2**, 1573–1594.
- 69 J. Strefler, T. Amann, N. Bauer, E. Kriegler and J. Hartmann, *Environ. Res. Lett.*, 2018, **13**, 034010.
- 70 D. J. Beerling, E. P. Kantzas, M. R. Lomas, P. Wade, R. M. Eufrazio, P. Renforth, B. Sarkar, M. G. Andrews, R. H. James, C. R. Pearce, J. F. Mercure, H. Pollitt, P. B. Holden, N. R. Edwards, M. Khanna, L. Koh, S. Quegan, N. F. Pidgeon, I. A. Janssens, J. Hansen and S. A. Banwart, *Nature*, 2020, **583**, 242–248.
- 71 S. J. T. Hangx and C. J. Spiers, *Int. J. Greenhouse Gas Control*, 2009, **3**, 757–767.
- 72 P. Renforth, *Nat. Commun.*, 2019, **10**, 1401.
- 73 L. T. Bach, S. J. Gill, R. E. M. Rickaby, S. Gore and P. Renforth, *Front. Clim.*, 2019, **1**, 7.
- 74 R. M. Bright, K. Zhao, R. B. Jackson and F. Cherubini, *Global Change Biol.*, 2015, **21**, 3246–3266.
- 75 J. Alcalde, S. Flude, M. Wilkinson, G. Johnson, K. Edlmann, C. E. Bond, V. Scott, S. M. V. Gilfillan, X. Ogaya and R. S. Haszeldine, *Nat. Commun.*, 2018, **9**, 2201.
- 76 J. Fargione, J. Hill, D. Tilman, S. Polasky and P. Hawthorne, *Science*, 2008, **319**, 1235–1238.
- 77 R. J. Plevin, M. O'Hare, A. D. Jones, M. S. Torn and H. K. Gibbs, *Environ. Sci. Technol.*, 2010, **44**, 8015–8021.
- 78 K. P. Overmars, E. Stehfest, J. P. M. Ros and A. G. Prins, *Environ. Sci. Policy*, 2011, **14**, 248–257.
- 79 D. Huppmann, J. Rogelj, E. Kriegler, V. Krey and K. Riahi, *Nat. Clim. Change*, 2018, **8**, 1027–1030.
- 80 N. Mac Dowell, N. Sunny, N. Brandon, H. Herzog, A. Y. Ku, W. Maas, A. Ramirez, D. M. Reiner, G. N. Sant and N. Shah, *Joule*, 2021, **5**, 2524–2529.
- 81 FAO, *Global Ecological Zones for FAO Forest Reporting: 2010 Update*, Rome, 2011.
- 82 FOREST EUROPE, *State of Europe's Forests*, 2020.

