



Cite this: *Mater. Adv.*, 2023, 4, 1202

DOI: 10.1039/d3ma90005c

rsc.li/materials-advances

## Correction: Insulative wood materials templated by wet foams

Elisa S. Ferreira,<sup>ab</sup> Elizabeth Dobrzanski,<sup>bc</sup> Praphulla Tiwary,<sup>d</sup> Prashant Agrawal,<sup>d</sup> Richard Chen<sup>d</sup> and Emily D. Cranston<sup>\*ac</sup>

Correction for 'Insulative wood materials templated by wet foams' by Elisa S. Ferreira *et al.*, *Mater. Adv.*, 2023, 4, 641–650, <https://doi.org/10.1039/d2ma00852a>.

The authors regret that the y-axis label in Fig. 6b was shown incorrectly in the original article. The correct version of Fig. 6b is shown here.

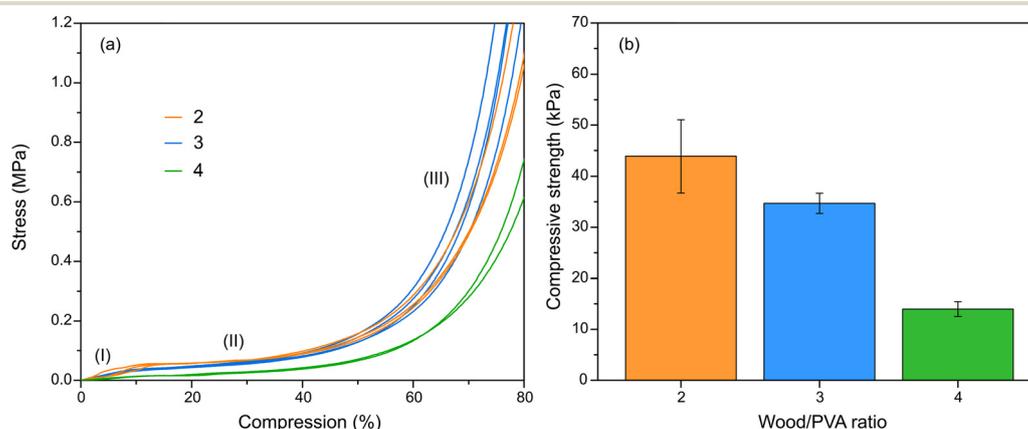


Fig. 6 Mechanical properties of wood foams prepared with wood/PVA ratios of 2, 3, and 4: (a) stress–strain diagrams under compressive strain showing three compressive regions: (I) elastic, (II) plateau, and (III) densification; (b) compressive strength at 10% compression according to ASTM Standard (D1621-16).

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.

<sup>a</sup> Department of Wood Science, University of British Columbia, Vancouver, BC, V6T 1Z4, Canada. E-mail: emily.cranston@ubc.ca

<sup>b</sup> Bioproducts Institute, University of British Columbia, Vancouver, BC, V6T 1Z4, Canada

<sup>c</sup> Department of Chemical and Biological Engineering, University of British Columbia, Vancouver, BC, V6T 1Z4, Canada

<sup>d</sup> Plantee Bioplastics Inc., Vancouver, Canada

