

CORRECTION

[View Article Online](#)
[View Journal](#) | [View Issue](#)Cite this: *RSC Adv.*, 2023, **13**, 2937DOI: 10.1039/d3ra90006a
rsc.li/rsc-advances

Correction: Dispersion stability and tribological properties of additives introduced by ultrasonic and microwave assisted ball milling in oil

Siyuan Wang,^a Ding Chen,^{*ab} Yaotong Chen^b and Kaiji Zhu^a

Correction for 'Dispersion stability and tribological properties of additives introduced by ultrasonic and microwave assisted ball milling in oil' by Siyuan Wang *et al.*, *RSC Adv.*, 2020, **10**, 25177–25185, <https://doi.org/10.1039/D0RA03414B>.

The authors regret that an incorrect version of Fig. 15b was included in the original article. The correct version of Fig. 15 is presented below.

An independent expert has viewed the corrected images and has concluded that they are consistent with the discussions and conclusions presented.

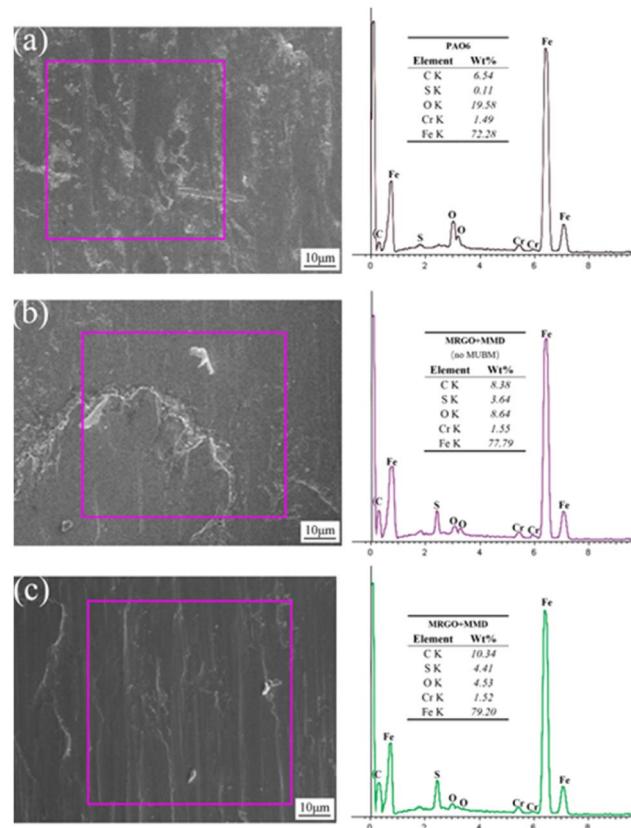


Fig. 15 SEM and EDS images of the friction surface are lubricated with (a) the base oil, (b) the lubricating oil without UMBM treatment, and (c) the lubricating oil by UMBM treatment.

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.

