RSC Advances

CORRECTION

View Article Online
View Journal | View Issue

Check for updates

Cite this: *RSC Adv.*, 2023, **13**, 2937

Correction: Dispersion stability and tribological properties of additives introduced by ultrasonic and microwave assisted ball milling in oil

Siyuan Wang,[a] Ding Chen,*[ab] Yaotong Chen[b] and Kaiji Zhu[a]

DOI: 10.1039/d3ra90006a

rsc.li/rsc-advances

Correction for 'Dispersion stability and tribological properties of additives introduced by ultrasonic and microwave assisted ball milling in oil' by Siyuan Wang *et al.*, *RSC Adv.*, 2020, **10**, 25177–25185, https://doi.org/10.1039/D0RA03414B.

The authors regret that an incorrect version of Fig. 15b was included in the original article. The correct version of Fig. 15 is presented below.

An independent expert has viewed the corrected images and has concluded that they are consistent with the discussions and conclusions presented.

[a]*State Key Laboratory of Advanced Design and Manufacturing for Vehicle Body, Hunan University, 410082 Changsha, China. E-mail: chending@hnu.edu.cn*
[b]*College of Materials Science and Engineering, Hunan University, 410082 Changsha, China*

Open Access Article. Published on 18 January 2023. Downloaded on 11/22/2025 6:44:05 AM.
This article is licensed under a Creative Commons Attribution 3.0 Unported Licence.

© 2023 The Author(s). Published by the Royal Society of Chemistry

Open Access Article. Published on 18 January 2023. Downloaded on 11/22/2025 6:44:05 AM.
This article is licensed under a Creative Commons Attribution 3.0 Unported Licence.

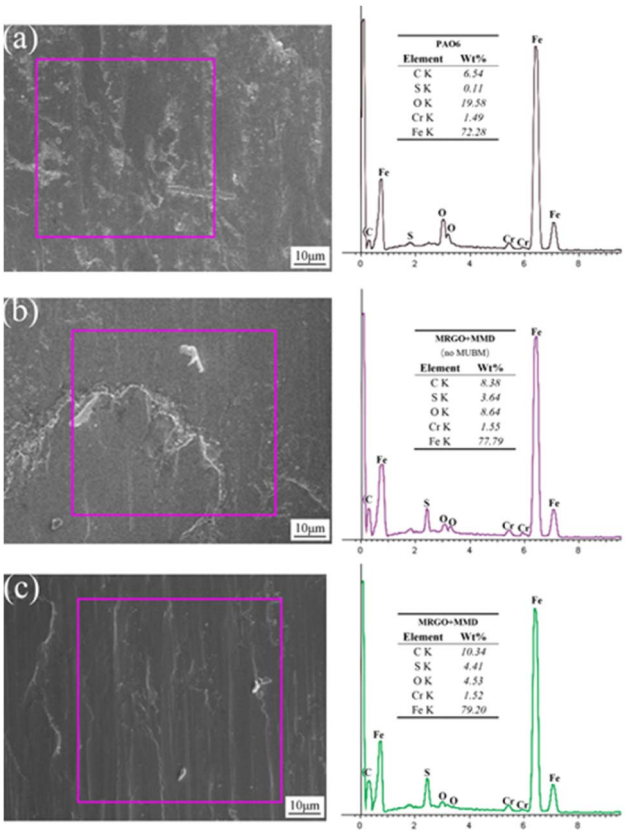

Fig. 15 SEM and EDS images of the friction surface are lubricated with (a) the base oil, (b) the lubricating oil without UMBM treatment, and (c) the lubricating oil by UMBM treatment.

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.

 © 2023 The Author(s). Published by the Royal Society of Chemistry