

# Faraday Discussions

Accepted Manuscript



This is an Accepted Manuscript, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this Accepted Manuscript with the edited and formatted Advance Article as soon as it is available.

You can find more information about Accepted Manuscripts in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this Accepted Manuscript or any consequences arising from the use of any information it contains.

This article can be cited before page numbers have been issued, to do this please use: S. F. Wenzel, H. Lee and H. Ren, *Faraday Discuss.*, 2024, DOI: 10.1039/D4FD00080C.

# Controlling Droplet Cell Environment in Scanning Electrochemical Cell Microscopy (SECCM) via Migration and Electroosmotic Flow

Samuel F. Wenzel<sup>1</sup>, Heekwon Lee<sup>1</sup>, Hang Ren<sup>1,2,3</sup> \*

1. Department of Chemistry, 2. Center for Electrochemistry, 3. Texas Materials Institute, The University of Texas at Austin, Austin, TX 78712, USA

\*Corresponding author: [hren@utexas.edu](mailto:hren@utexas.edu)

## ABSTRACT

Scanning electrochemical cell microscopy (SECCM) is a powerful nanoscale electrochemical technique that advances our understanding of heterogeneity at the electrode-electrolyte interface. In SECCM, dual-channel nanopipettes often serve as the probe, and a voltage bias between the channels can control the local electrolyte environment via migration and electroosmotic flow (EOF). The ability to predict the contribution of each type of transport is desirable. In this work, we measured the limiting current of different redox molecules to experimentally elucidate the contribution of migration and EOF at the droplet-substrate interface in SECCM. The results, further supported by fluorescence imaging and finite element modeling, showed that for redox mediators with high charges, such as  $\text{Ru}(\text{NH}_3)_6^{3+}$ , migration contributes 5× as much mass transport limiting current compared to EOF when a bias voltage is applied. The exact contribution of each mode at a given potential bias depends on the electrical double layer structure, which can be tuned by the surface charge and solution composition. The contribution can be quantitatively predicted in the finite element model. Our findings will enable the precise control of mass transport in dual-channel SECCM and potentially open new scanning modes in SECCM via precise control of reaction flux.

**KEYWORDS.** Nanopipette, solution switching, nanofluidics, nanoelectrochemistry, scanning electrochemical probe microscopy, electrochemical imaging



## INTRODUCTION

Revealing the detailed structure-reactivity relationship at the electrochemical interfaces is critical for advancing the knowledge required for rational design and engineering of the interfaces for electrochemical energy conversion and storage.<sup>1,2</sup> Conventional bulk electrochemical measurements often only provide averaged information about the electrode surface: the heterogeneity of the interfacial structures and their impact on the reactivity is lost during the ensemble averaging.<sup>3,4</sup> The ensemble averaging effect can be mitigated via electrochemical imaging.<sup>1,5</sup> By dissecting the average ensemble measurement into many local electrochemical measurements, detailed information about the “hot spots” of high activity on a particular material can be revealed.<sup>2,6</sup> Scanning electrochemical cell microscopy (SECCM) is a state-of-the-art electrochemical technique for electrochemical mapping that uses a nanopipette as the probe.<sup>7,8,9</sup> The nanoscale droplet cell formed between the end of the pipette and the substrate electrode surface allows for examining electrochemical activity at local sites with high spatial resolution, especially when coupled with colocalized structure characterization.<sup>7,8,10</sup> For example, SECCM has helped reveal the higher activity for hydrogen evolution reaction (HER) on the edge sites on MoS<sub>2</sub> and enhanced activity of CO<sub>2</sub> reduction (CO<sub>2</sub>RR) at the grain boundaries of Au.<sup>11,12</sup> In addition, the high spatial resolution allows measurement of electrocatalytic activity at the single nanoparticle level.<sup>13,14</sup> On the other hand, this high-resolution electrochemical technique has been demonstrated for the electrochemical synthesis of nanostructures of different varieties, including polymers and metal nanoparticles.<sup>15,16</sup>


Generally, SECCM uses a single or dual-channel pipette as the probe, which is filled with a single type of electrolyte to study the local electrochemistry to synthesize nanostructure at the substrate.<sup>8,15</sup> We recently demonstrated the modulation of solution composition in SECCM by using a dual-channel pipette filled with different electrolytes in each channel.<sup>16</sup> Polarization of the quasi-reference/counter electrodes between the two channels allows alteration of the solution composition inside the nanodroplet,<sup>17</sup> which was used to synthesize bimetallic nanoparticle alloys with controlled variation in composition.<sup>16</sup> It is envisioned that the same principle of solution composition modulation in SECCM can be broadly applied to other systems, for example, to study the effect of local electrolyte environment in electrocatalytic reactions. The mechanism of solution composition modulation is based on voltage-induced mass transport, including electrophoretic migration and electroosmotic flow (EOF).<sup>8</sup> Knowledge of the extent of contribution of each migration vs EOF is necessary in quantitatively predicting and designing the system



for solution composition modulation in SECCM. However, the mechanism remains to be quantitatively understood.<sup>18</sup>

In this report, we use both experimental analysis and finite element simulations to quantitatively unveil the contribution of electrophoretic migration and EOF. Experimentally, we first use different outer-sphere redox-active species with different charges, including (ferrocenylmethyl)trimethylammonium ( $\text{FcTMA}^+$ ), hexamineruthenium (III) ( $\text{Ru}(\text{NH}_3)_6^{3+}$ ), and ferrocenedimethanol ( $\text{Fc}(\text{MeOH})_2$ ). Mass transport limiting current of these redox probe molecules in the voltammogram reports their total flux to the electrode surface,<sup>19,20</sup> and the variation of charge on the redox molecules allows separation electromigration from EOF. For example, neutral redox molecules will report the effect of EOF alone with no contribution from electromigration.<sup>19</sup> To support the transport mechanism, we modulate the EOF by changing the ionic strength and pH of the solution.<sup>19,21</sup> The results are further visualized by fluorescence microscopy. Lastly, finite element simulation is used to quantitatively understand the experimental results, dissecting the contribution from different mass transport modes.

## RESULTS AND DISCUSSION

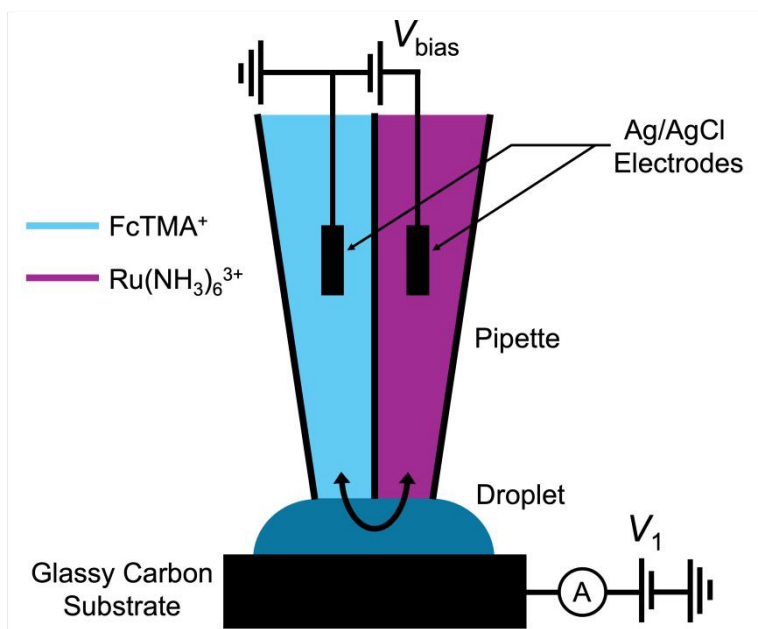

**Scheme 1.** (Left) Schematic illustration of the experimental setup utilized in **Figure 1**, where a dual channel nanopipette containing 2 mM (ferrocenylmethyl)trimethylammonium ( $\text{FcTMA}^+$ ) + 2 mM KCl in one channel, and 2 mM ruthenium hexamine (III) + 2 mM KCl in the other channel approaches to a glassy carbon working electrode. A voltage,  $V_1$ , is applied between the substrate and the  $\text{Ag}/\text{AgCl}$  electrode in




the FcTMA barrel. (Right) A bias voltage,  $V_{\text{bias}}$ , is applied between the two channels to manipulate the composition of the droplet.

A schematic showing the SECCM experiment for solution composition modulation is shown in **Scheme 1**. The left channel is filled with 2 mM FcTMA<sup>+</sup> and 2 mM KCl, while the right channel is filled with 2 mM Ru(NH<sub>3</sub>)<sub>6</sub><sup>3+</sup> and 2 mM KCl. Each channel contains a Ag/AgCl electrode. The left channel is the designated common ground for all potentials.  $V_1$  represents the potential difference between the glassy carbon substrate and the ground Ag/AgCl electrode in the left channel.  $V_{\text{bias}}$  is the potential of right channel vs the left one. A non-zero  $V_{\text{bias}}$  induced an electric field in the solution, with the largest occurring near the pipette opening and the droplet cell due to the higher local solution resistance. This electric field causes both migration and EOF, moving the redox molecules between the channels through the droplet cell.<sup>8</sup> When a positive voltage,  $V_{\text{bias}}$ , is applied to the right channel, Ru(NH<sub>3</sub>)<sub>6</sub><sup>3+</sup> is expected to move from its own channel to the left channel, increasing its flux at the substrate-droplet interface, which can be directly measured as the limiting current at the substrate electrode. Conversely, when a negative  $V_{\text{bias}}$  is applied, FcTMA<sup>+</sup> is expected to move from the left channel to the right, increasing its limiting current at the substrate. When 0 V is applied, negligible EOF or migration between the channels is expected due to the diminished electric field in the solution induced by  $V_{\text{bias}}$ .<sup>19</sup> Note that the position of the ground and the two Ag/AgCl electrodes dictate that the potential of the substrate working electrode ( $V_{\text{we}}$ ) would be shifted at different  $V_{\text{bias}}$  approximately according to **eq 1**,<sup>22</sup> and all the voltammograms in this paper will be reported using  $V_{\text{we}}$ .

$$V_{\text{we}} = V_1 - 0.5V_{\text{bias}}(1)$$



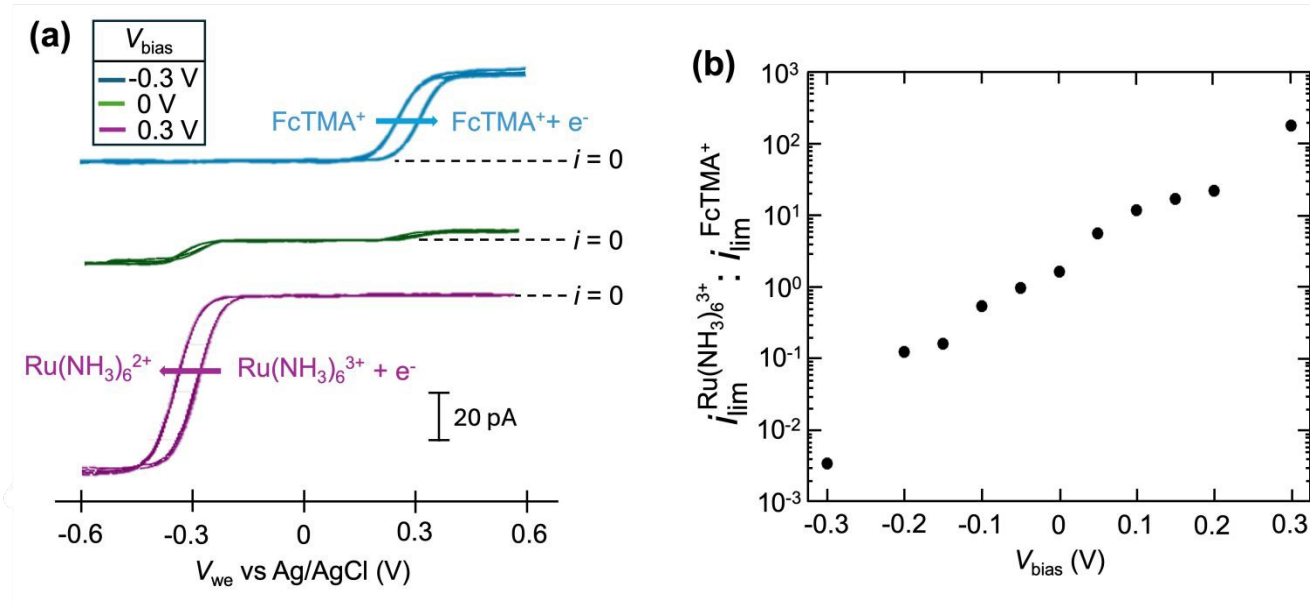


**Figure 1.** (a) Cyclic voltammograms of a dual-channel nanopipette containing 2 mM  $(Ru(NH_3)_6^{3+})$ , 2mM KCl in one channel and 2 mM FcTMA<sup>+</sup>, 2 mM KCl in the other channel at different values of  $V_{bias}$ . Two cycles are shown. (b) The ratio of limiting current ( $i_{lim}$ ) between  $Ru(NH_3)_6^{3+}$  and FcTMA as a function of  $V_{bias}$ .

**Figure 1a** shows the cyclic voltammograms of a dual-channel nanopipette at the surface of glassy carbon in SECCM. One channel is filled with 2 mM FcTMA<sup>+</sup>, while the other channel is filled with 2 mM  $Ru(NH_3)_6^{3+}$  as illustrated in **Scheme 1**. When 0 V was applied between the two channels (green trace), essentially, no electric field was expected through the narrow channel of the nanopipette. Therefore, no EOF or migration is expected to transport molecules between the channels. Under this condition, the voltammogram shows two sigmoidal waves: one for the oxidation of FcTMA<sup>+</sup> ( $E_{1/2} = 0.32$  V), and the other for the reduction of  $Ru(NH_3)_6^{3+}$  ( $E_{1/2} = -0.29$  V). The sigmoidal shape of each voltammetric wave indicates that the voltammetric experiment reached a steady state, which is expected due to the small dimension of the pipette. The limiting current for  $Ru(NH_3)_6^{3+}$  ( $i_{lim}^{Ru(NH_3)_6^{3+}}$ ) is 1.6× larger than FcTMA<sup>+</sup>, which is attributed to the higher migration towards the electrode surface due to the higher charge on  $Ru(NH_3)_6^{3+}$ . The presence of two voltammetric waves confirms that both  $Ru(NH_3)_6^{3+}$  and FcTMA<sup>+</sup> exist in the droplet at a significant level as expected. At  $V_{bias} = +0.3$  V (purple trace), the FcTMA limiting current ( $i_{lim}^{FcTMA^+}$ ) decreases by 94 % and  $i_{lim}^{Ru(NH_3)_6^{3+}}$  increases by 600 % compared to  $V_{bias} = 0$  V. The observed increase/decrease in the limiting currents suggests enrichment of  $Ru(NH_3)_6^{3+}$  and depletion of FcTMA<sup>+</sup> in the SECCM droplet, which was expected based on the direction of both migration and EOF.



Because both redox mediators are positively charged, positive  $V_{\text{bias}}$  will induce migration of  $\text{Ru}(\text{NH}_3)_6^{3+}$  out of the channel, and  $\text{FcTMA}^+$  back into its own channel. Under the same condition, EOF is also expected to induce a flow from the  $\text{Ru}(\text{NH}_3)_6^{3+}$  barrel to the  $\text{FcTMA}^+$  barrel due to the negative fixed charges on the surface of the quartz pipette. Therefore, both migration and EOF result in the same trend of increasing the flux of  $\text{Ru}(\text{NH}_3)_6^{3+}$  to the substrate while decreasing that for  $\text{FcTMA}^+$ . The direction of the migration and EOF can be reversed when the polarity of  $V_{\text{bias}}$  is changed. For example, at  $V_{\text{bias}} = -0.3$  V (blue trace),  $i_{\text{lim}}^{\text{Ru}(\text{NH}_3)_6^{3+}}$  is decreased by 91% while the limiting current for  $\text{FcTMA}^+$  is increased by 583% compared to  $V_{\text{bias}} = 0$  V, suggesting an enrichment of  $\text{FcTMA}^+$  and depletion of  $\text{Ru}(\text{NH}_3)_6^{3+}$  in the droplet.

The effect of  $V_{\text{bias}}$  on the limiting current is quantified by the ratios of limiting currents as shown in **Figure 1b**, which shows a consistent trend of an increasing/decreasing the ratio of  $i_{\text{lim}}^{\text{Ru}(\text{NH}_3)_6^{3+}}$  vs  $i_{\text{lim}}^{\text{FcTMA}^+}$  with increasing/decreasing  $V_{\text{bias}}$ . It is worth noting the enhancement factor of  $i_{\text{lim}}^{\text{Ru}(\text{NH}_3)_6^{3+}}$  at  $V_{\text{bias}} = +0.3$  V ( $6.0\times$  compared to  $V_{\text{bias}} = 0$  V) is larger than that for  $i_{\text{lim}}^{\text{FcTMA}^+}$  at  $V_{\text{bias}} = -0.3$  V ( $5.82\times$  compared to  $V_{\text{bias}} = 0$  V). This asymmetry is mainly attributed to the higher charge on  $\text{Ru}(\text{NH}_3)_6^{3+}$  compared to  $\text{FcTMA}^+$  as the two molecules have very similar diffusion coefficients (see SI Table S1).<sup>19</sup> This result suggests that migration through the channels plays a significant role in the modulation of mass transport towards the electrode surface.

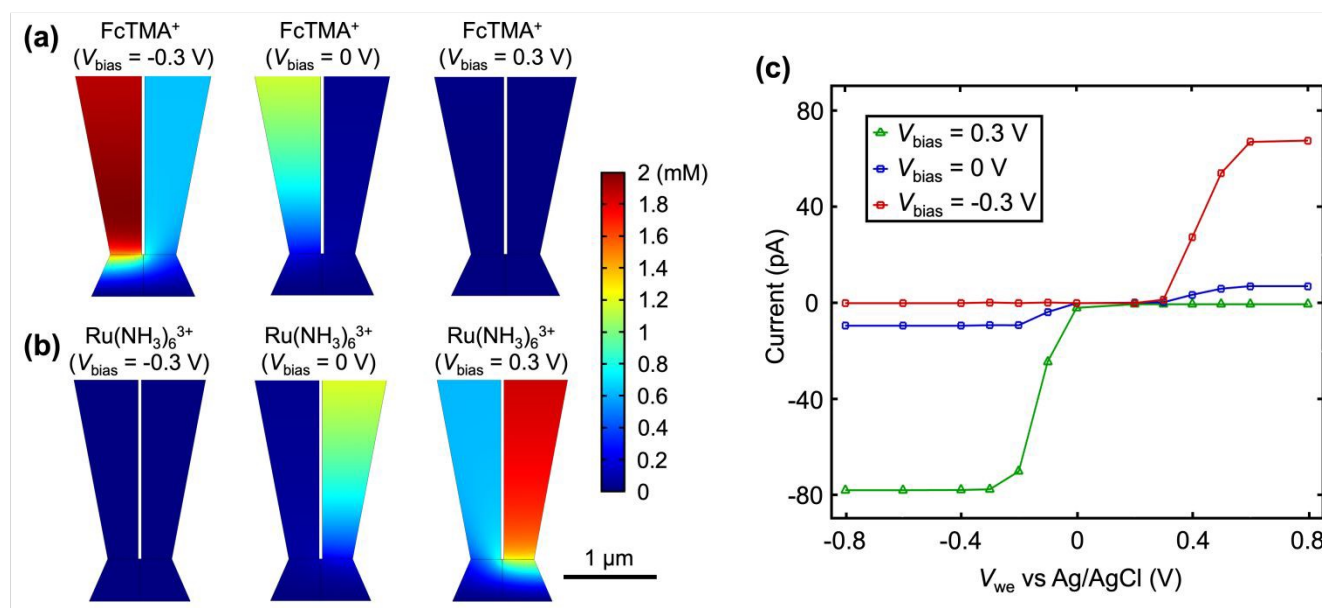



**Figure 2.** Simulated steady-state concentration profiles at different  $V_{\text{bias}}$  for (a) FcTMA at  $V_{\text{we}} = +0.8$  V and (b)  $\text{Ru}(\text{NH}_3)_6^{3+}$  at  $V_{\text{we}} = -0.8$  V. A length of  $1.2 \mu\text{m}$  dual-barrel pipette is simulated in 3D, and only the portion near the tip is shown. (c) Simulated CVs under various biases.

To quantitatively analyze the contributions from EOF and migration, we developed a finite element 3-D model to simulate the concentration profiles and voltammograms observed in the experiment. The geometry of the model is shown in **Figure S2**. The Nernst-Planck equation (**Equation 2**) with electroneutrality is used:

$$J_i = -D_i \nabla C_i - \frac{z_i u_i F C_i}{|z_i|} \nabla V + C_i \mathbf{v} \quad (2)$$

In eq 2,  $D_i$ ,  $C_i$ ,  $z_i$ , and  $u_i$  are the diffusion coefficient, bulk concentration, charge, and ionic mobility, respectively, for each species  $i$ .  $F$  is Faraday's constant,  $V$  is the electrical potential, and  $\mathbf{v}$  is the velocity field. Steady-state solutions were obtained via:

$$\frac{\partial c}{\partial t} = -\nabla \cdot J_i = \nabla \cdot \left( D_i \nabla C_i + \frac{z_i u_i F C_i}{|z_i|} \nabla V - C_i \mathbf{v} \right) = 0 \quad (2)$$

The fluidic flow is described by the Navier-Stokes equation (**eq 3**), and electroosmotic flow velocity at the slip plane is described by Helmholtz-Smoluchowski equation (**eq 4**).

$$\rho \frac{\partial \mathbf{v}}{\partial t} + \rho (\mathbf{v} \cdot \nabla) \mathbf{v} = -\nabla p + \mu \nabla^2 \mathbf{v} \quad (3)$$

$$v_{\text{EOF}} = \frac{\epsilon_0 \epsilon_r \zeta}{\eta} E_{\text{wall}} \quad (4)$$

In eqs 3-4,  $\rho$  is the fluid density,  $p$  is the static pressure, and  $\mu$  is the dynamic viscosity.  $v_{\text{EOF}}$  is the slip velocity magnitude at the quartz wall due to EOF,  $\epsilon_0$  is the vacuum permittivity,  $\epsilon_r$  is the dielectric constant of solvent,  $E_{\text{wall}}$  is the magnitude of the electric field tangent to the wall and  $\zeta$  is zeta potential. The geometry of the simulation is based on the SEM image of the nanopipette as shown in **Figure S1**. The detailed simulation parameters are described in SI Section S2.

The first simulation condition is consistent with Figure 1: the left channel contains 2 mM FcTMA<sup>+</sup> and 2 mM KCl, while the right channel contains 2 mM  $\text{Ru}(\text{NH}_3)_6^{3+}$  and 2 mM KCl. Diffusion-limited current is enforced at the substrate electrode. **Figure 2a** shows the concentration profile for FcTMA<sup>+</sup> at






different  $V_{\text{bias}}$ . At  $V_{\text{bias}} = 0$  V, a concentration gradient is observed for FcTMA<sup>+</sup> in its channel, while close to 0 mM is observed in the other channel. At  $V_{\text{bias}} = -0.3$  V, a significant amount of FcTMA<sup>+</sup> is present in both channels even though it is consumed at a mass transport limited rate at the substrate electrode. Indeed, 0.9 mM FcTMA<sup>+</sup> is found within 4  $\mu\text{m}$  from the pipette opening into the channel where FcTMA<sup>+</sup> was initially absent. The enrichment of FcTMA<sup>+</sup> in both channels and the droplet is due to its EOF and migration from the bulk solution of FcTMA<sup>+</sup> to the other channel through the droplet. At  $V_{\text{bias}} = +0.3$  V, the direction of EOF and migration is reversed, and FcTMA<sup>+</sup> is depleted in both channels in the entire region shown in **Figure 2a** (3  $\mu\text{m}$  from the substrate). This enrichment or depletion of FcTMA<sup>+</sup> directly increases or decreases the limiting current for FcTMA<sup>+</sup>, as shown in the simulated voltammograms in **Figure 2c**. The trend of enrichment or depletion of Ru(NH<sub>3</sub>)<sub>6</sub><sup>3+</sup> vs  $V_{\text{bias}}$  is the opposite of the trend for FcTMA<sup>+</sup> because Ru(NH<sub>3</sub>)<sub>6</sub><sup>3+</sup> is in the opposite channel. At  $V_{\text{bias}} = -0.3$  V, the potential in the Ru(NH<sub>3</sub>)<sub>6</sub><sup>3+</sup> channel is more negative than the FcTMA<sup>+</sup> channel, causing the recession of Ru(NH<sub>3</sub>)<sub>6</sub><sup>3+</sup> into the bulk of solution and its depletion in the droplet (**Figure 2b**). Conversely, at  $V_{\text{bias}} = +0.3$  V, Ru(NH<sub>3</sub>)<sub>6</sub><sup>3+</sup> is moved from the bulk of the left channel to the right channel through the droplet and enriched near the electrode surface. The depletion and enrichment of Ru(NH<sub>3</sub>)<sub>6</sub><sup>3+</sup> also show up as a decrease and increase in its limiting current (Figure 2c). Overall, the simulated voltammogram in **Figure 2c** is consistent with the experimental results in **Figure 1a**.

Because the limiting currents in the simulation match those in the experiment within 15%, we used the simulation results to reveal the contribution from migration and EOF. At  $V_{\text{bias}} = +0.3$  V, it was found that the contribution of migration at  $i_{\text{lim}}^{\text{Ru(NH}_3)_6^{3+}}$  near the electrode surface is 5 $\times$  higher than EOF (**Figure 2c**). The case is different for FcTMA<sup>+</sup>, as it was observed that at  $V_{\text{bias}} = -0.3$  V, the contribution of migration near the electrode surface is only 1.25 $\times$  higher than EOF at mass transfer limiting current. Therefore, migration is the most important mode of transport mode for Ru(NH<sub>3</sub>)<sub>6</sub><sup>3+</sup>, while its contribution is similar to EOF for FcTMA<sup>+</sup>. The observation is expected because Ru(NH<sub>3</sub>)<sub>6</sub><sup>3+</sup> has a higher charge (3+) charge, and would be 3 $\times$  faster compared to FcTMA, which is observed in the simulation. Any minor differences can likely be attributed to the slight differences in diffusion coefficients.<sup>19</sup>




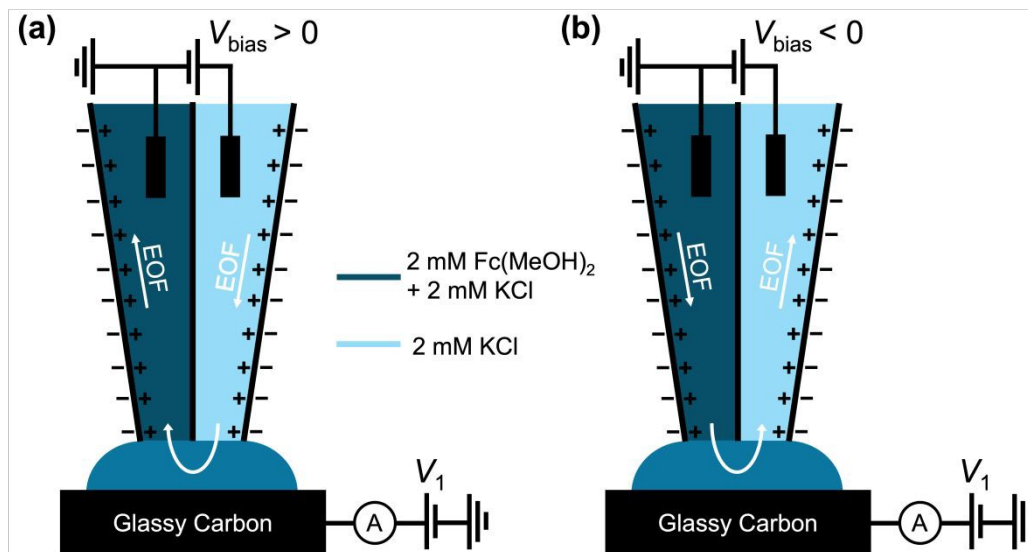

**Scheme 2.** Experimental setup for the  $\text{Fc}(\text{MeOH})_2$ -KCl system utilized for **Figures 2,3,4**. The left channel contains 2 mM  $\text{Fc}(\text{MeOH})_2$  and 2 mM KCl (dark blue), while the right channel contains 2 mM KCl (light blue).

To eliminate the contribution of migration, a neutral redox molecule, ferrocenedimethanol ( $\text{Fc}(\text{MeOH})_2$ ), is used in the proceeding study. A schematic representation of this experiment is shown in **Scheme 2**. Under the same electric field, the magnitude of EOF is directly related to EDL structure, which can be altered by the surface charge and ionic strength of the solution.<sup>23,24</sup> We first change the surface on the pipette via solution pH: at pH below the  $\text{p}K_a$  ( $\sim 3$ ), the silanol groups (Si-OH) on the glass surface are neutral. Under this condition, EOF is negligible. In contrast, at higher pH, silanol groups are deprotonated and result in negative surface charges. Under this condition, a strong EOF can be induced.




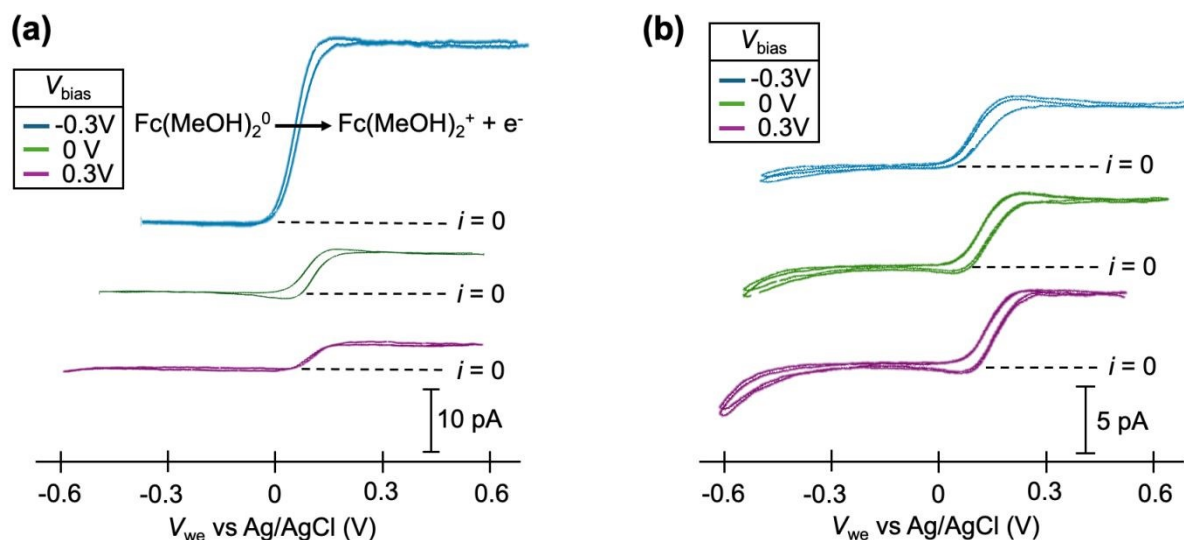

**Figure 3.** Cyclic voltammograms of 2 mM ferrocenedimethanol ( $\text{Fc}(\text{MeOH})_2$ ) at (a)  $\text{pH} = 7$  and (b)  $\text{pH} = 1$  at  $V_{\text{bias}} = -0.3, 0,$  and  $0.3$  V. Each condition shows 2 cycles of voltammogram.

Cyclic voltammograms of the  $\text{Fc}(\text{MeOH})_2$ -KCl system at  $\text{pH} = 7$  are shown in **Figure 3a**. At this  $\text{pH}$ , significant increases in limiting current are observed at  $V_{\text{bias}} = -0.3$  V compared to 0 V, consistent with an EOF flowing from the  $\text{Fc}(\text{MeOH})_2$  channel to the KCl-only channel through the droplet, effectively increasing the flux of  $\text{Fc}(\text{MeOH})_2$  towards the electrode surface. When  $V_{\text{bias}} = +0.3$  V, the direction of EOF is reversed, and therefore, a decrease in the limiting current is observed. Quantitatively, a  $7\times$  increase in the limiting current is observed due to EOF alone when  $V_{\text{bias}}$  is switched from  $+0.3$  V to  $-0.3$  V. In the mixed EOF/migration study in **Figure 1a**,  $i_{\text{lim}}^{\text{FcTMA}^+}$  is essentially eliminated when switched to  $V_{\text{bias}} = -0.3$  V. Because of the similar experimental conditions (ionic strength,  $\text{pH}$  and pipette size) in these two studies, and the similar diffusion coefficients of  $\text{FcTMA}^+$  and  $\text{Fc}(\text{MeOH})_2$ , the experimental results are consistent with the conclusions from the simulation: EOF and migration have a near equal contribution for  $\text{FcTMA}^+$  at  $\text{pH} = 7$ . At  $\text{pH} = 1$ , the limiting current for  $\text{Fc}(\text{MeOH})_2$  oxidation is not sensitive to  $V_{\text{bias}}$ , as shown in **Figure 3b**, which is consistent with that the neutralization of the surface charge at a low  $\text{pH}$  effectively eliminates the EOF.<sup>21,23,25</sup> Because our voltammetric experiment approaches a steady state, the limiting current for the oxidation of the neutral  $\text{Fc}(\text{MeOH})_2$  molecule should have no migration contribution as has been shown by Amatore et al.<sup>26</sup>




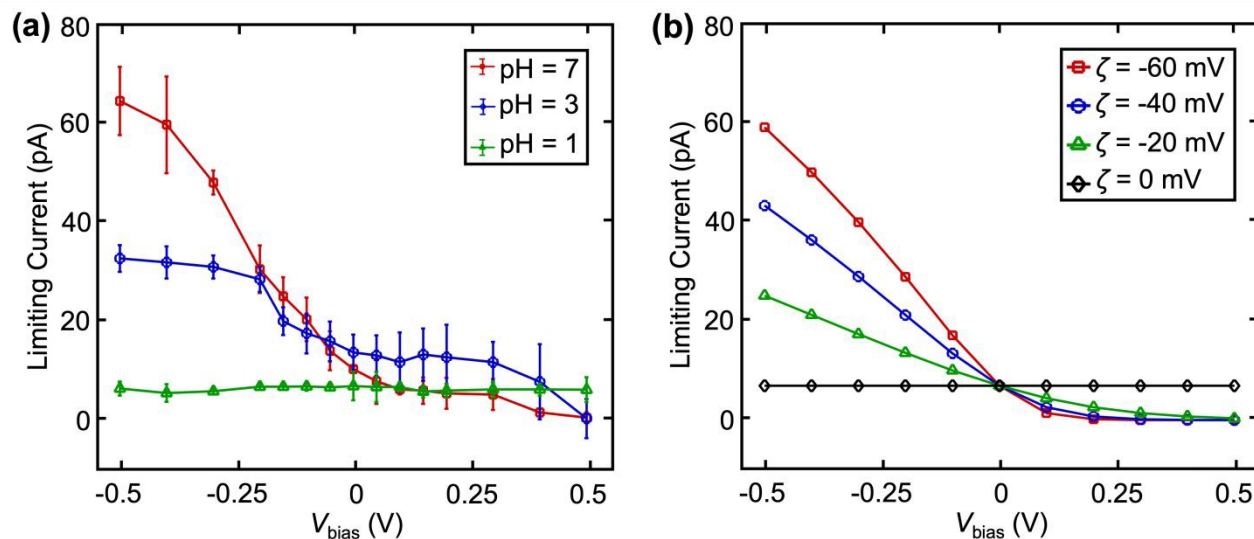

**Figure 4.** (a) Experimental and (b) simulated limiting currents of 2 mM  $\text{Fc}(\text{MeOH})_2$  as a function of  $V_{\text{bias}}$  at various pH. Error bars indicate standard deviation in a sample size of  $n = 4$ .

The effect of surface charge (via altering solution pH) on  $i_{\text{lim}}^{\text{FcTMA}^+}$  at different  $V_{\text{bias}}$  is summarized in **Figure 4a**. Overall,  $i_{\text{lim}}^{\text{FcTMA}^+}$  increases with pH at fixed  $V_{\text{bias}}$ , further confirming that the higher pH surface charge led to surface charge and zeta potential.<sup>21,24,27</sup> Note that buffer concentrations were adjusted to match the ionic strength for pH 3 and 7. This trend of limiting current vs  $V_{\text{bias}}$  can be reproduced in finite element simulation when assuming different zeta potentials ( $\zeta$ ) as shown in **Figure 4b**.<sup>23</sup> Notably, at pH = 1, the surface charge and  $\zeta$  are both 0, eliminating the EOF.




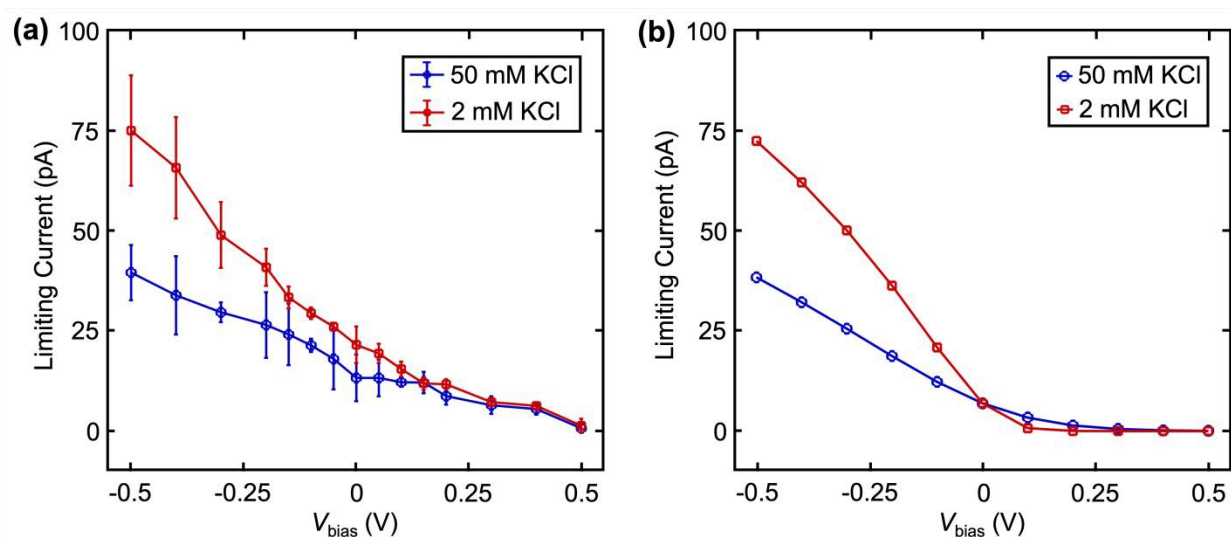

**Figure 5.** (a) Experimental and (b) simulated limiting currents of 2 mM  $\text{Fc}(\text{MeOH})_2$  with 2 mM and 50 mM KCl as a function of  $V_{\text{bias}}$ . Zeta potential ( $\zeta$ ) of  $-0.08$  and  $-0.03$  mV were used for 2 mM and 50 mM KCl, respectively. Errors bars indicate standard deviation from  $n = 4$  nanopipettes.

We further validate the contribution of EOF in dual barrel SECCM by changing the solution ionic strengths (**Figure 5**). The EDL is known to be compressed at higher ionic strength, resulting in a steeper drop of the potential in the EDL and a smaller zeta potential.<sup>24</sup> Based on this phenomenon, a smaller EOF is expected at higher ionic strength. **Figure 5a** shows the limiting current of  $\text{Fc}(\text{MeOH})_2$  at different  $V_{\text{bias}}$  with 2 mM and 50 mM KCl as the supporting electrolyte. Note the KCl concentration is the same in both channels, but the left channel additionally contains 2 mM  $\text{Fc}(\text{MeOH})_2$ . As expected, with increased ionic strength, we observe a smaller change of limiting current in response to  $V_{\text{bias}}$ , suggesting a lower EOF at higher ionic strength as expected.<sup>23,24</sup> These results are further confirmed near quantitatively by the finite element model (**Figure 5b**) by adjusting  $\zeta$  to match the literature values of glass in different concentrations of KCl solution.<sup>23</sup> The small discrepancies between experimental data (averaged among  $n=4$  nanopipettes) and simulation in **Figures 4 and 5** are attributed to uncertainty in diffusion coefficients, zeta potentials, and exact pipette geometry.



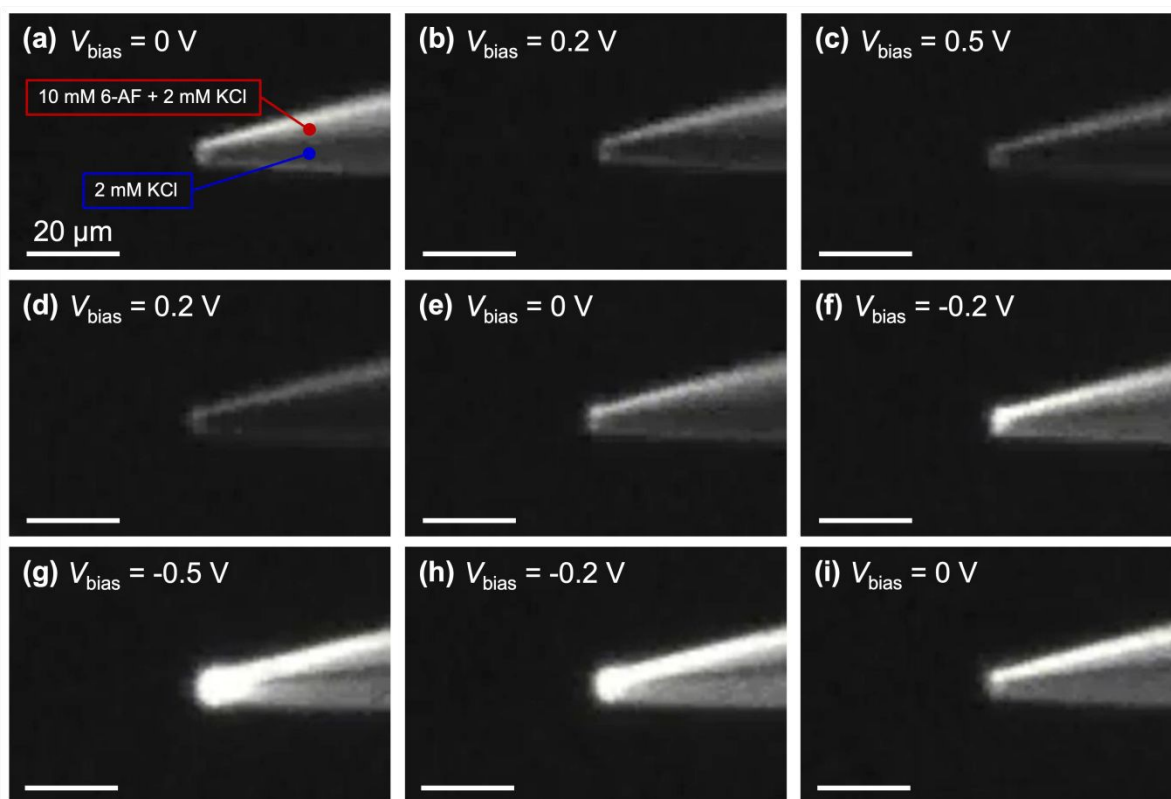


**Figure 6.** Fluorescent imaging of mass transport in a dual-barrel pipette at different  $V_{\text{bias}}$ . The upper lumen contains 10 mM 6-aminofluorescein (6-AF) and 2 mM KCl, and the lower lumen contains 2 mM KCl only. Scale bars: 20  $\mu\text{m}$ . The micrographs were collected from Movie S1.

Lastly, we visualized the mass transport tracking a fluorescent dye molecule, 6-aminofluorescein (6-AF), under microscope at different  $V_{\text{bias}}$  as shown in **Figure 6** and **Movie S1**. Because 6-AF is neutral in our solution condition, it resembles the  $\text{Fc}(\text{MeOH})_2\text{-KCl}$  system illustrated in **Scheme 2**, which serves to probe EOF.<sup>19</sup> At  $V_{\text{bias}}=0$ , no visible movement of the fluorescent molecule is observed (**Figure 6a**). As  $V_{\text{bias}}$  is linearly stepped to +0.5 V, the fluorescent molecule recesses from the tip into its channel (**Figures 6b-c**). As  $V_{\text{bias}}$  is linearly stepped to -0.5 V, the fluorescent molecule moves back to the tip and into the other channel, which is enriched near the tip (**Figures 6d-g**). The motion of the fluorescent molecules is consistent with the limiting currents in the voltammograms observed experimentally (**Figure 3**). After the potential is swept back to 0 V again, the dual channel pipette returns to its original state, with each channel isolated in its original contents (**Figures 6h-i**).





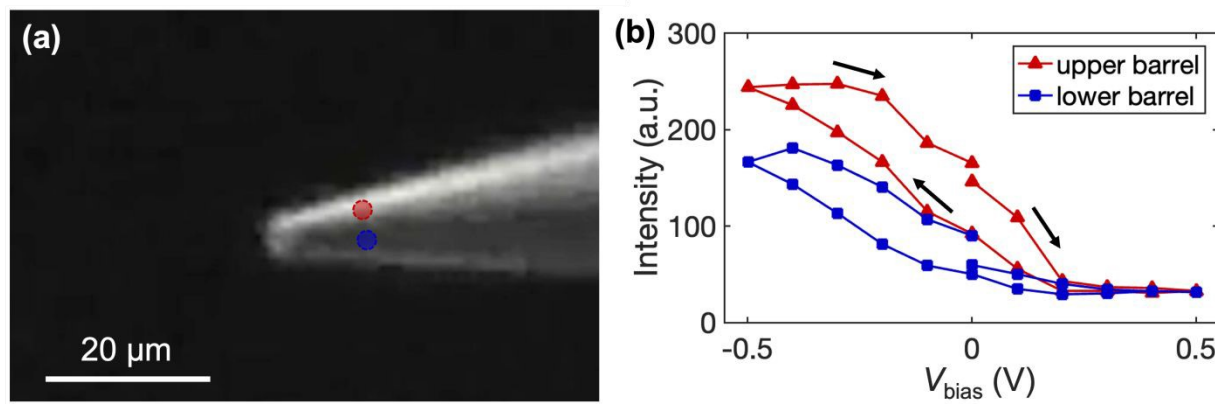

**Figure 7.** Quantification of mass transport of 6-AF in a dual-channel pipette. (a) Fluorescence micrograph with two tracking dots on the upper (red) and lower (blue) barrel for quantification of intensity change with  $V_{\text{bias}}$ . (b) Fluorescence intensity in the tracking dots as a function of  $V_{\text{bias}}$  throughout the experiment.

We further quantify the fluorescence intensity of the upper and lower barrels, and the locations are indicated on the optical micrograph in **Figure 7a**. As shown in **Figure 7b**, lower biases (i.e., more negative  $V_{\text{bias}}$ ) result in higher intensity in the upper barrel. Meanwhile, the fluorescence intensity also increases in the lower channel, consistent with the EOF-assisted transport of the fluorescent molecule through the droplet at the pipette tip into the other barrel. In contrast, at more positive  $V_{\text{bias}}$ , the fluorescence intensity in each channel decreases. Both observations agree with the limiting currents observed in the voltammetric experiments. Note that pipettes with larger openings (10  $\mu\text{m}$  in diameter) were used in the fluorescent experiment to afford a higher optical signal.

## CONCLUSION

In this study, we characterized the contributions of migration and electroosmotic flow (EOF) induced by electrochemical redox molecules in dual-barrel SECCM. We showed that at neutral pH, migration contributes majorly when the species is highly charged, while the contributions of migration and EOF are similar for singly charged species. Furthermore, our experimental approach incorporated fluorescence imaging alongside finite element simulation, offering a comprehensive visualization and understanding of the contribution of these mass transport phenomena. We anticipate that this integrated methodology holds great promise for advancing research not only in electrochemical synthesis but also in the localized exploration of kinetics pertinent to electrocatalytic reactions and in correlative detection





studies. Additionally, our findings suggest new avenues for precise modulation of reaction flux at the nanoscale, thereby enriching the landscape of electrochemistry.

## EXPERIMENTAL

**Chemicals and Materials.** Hexaammineruthenium(III) chloride (Thermo Fisher Scientific), (Ferrocenylmethyl)trimethylammonium chloride (Tokyo Chemical Industry), 1,1'-Ferrocenedimethanol (Sigma Aldrich), 6-aminofluorescein (Sigma Aldrich), potassium chloride (Fisher Chemical), sodium phosphate monobasic (Fisher Chemical), sodium phosphate dibasic (Fisher Chemical), hydrochloric acid 70% (Millipore Sigma), deionized (DI) water (18.2 M $\Omega$  cm, Synergy water purification system). Silver/silver chloride (Ag/AgCl) wires were used as quasi-reference counter electrodes (QRCE) and were prepared by immersing an Ag wire (0.25 mm diameter, 99.9% metals basis, Thermo Scientific) in a bleach solution and sonicated for 5 minutes followed by 1 minute of sonication in DI water.

**Nanopipette Fabrication.** Dual channel nanopipettes (OD: 1.2mm, ID: 0.7mm) were prepared using theta quartz capillaries (QT120-90-7.5, Sutter Instrument P-2000G laser Puller. The pulling parameters were HEAT = 700, FIL = 4, VEL = 40, DEL = 130, and PUL = 30 for line 1 and HEAT = 650, FIL = 3, VEL = 30, DEL = 130, and PUL = 100 for line 2.

**SECCM Measurements.** The SECCM experiments were performed on an in-house assembled scanning electrochemical probe system. The vertical movement of the pipet was controlled by a one-axis piezo-positioner (NPX 25-105, nPoint), and the x-y movement of the substrate working electrode was controlled by a two-axis piezo-positioner (P-622.2CD, Physik Instrumente). The scanning probe system was mounted in a vibration dampener (25BM-6, Minus K Technology) and enclosed in a custom-built Faraday cage. Voltage control and current measurements were achieved by Patch-clamp amplifiers HEKA EPC 10 USB with S-Probe Headstage (Harvard Bioscience Inc.) and DDP-300 (FEMTO). Data acquisition was accomplished via FPGA card (USB-7855R, National Instruments) and interfaced with the Warwick Electrochemical-Scanning Probe Microscopy Platform (WEC-SPM) software, which was kindly provided by the Warwick Electrochemistry & Interfaces Group (WEIG). Working electrode potential ( $V_{we}$ ) is calculated using **Equation 1**.

**Fluorescence Measurements.** Fluorescent and optical microscopy measurements were performed using a microscope (Eclipse TE2000-U Microscope, Nikon). Image focusing was accomplished using an



objective lens (Plan Fluor 20x/0.5 NA 2.1mm WD, Nikon). Wavelengths for excitation were accomplished by a lamp (X-Cite Series 120 Q, Excelitas Technologies) and a filter (Green Interference Filter 33 mm with slider, Nikon). Bias voltages for fluorescent imaging were controlled with a source meter (6430 Sub-Femtoamp Remote SourceMeter, Keithley). Images and videos were collected via software V++ (Digital Optics) and Bandicam (Bandicam Company), respectively.

## AUTHOR CONTRIBUTIONS

SW performed the key experiments/analysis and drafted the manuscript. HL assisted in data analysis and simulation. H.R. conceived the project and drafted the manuscript.

## CONFLICTS OF INTEREST

The authors declare no conflicts of interest.

## ACKNOWLEDGEMENTS

The authors would like to acknowledge support from the Chemical Measurement & Imaging Program (CMI) at the National Science Foundation (NSF) under Grant No. CHE-2240113. We also thank Prof. Richard M. Crooks for providing the fluorescence microscope instrument and Prof. Martin Edwards for the helpful discussions.

## REFERENCES

1. C. H. Ryu, H. Lee, H. Lee and H. Ren, *The Journal of Physical Chemistry Letters*, 2022, 13, 7838-7846.
2. E. Daviddi, K. L. Gonos, A. W. Colburn, C. L. Bentley and P. R. Unwin, *Analytical Chemistry*, 2019, 91, 9229-9237.
3. M. Kang, C. L. Bentley, J. T. Mefford, W. C. Chueh and P. R. Unwin, *ACS Nano*, 2023, 17, 21493-21505.
4. B. Tao, I. J. McPherson, E. Daviddi, C. L. Bentley and P. R. Unwin, *ACS Sustainable Chemistry & Engineering*, 2023, 11, 1459-1471.
5. C. Chen, H. Jin, P. Wang, X. Sun, M. Jaroniec, Y. Zheng and S.-Z. Qiao, *Chemical Society Reviews*, 2024, 53, 2022-2055.



6. Y. Wang, M. Li and H. Ren, *ACS Measurement Science Au*, 2022, 2, 304-308.
7. N. Ebejer, M. Schnippering, A. W. Colburn, M. A. Edwards and P. R. Unwin, *Analytical Chemistry*, 2010, 82, 9141-9145.
8. M. E. Snowden, A. G. Güell, S. C. S. Lai, K. McKelvey, N. Ebejer, M. A. O'Connell, A. W. Colburn and P. R. Unwin, *Analytical Chemistry*, 2012, 84, 2483-2491.
9. R.-J. Yu, Y.-L. Ying, R. Gao and Y.-T. Long, *Angewandte Chemie International Edition*, 2019, 58, 3706-3714.
10. D. Martín-Yerga, P. R. Unwin, D. Valavanis and X. Xu, *Current Opinion in Electrochemistry*, 2023, 42, 101405.
11. C. L. Bentley, M. Kang, F. M. Maddar, F. Li, M. Walker, J. Zhang and P. R. Unwin, *Chemical Science*, 2017, 8, 6583-6593.
12. R. G. Mariano, K. McKelvey, H. S. White and M. W. Kanan, *Science*, 2017, 358, 1187-1192.
13. C. L. Bentley, J. Edmondson, G. N. Meloni, D. Perry, V. Shkirskiy and P. R. Unwin, *Analytical Chemistry*, 2019, 91, 84-108.
14. M. Choi, N. P. Siepser, S. Jeong, Y. Wang, G. Jagdale, X. Ye and L. A. Baker, *Nano Letters*, 2020, 20, 1233-1239.
15. K. McKelvey, M. A. O'Connell and P. R. Unwin, *Chemical Communications*, 2013, 49, 2986-2988.
16. H. Lee, K. C. Matthews, X. Zhan, J. H. Warner and H. Ren, *ACS Nano*, 2023, 17, 22499-22507.
17. Y. Zhao, L. Lin, R. Liu, Y. Liu, Y. Wang and D. Wang, *Analytical Chemistry*, 2024, 96, 4190-4196.
18. W. Brown, Y. Li, R. Yang, D. Wang, M. Kvetny, H. Zheng and G. Wang, *Chemical Science*, 2020, 11, 5950-5958.



19. A. J. Bard, L. R. Faulkner and H. S. White, *Electrochemical Methods Fundamentals and Applications*, John Wiley & Sons Ltd, 2022.
20. M. V. Mirkin and A. Shigeru, *Nanoelectrochemistry* 1st Edition, CRC Press, 2015.
21. L. Zhang, T. Kang, J. Kang, X. Zhang, R. Zhang and G. Kang, *ACS Omega*, 2020, 5, 29257-29264.
22. B. Blount, G. Juarez, Y. Wang and H. Ren, *Faraday Discussions*, 2022, 233, 149-162.
23. H. C. Li and P. L. De Bruyn, *Surface Science*, 1966, 5, 203-220.
24. J. Lyklema, *Fundamentals of Interface and Colloid Science*, Elsevier, 2005.
25. M. A. Hayes, I. Kheterpal and A. G. Ewing, *Analytical Chemistry*, 1993, 65, 27-31.
26. C. Amatore, B. Fosset, J. Bartelt, M.R. Deakin and R.M. Wightman, *Journal of Electroanalytical Chemistry and Interfacial Electrochemistry*, 1988, 256, 255–268.
27. W.-L. Tseng, M.-M. Hsieh, S.-J. Wang and H.-T. Chang, *Journal of Chromatography A*, 2000, 894, 219-230.

