CORRECTION

Check for updates

Correction: Steady states and kinetic modelling of the acid-catalysed ethanolysis of glucose, cellulose, and corn cob to ethyl levulinate

Conall McNamara,*[a] Ailís O'Shea,[a] Prajwal Rao,[a] Andrew Ure,[a] Leandro Ayarde-Henríquez,[a] Mohammad Reza Ghaani,[b] Andrew Ross[c] and Stephen Dooley[a]

Correction for 'Steady states and kinetic modelling of the acid-catalysed ethanolysis of glucose, cellulose, and corn cob to ethyl levulinate' by Conall McNamara *et al.*, *Energy Adv.*, 2024, **3**, 1439–1458, https://doi.org/10.1039/D4YA00043A.

The authors regret errors in the order of reaction conditions presented in Fig. 7 and 8. These errors do not impact the conclusions or interpretations provided in the text. In addition, the asterisks given in the original Fig. 7 and 8 communicate unnecessary additional information.

The updated Fig. 7 and 8, along with their revised captions, are as follows.

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.

[a] *School of Physics, Trinity College Dublin, Dublin 2, Ireland. E-mail: mcnamac4@tcd.ie*
[b] *School of Engineering, Department of Civil, Structural & Environmental Engineering, Trinity College Dublin, Dublin 2, Ireland*
[c] *School of Chemical and Process Engineering, University of Leeds, 209 Clarendon Road, Leeds LS2 9JT, UK*
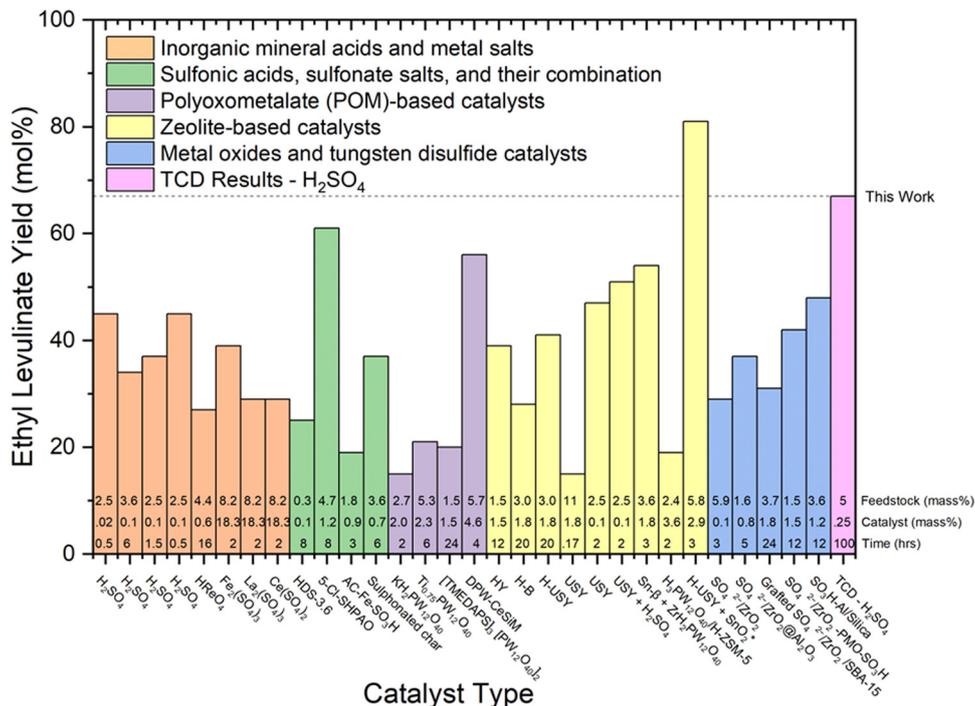
Fig. 7 Literature review of experimental yields of ethyl levulinate using various catalyst types.[17,18,21,22,27,29,30,32,37–39,41–43,47,50,51,53,60,67–71] All reaction systems use conventional heating, glucose as a feedstock, and a one-pot process. The feedstock loading (mass%), catalyst loading (mass%), and reaction times (hrs) are displayed at the bottom of each column.
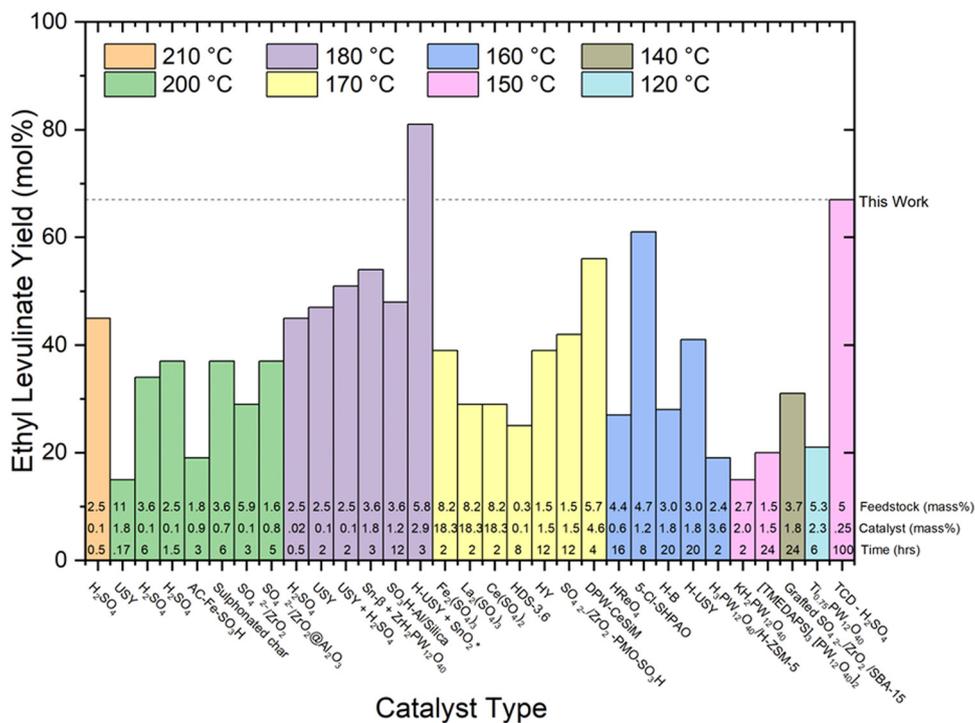

Fig. 8 Literature review of experimental yields of ethyl levulinate using various catalyst types.[17,18,21,22,27,29,30,32,37–39,41–43,47,50,51,53,60,67–71] All reaction systems use conventional heating, glucose as the feedstock, and a one-pot process. The feedstock loading (mass%), catalyst loading (mass%), and reaction times (hrs) are displayed at the bottom of each column.