

# EES Batteries

Accepted Manuscript

This article can be cited before page numbers have been issued, to do this please use: J. He, J. Xiang, S. Chou, X. Tan and D. Lyu, *EES Batteries*, 2025, DOI: 10.1039/D5EB00215J.



This is an Accepted Manuscript, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this Accepted Manuscript with the edited and formatted Advance Article as soon as it is available.

You can find more information about Accepted Manuscripts in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this Accepted Manuscript or any consequences arising from the use of any information it contains.

# Transfer from Lithium to Sodium: Promoting Battery Lifetime Prognosis Application<sup>☆</sup>

Jiahao He,<sup>a</sup> Jiawei Xiang,<sup>b,d</sup> Shulei Chou,<sup>a,c,d</sup> Xin Tan,<sup>a,c,d</sup> Dongzhen Lyu,<sup>b,d</sup> \*

Lithium-ion batteries (LIBs) have achieved substantial progress; however, the limited availability of lithium resources poses a significant challenge to their continued scalability. Sodium-ion batteries (SIBs) offer a promising, cost-effective alternative, yet their widespread adoption is hindered by limited research—particularly in performance degradation and health management. This knowledge gap reinforces a development bottleneck, in contrast to the extensive diagnostic and prognostic studies available for LIBs. To address this, we construct a comprehensive SIB cycling life dataset and propose a transfer learning-based prognostic framework. Our approach utilizes knowledge from LIBs to speed up prognostics development for SIBs, while enhancing modeling flexibility and prediction accuracy. Central to this method is a Dual-Dynamic Mode Decomposition (Dual-DMD) model that captures both shared degradation behaviors and battery-specific deviations. By extracting universal features from LIB data and modeling SIB-specific characteristics, effective knowledge transfer is achieved. An online transfer factor optimization mechanism further mitigates distributional discrepancies between LIBs and SIBs. Degradation trajectories are then predicted using an adaptive unscented Kalman filter (AUKF). The proposed Dual-DMD framework achieves high predictive accuracy, with average mean absolute percentage error (MAPE), mean absolute error (MAE), and root mean square error (RMSE) of 3.73%, 4.6%, and 5.2%, respectively, across all SIB test samples.

## 1. Introduction

Owing to LIBs' excellent energy density, long cycle life, and versatile application potential, it has seen widespread adoption in areas including new energy vehicles, large-scale energy storage, and consumer electronic devices<sup>1-6</sup>. As battery-powered transportation rapidly develops and the need for high-capacity energy storage continues to grow, LIBs have become a foundational technology driving the global shift toward sustainable energy. However, the raw materials required for LIBs—such as lithium, cobalt, and other critical minerals—are facing growing scarcity driven by surging demand<sup>7-10</sup>. This resource constraint, coupled with environmental concerns associated with mineral extraction, raises questions about the long-term sustainability of lithium-ion battery technology<sup>11,12</sup>. Moreover, LIBs are prone to safety risks, including thermal runaway under conditions such as overcharging, short-circuiting, or elevated temperatures, posing significant safety and environmental hazards<sup>13,14</sup>. In light of these challenges, SIBs have garnered growing attention as a promising alternative to LIBs.

Sodium, owing to its abundance and electrochemical similarity to lithium, represents a viable solution for future energy storage technologies<sup>15</sup>. While LIBs are well known for delivering excellent energy performance, typically around 95%, SIBs exhibit a slightly lower efficiency of approximately 90%<sup>16,17</sup>. Despite this modest efficiency gap, SIBs offer significant advantages, particularly in terms of thermal and operational safety. Compared to their lithium-based counterparts, SIBs are less prone to thermal runaway and related safety hazards, making them a safer and more stable choice for specific applications<sup>18</sup>. Consequently, SIBs are increasingly regarded as an ideal solution for energy storage systems, especially in renewable energy applications and low-speed electric vehicles, where safety, cost-effectiveness, and resource sustainability are critical concerns. However, the long-term performance of SIBs is subject to degradation, leading to capacity fade and efficiency loss over time<sup>19</sup>. Therefore, accurate prediction of their remaining useful life (RUL) is essential to prevent unexpected failures and minimize equipment damage<sup>20</sup>.

Estimating RUL has become a critical research focus within the field of battery technology<sup>21,22</sup>, as accurate RUL estimation is essential for improving the performance, safety, and lifespan of batteries. RUL prediction methods are mainly two types of approaches: physics-based models and data-driven methods<sup>23,24</sup>. However, existing research efforts in both categories have predominantly focused on LIBs, with few studies addressing batteries with other chemistry, such as SIBs. The physics model-based approach provides a more intuitive prediction method by modeling the electrochemical reactions and degradation mechanisms of batteries, however, they often struggle to capture the nonlinear degradation behavior under complex, real-world conditions<sup>25,26</sup>. In contrast, machine learning and deep learning techniques within data-driven approaches have achieved significant advancements in the past few years. They improve the accuracy of predictions by extracting degradation trends from extensive historical data<sup>27,28</sup>. Algorithms based on machine learning—including support vector machines (SVM), random forests (RF), and decision trees (DT)—have demonstrated strong predictive performance across various applications, effectively capturing the nonlinear and complex characteristics of battery degradation processes<sup>29,30</sup>. Meanwhile, deep learning approaches like convolutional neural networks (CNNs) and long short-term memory (LSTM) models, with their powerful feature extraction and modeling capabilities, have shown considerable advantages, especially when handling high-dimensional and sequential data<sup>31,32</sup>. These methods enable more accurate modeling of complex degradation mechanisms through automated feature extraction and are extensively utilized across fields such as electric mobility and large-scale energy storage systems. However, it is important to note that most existing RUL prediction research has focused on LIBs underpinned by a wealth of publicly available datasets and extensive experimental validation. In contrast, the RUL prediction of SIBs remains largely unexplored, with systematic and dedicated studies still lacking. This research gap is primarily due to the relatively recent emergence of sodium-ion battery technology and the absence of long-term, large-scale degradation datasets under diverse operational scenarios. Given the similarities in electrochemical principles and degradation mechanisms between LIBs and SIBs, leveraging the

<sup>a</sup>Institute for Carbon Neutralization Technology, College of Chemistry and Materials Engineering, Wenzhou University, Wenzhou, Zhejiang, 325035, China

<sup>b</sup>College of Mechanical and Electrical Engineering, Wenzhou University, Wenzhou, 325035, China

<sup>c</sup>Wenzhou Key Laboratory of Sodium-ion Batteries, Wenzhou University Technology Innovation Institute for Carbon Neutralization, Wenzhou, Zhejiang, 325035, China

<sup>d</sup>Zhejiang Key Laboratory of Equipment Monitoring and Intelligent Operation & Maintenance under Extreme Working Conditions, Wenzhou, Zhejiang, 325035, China

\*Corresponding authors. lvdongzhen@yeah.net (D. Lyu). xintan@wzu.edu.cn (X. Tan). chou@wzu.edu.cn (S. Chou).



well-established knowledge, methodologies, and predictive models developed for LIBs offers a compelling pathway to advance RUL prediction for SIBs<sup>33,34</sup>. Such cross-domain transfer of knowledge can effectively address current challenges posed by limited sodium-ion battery datasets and modeling frameworks, thereby enhancing the accuracy, robustness, and generalization capability of RUL prediction models for SIBs. DOI: 10.1039/D5EB00215J

We propose an innovative transfer-driven prediction approach, termed Dual-DMD, which integrates shared dynamic mode extraction with differential trajectory modeling, building upon state-of-the-art RUL prediction techniques developed for LIBs<sup>35</sup>. The experimental analysis utilized 8 degradation datasets of LIBs and 7 degradation datasets of SIBs. The lithium-ion battery data and the sodium-ion battery data were obtained from cycling life tests, using SIBs were assembled using synthesized electrode materials. First, a time-delay (TD) module is embedded into dynamic mode decomposition (DMD) to extract the dynamic features of lithium battery degradation data. Based on these features, a differential modeling structure is constructed to capture the deviation between a reference lithium trajectory and the target sodium-ion battery. The resulting prediction model is then combined with an adaptive Kalman filter to estimate the degradation trend of the sodium-ion battery.

The main contributions of this study are summarized as follows:

1. Propose a transfer learning approach that leverages rich LIB knowledge to accelerate prognostics application development for SIBs, enhancing modeling flexibility and improving prediction accuracy.
2. A Dual-DMD framework is developed to separate shared degradation patterns from LIBs and SIB-specific variations, enabling efficient and interpretable cross-domain modeling.
3. A time-delay embedding mechanism is integrated to enhance the modeling of temporal dependencies and nonlinear degradation behavior within the Dual-DMD process.
4. An adaptive transfer factor strategy is proposed to reduce distribution gaps between LIB and SIB data, improving model robustness and prediction accuracy.
5. The integration of the Dual-DMD model with an adaptive unscented Kalman filter allows for accurate, real-time prognostics of SIB degradation trajectories.

By leveraging extensive LIB datasets to compensate for the limited availability of SIB data, our approach significantly improves the accuracy and generalization of remaining useful life predictions for sodium-ion batteries. This work thus offers a scalable and practical solution to advance health management in emerging sodium-ion battery technologies.

The remainder of this paper is organized as follows: Section 2 details the lithium-ion and sodium-ion battery datasets employed in this work and discusses the differences between capacity degradation in lithium-ion and sodium-ion batteries. Section 3 introduces the overall research methodology, including the proposed Dual-DMD and adaptive unscented Kalman filter-based transfer-driven prediction method, which establishes a high-precision cross-battery-type lifetime prediction approach. Section 4 comprehensively evaluates and discusses the performance of the proposed transfer-based prediction approach. Section 5 concludes the paper and provides perspectives for future research.

## 2. Description of experimental data

The lithium-ion and sodium-ion battery datasets utilized in this study are detailed below. The lithium-ion battery consists of cells with ternary lithium (NCM) cathodes, graphite anodes, and a polymer electrolyte. We employed eight lithium iron pouch cells (see Fig. S3), each with a nominal capacity of 0.8 Ah, and a nominal voltage of 3.7 V. The battery charges at a constant current of 1 C until the voltage reached 4.2 V and held. Charging continues until the current drops to 0.25 C, preventing overcharging. During discharge, the system applies a constant 1 C current until the voltage drops 2.7 V. Here, "C" denotes the current rate relative to the battery's nominal capacity. For instance, 1 C corresponds to a current of 0.8 A for a 0.8 Ah lithium-ion battery. The nominal configuration of each lithium-ion battery is shown in Fig. 1a, and details of the battery degradation testing platform are provided in Fig. S2. The dataset was selected as the lithium-ion battery domain primarily because its degradation features are representative, the dataset size is moderate, and it contains enough lithium-ion samples to ensure effective transfer learning.

The target domain is a sodium-ion battery dataset (see Fig. S4). Such a cross-domain design facilitates assessment of the model's generalization capability and prediction accuracy. We constructed seven sodium-ion battery half-cells using iron–manganese Prussian blue analogue as the cathode, hard carbon as the anode, and an electrolyte composed of 1 M NaClO<sub>4</sub> in propylene carbonate with 1% vinylene carbonate (VC). Detailed morphological and structural characterizations of the iron–manganese Prussian blue cathode material—including scanning electron microscopy (see Fig. S5), X-ray diffraction (see Fig. S6), thermogravimetric analysis (see Fig. S7), and Fourier-transform infrared spectroscopy (see Fig. S8) analyses. The synthesis procedures, material characteristics, and electrochemical performance of these components have been thoroughly described in previous studies<sup>36</sup>. Specifically, Prussian Blue was synthesized via the co-precipitation method, and hard carbon was produced through high-temperature pyrolysis. Button cell assembly was carried out in a glove box filled with argon atmosphere<sup>37</sup>. After assembly, the sodium-ion battery half-cells were rested for 10 hours in a constant-temperature chamber to ensure full electrolyte infiltration. Then, we performed the charge/discharge test using the Neware CT-4008 Battery Test System. Charging was carried out at 0.5 C between 2.0–4.0 V, while discharging was performed at 1 C (1 C = 100 mAh/g). The nominal configuration of each sodium-ion battery is shown in Fig. 1b, and details of the battery degradation testing platform are provided in Fig. S1. Specifications for the two battery types are provided in Table S1.

Fig. 2 presents the degradation trajectories of eight LIBs and seven SIBs. Fig. 2a shows the capacity degradation curve of the lithium-ion battery, with a cycle life of approximately 1200 cycles. The discrete outliers in the figure correspond to periodic checkpoints set by Lyu et al. In the early stages of cycling, the battery degradation trajectory follows a slow decline. Around the 900th cycle, the degradation rate becomes roughly linear, and subsequently, the degradation rate begins to accelerate. When the capacity degradation reaches around 1100 cycles, the rate of decline slows again. Overall, the battery's degradation rate exhibits an inverted S-shape. This dataset comes from the world's largest, longest-running, and most systematic battery performance degradation experiment.

Each sodium-ion battery in Fig. 2b exhibits a nearly identical capacity degradation trend, due to the consistent materials, manufacturing processes, and testing protocols, all of which are from the same batch. The cycle life of these batteries is approximately 1100 cycles, and we selected the first 800 cycles as the effective lifespan for analysis in the experiment. Lithium-ion and sodium-ion batteries have different capacity sizes: LIBs are usually measured in ampere-hours (Ah), while SIBs are measured in milliampere-hours (mAh). Moreover, LIBs are generally pouch-type cells, while SIBs are coin-type cells, leading to differences in capacity scale, thermal properties, and mechanical behavior. These disparities in unit scale, form factor, and cycling characteristics introduce variations in data scale and degradation distribution, which motivate the use of a transfer-driven modeling strategy capable of bridging such cross-domain inconsistencies. Importantly, the distinct structural and electrochemical characteristics between LIBs and SIBs provide a meaningful opportunity to rigorously evaluate the transferability of the proposed Dual-DMD framework. The successful knowledge transfer from pouch-type LIBs to coin-type SIBs thus serves as strong evidence of the model's capability to generalize across different chemistries and cell architectures, highlighting the robustness of the proposed cross-domain approach.



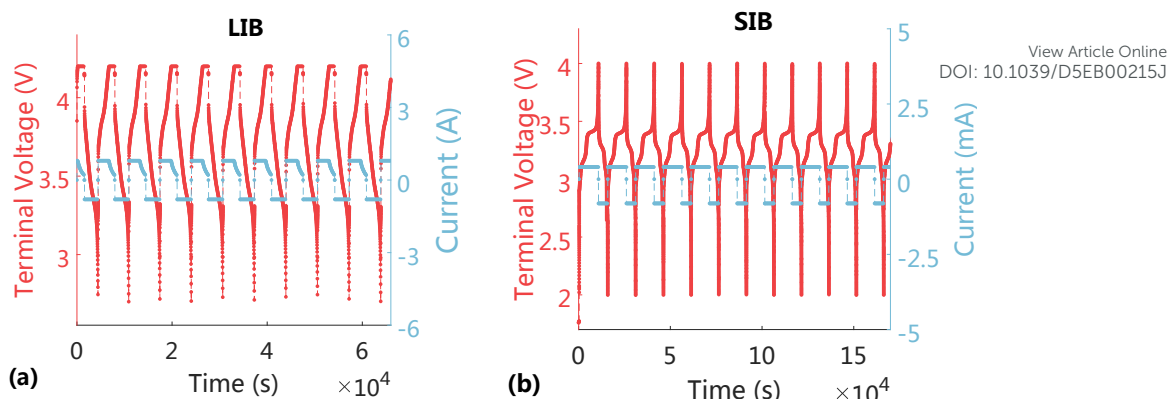


Fig. 1 Voltage and current responses during cycling. (a) Lithium-ion batteries; (b) Sodium-ion batteries

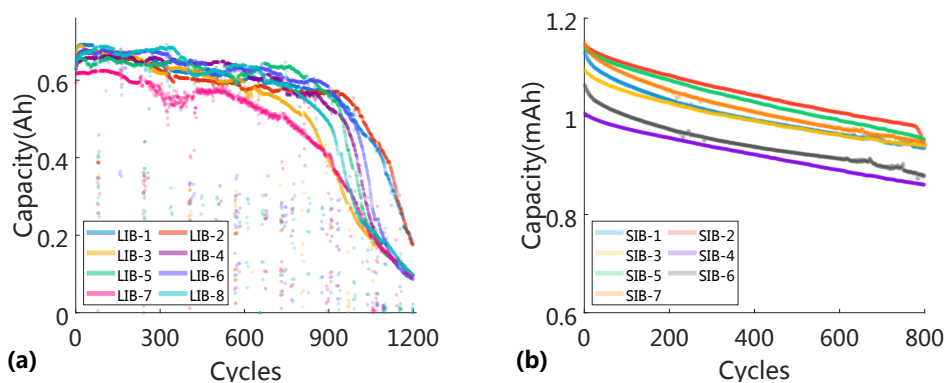


Fig. 2 Capacity degradation curve. (a) Lithium-ion batteries; (b) Sodium-ion batteries

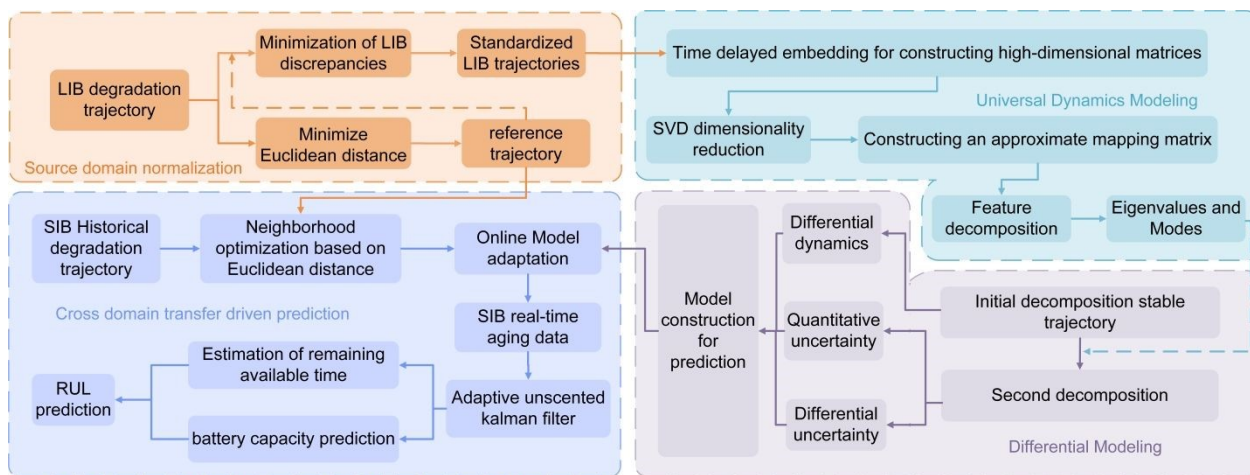


Fig. 3 Cross battery type RUL prediction framework

### 3. Research methods

#### 3.1. Overview of the Dual-DMD Prediction Framework

The proposed Dual-DMD framework aims to provide precise remaining useful life forecasts across multiple battery types with varying characteristics. The framework integrates two complementary modeling strategies: time-delay embedded dynamic mode decomposition (TD-DMD) and adaptive differential modeling (ADMD) <sup>27</sup>. Unlike traditional ensemble schemes that combine multiple model outputs through statistical weighting, the "linear combination" in Dual-DMD occurs within the dynamic state-evolution formulation. TD-DMD is employed to extract dominant and transferable degradation dynamics from time-series data, capturing universal patterns shared across different battery types as global features. In parallel, ADMD constructs a flexible differential modeling structure between a selected reference trajectory and each target trajectory, enabling the model to adaptively capture battery-specific degradation variations. The two modules are coupled inside the evolution equation rather than at the output level, forming a unified dynamics decomposition and reconstruction mechanism. The integration of these two modules forms the core of the Dual-DMD framework: TD-DMD ensures global generalization, while



ADMD introduces localized adaptability. By anchoring the differential modeling process to TD-DMD-derived modes, the framework maintains consistency with fundamental degradation trends while accommodating inter-battery variability.

Fig. 3 illustrates the proposed Dual-DMD framework, which consists of four main modules: normalization of source domain degradation trajectories, extraction of shared degradation features via TD-DMD; differential modeling for individualized adaptation, and cross-domain prediction through model fusion. Each module is described in detail in the following sections.

### 3.2. Source Domain Degradation Normalization

Substantial variations are observed among the degradation trajectories of LIBs, as illustrated in Fig. 2a. To address this, we first use Euclidean distance to measure the similarity between all degraded trajectories in LIBs, and the degraded trajectory with the smallest cumulative deviation from other trajectories is selected as the reference trajectory (see Table S2 for symbols, acronyms, and definitions). For any two-dimensional coordinates  $(t_1, z_1)$  and  $(t_2, z_2)$ , the Euclidean distance between the two is:

$$d_{\text{Euc}} = \sqrt{(z_2 - z_1)^2 + (t_2 - t_1)^2} \quad (1)$$

Let  $k$  and  $m$  denote two different LIBs; their total distance is formulated as:

$$E_{\text{sum}}^{k-m} = \sum_{i=1}^{N^k} E_i^{a^m} \quad (2)$$

where  $E_{\text{sum}}^{k-m}$  denotes the sum distance from  $k$ th to  $m$ th lithium-ion battery, it is the total of all point differences, including  $E_1^m, E_2^m, \dots, E_{N^k}^m$ . The value  $E_i^{a^m}$  indicates the difference between the  $k$ th and  $m$ th LIB trajectories. It is the smallest Euclidean distance between the  $i$ th point  $(t_i^k, z_i^k)$  in the  $k$ th lithium-ion battery trajectory and all the points in the  $m$ th lithium-ion battery trajectory. After calculating the total Euclidean distance difference between any lithium-ion battery and other lithium-ion battery, select the reference trajectory  $Tr^{ref}$  in the lithium-ion battery domain. Compared to any other degradation trajectory of LIBs, the reference trajectory  $Tr^{ref}$  has the smallest sum of total Euclidean distances with all other degradation trajectories.

For each non reference lithium-ion battery other than the reference degradation trajectory battery, a normalization coefficient  $N_r$  is sequentially set to normalize the  $r$ th non reference lithium-ion battery. Normalization aims to minimize the Euclidean distance between each non reference lithium-ion battery and the reference degradation trajectory battery. Taking the non reference lithium-ion battery  $Tr^{Li-r}$  as an example, its normalized degradation data is:

$$Nor^{Li-r} : \{(t_1^r, z_1^r * N_r), (t_2^r, z_2^r * N_r), \dots, (t_{N^r}^r, z_{N^r}^r * N_r)\} \quad (3)$$

Fig. 4 presents the degradation curves of all LIBs after normalization based on their Euclidean distance similarity. Compared with Fig. 2a, the inter-cell differences are significantly reduced.

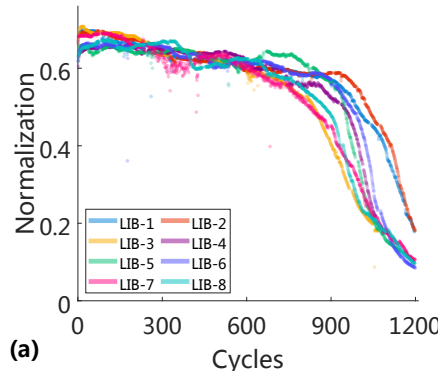


Fig. 4 Normalized degradation trend

### 3.3. Universal Feature Extraction via TD-DMD

DMD is a widely used data-driven technique for analyzing the spatiotemporal evolution of dynamic systems<sup>38</sup>. It decomposes sequential measurements into a set of characteristic modes, each associated with a specific temporal behavior defined by eigenvalues. Despite its success in approximating complex dynamics, standard DMD assumes linearity and requires full-state measurements, which limits its effectiveness in handling localized, nonlinear degradation in battery systems<sup>39</sup>.

To overcome these limitations, we adopt TD-DMD<sup>40</sup>, which enhances the dynamic observability of time-series data by constructing high-dimensional delay-coordinate matrices. This enables the model to extract dominant degradation patterns from partial measurements and improves prediction performance in low-frequency or local sampling scenarios.

TD-DMD is used to extract the main dynamic modes of battery degradation processes in the lithium-ion battery domain. Through the construction of a time-delay matrix, singular value decomposition (SVD), eigenvalue calculation, and mode selection, the main dynamic features of battery degradation trajectories are analyzed. The following is the detailed TD-DMD calculation process.

To effectively get the temporal dynamic characteristics of lithium-ion battery degradation, we construct a time delay matrix and convert the time series data into a high-dimensional embedding matrix, enabling the DMD method to identify the dynamic patterns of battery degradation. We use  $Z = [Z_1, Z_2, \dots, Z_m]$  to represent any one of the battery degradation trajectories, where  $Z_i$  represents the capacity of the lithium-ion battery at the  $i$ th cycle.  $m$  is the number of cycles. Construct delay matrices  $Y_1$  and  $Y_2$ ,

$$Y_1 = \begin{bmatrix} Z_1 & Z_2 & L & Z_{m-d} \\ Z_2 & Z_3 & L & Z_{m-d+1} \\ M & M & O & M \\ Z_d & Z_{d+1} & L & Z_{m-1} \end{bmatrix} \quad (4)$$





$$Y_2 = \begin{bmatrix} Z_2 & Z_3 & L & Z_{m-d+1} \\ Z_3 & Z_4 & L & Z_{m-d+2} \\ M & M & O & M \\ Z_{d+1} & Z_{d+2} & L & Z_m \end{bmatrix}$$

View Article Online  
DOI: 10.1039/D5EB00215J

where  $d$  denotes the total number of delay steps.

To reduce dimensionality and remove noise, we perform singular value decomposition on the time delay matrix  $Y_1$ :

$$Y_1 = OVM^T \quad (6)$$

here,  $O$  and  $M$  denote orthogonal matrices with unit norm, and  $V$  is a diagonal matrix.

The optimal linear operator  $A$  establishes the relationship between the two data matrices as follows:

$$Y_2 = AY_1 \quad (7)$$

So, the matrix  $A$  can be expressed by

$$A = Y_2MV^{-1}O^T \quad (8)$$

A low-dimensional way of  $A$  is obtained by retaining the first  $r$  modes from matrices  $O, M, V$ . Then,  $A, Y_1, Y_2$  are projected onto the first  $r$  POD modes extracted from  $Y_1$ ,

$$A_r = O_r^T Y_2^{t-d+1} M_r V_r^{-1} \quad (9)$$

To perform dimensionality reduction, we selected  $r$  as a truncation number. The eigen-decomposition of matrix  $A_r$  is defined as follows:

$$A_r = G\Lambda G^{-1} \quad (10)$$

matrix  $G$  consists of eigenvectors and has dimensions of  $r \times r$ . Matrix  $\Lambda$  denotes the eigenvalue matrix, which is the DMD method. It contains the dynamic characteristics of the corresponding DMD modes.

$$\phi = OG \quad (11)$$

Then, the system state at any given time can be expressed as

$$L_t = \sum_{i=1}^r \phi_i \lambda_i^{t-d-1} \phi_i^{-1} L_1 \quad (12)$$

This formulation defines the DMD method in its discrete form,  $\lambda$  denotes the eigenvalues, which can be represented as

$$\omega = \frac{\log(\lambda)}{\Delta t} \quad (13)$$

where  $\omega$  is the continuous-time eigenfrequency,  $\lambda$  is the discrete-time eigenvalue from the DMD model, and  $\Delta t$  is the sampling interval.

### 3.4. Individual Degradation Modeling via ADMD

ADMD method is designed to capture the individual degradation dynamics of batteries by modeling the deviations between a reference trajectory and the target trajectory. The process of ADMD consists of two key stages: first-stage decomposition and second-stage decomposition. The first-stage decomposition focuses on assessing uniform uncertainty in measurements and plays a key role in stabilizing the degradation trend, while the second-stage decomposition focuses on refining the model by capturing the nonlinear dynamic behavior of individual battery cells.

The first-stage decomposition involves utilizing Euclidean distance-based normalization of the degradation trajectories of LIBs. This normalization reduces the variation among the degradation trajectories across different batteries, though significant fluctuations and noise may still exist in the data. To mitigate this, a smoothing spline is used to eliminate the measurement noise, leading to stabilized degradation trajectories. The relationship between the original degradation trajectory  $p_t$ , the normalized trajectory  $L_t$ , and the measurement noise  $u_t$  is expressed as:

$$p_t = L_t + u_t \quad (14)$$

where  $p_t$  represents the raw degradation path observed at time  $t$ , and  $L_t$  indicates its stabilized form. The term  $u_t$  indicates the measurement uncertainty, representing the extracted noise component derived from the discrepancy between the two trajectories. This stage establishes a stabilized degradation trajectory that forms the basis for the next modeling steps.

The second-stage decomposition further refines the model by addressing the nonlinear dynamics and temporal relationships between the degradation states of the battery. The second-stage decomposition utilizes the differential dynamics between the target and reference trajectories, thereby offering a more reliable basis for precise prediction. The dynamic correlation between two consecutive degradation states can be expressed as:

$$L_{t+1} - L_t = f'(L_t, t) + \omega_t \quad (15)$$

where  $L_{t+1} - L_t$  refers to the raw differential dynamics derived and visualized in Fig. 5, while  $f'(L_t, t)$  indicates the nonlinear model employed to represent these dynamics.  $\omega_t$  denotes the modeling uncertainty related to differential variation.

### 3.5. Fusion of Universal and Individual Dynamics for RUL Prediction

To achieve accurate and adaptable remaining useful life prediction across heterogeneous battery types, we propose a unified prediction formulation by integrating the global degradation dynamics extracted by TD-DMD with the individual degradation variations modeled by ADMD. Specifically, the predicted degradation state at time  $t+1$  is expressed as a combination of a shared dynamic component and an individual deviation component:

$$L_{t+1} = f_{\text{TD-DMD}}(L_t) + \Delta f_{\text{ADMD}}(L_t) \quad (16)$$

Dual-DMD fuses the TD-DMD and ADMD modules through a dynamics-level combination rather than output aggregation. The first term  $f_{\text{TD-DMD}}(L_t)$  captures the dominant temporal degradation trends shared among batteries in the lithium-ion battery domain. Eq. (11) and Eq. (13) are used to realize the reconstruction, which is based on time-delay embedding and dynamic mode decomposition:

$$f_{\text{TD-DMD}}(L_t) = \sum_{i=1}^r \phi_i e^{m_i(t-1)\Delta t} \phi_i^{-1} L_1 \quad (17)$$

where  $\phi_i$  is the  $i$ th DMD mode,  $\omega_i$  denotes the corresponding modal frequency, and  $r$  is the number of dominant modes retained after truncation.



The second term  $\mathcal{A}_{\text{ADMD}}(L_i)$  characterizes the individual-specific degradation dynamics of the target battery by modeling the deviation from the reference trajectory. Such a dynamics-based coupling enables the model to maintain cross-system generality while capturing system-specific nonlinearities through the differential term, in contrast to conventional ensembles that combine outputs post-hoc. It is formulated as a nonlinear differential model.

$$\mathcal{A}_{\text{ADMD}}(L_i) = f'(L_i, t) + \omega_i \quad (18)$$

Moreover, the Dual-DMD framework leverages the global modal structure extracted from the entire LIB dataset rather than relying on a single reference trajectory. The reference trajectory only serves as a temporal alignment baseline for differential modeling, ensuring consistent performance across different selections within the same dataset. Localized irregularities in the reference data are effectively mitigated through the differential dynamics and adaptive filtering mechanisms.

### 3.6. Prediction of cross battery type migration

#### 3.6.1. Cross domain feature alignment and scale control mechanism

In the Dual-DMD model, differential modeling is centered around the reference trajectory in lithium battery degradation data and is only applicable within the lithium-ion battery domain. For sodium-ion batteries with different electrode materials and specifications, direct application of the model is not feasible. To enable accurate lifetime prediction for SIBs, a cross-domain alignment strategy is essential for aligning the target and reference trajectories in both temporal structure and scale, thereby enabling reliable model transfer to the SIBs.

Using the reference path taken from LIBs, where all data is available, we get the following form:

$$Tre^{ref} : \{(t_1^{ref}, z_1^{ref}), (t_2^{ref}, z_2^{ref}), \dots, (t_m^{ref}, z_m^{ref})\} \quad (19)$$

where  $t_m^{ref}$  represents the  $m$ th charge–discharge cycle,  $z_m^{ref}$  corresponds to the capacity measured at that cycle, and  $(t_m^{ref}, z_m^{ref})$  represents the  $m$ th data from the reference trajectory.

The degradation trajectory of SIBs is represented as:

$$Tre_{pac,1:n} = \{(t_1^{pac}, z_1^{pac}), (t_2^{pac}, z_2^{pac}), \dots, (t_n^{pac}, z_n^{pac})\} \quad (20)$$

where  $(t_n^{pac}, z_n^{pac})$  represents the  $n$ th data from the target trajectory.

We utilized a scale factor to normalize the degraded trajectory in the target domain, thereby reducing its deviation from the reference trajectory, and constructed a scale domain difference index:

$$E_{\text{domain}}^{\text{scale}} = \frac{1}{n} \sum_{i=1}^n E_i^{\text{scale}} \quad (21)$$

$$E_i^{\text{scale}} = \min_j \left\| (t_i^{pac}, z_i^{pac} * \mathbf{S}) - (t_j^{ref}, z_j^{ref}) \right\|_2$$

where  $E_{\text{domain}}^{\text{scale}}$  is the gap between the scaled sodium ion battery and reference trajectory across the domain, which is defined as the average of all scaled point discrepancies in  $E_i^{\text{scale}}$ , including  $E_1^{\text{scale}}, E_2^{\text{scale}}, \dots, E_n^{\text{scale}}$ .  $E_i^{\text{scale}}$  measures the scaled difference between the target and reference trajectories at each point. Specifically, it equals the minimum Euclidean distance from the  $i$ th scaled target point  $(t_i^{pac}, z_i^{pac} * \mathbf{S})$  to any point within the reference trajectory.

#### 3.6.2. Adaptive real-time adjustment of the transfer factor

In migration prediction tasks, because the complete degradation trajectory of the target domain (sodium-ion battery) is often unavailable in the early stages, it is necessary to rely on the currently observed partial data and for online prediction. To better adapt the model to the characteristics of the target domain, we introduce an online adaptive mechanism based on transfer coefficients, which dynamically adjusts the scale of the target trajectory to align with the reference trajectory of the lithium-ion battery domain, thereby enhancing the model's generalization performance. To improve prediction accuracy, we adopt an online approach to adjust the transfer coefficient  $k$  in real-time to minimize  $E_{\text{domain}}^{\text{scale}}$ . The optimization problem is formalized as:

$$\min_k (E_{\text{domain}}^{\text{scale}}), k > 0 \quad (22)$$

where the domain discrepancy  $E_{\text{domain}}^{\text{scale}}$  is the optimization objective, and the transfer factor  $k$  is defined as a data-driven dynamic scale-alignment coefficient rather than a representation of electrochemical parameters.

In order to solve this problem, we introduce the Lagrange function:

$$\mathbf{L}(k, \lambda) = E_{\text{domain}}^{\text{scale}} - \lambda k \quad (23)$$

the term  $\lambda$  is the Lagrange multiplier for the constraint  $k > 0$ , enabling the objective function to balance reducing domain difference with constraint satisfaction.

By calculating the first and second derivatives,  $\nabla \mathbf{L}(k, \lambda) = \frac{\partial \mathbf{L}}{\partial k}$  and  $\nabla^2 \mathbf{L}(k, \lambda) = \frac{\partial^2 \mathbf{L}}{\partial k^2}$ , we use Newton's method to iteratively update  $k$ :

$$k_{i+1} = k_i - [\nabla^2 \mathbf{L}(k_i, \lambda_i)]^{-1} \nabla \mathbf{L}(k_i, \lambda_i) \quad (24)$$

here,  $k_i$  indicates the transfer factor at the  $k$ th step, and  $\lambda_i$  denotes the Lagrange multiplier. The gradient matrix provides the direction, and the Hessian captures the curvature of the Lagrangian.

After obtaining a new target domain data point, this process can be executed once to dynamically adjust the transfer factor  $k$ . Finally, apply the updated  $k$  to the capacity value of the target trajectory:

$$y_i = k_i \cdot y_i \quad (25)$$

The adjusted target trajectory will be used as input for the Dual-DMD to enhance the precision and stability of cross-domain prediction.

#### 3.6.3. Life prediction based on adaptive unscented kalman filter

The unscented kalman filter is a commonly adopted approach for estimating the states of nonlinear systems, that estimates the system state in real-time without requiring linearization of the system model<sup>41</sup>. The core idea is to select a representative set of sigma points through the unscented transform, propagate them in nonlinear systems, and capture changes in the state distribution's properties, including its mean and covariance<sup>42</sup>. However, due to the inherent uncertainty of nonlinear systems, including structural variations and external disturbances, it is difficult to accurately obtain the covariance matrices of both process and measurement noise. Factors such as initial state estimation errors, abnormal measurement fluctuations, or inaccuracies in battery RC model identification may lead to significant state estimation biases. Therefore, the adaptability of the traditional UKF is limited when faced with noise variability or model errors. To overcome this deficiency, this paper introduces the Sage Husa adaptive mechanism into UKF, which dynamically responds to changes in noise characteristics through online updates of noise mean and covariance parameters, dynamically estimates the system state, and combines uncertainty for trajectory prediction. System-specific nonlinearities and uncertainties are primarily handled by the ADMD and the AUKF, while the transfer factor only



performs input-level scale alignment. In this sense, the Dual-DMD framework leverages TD-DMD, ADMD, and the AUKF to implicitly accommodate nonlinear degradation behaviors without introducing extra nonlinear transformations.

The state update equation of the target domain sodium ion battery is defined as follows:

View Article Online  
DOI: 10.1039/D5EB00215J

$$x_{i+1} = \frac{f(x_i, i) + \omega_{i+1}}{k_i} \quad (26)$$

where  $x_i$  denotes the system state at time  $i$ ,  $\omega_{i+1}$  is the process noise, and  $k_i$  represents the transfer factor updated at time  $i$ ; the nonlinear function  $f(\cdot)$  is derived from the foundational form of the Dual-DMD method.

At each moment  $t$ , generate  $2n+1$  sigma points using the current state mean  $u_{t-1}$  and covariance matrix  $P_{t-1}$ :

$$\begin{aligned} U_{t-1}^{(j)} &= \left( \sqrt{(n+\mu)P_{t-1}} \right)_j + u_{t-1}, \quad j=1, \dots, n \\ U_{t-1}^{(j+n)} &= \left( \sqrt{(n+\mu)P_{t-1}} \right)_j + u_{t-1}, \quad j=1, \dots, n \end{aligned} \quad (27)$$

where  $\mu$  is the adjustment parameter.

Within the UKF process, the battery status and covariance are updated over time. A single-step estimation of the system state  $\hat{u}_t$  and its corresponding covariance  $P_t$  is obtained based on the propagated sigma points.

$$\begin{aligned} \hat{U}_t^j &= \frac{f(U_{t-1}^j, t-1)}{k_{t-1}} \\ \hat{u}_t &= \sum_{j=1}^{2n+1} \omega_j^{(j)} \frac{f(U_{t-1}^j, t-1)}{k_{t-1}} + q_t \\ P_t &= \sum_{j=1}^{2n+1} \omega_j^{(d)} \left( \hat{U}_t^j - \hat{u}_t \right) \left( \hat{U}_t^j - \hat{u}_t \right)^T + Q_t^{(A)} \\ Q_t^{(A)} &= (1 - \eta_q) Q_{t-1}^{(A)} + \eta_q \omega_t \omega_t^T \end{aligned} \quad (28)$$

$Q_t^{(A)} \in R^{n \times n}$  is the present process noise covariance matrix, where  $A$  represents the adaptive update mechanism;  $Q_{t-1}^{(A)}$  is the process noise covariance from the last time step;  $\omega_t$  represents process noise;  $\eta_q \in (0, 1)$  is the update rate, which controls the weight of new information in the update process, usually set to a small value, such as 0.01;  $\omega_t \omega_t^T$  describes the covariance characteristics of the current noise.

By recursively applying state transition functions, it is possible to predict the state distribution at any future time:

$$\begin{aligned} \hat{U}_{t+r}^{(j)} &= \frac{f(\hat{U}_{t+r-1}^{(j)}, t+r-1)}{k_{t+r-1}}, \quad j=1, \dots, 2n+1 \\ \hat{u}_{t+r} &= \sum_{j=1}^{2n+1} \omega_j^{(m)} \hat{U}_{t+r}^{(j)}, \quad j=1, \dots, 2n+1 \\ P_{t+r} &= \sum_{j=1}^{2n+1} \omega_j^{(d)} \left( \hat{U}_{t+r}^{(j)} - \hat{u}_{t+r} \right) \left( \hat{U}_{t+r}^{(j)} - \hat{u}_{t+r} \right)^T \end{aligned} \quad (29)$$

where  $\hat{u}_{t+r}$  is the state mean and  $P_{t+r}$  is the covariance, respectively. The system's predicted state at each time step reflects the most likely estimation. Weights  $\omega_j^{(m)}$  and  $\omega_j^{(d)}$  are utilized in the calculation of the mean and covariance. With iterative application of the transition function, both metrics can be estimated for any future time  $n+r$ .

#### 4. Results and Discussion

This chapter aims to show a comprehensive evaluation of the proposed transfer-based prediction method. By extracting both intuitive and detailed degradation features from the lithium-ion battery domain, this approach seeks to ensure accurate and reliable predictions in the target domain. Specifically, the degradation data of lithium batteries are used as the lithium-ion battery domain, while the degradation process of sodium batteries serves as the target domain. To achieve this, a Dual-DMD model is constructed and trained using the degradation data from eight lithium battery cells. Subsequently, this model is employed to predict the degradation processes of seven sodium battery cells, and the prediction results are thoroughly evaluated and discussed.

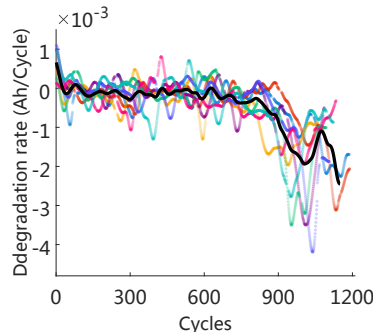


Fig. 5 LIBs differential dynamics

The prediction performance of battery capacity degradation is quantitatively assessed using four commonly adopted metrics: absolute percentage error (PE), MAE, RMSE, and MAPE, which are defined as follows:

$$MAE = \frac{\sum_{i=1}^n |\hat{C}_i - C_i|}{n}, \quad (30)$$

$$RMSE = \sqrt{\frac{\sum_{i=1}^n (\hat{C}_i - C_i)^2}{n}}, \quad (31)$$





$$PE = \left| \frac{\hat{C}_i - C_i}{C_i} \right| \times 100\%, \quad (32)$$

View Article Online  
DOI: 10.1039/D5EB00215J

$$MAPE = \frac{\sum_{i=1}^n \left| \frac{\hat{C}_i - C_i}{C_i} \right|}{n} \times 100\% \quad (33)$$

where  $C_i$  is the measured capacity,  $\hat{C}_i$  represents the estimated capacity at the  $i$ th cycle, and  $n$  is the count of prediction samples. MAE reflects the average absolute deviation between predicted and true capacities, RMSE emphasizes larger errors by squaring them, and MAPE measures the relative prediction error with respect to the actual capacity. These indicators together evaluate how accurately the model estimates the degradation trend.

#### 4.1. RUL prediction results of sodium ion batteries

The proposed method for predicting the capacity aging trajectory is iterative, wherein the model is progressively refined through continuous updates of actual lifespan data and sodium-ion battery characteristics. This iterative process optimizes the prediction outcomes and gradually approaches the battery's actual degradation behavior.

Fig. 6 illustrates the predicted capacity degradation trajectories for SIBs 1 through 7, all of which rely on offline training data from eight LIBs. The yellow line represents the actual measured cycle life, while the blue solid line depicts the predicted future trajectory. The light blue dotted line indicates the predicted confidence interval range, and the purple shaded area denotes the probability density function (PDF) of the battery's RUL prediction. The pink dotted line denotes the end-of-life threshold.

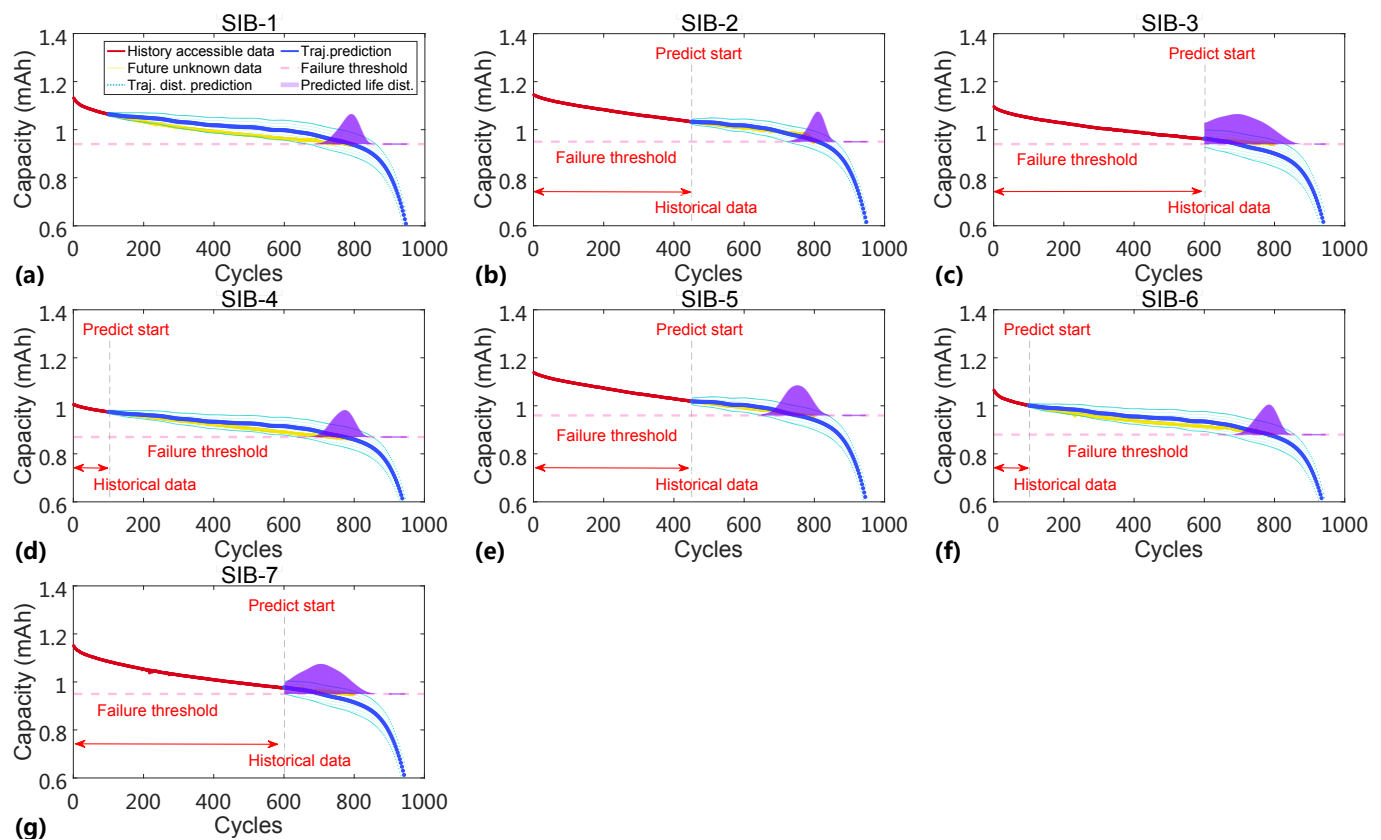


Fig. 6 The capacity prediction results for sodium-ion batteries

To ensure the general applicability of the proposed method, we evaluate its performance across different stages of battery aging. We consider three prediction starting points—namely the 100th, 450th, and 600th cycles, each starting point representing distinct stages of the battery lifecycle. The early stage (100th cycle) exhibited stable performance, while the mid stage (450th cycle) marked the onset of accelerated degradation. The late stage (600th cycle), on the other hand, highlighted a more pronounced acceleration of degradation, accompanied by an increased risk of failure. This varied selection of starting points provides a comprehensive perspective on battery degradation dynamics across different phases of its life.

In battery life prediction, the end-of-life threshold is a critical parameter, representing the point at which a battery is deemed to have reached the end of its usable life. For LIBs, the end-of-life threshold is usually set around 80% of the nominal capacity, reflecting their performance degradation due to capacity loss, internal resistance increase, and other aging factors. This threshold is a widely accepted industry standard, ensuring that batteries are replaced before their performance becomes unacceptable for most applications. In contrast, SIBs, which exhibit slower degradation rates and more stable cycling performance, have a higher end-of-life threshold, often set at 85%. This higher threshold reflects the generally more stable electrochemical behavior of SIBs, which allows them to retain a greater proportion of their capacity over time. By setting the end-of-life threshold at 85%, the prediction model accounts for the extended useful life and more gradual performance decline characteristic of SIBs, providing a more accurate estimation of their operational lifespan.

Fig. 6 presents the predicted degradation trajectories of SIBs 1–7. In this analysis, the prediction starting points are set at the 100th cycle for SIB-1, SIB-4 and SIB-6; the 450th cycle for SIB-2 and SIB-5; and the 600th cycle for SIB-3 and SIB-7. From a more detailed perspective, when the starting point is set at the 100th cycle, the probability density function (PDF) is narrower, and the initial predicted trajectory closely aligns with the actual degradation trajectory. Although there is a slight deviation between the 300th and 680th cycles, the method demonstrates good short-to-medium term accuracy, indicating its applicability even with limited early data. Notably, in Fig. 6b and Fig. 6e, when the prediction starting point is set to the 450th cycle, the battery enters the mid-stage of degradation, where the rate of degradation begins to accelerate. At this stage, the model maintains strong predictive performance benefiting from well-



formed degradation trends that align with the model’s dynamic tracking capability. In contrast, Fig. 6c and Fig. 6g show that when the prediction starts at the 600th cycle, the degradation process becomes more unstable, resulting in a wider predicted confidence interval. This is attributed to the more obvious nonlinear dynamics and accelerated degradation occurring in the later stage of battery life, which introduce greater uncertainty into the model’s predictions. Despite this increased complexity, the model still successfully captures the overall degradation trend within an acceptable uncertainty range, demonstrating its stability under challenging conditions.

Then, to further assess the predictive performance of our method across various initiation points, we present the distribution maps of percentage errors for seven SIBs. These visualizations offer an in-depth evaluation of the method’s accuracy over a range of prediction start times. Fig. 7 illustrates the dynamic fluctuations in the absolute percentage error observed across SIBs 1 through 7. Upon further analysis, a distinct pattern is observed: the maximum deviation between predicted and actual values remains approximately 10%, regardless of the specific characteristics of the individual batteries. The consistent error threshold observed across a range of cells highlights the underlying complexities inherent in battery prediction models. Although the variations are subtle, the 10% error margin consistently exists, emphasizing the challenges and limitations in achieving precise predictions within this field. As the prediction period extends, the prediction error initially decreases before subsequently increasing. For prediction periods up to 200 cycles, the prediction error remains below 16%. However, after 400 cycles, a significant increase in prediction error is observed, although it remains within 15%. These results demonstrate that the proposed method possesses robust long-term predictive capability, making it sufficient to provide detailed battery degradation information across various aging stages for battery management systems.

In this study, battery life is defined as the number of charge-discharge cycles until the capacity falls below 85% of its initial value, while the remaining useful life refers to the difference between the current cycle count and the total battery life. Fig 8 illustrates the predicted RUL for seven SIBs. The light green line denotes the 95% confidence range, the blue dashed line denotes the actual RUL, and the dark green solid line denotes the average RUL at each prediction starting point. As shown in the figure, the predicted RUL closely aligns with the actual values. To quantitatively assess the comprehensive predictive performance of the model, several error metrics are employed, including MAPE, RMSE, and MAE. Lower metric values denote improved prediction accuracy. As depicted in Fig. 9, the proposed approach shows strong predictive performance, with average values of RMSE, MAPE, and MAE of 5.28%, 3.73%, and 4.60%, respectively, over all battery samples.

Fig. 10 and Fig. 11 compare the predicted capacity trajectories of different methods at a prediction starting point of 100 cycles for the source and target domains, respectively. In the lithium-ion battery domain, almost all methods achieve excellent performance on LIB-1. However, the Long Short-Term Memory (LSTM) performs poorly, exhibiting a larger deviation after 200 cycles. In the target domain, only the proposed Dual-DMD method demonstrates strong predictive performance. Using SIB-1 as an illustrative example in Fig. 12, the Dual-DMD method produces a predicted degradation path that not only closely matches the actual trend but also presents a confidence interval that entirely contains the random variation in the measured values. In contrast, other approaches display notable discrepancies between predicted and actual degradation paths, with prediction intervals unable to capture future degradation behavior accurately.

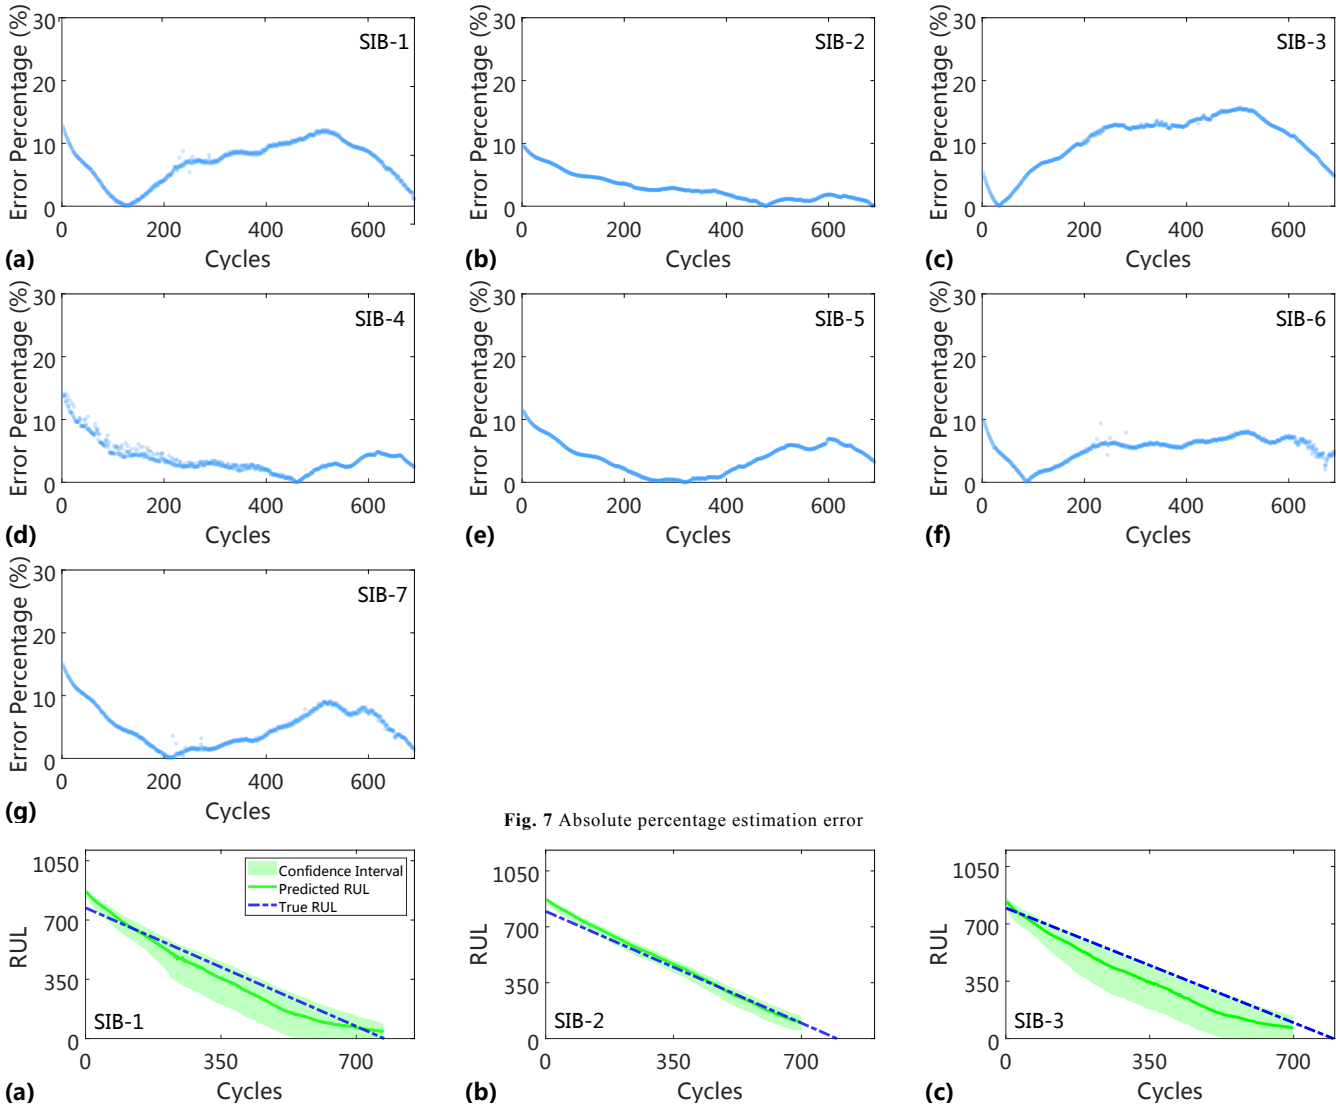
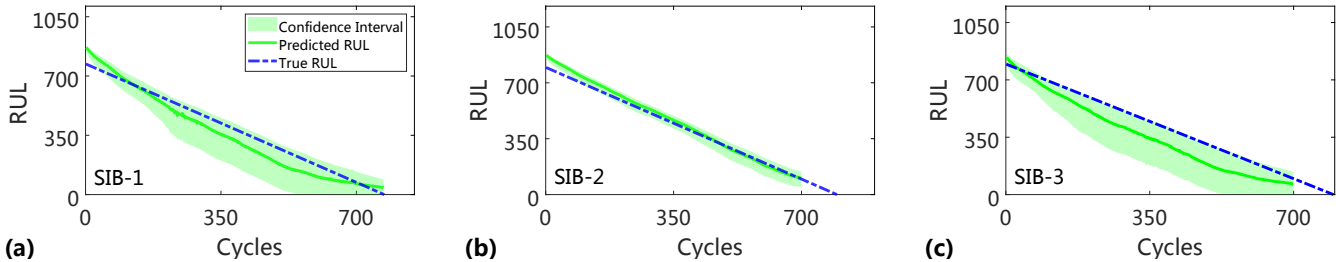


Fig. 7 Absolute percentage estimation error



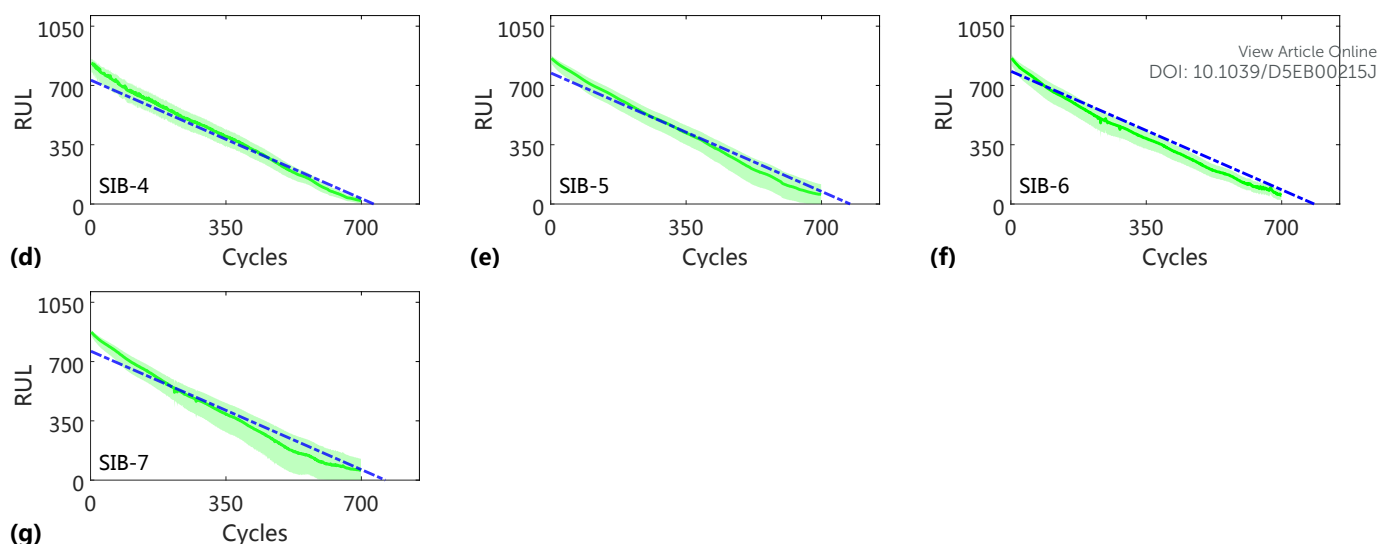


Fig. 8 Remaining life prediction results of the sodium-ion batteries throughout the life cycle

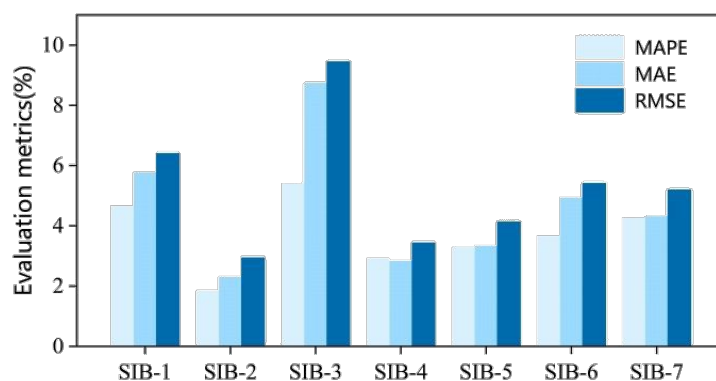
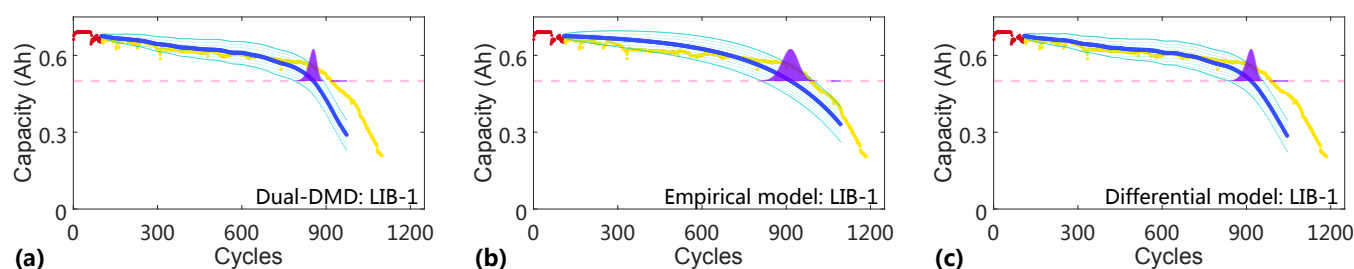


Fig. 9 The RUL estimation metrics (RMSE, MAE, RMSE) results

Fig. 12 present the percentage error in RUL predictions across the entire lifecycle. Among LIBs 1–8 in the lithium-ion battery domain, the performance differences between Dual-DMD, ADMD, and DMD are relatively minor, fluctuating around 8%. In the early stages of prediction, the predictive performance of FNN and ED is relatively stable. However, in the later stages, the predictive performance of FNN and ED may deteriorate, and the error may exceed 50%. The LSTM model shows unstable prediction behavior throughout the entire process, characterized by large fluctuations in the error curve. High variability in prediction results and weak performance in later cycles indicate that the two methods are not suitable for employment. On SIBs 1-7 sodium ion batteries in the target domain, the prediction accuracy of differential model and ADMD has significantly deteriorated, increasing from 8% to over 30%. The predictive performance of FNN and ED for sodium-ion battery is also worse than that for lithium-ion battery. Notably, under the same dataset, our model exhibits superior estimation accuracy in the case of transition driven prediction from lithium-ion battery to sodium-ion battery. The prediction error for each sodium-ion battery is below 5.5%.

Table 1 and Table 2 comprehensively compare the prediction performance of five methods across both source and target domains using MAPE, MAE, and RMSE metrics. In the lithium-ion battery domain, although several methods perform competitively, Dual-DMD consistently achieves lower error rates, demonstrating strong adaptability to lithium-ion battery degradation patterns. In the more challenging target domain involving SIBs, Dual-DMD outperforms all other methods by a significant margin, especially in terms of generalization ability under distribution shift. It yields the lowest MAPE, MAE, and RMSE values across most cases, highlighting its superiority in transfer-driven RUL prediction tasks. Specifically, Dual-DMD achieves an average MAPE of approximately 3.73%, MAE of 4.6%, and RMSE of 5.2% across all batteries, further confirming its robustness and accuracy in cross-domain scenarios.



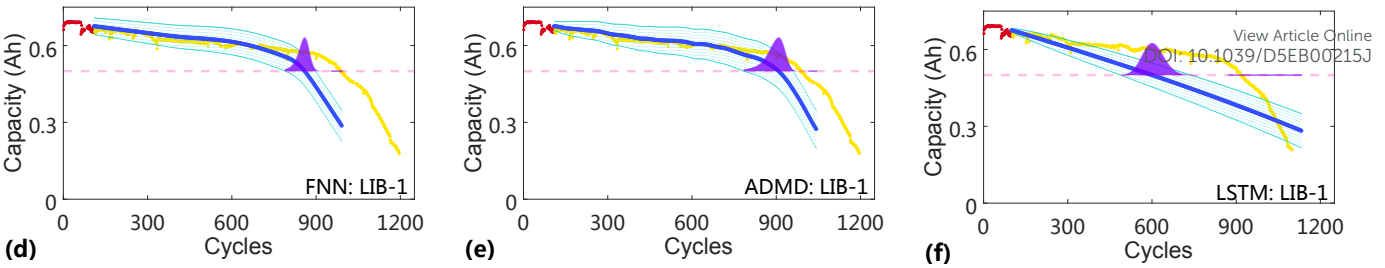


Fig. 10 Comparison of different methods in the lithium-ion battery

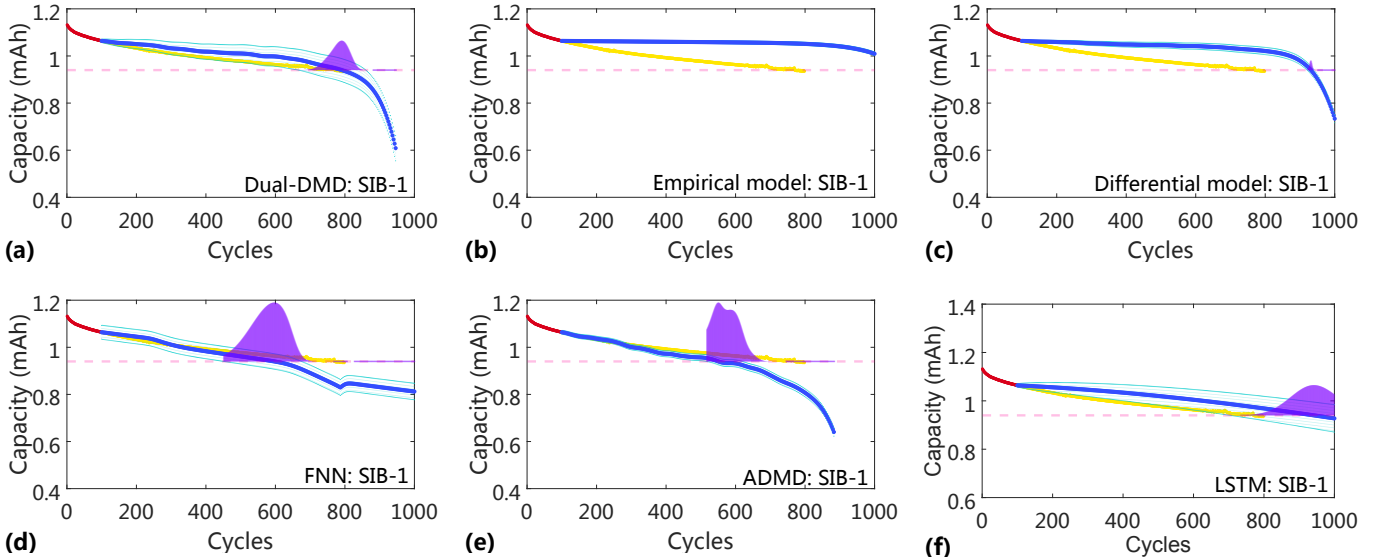
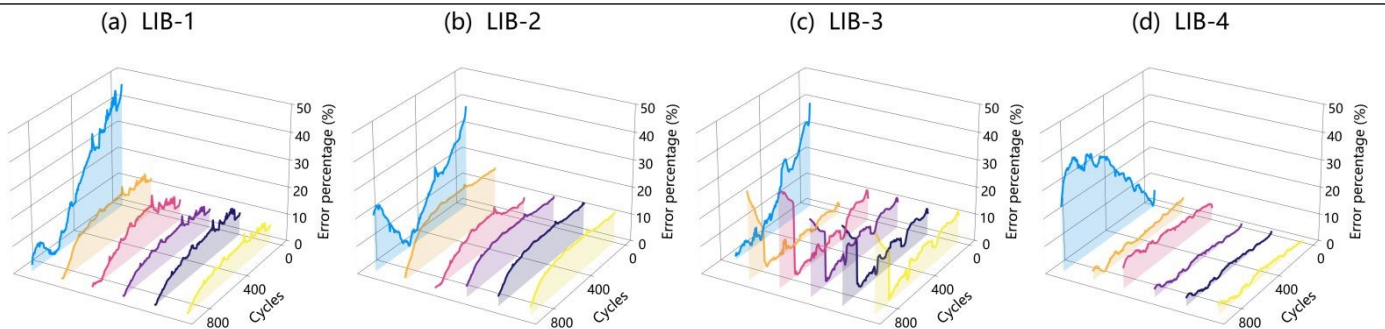


Fig. 11 Comparison of different methods in the sodium-ion batteries

Table 1 Comparison of RUL estimation results (MAPE%).

	Battery	Dual-DMD	ADMD	DMD	ED	FNN	LSTM
Source domain	LIB-1	7.14	8.56	7.08	9.07	14.65	17.92
	LIB-2	9.80	10.16	11.05	9.73	15.61	17.70
	LIB-3	10.51	10.14	6.22	10.79	22.53	9.43
	LIB-4	2.71	1.73	1.37	7.63	4.03	19.85
	LIB-5	3.54	3.36	5.27	8.6	3.08	25.25
	LIB-6	3.83	3.35	3.31	5.22	11.55	18.01
	LIB-7	26.57	29.45	20.10	21.36	18.99	16.86
	LIB-8	6.33	5.64	6.28	12.01	2.86	21.52
Target domain	SIB-1	4.67	22.09	18.32	39.10	19.43	39.39
	SIB-2	1.85	10.99	17.35	43.38	11.72	21.74
	SIB-3	5.42	24.71	8.62	32.92	30.01	30.97
	SIB-4	2.92	18.96	9.52	17.59	21.15	35.10
	SIB-5	3.30	15.97	20.10	52.59	14.91	21.90
	SIB-6	3.67	13.58	14.46	49.11	20.79	23.13
	SIB-7	4.28	16.09	18.57	40.19	18.88	33.78



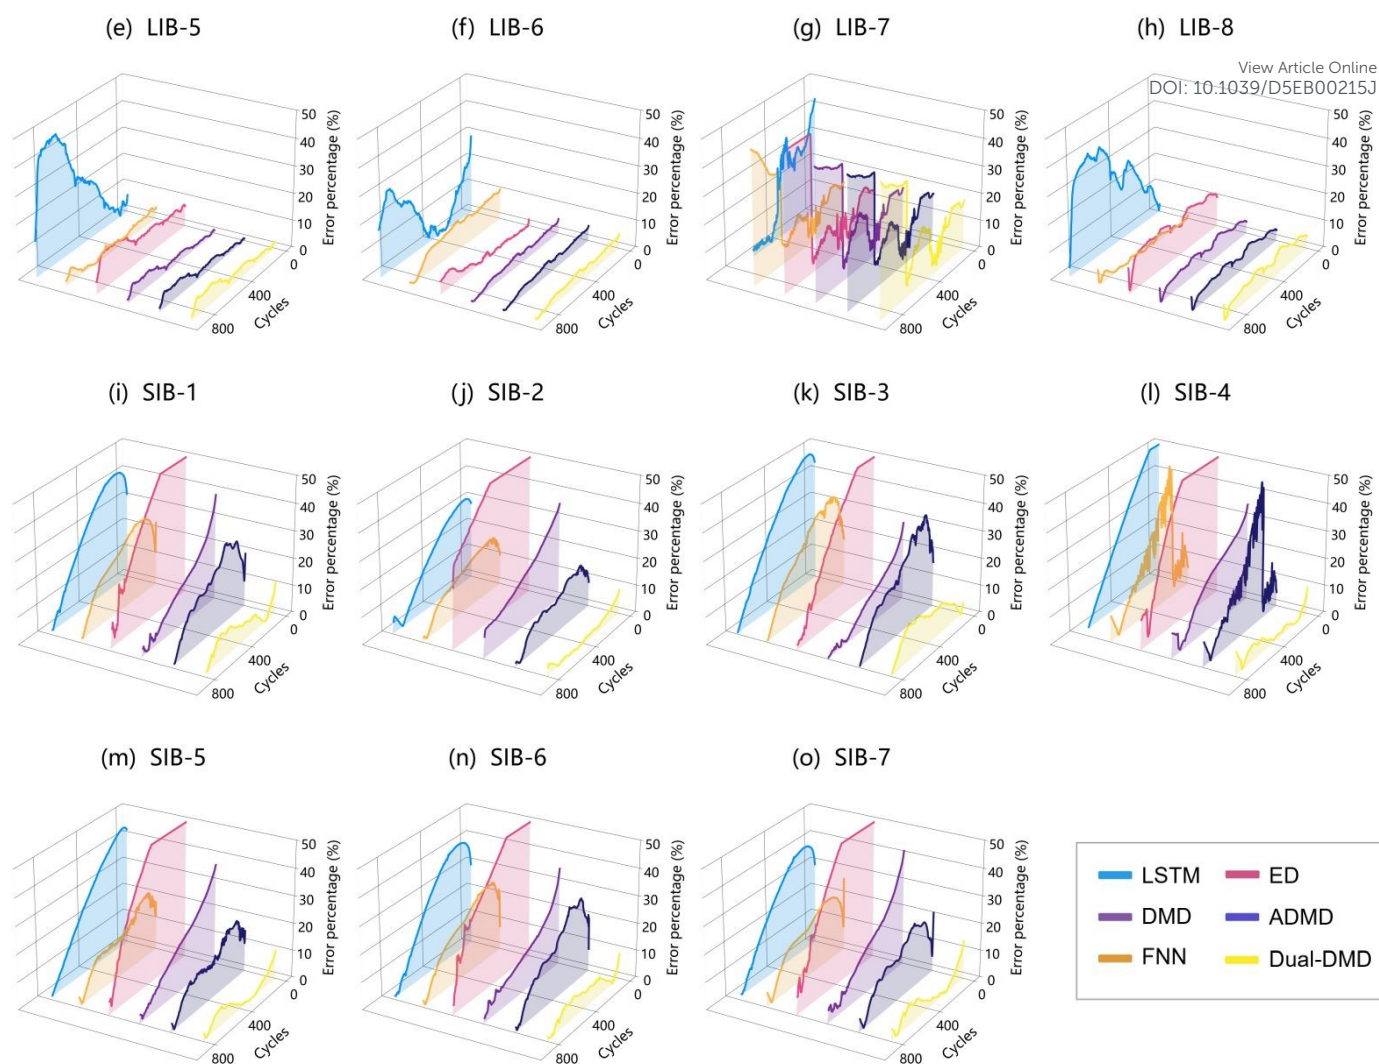


Fig. 12 Comparison of prediction Errors Across Different Methods for LIBs and SIBs

## 5. conclusions

This study develops a new domain transfer strategy for RUL prediction of SIBs by utilizing the rich historical degradation data of LIBs. The primary contribution is the development of a Dual-DMD prediction model that achieves effective transfer from LIBs to SIBs. This model integrates TD-DMD to capture shared degradation dynamics and ADMD to characterize battery-specific degradation behaviors. An online adaptive transfer factor optimization mechanism is further introduced to reduce the distributional discrepancies between the two battery types, thereby enabling accurate and reliable prediction of sodium-ion battery degradation, even during the initial operational phase.

Experimental results using degradation data from both LIBs and SIBs prove the proposed method's performance, as the average absolute percentage error for each SIB degradation trajectory remains below 3.8%. The proposed approach surpasses current methods with aspect to prediction accuracy. Additionally, the method's capability to handle diverse battery types and varying operating conditions offers a significant advancement in the battery health management field. From a practical perspective, this study provides a robust framework for integrating SIBs into renewable energy systems.

However, the study is not without its limitations. The differences in cell formats (pouch full-cells vs. button half-cells) and capacity scales (Ah vs mAh) may introduce variability in degradation mechanisms, which could affect the model's generalizability. The method relies on the availability of comprehensive degradation data from LIBs, which are not ensured to be accessible under practical operating conditions. The generalization of the model across diverse battery types and working environments has yet to be fully achieved. Additionally, the complexity of the degradation process, including non-linear behavior and varying environmental conditions, presents challenges in achieving universally high prediction accuracy. Nonetheless, these differences should not be viewed solely as limitations. In fact, the variations in chemistry, cell configuration, and capacity scale also provide a meaningful opportunity to evaluate the cross-domain transferability of the proposed Dual-DMD framework. The successful application of a LIB-trained model to predict the degradation trajectories of SIB cells demonstrates the framework's robustness and adaptability across distinct electrochemical systems. This finding underscores the potential of transfer learning strategies to bridge data gaps between mature and emerging battery technologies.

Future work should aim to broaden the dataset by adding cycling life data from sodium-ion batteries with different electrode materials and styles, thereby enhancing the model's adaptability across batteries with various chemistries, and further refining the transfer learning mechanism. Exploring the integration of uncertainty quantification techniques, such as Monte Carlo simulations, could also help in addressing the inherent uncertainty in battery lifespan predictions, thus enhancing the reliability of the proposed method in large-scale, real-world deployments.

Table 2 Comparison of RUL estimation results(MAE、RMSE).

Battery	Error (%)	Dual-DMD	ADMD	DMD	ED	FNN	LSTM
Source domain LIB-1	MAE	7.05	8.06	7.32	8.59	12.21	19.57
	RMSE	7.37	8.56	7.70	9.57	12.83	24.10







Target domain	LIB-2	MAE	10.13	11.03	10.41	7.29	14.75	15.77
		RMSE	10.66	11.24	10.86	8.18	15.47	17.92
	LIB-3	MAE	7.77	6.08	7.26	4.61	1.91	13.00
		RMSE	8.25	6.61	7.77	5.71	2.32	16.74
	LIB-4	MAE	2.04	1.29	1.30	8.03	3.81	23.20
		RMSE	2.25	1.55	1.56	8.14	4.02	25.71
	LIB-5	MAE	4.08	3.12	2.82	9.66	2.62	23.66
		RMSE	4.44	3.52	3.24	9.98	2.91	28.14
	LIB-6	MAE	3.23	3.39	3.05	1.99	7.96	13.55
		RMSE	3.44	3.62	3.30	2.78	8.57	16.24
	LIB-7	MAE	13.95	14.10	13.34	9.92	9.97	18.83
		RMSE	14.97	15.02	14.34	10.90	10.60	23.11
	LIB-8	MAE	6.10	5.36	5.74	12.84	1.10	24.69
		RMSE	6.34	5.52	5.93	13.05	1.39	27.02
Target domain	SIB-1	MAE	5.77	18.01	14.04	40.24	20.68	27.29
		RMSE	6.39	19.43	16.77	44.35	22.39	30.29
	SIB-2	MAE	2.30	11.18	18.94	49.68	11.55	18.30
		RMSE	2.93	12.12	20.31	51.06	12.36	21.09
	SIB-3	MAE	8.74	21.16	9.37	33.11	21.61	29.87
		RMSE	9.44	23.15	11.81	37.64	23.39	33.28
	SIB-4	MAE	2.83	17.56	18.32	46.47	18.50	29.24
		RMSE	3.43	22.47	20.35	50.21	22.98	33.37
	SIB-5	MAE	3.33	13.31	17.04	45.06	15.78	25.97
		RMSE	4.12	14.25	19.36	48.59	16.69	29.37
	SIB-6	MAE	4.93	18.10	13.92	41.27	18.85	25.48
		RMSE	5.40	19.85	15.62	43.88	20.45	28.73
	SIB-7	MAE	4.31	14.93	17.25	44.83	18.18	24.94
		RMSE	5.19	16.03	19.90	48.67	19.86	27.77

CRedit authorship contribution statement

**Jiahao He:** Writing– original draft, Validation, Methodology, Conceptualization. **Jiawei Xiang:** Resources, Investigation. **Shulei Chou:** Writing– review & editing, Supervision, Funding acquisition. **Xin Tan:** Writing– review & editing, Supervision, Funding acquisition. **Dongzhen Lyu:** Writing– review & editing, Supervision, Resources, Funding acquisition.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Data availability

The dataset of NCM/graphite cells and sodium-ion batteries used in this work is available at <https://github.com/Jiahao8/Dataset>. Supplementary Information (SI) is available. The SI file includes details of the experimental setup, capacity degradation curves of LIBs and SIBs, and material characterization data (SEM, XRD, TGA, FTIR). Additional figures show the testing platform, electrode morphology, and symbol definitions used in this study.

References

1. X. Q. Zeng, M. Li, D. Abd El-Hady, W. Alshitari, A. S. Al-Bogami, J. Lu and K. Amine, *Advanced Energy Materials*, 2019, **9**.  
2. Y. L. Gao, Z. H. Pan, J. G. Sun, Z. L. Liu and J. Wang, *Nano-Micro Lett.*, 2022, **14**, 49.  
3. B. Diouf and R. Pode, *Renew. Energy*, 2015, **76**, 375-380.  
4. D. Lyu, E. Liu, B. Zhang, E. Zio, T. Yang and J. Xiang, *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, 2025, **55**, 685-698.

5. D. Lyu, G. Niu, E. Liu, B. Zhang, G. Chen, T. Yang and E. Zio, *Reliability Engineering & System Safety*, 2022, **226**.
6. T. M. Gür, *Energy & Environmental Science*, 2018, **11**, 2696-2767.
7. E. A. Olivetti, G. Ceder, G. G. Gaustad and X. K. Fu, *Joule*, 2017, **1**, 229-243.
8. E. Shojaeddini, E. Alonso and N. T. Nassar, *Resour. Conserv. Recycl.*, 2024, **207**, 9.
9. M. Dixit, B. Witherspoon, N. Muralidharan, M. M. Mench, C. B. M. Kweon, Y. K. Sun and I. Belharouak, *Acs Energy Letters*, 2024, **9**, 3780-3789.
10. D. Lyu, G. Niu, E. Liu, T. Yang, G. Chen and B. Zhang, *IEEE Transactions on Industrial Electronics*, 2022, **69**, 5235-5246.
11. E. S. Fan, L. Li, Z. P. Wang, J. Lin, Y. X. Huang, Y. Yao, R. J. Chen and F. Wu, *Chem. Rev.*, 2020, **120**, 7020-7063.
12. D. Lyu, G. Niu, B. Zhang, G. Chen and T. Yang, *IEEE Transactions on Industrial Electronics*, 2021, **68**, 1591-1603.
13. S. Rana, R. Kumar and R. S. Bharj, *Chem. Eng. J.*, 2023, **463**, 29.
14. D. Z. Lyu, B. Zhang, E. Zio and J. W. Xiang, *Cell Rep. Phys. Sci.*, 2024, **5**, 18.
15. Z. Xu and J. Wang, *Advanced Energy Materials*, 2022, **12**, 33.
16. K. Chayambuka, G. Mulder, D. L. Danilov and P. H. L. Notten, *Advanced Energy Materials*, 2020, **10**, 11.
17. P. K. Nayak, L. T. Yang, W. Brehm and P. Adelhelm, *Angew. Chem.-Int. Edit.*, 2018, **57**, 102-120.
18. X. N. Guo, S. Guo, C. W. Wu, J. Y. Li, C. T. Liu and W. H. Chen, *Advanced Energy Materials*, 2023, **13**, 19.
19. Y. Q. Chen, S. M. Yan, L. Chen, D. Zhao, Y. Ding, Y. B. Zeng and Z. X. Chen, *Small*, 2025, **21**, 18.
20. Y. H. Che, X. S. Hu, X. K. Lin, J. Guo and R. Teodorescu, *Energy & Environmental Science*, 2023, **16**, 338-371.
21. H. Rauf, M. Khalid and N. Arshad, *Renew. Sust. Energy Rev.*, 2022, **156**, 27.
22. L. Sugiarto, Z. J. Huang and Y. C. Lu, *Energy & Environmental Science*, 2025, **18**, 2511-2523.
23. H. Q. Li, Z. X. Zhang, T. M. Li and X. S. Si, *Mech. Syst. Signal Proc.*, 2024, **209**, 32.
24. L. Q. Y. Xu, F. Wu, R. J. Chen and L. Li, *Energy Storage Mater.*, 2023, **59**, 34.
25. W. Deng, H. Le, K. T. P. Nguyen, C. Gogu, K. Medjaher, J. Morio and D. Wu, *Applied Energy*, 2025, **384**, 125314.
26. A. H. Tang, Y. C. Xu, Y. Z. Hu, J. P. Tian, Y. W. Nie, F. W. Yan, Y. Tan and Q. Q. Yu, *Applied Energy*, 2024, **370**, 16.
27. M. F. Ng, J. Zhao, Q. Y. Yan, G. J. Conduit and Z. W. Seh, *Nature Machine Intelligence*, 2020, DOI: 10.1038/s42256-020-0191-4, 1.
28. C. Ferreira and G. Goncalves, *J. Manuf. Syst.*, 2022, **63**, 550-562.
29. M. W. Ahmad, J. Reynolds and Y. Rezgui, *J. Clean Prod.*, 2018, **203**, 810-821.
30. P. S. Yu, T. C. Yang, S. Y. Chen, C. M. Kuo and H. W. Tseng, *J. Hydrol.*, 2017, **552**, 92-104.
31. L. Alzubaidi, J. L. Zhang, A. J. Humaidi, A. Al-Dujaili, Y. Duan, O. Al-Shamma, J. Santamaria, M. A. Fadhel, M. Al-Amidie and L. Farhan, *J. Big Data*, 2021, **8**, 74.
32. S. F. Ahmed, M. S. B. Alam, M. Hassan, M. R. Rozbu, T. Ishtiak, N. Rafa, M. Mofijur, A. Ali and A. H. Gandomi, *Artif. Intell. Rev.*, 2023, **56**, 13521-13617.
33. Q. Mayemba, A. Li, G. Ducret and P. Venet, *J. Energy Storage*, 2024, **83**, 25.
34. K. A. Severson, P. M. Attia, N. Jin, N. Perkins, B. Jiang, Z. Yang, M. H. Chen, M. Aykol, P. K. Herring, D. Fraggadakis, M. Z. Bazan, S. J. Harris, W. C. Chueh and R. D. Braatz, *Nat. Energy*, 2019, **4**, 383-391.
35. D. Lyu, E. H. Liu, H. L. Chen, B. Zhang and J. W. Xiang, *Applied Energy*, 2025, **377**, 12.
36. W. J. Li, C. Han, G. Cheng, S. L. Chou, H. K. Liu and S. X. Dou, *Small*, 2019, **15**, 21.
37. R. G. Cao, K. Mishra, X. L. Li, J. F. Qian, M. H. Engelhard, M. E. Bowden, K. S. Han, K. T. Mueller, W. A. Henderson and J. G. Zhang, *Nano Energy*, 2016, **30**, 825-830.
38. P. J. Schmid, *Annu. Rev. Fluid Mech.*, 2022, **54**, 225-254.
39. S. S. Cao, Z. F. Zhang, Q. Z. Zhang and Y. S. He, *Nonlinear Dyn.*, 2024, **112**, 11265-11281.
40. Y. Yuan, K. Zhou, W. Zhou, X. Wen and Y. Liu, *Physics of Fluids*, 2021, **33**.
41. M. Khodarahmi and V. Maihami, *Archives of Computational Methods in Engineering*, 2023, **30**, 727-747.
42. W. D. Wang, X. T. Wang, C. L. Xiang, C. Wei and Y. L. Zhao, *Ieee Access*, 2018, **6**, 35957-35965.



Data availability

The dataset of NCM/graphite cells and sodium-ion batteries used in this work is available at <https://github.com/Jiahao8/Dataset>. Supplementary Information (SI) is available. The SI file includes details of the experimental setup, capacity degradation curves of LIBs and SIBs, and material characterization data (SEM, XRD, TGA, FTIR). Additional figures show the testing platform, electrode morphology, and symbol definitions used in this study.

