Journal of Materials Chemistry C

CORRECTION

View Article Online
View Journal | View Issue

Open Access Article. Published on 10 June 2025. Downloaded on 8/1/2025 5:00:39 PM.
This article is licensed under a Creative Commons Attribution 3.0 Unported Licence.

Check for updates

Cite this: *J. Mater. Chem. C*, 2025, **13**, 12565

Correction: Impact of oxygen vacancy reduction on the dielectric, energy storage, and electrocaloric properties of annealed BCZT ceramic

Vartika Khandelwal,[a] Piyush Siroha,[a] Soumyaranjan Barik,[a] S. Satapathy,[b] Sonali Pradhan,[b] Ashok Kumar,[c] Surendra Kumar,[d] Narendra Jakhar,[e] Ramovatar*[a] and Neeraj Panwar*[f]

DOI: 10.1039/d5tc90092a

rsc.li/materials-c

Correction for 'Impact of oxygen vacancy reduction on the dielectric, energy storage, and electrocaloric properties of annealed BCZT ceramic' by Vartika Khandelwal *et al.*, *J. Mater. Chem. C*, 2025, **13**, 10178–10193, **https://doi.org/10.1039/D5TC00115C**.

In the published article, the Fig. 2a and b inset images were unfortunately omitted. The corrected Fig. 2 is as shown here.

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.

[a] *Department of Physics and Astrophysics, Central University of Haryana, Jant-Pali, Mahendergarh 123031, Haryana, India. E-mail: ramovatar@cuh.ac.in*
[b] *Laser Biomedical Applications Division, Raja Ramanna Centre for Advanced Technology, Indore 452013, Madhya Pradesh, India*
[c] *CSIR-National Physical Laboratory, Dr K. S. Krishnan Marg, Delhi-110012, India*
[d] *Department of Physics, Shivaji College, University of Delhi, New Delhi 110027, India*
[e] *Department of Physics, University of Rajasthan, Jaipur 302004, India*
[f] *Department of Physics, Chaudhary Charan Singh University Meerut, Uttar Pradesh 250004, India. E-mail: npanwar.phy@ccsuniversity.ac.in*

Open Access Article. Published on 10 June 2025. Downloaded on 8/1/2025 5:00:39 PM.
This article is licensed under a Creative Commons Attribution 3.0 Unported Licence.

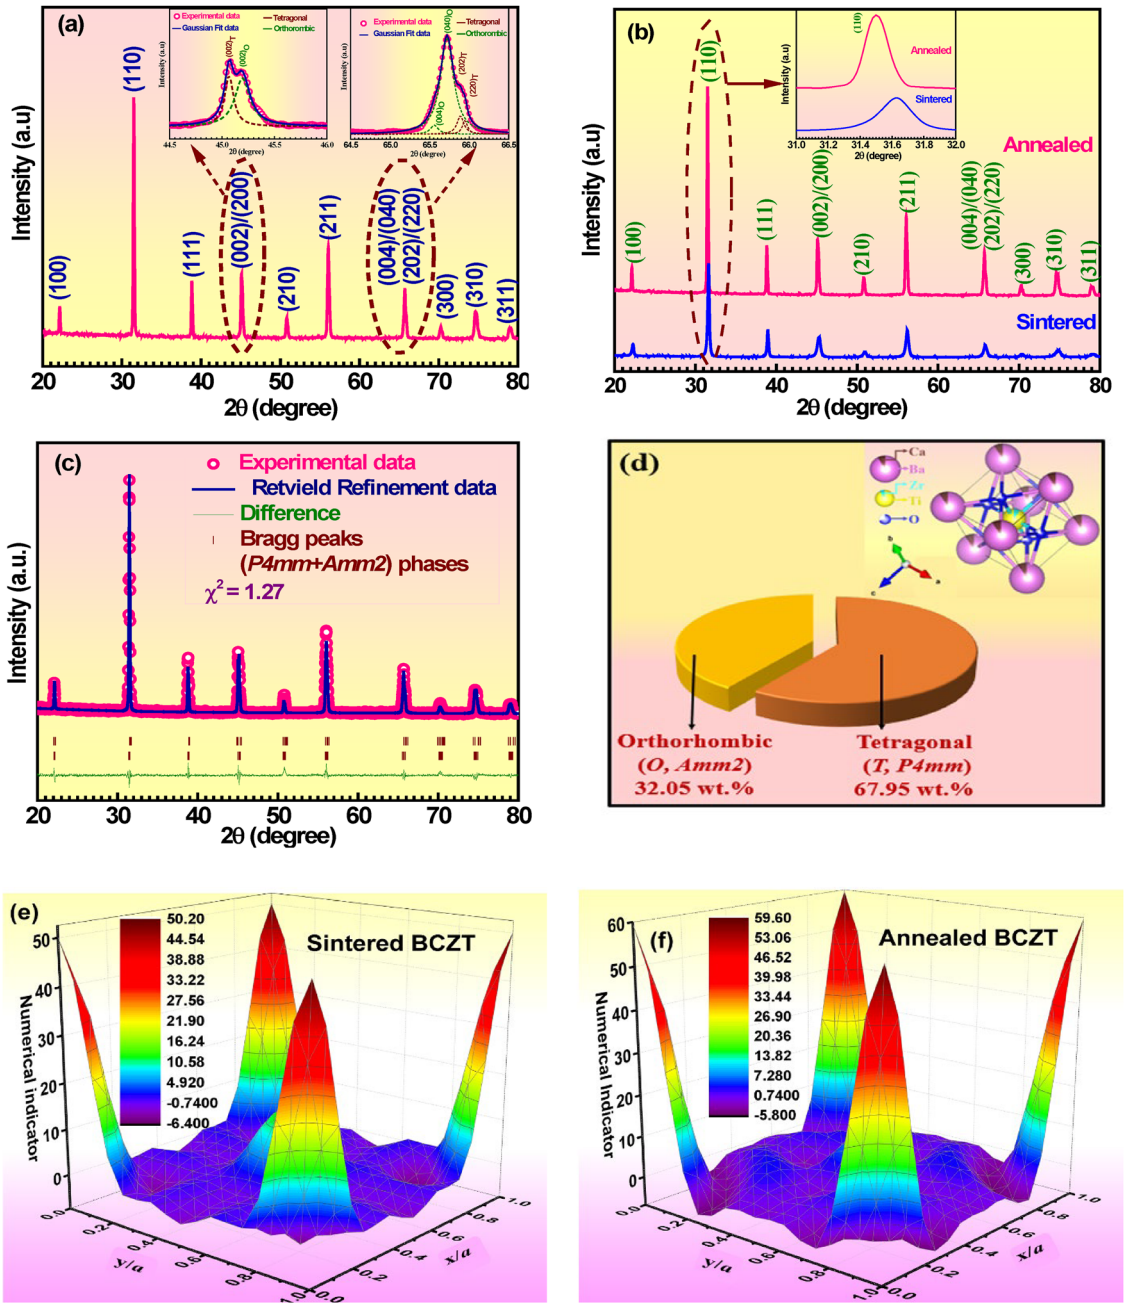

Fig. 2 (a) The XRD pattern, its insets show the Gaussian fitting at the 2θ range 44.5°–46° and 64.5°–66.5° of the annealed BCZT ceramic. (b) A comparison of the XRD pattern of sintered and annealed BCZT samples, (c) the Rietveld refinement pattern, (d) a 3-D pie chart of wt% phase composition, the inset shows the crystal structure of the annealed sample, and (e) and (f) an electron density graph of sintered and annealed BCZT ceramics, respectively.

 This journal is © The Royal Society of Chemistry 2025