



Cite this: *Environ. Sci.: Atmos.*, 2026, 6, 338

Emissions of volatile organic compounds from industrial sources and their effects on ozone formation in Wuhan, China

Yuhan Xiang,^a Tianqi Zhang,^a Yanfen Hao,^b Beirou Yang,^a Tiantian Han,^a Jing Xu,^c Wenjuan Li,^a Pu Wang^{ab} and Yong Liang^a

Emissions of typical forty-eight volatile organic compounds (VOCs) were investigated inside sixteen industries, including the vehicle-related industries and commodity manufacturing industries located in Wuhan, China. The total concentrations of the twenty-seven detectable VOCs ranged from 0.4 to 99.8 $\mu\text{g m}^{-3}$, with vehicle-related industries (1.3–99.8 $\mu\text{g m}^{-3}$) emitting more VOCs than the commodity manufacturing industry (0.4–20.0 $\mu\text{g m}^{-3}$). Data comparison between organized and fugitive emission groups revealed that the VOCs emitted from organized vehicle-related industries implementing the zeolite rotary concentrator system coupled with the regenerative thermal oxidizer catalytic combustion technology (0.04–31.5 $\mu\text{g m}^{-3}$) could significantly meet the national emission standards (500–40000 $\mu\text{g m}^{-3}$). This technology was proven to have a remarkable effect on reducing benzene-based VOCs, which are important precursors of ozone (O_3). A significant decreasing trend of O_3 levels was observed with the increase in the distance around these vehicle-related industries based on the data from the monitoring and control platform of small air quality monitoring stations of Wuhan. The total O_3 formation potential (OFP) values calculated based on these twenty-seven VOCs in the vehicle-related industries were 5.3–646.8 $\mu\text{g m}^{-3}$, in which aromatic hydrocarbons were the most reactive analogues, with a cumulative share of 93.0% of the O_3 formation potential. 1,3,5-Trimethylbenzene and *o*-xylene, which together account for 52.3% of the total OFP values, should be identified as the priority pollutants to be controlled in the vehicle-related industry. This study emphasizes the contribution of VOCs emitted from vehicle-related industries to ozone pollution and further provides ideas for prioritizing industrial VOCs for improving regional O_3 control strategies.

Received 9th September 2025
Accepted 24th November 2025

DOI: 10.1039/d5ea00109a

rsc.li/esatmospheres

Environmental significance

The increasingly severe ozone (O_3) pollution poses a serious threat to ecosystems and public health. Volatile organic compounds (VOCs), released from industrial emission sources, are the main precursors for ozone formation, so it is crucial to identify key VOC emission sources and implement effective control measures. This study has precisely observed the concentrations and analogue profiles of forty-eight VOCs emitted from sixteen typical vehicle-related and commodity manufacturing industries in Wuhan, central China. The impact of vehicle-related industries on the regional O_3 pollution has been stressed, and O_3 formation potential values have been further evaluated to identify the crucial VOC analogues. These findings provide direct scientific evidence for feasibly controlling VOC emissions and O_3 pollution to alleviate the ecological hazards.

1. Introduction

Ozone (O_3) is an important trace gas that regulates temperature and climate in the lower atmosphere.¹ However, excessive atmospheric O_3 can adversely affect human health and

vegetation due to its strong oxidizing properties.^{1,2} Previous studies have assessed the association between long-term O_3 exposure and mortality, particularly cardiovascular disease mortality, which caused 17.8 million deaths in 2017, accounting for 31.8% of all-cause deaths globally.² In addition, excessive atmospheric O_3 can trigger plant oxidation, thereby disrupting photosynthesis^{1,3} and reducing gas exchange within plants, further retarding natural vegetation and crop growth.^{1,4,5} Therefore, there is an increasing concern about the concentration of O_3 in the air. It has been observed that the industrialization of society is one of the main reasons for the increasing number of O_3 pollution incidents.⁵ Volatile organic compounds (VOCs),

^aHubei Key Laboratory of Environmental and Health Effects of Persistent Toxic Substances, School of Environment and Health, Jiangnan University, Wuhan, 430056, China. E-mail: Hao_YF@jhun.edu.cn

^bHubei Key Laboratory of Industrial Fume & Dust Pollution Control, Jiangnan University, Wuhan, 430056, China

^cAdvanced Interdisciplinary Institute of Environment and Ecology, Beijing Normal University, Zhuha, 519087, China



defined as a class of compounds with high vapor pressure, low water solubility, and photochemical reactivity, have been reported to be the key precursors of O₃ in most industrial regions.⁶ Increasing VOCs emitted in industrial areas might cause excessive O₃ in the air,⁵ and the effect of VOC emission control will directly affect the control and prevention of O₃ pollution.

The emission sources of atmospheric VOCs have been divided into two categories: natural sources and anthropogenic sources.⁷ Anthropogenic sources are generally regarded as the main source of atmospheric VOC emissions, with their increasing emissions and high potential in forming O₃. Previous studies have shown that in typical industrial cities, the concentration level of VOCs from anthropogenic sources can reach 3.4 times higher than that of natural sources, and industries are the main part of the anthropogenic sources.⁸ The emission characteristics of these VOCs from anthropogenic sources show obvious industry-specificity due to the significant differences in the production processes, energy structures, and product characteristics of different industries.⁹ A previous study reported the compositions of VOCs emitted from various industries in Zhengzhou City, China. It was observed that VOCs emitted by packaging and printing enterprises are mainly composed of oxygenated VOCs (OVOCs), of which ethyl acetate and isopropanol together account for more than 93.1%; whereas, aromatic hydrocarbons dominate the VOCs emitted from the automotive, furniture, and paint manufacturing enterprises, accounting for 33.5–90.0%, with *m/p*-xylene, *o*-xylene and ethylbenzene being the main constituents. Dominant analogues were halogenated hydrocarbons (52.3%), alkanes (28.8%), and aromatic hydrocarbons (28.5%) in food processing enterprises, rubber enterprises, and graphite and carbon enterprises, respectively.¹⁰ Given the different O₃ formation potentials (OPF) of various VOC analogues, the diverse analogue profiles of VOCs in different industries might have different contributions to O₃ pollution. This indicates that conducting precise research on VOC emissions in typical industries and further evaluating their OPF is of vital importance.

Previous research on VOCs mainly focused on the emission inventory and treatment methods of VOCs.^{11–13} Studies on the impact of industrial source VOC emissions on atmospheric O₃ pollution mainly concentrated on simulation analysis based on large-scale environmental monitoring data.¹⁴ There were a few domestic studies on the emission profiles of industrial VOCs in specific cities, including Beijing,¹⁵ Shanghai,¹⁶ Nanjing,¹⁶ Chengdu,¹⁷ Zhengzhou,¹⁰ Hangzhou,¹⁸ Yichang¹⁹ and Chongqing.²⁰ Given the significant differences in the pillar industries in different cities, there is limited data on the VOC emission profiles in Wuhan, which is one of the typical industrial cities in China.²¹ This could hinder the evaluation of VOC emissions in China, which would further have a negative impact on the formulation of legislation controlling regional O₃ pollution.¹⁸ Therefore, this study aims to investigate the emission patterns and potential O₃ formation of VOCs in typical industries in Wuhan. Wuhan is located in the central part of China, where O₃ pollution might cause adverse effects on a large scale. Sixteen typical VOC-emitting enterprises were selected in the key

industrial area of Wuhan, including vehicle-related industries, as well as commodity manufacturing industries. VOC emission data were collected by measurement inside these enterprises, emission profiles between organized and fugitive emission groups were observed, and OPF values were further calculated to evaluate the impacts of these enterprises on O₃ pollution. The objectives of this study were as follows: (1) analyze the concentrations and analogue compositions of VOCs emitted from typical industries in Wuhan; (2) identify the effects of VOC treatment equipment in organized emission groups; (3) reveal the impacts of various industries on the regional O₃ pollution and specify the specific VOC analogues that need to be strictly controlled. Therefore, this study is of great significance for controlling VOC emissions and improving O₃ pollution in megacities.

2. Materials and methods

2.1. Sample collection

The industrial development of Hubei Province has been rapid,²² with the industrial growth increasing by 14.8% in 2021. This growth rate is ranked first in central China and second overall in China.²³ The sixteen selected industries in this study were located in a typical industrial region in Wuhan, Hubei Province, including nine vehicle-related industries and seven commodity manufacturing industries. Table S1 shows the basic information from the nine vehicle-related and seven commodity manufacturing industries. The sampling campaign was carried out under the HJ 644-2013 Chinese standard method during the period of July 19-21, 2021. The detailed information for the 16 sampling points is shown in Table S2. In brief, each adsorption tube was aged at 350 °C and 40 mL min⁻¹ for 15 minutes to remove interfering substances before sampling. A TH-110E air sampler (Tianhong Inc, Wuhan, China) was used to collect atmospheric VOCs inside the industries, and the sampling rate and duration were set at 100 mL min⁻¹ and 20 minutes, respectively. Two parallel samples, as well as one field blank sample, were collected in each sampling site, and forty-eight sampling tubes in total were collected in sixteen industries. After sampling, the adsorption tube was sealed in a cleaned sleeve, wrapped with aluminum foil and transported to the laboratory for instrumental analysis.

2.2. Instrumental analysis

There are currently over a thousand known analogues of VOCs,²⁴ which could be classified into four major categories: aromatic hydrocarbons, halogenated aromatic hydrocarbons, haloalkanes, and halogenated olefins. The selection of target analogues in this study comprehensively considered these four major categories, the China national standards for VOCs emissions,²⁵ as well as the local VOC emissions characteristics of Wuhan.²⁶ In addition, the production raw materials, process features, and VOC emission characteristics of these representative industries were also taken into consideration. Therefore, forty-eight VOC analogues were selected as the target substances, which cover all four major categories (aromatic



hydrocarbons, halogenated aromatic hydrocarbons, haloalkanes, and halogenated olefins) and the main emitted analogues from these industries. It was supposed that the observation in this study could represent the emission characteristics of VOCs from related industries to some extent. The concentrations of forty-eight typical VOCs in the sampling tubes were measured based on the EPA method 8260D.²⁷ The individual compounds are as follows: *trans*-1,2-dichloroethene, 1,1-dichloroethene, *cis*-1,2-dichloroethane, bromochloromethane, chloroform, 1,1,1-trichloroethene, 1,1-dichloropropene, 1,2-dichloroethene, benzene, trichloroethene, 1,2-dichloropropane, methylene bromide, bromodichloromethane, *cis*-1,3-dichloropropene, toluene, *trans*-1,3-dichloropropene, 1,1,2-trichloroethane, 1,3-dichloropropane, tetrachloroethene, chlorodibromomethane, 1,2-dibromoethane, chlorobenzene, 1,1,1,2-tetrachloroethane, ethylbenzene, *m* + *p*-xylene, *o*-xylene, styrene, bromoform, isopropylbenzene, 1,1,2,2-tetrachloroethane, bromobenzene, 1,2,3-trichloropropane, propylbenzene, 2-chlorotoluene, 1,3,5-trimethylbenzene, *tert*-butylbenzene, 1,2,4-trimethylbenzene, *sec*-butylbenzene, 1,3-dichlorobenzene, *p*-cymene, 1,4-dichlorobenzene, 1,2-dichlorobenzene, butylbenzene, 1,2-dibromo-3-chloropropane, 1,2,4-trichlorobenzene, hexachloro-1, 3-butadiene, naphthalene, and 1,2,3-trichlorobenzene. All these forty-eight compounds are regarded as the common VOCs emitted from industries and have been identified as contributors to the O₃ pollution.

The internal standard (4-bromofluorobenzene, BFB) was injected into the adsorption tube before the thermal desorption. All target VOCs were then desorbed by a multi-tube thermal desorber (TD100, Makers International, UK) and analyzed by the gas chromatography-mass spectrometer (TSQ8000Evo, Thermo Fisher Scientific). DB-624 capillary chromatography columns were used for the separation of VOCs (30 m × 0.25 mm i.d. × 1.4 μm film thickness). The detailed temperature programming was provided in the EPA method 8260D.²⁷

2.3. QA & QC

The concentrations of VOCs in the samples were calculated based on the internal standard method. The calibration curves were developed by using five standard samples (5, 10, 25, 50, 100 mg L⁻¹) comprising forty-eight VOCs. One laboratory blank was added after every ten samples. The R² values of the curve for each VOC were ≥0.99, and the deviation of BFB concentration in both standard and collected samples was less than 6%. The method detection limit (MDL) was defined as the field or laboratory blank sample when the targets were detectable, and was triple the signal-to-noise ratio values when the targets were undetectable. If all VOCs were detected in the blanks and were less than 10% of those in the collected samples, the final measurement results were obtained by subtracting the blank samples from the parallel samples.

2.4. Data analysis

The OFP value is an important index for evaluating the contribution of VOC analogues to O₃ generation. It is calculated based on the

concentrations and maximum incremental reactivity (MIR) of each VOC. The MIR values used for the calculation in this study were obtained in a previous study;²⁸ the calculation is as follows:

$$\text{OFP}_i = \text{MIR}_i \times \text{Con}_i$$

OFP_{*i*} is the OFP of a specific VOC analogue (*i*, μg m⁻³), MIR_{*i*} is the MIR coefficient of a specific VOC analogue, Con_{*i*} is the measured concentration of a specific VOC analogue (μg m⁻³).

3. Results and discussion

3.1. Concentration and characterization of VOCs

Forty-eight VOCs emitted from operating vehicle-related industries and other commodity manufacturing industries in the typical industrial area of Wuhan were analyzed, in which twenty-seven analogues were detectable. These detectable VOC analogues were classified into four major categories: aromatic hydrocarbons, halogenated aromatic hydrocarbons, haloalkanes and halogenated olefins (Fig. 1). The concentrations of twenty-seven VOCs (C_{Σ27VOCs}) ranged from 0.4 μg m⁻³ to 100.0 μg m⁻³. Among them, the C_{Σ27VOCs} observed from the vehicle-related industries (1.3–100.0 μg m⁻³) are nearly an order of magnitude higher than those from the commodity manufacturing industry (0.4–20.0 μg m⁻³) (Fig. 1 and Table 1). Within these typical nine vehicle-related industries, the C_{Σ27VOCs} were dominated by aromatic hydrocarbons, with an average concentration of 30.8 μg m⁻³, accounting for 72.4% of C_{Σ27VOCs}. Haloalkanes were the second largest group, with an average concentration of 6.6 μg m⁻³ (15.5%), followed by halogenated aromatic hydrocarbons (4.9 μg m⁻³, 11.4%) and halogenated olefins (0.3 μg m⁻³, 0.7%). *o*-Xylene (7.2 μg m⁻³) was the most predominant analogue emitted from vehicle-related industries, accounting for 18.2% of the C_{Σ27VOCs}, followed by *sec*-butylbenzene (6.6 μg m⁻³), 1,3,5-trimethylbenzene (5.1 μg m⁻³), 1,2,3-trichloropropane (5.1 μg m⁻³) and 2-chlorotoluene (4.8 μg m⁻³), which respectively account for 11.7%, 11.1%, 11.0, and 11.64% of C_{Σ27VOCs}. Previous studies have shown that coating and spraying are the crucial processes that release considerable VOCs.²² The solvent-based materials used in these two processes are mainly constituted of C7–C8 aromatic hydrocarbons.^{11,29} Therefore, the analogue profiles investigated in the vehicle-related industries were mainly attributed to the coating and spraying processes.

For the commodity manufacturing industries, different emission profiles were observed. The C_{Σ27VOCs} of four major categories were in the order of haloalkanes (2.7 μg m⁻³, 65.80%) > aromatic hydrocarbons (0.7 μg m⁻³, 16.3%) = halogenated olefins (0.7 μg m⁻³, 16.3%) > halogenated aromatic hydrocarbons (0.1 μg m⁻³, 1.7%). Moreover, the 1,2,3-trichloropropane (2.6 μg m⁻³, 14.6%), *trans*-1,3-dichloropropene (0.6 μg m⁻³, 20.4%), *o*-xylene (0.4 μg m⁻³, 23.9%), bromodichloromethane (0.09 μg m⁻³, 4.6%), and butylbenzene (0.1 μg m⁻³, 4.4%) were the top five VOC analogues emitted from other commodity manufacturing industries. Different analogue profiles of VOCs might be associated with the different raw materials used in



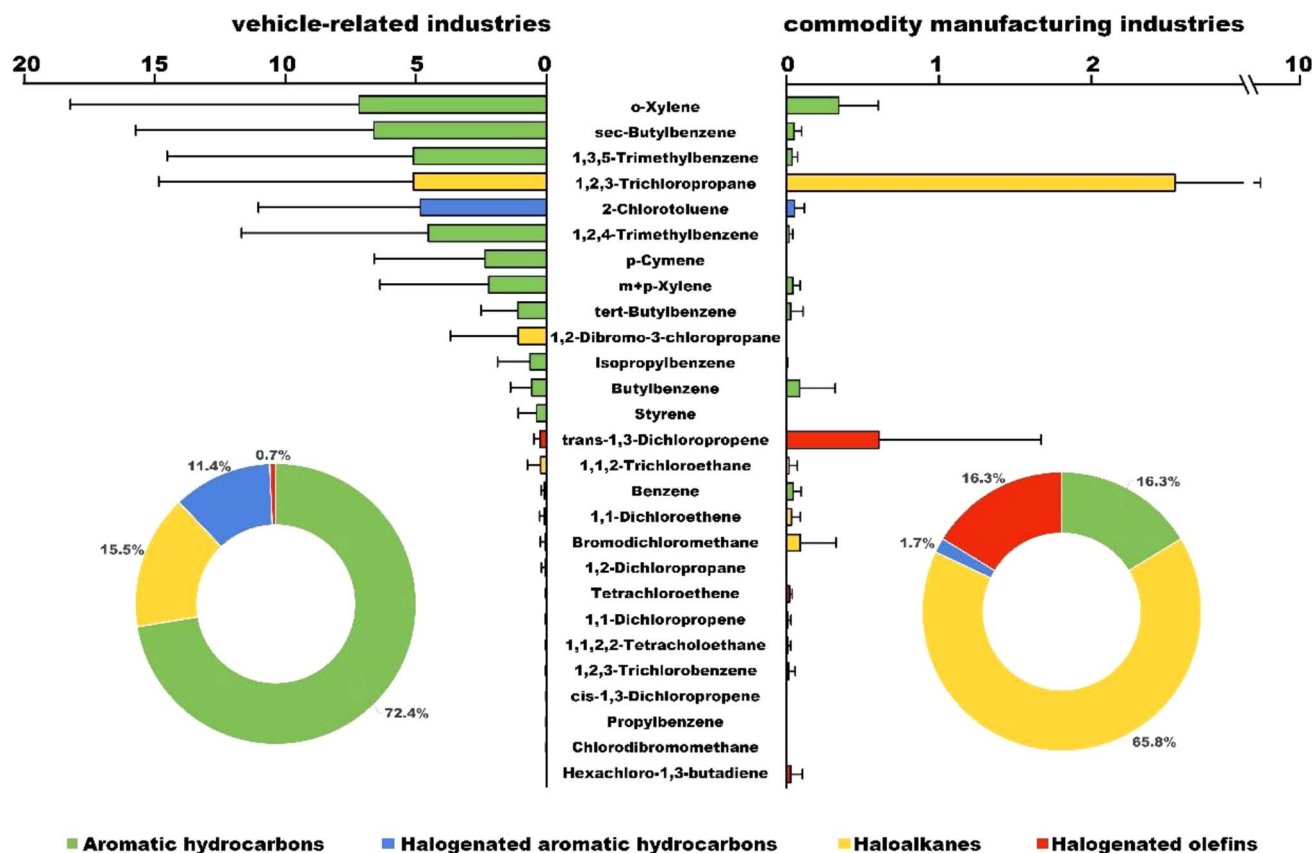


Fig. 1 Concentrations ($\mu\text{g m}^{-3}$) of individual analogues and the proportions (%) of major categories emitted from vehicle-related industries and commodity manufacturing industries.

these industries. Among them, the dominant analogue in the packaging enterprise was 1,2,3-trichloropropane ($17.5 \mu\text{g m}^{-3}$, 87.9%), whereas that in the clothing enterprise was *trans*-1,3-dichloropropene ($2.9 \mu\text{g m}^{-3}$, 84.2%). Previous studies have shown that the main emission source of VOCs in the packaging enterprise was related to the use of printing inks,³⁰ whereas that in the clothing enterprise was the polyester products,³¹ which are supposed to be related to the processes of printing and dyeing, respectively.

It was found that there were relatively limited studies on the analogue profiles of VOCs emitted from typical industries in Wuhan, which hindered the data comparison. Therefore, previous monitoring data¹⁹ in other industrial areas was applied for comparison. It was observed that the VOC emission profiles previously reported in Yichang (Hubei Province) were similar to those in this study, whose sampling sites were also set in Hubei Province. VOC emission profiles obtained in Yichang were based on monitoring data, which were affected by various industries. It was previously observed that the percentage values of halogenated hydrocarbons (32.6% to 80.7%) were higher than those for aromatic hydrocarbons (33.1% to 55.1%) from commodity manufacturing industries in Yichang.¹⁹ These emission profiles were similar to those from commodity manufacturing industries in this study, with higher halogenated hydrocarbons (19.3% to 94.8%) than aromatic hydrocarbons (5.2% to 69.8%). For the VOC emission profiles observed

in industrial areas in other cities, similar high percentage values of aromatic hydrocarbons from vehicle-related industries were also observed in Chongqing,²⁰ Nanjing,¹⁶ Zhengzhou,¹⁰ Beijing,¹⁵ and Shanghai¹⁶ (27.1–90%). The significant commonalities in the emission profiles of industrial VOCs in different regions not only verified the validity of the data in this study, but also stressed the importance of providing a scientific basis for formulating regional coordinated VOC control strategies. In addition, aromatic hydrocarbons, especially the benzene series of compounds, were previously identified to have a significant contribution to the O_3 pollution and adverse impact on public health.³² The higher percentage values of aromatic hydrocarbons in vehicle-related industries observed in this study attract attention to the impact of these industries on the regional air pollution in Wuhan. The adverse impacts of vehicle-related industries on the air pollution in a large-scale region, including the North China Plain, Central China, and the Pearl River Delta regions,²⁴ were also previously reported based on the large-scale environmental monitoring data, which further stressed the importance of investigating the emission profiles of VOCs from vehicle-related industries.

3.2. Comparison of emission profiles between organized and fugitive emission groups

From the on-site investigation, VOC treatment devices were installed in some of the vehicle-related industries in this study,



Table 1 Concentrations of twenty-seven detectable VOC analogues from nine vehicle-related and seven commodity manufacturing industries ($\mu\text{g m}^{-3}$)^a

Sampling sites	Vehicle-related industries									Commodity manufacturing industries						
	DFFS	DFSC	DFYC	SLSC	LY	DFADT	DFEC	GM	VSKT	MXDZ	ZL	JC	BD	CLBL	HB	HJL
Organized (O) or fugitive (F) emissions	O	O	O	O	O	F	F	F	F	O	F	F	F	F	F	F
<i>o</i> -Xylene	0.6	3.7	1.6	4.7	23.2	0.3	0.7	29.4	0.5	0.2	0.8	0.1	0.2	0.2	0.31	0.6
1,2,3-Trichloropropane	0.4	0.4	19.0	25.2	0.7	n.d.	n.d.	0.2	0.03	0.3	17.5	n.d.	0.02	n.d.	n.d.	0.01
<i>sec</i> -butylbenzene	0.5	16.5	1.9	12.3	25.0	0.04	0.2	3.0	0.2	0.1	0.03	0.02	n.d.	0.1	0.04	0.1
1,3,5-Trimethylbenzene	1.9	0.4	0.03	0.1	21.2	0.1	0.1	22.2	0.1	0.01	0.1	n.d.	0.1	n.d.	0.04	0.1
2-Chlorotoluene	0.5	18.4	2.7	10.8	5.5	0.2	0.2	4.9	0.4	n.d.	0.2	n.d.	0.1	0.01	n.d.	0.1
1,2,4-Trimethylbenzene	0.7	19.2	2.4	14.3	0.1	0.01	0.2	3.6	0.3	0.01	n.d.	n.d.	n.d.	0.1	0.05	0.02
<i>P</i> -cymene	0.2	12.1	0.9	6.7	n.d.	n.d.	0.1	1.1	0.1	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.
Between + paraxylene	0.1	0.5	0.4	1.0	5.5	0.03	0.2	12.3	0.04	0.02	0.1	<0.01	0.01	0.02	0.04	0.1
Tert-butylbenzene	0.1	3.1	0.4	3.3	2.4	n.d.	n.d.	0.7	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	0.2
1,2-Dibromo-3-chloropropane	n.d.	0.9	n.d.	0.7	7.9	n.d.	n.d.	0.2	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.
<i>trans</i> -1,3-Dichloropropene	0.1	0.1	0.2	0.1	0.5	0.1	0.1	0.3	0.8	n.d.	1.0	0.1	2.9	0.1	0.08	0.7
Isopropylbenzene	0.02	0.3	0.1	0.4	3.8	0.1	0.03	1.1	n.d.	<0.01	0.01	0.01	n.d.	n.d.	<0.01	n.d.
Butylbenzene	0.02	2.2	0.2	1.3	1.3	n.d.	n.d.	0.2	n.d.	0.6	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.
Styrene	<0.01	0.1	0.04	0.2	2.0	n.d.	0.01	1.1	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.
1,1,2-Trichloroethane	0.01	0.02	n.d.	1.5	n.d.	0.1	0.3	0.2	n.d.	0.1	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.
Bromodichloromethane	n.d.	n.d.	<0.01	n.d.	n.d.	n.d.	n.d.	0.5	n.d.	0.6	n.d.	n.d.	0.01	n.d.	n.d.	n.d.
Benzene	0.1	0.01	<0.01	0.1	0.03	0.4	0.1	0.03	0.02	0.02	0.1	0.1	n.d.	0.01	0.01	0.1
1,1-Dichloroethylene	n.d.	n.d.	<0.01	0.01	0.6	n.d.	n.d.	n.d.	n.d.	0.01	n.d.	n.d.	n.d.	0.04	0.03	0.2
1,2-Dichloropropane	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	0.4	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.
Tetrachloroethylene	0.01	0.02	0.01	0.02	0.02	n.d.	0.02	0.02	0.03	0.01	0.03	0.03	0.1	0.03	0.03	0.02
Hexachloro-1,3-butadiene	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	0.2	n.d.	n.d.	n.d.	n.d.	n.d.
1,2,3-Trichlorobenzene	n.d.	n.d.	n.d.	n.d.	0.1	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	0.1
1,1-Dichloropropene	n.d.	n.d.	n.d.	0.01	n.d.	n.d.	n.d.	0.1	n.d.	n.d.	n.d.	n.d.	0.1	n.d.	n.d.	n.d.
1,1,2,2-Tetrachloroethane	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	0.01	0.03	n.d.	n.d.	n.d.	0.1	n.d.	n.d.	n.d.	n.d.
<i>cis</i> -1,3-Dichloropropene	n.d.	n.d.	n.d.	n.d.	0.03	n.d.	0.04	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.
Propylbenzene	n.d.	0.05	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.
Chlorodibromomethane	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	0.04	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.	n.d.
$C_{\Sigma 27\text{VOCs}}$	5.0	77.8	29.8	82.6	99.8	1.3	2.3	81.4	2.5	2.0	20.0	0.4	3.4	0.5	0.6	1.8

^a n.d. = not detected.

aiming to reduce the emission of VOC analogues. The industries equipped with VOC treatment devices were defined as the organized emission group (O), whereas the others as the fugitive emission group (F). As shown in Table 1, the average $C_{\Sigma 27\text{VOCs}}$ in the organized emission group was $21.9 \mu\text{g m}^{-3}$, which is two times lower than that of the fugitive emission group ($59.0 \mu\text{g m}^{-3}$), implying the validity of VOC treatment devices. According to Chinese emission standards (DB42/1539-2019, China),²⁵ the twenty-seven detectable VOCs in this study were classified into four major categories: benzene, toluene and xylene, the benzene series, and total non-methane hydrocarbons (NMHs). A comparison of the concentrations (in logarithmic value) of these four categories from the organized emission group and their corresponding highest acceptable values²⁵ was made, as presented in Fig. 2. The specific detection data showed that the average concentrations of benzene, toluene and xylene, the benzene series, and NMHs were $0.04 \mu\text{g m}^{-3}$, $15.8 \mu\text{g m}^{-3}$, $31.5 \mu\text{g m}^{-3}$, and $11.7 \mu\text{g m}^{-3}$, which are lower than the highest national emission standards of $500 \mu\text{g m}^{-3}$, $15\,000 \mu\text{g m}^{-3}$, $20\,000 \mu\text{g m}^{-3}$, and $40\,000 \mu\text{g m}^{-3}$, respectively. Among them, the difference in value between NMHs and the standard value is the largest, which is related to the relatively lenient national

standard for NMHs. This result suggests that current VOC treatment devices can enable the VOCs released from the industries to meet the Chinese emission standards.

The VOC treatment device installed in the organized emission group in this study is based on the technology of the zeolite rotary (ZR) concentrator system coupled with regenerative thermal oxidizer (RTO) catalytic combustion. ZR adsorption is a physical adsorption technology aiming to concentrate VOCs emitted from industries by using hydrophobic zeolite materials. The RTO catalytic combustion is an oxidative reaction technology used for the removal of these concentrated VOCs, and it transforms them into CO_2 and H_2O , especially for the removal of aromatic VOCs.³³ Therefore, the VOCs treatment device installed in the organized emission group mainly contains three stages: adsorption, catalytic combustion, and cooling regeneration. Firstly, the VOCs emitted from the industries were adsorbed and concentrated by the hydrophobic zeolite material. Then, these absorbed VOCs were desorbed into gaseous VOCs through thermal desorption. These gaseous VOCs were further treated by the RTO catalytic combustion and converted into CO_2 and H_2O . Finally, the non-toxic CO_2 and H_2O were emitted. The hydrophobic zeolite material, after thermal desorption, was



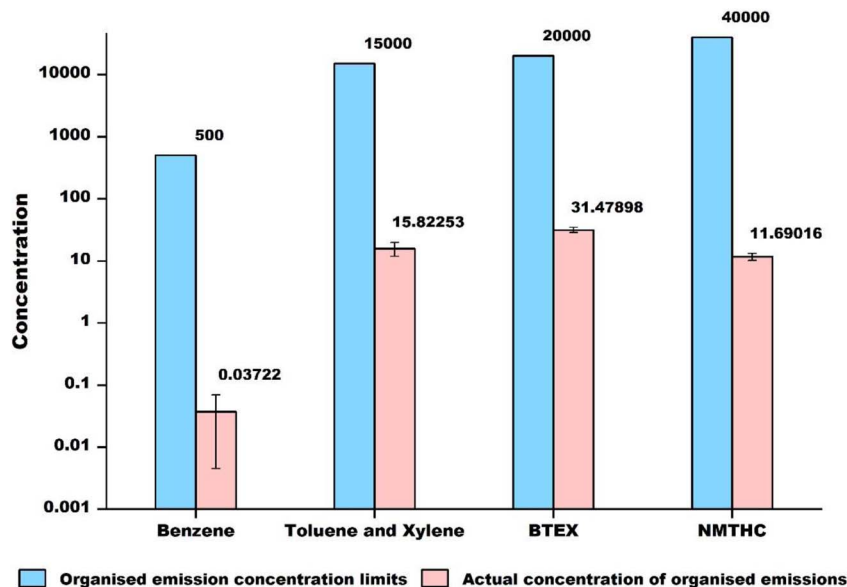


Fig. 2 Comparison of the concentrations (in logarithmic value) of VOCs from the organized emission group and emission standard (DB42/1539–2019, China).²⁵

rotated and cooled to restore its adsorption capacity, and could be reused in the adsorption stage. Previous research has reported a strong removal effect on aromatic hydrocarbon VOCs through a Pt catalyst in the thermal desorption regeneration stage. It was observed that the removal rate can reach over 97% under the conditions of a reactor inlet temperature of 200 °C and space velocity of 20 000 h⁻¹.³⁴ Aromatic hydrocarbons were observed to be the dominant VOC categories from vehicle-related industries in this study, with seven of the top ten VOC belonging to aromatic hydrocarbon analogues. Given the lack of data about VOC emission profiles before and after the VOC treatment device, the comparison of the VOC emission profiles of organized and fugitive emission groups from vehicle-related industries was carried out to verify the efficiency of this device in actual scenarios (Fig. 3). The percentage values of four major categories of C_{Σ27}VOCs in the organized emission group were in the order of aromatic hydrocarbons (67.3%) > haloalkanes (19.4%) > halogenated aromatic hydrocarbons (12.9%) > halogenated olefins (0.4%), whereas those in fugitive emission group were as follows: aromatic hydrocarbons (89.6%) >

halogenated aromatic hydrocarbons (6.5%) > haloalkanes (2.2%) > halogenated olefins (1.8%). Previous studies have proven that the aromatic hydrocarbons are more toxic than other types of VOCs.³⁵ Therefore, reducing the proportion of highly toxic aromatic hydrocarbons³⁵ is essential for eliminating the adverse impact on the public. Moreover, the variation of the proportions is significant in controlling VOC emissions. It should be noted that the proportion of aromatic hydrocarbons in the organized emission group was almost one-third lower than that in the fugitive emission group, implying the validity of the VOC treatment device in reducing aromatic hydrocarbons and its necessity in the vehicle-related industries. Given that the concentrations of emitted VOCs were highly related to the scale of the industries, and the scale of the organized emission group was commonly larger than that of the fugitive emission group, based on the survey. It is no surprise that the total of the aromatic VOCs in the organized emission group (198.7 μg m⁻³) was much higher than that of the fugitive emission group (78.3 μg m⁻³). However, a slight increase in the percentage values for halogenated aromatic hydrocarbons in

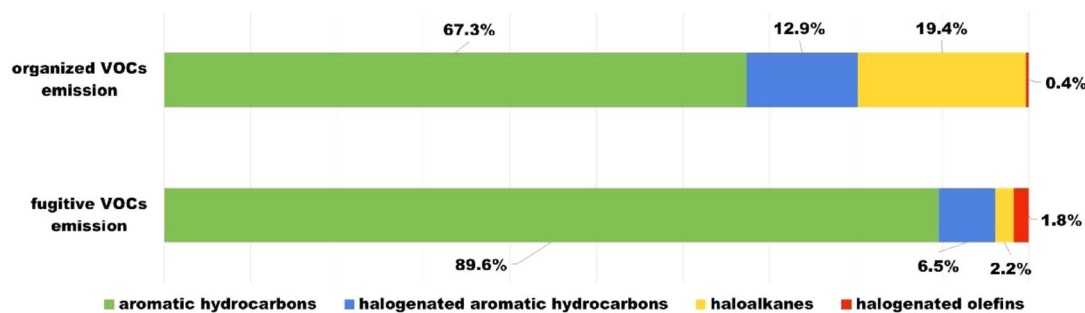


Fig. 3 Comparison of the VOC emission profiles of organized and fugitive emission groups from vehicle-related industries.



the organized emission group was observed, compared with the fugitive emission group. The impact of halogenated aromatic hydrocarbons on public health should not be ignored due to their potential toxicity. Therefore, the optimization of the VOC treatment device in controlling halogenated aromatic hydrocarbons was also applied in actual scenarios.

3.3. Calculated ozone formation potentials

VOCs are crucial precursors of O₃, and different VOC analogues have different potential for O₃ formation. Therefore, identifying the main VOC analogues that generate O₃ in specific regions and reducing their emissions is essential to prevent atmospheric O₃ pollution. Based on the real-time data collected from the monitoring and control platform of small air quality monitoring stations of Wuhan, a decreasing trend of O₃ concentrations was observed as the distance from vehicle-related industries increased (Fig. 4). The O₃ concentrations at monitoring stations within a 6 km radius around vehicle-related industries ranged from 58.3 μg m⁻³ to 61.4 μg m⁻³. It decreased to 46.5–56.5 μg m⁻³ within the range of 6–7 km, and further dropped to 38.8–51.7 μg m⁻³ beyond 7 km. The percentage value decreased to 13.3–36.5%, indicating the significant impact of VOCs emitted from vehicle-related industries on the regional O₃ pollution, whereas the trend of O₃ concentrations around commodity manufacturing industries was different. The

O₃ concentration within a 28 km radius remained consistently at a certain level, with the fluctuation being only ±3 μg m⁻³ (Fig. 4). Thus, although an overall higher O₃ concentration around commodity manufacturing industries than those around vehicle-related industries was observed, the contribution of VOCs emitted from these industries on regional O₃ pollution could be ignored. Further attention should be paid to the impacts of VOCs released from vehicle-related industries on the generation of O₃.

The calculated OFP values of VOC analogues (Σ_{OFP}) emitted from sixteen factories were 1.1–646.8 μg m⁻³, with an average value of 126.7 μg m⁻³. The Σ_{OFP} from vehicle-related industries ranged from 5.3 μg m⁻³ to 646.8 μg m⁻³, with an average value of 219.7 μg m⁻³ (Table S1), whereas the Σ_{OFP} from commodity manufacturing industries ranged from 1.1 μg m⁻³ to 17.4 μg m⁻³, with an average value of 7.3 μg m⁻³ (Table S2). It was observed that aromatic hydrocarbons were dominant categories for Σ_{OFP} from the vehicle-related industry (Table S3). Their OFP values ranged from 4.4 μg m⁻³ to 630.7 μg m⁻³, with an average percentage value of 93.0% to Σ_{OFP}. The top five VOC analogues with high percentage values with respect to Σ_{OFP} were 1,3,5-trimethylbenzene (27.3%), *o*-xylene (25.0%), 1,2,4-trimethylbenzene (18.3%), *m*-xylene (7.9%), and *sec*-butylbenzene (7.1%). As for commodity manufacturing industries, the contributions of aromatic hydrocarbons and halogenated olefins to Σ_{OFP} were comparable, with average percentage values

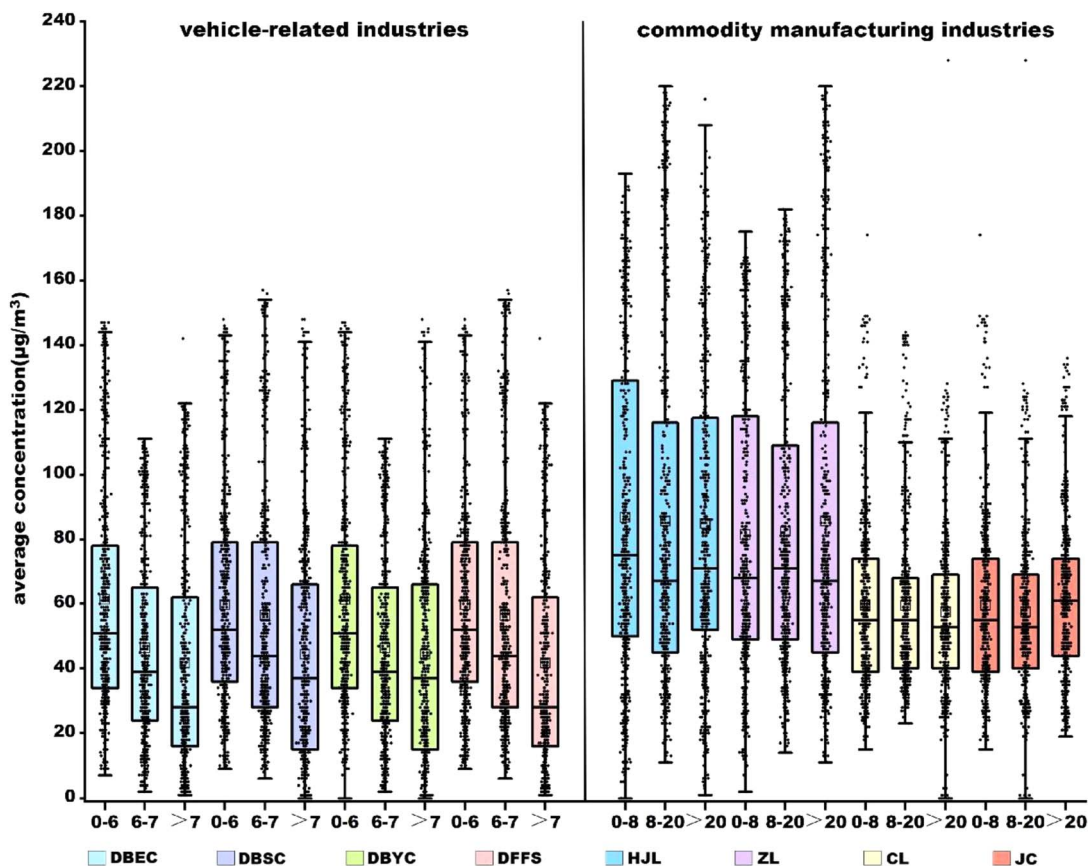


Fig. 4 Concentrations of atmospheric ozone around vehicle-related and commodity manufacturing industries.



of 55.6% and 42.2%, respectively. The VOC analogues with dominant Σ_{OFP} were *o*-xylene (36.4%) and *trans*-1,3-dichloropropene (42.2%).

Given the significant impact of VOCs emitted from vehicle-related industries on the regional O₃ pollution as mentioned above, the emission sources of crucial VOC analogues generating O₃ were further investigated. 1,3,5-Trimethylbenzene and *o*-xylene emitted from vehicle-related industries have been observed as the most important VOC analogues to the generation of O₃ in this study. It is worth noting that the concentrations of these two analogues (22.2 and 29.4 $\mu\text{g m}^{-3}$) emitted from the spraying process were two to three magnitudes higher than those from the process of sand core baking (0.08 and 0.5 $\mu\text{g m}^{-3}$), resulting in higher Σ_{OFP} (646.8 $\mu\text{g m}^{-3}$) calculated in samples close to the spraying process. Previous studies also stressed the importance of the spraying stage on the emission of aromatic hydrocarbons, including *m* + *p*-xylene, *o*-xylene, 1,2,4-trimethylbenzene and benzene,^{36,37} which were identified as the crucial analogues for O₃ generation. Therefore, optimization of the spraying process in vehicle-related industries is the key to controlling VOC emissions and O₃ pollution. The usage of solvent-based coatings in the spraying process has been reported as the main reason for a considerable amount of VOC emissions, and powder-type coatings were suggested as substitutes to reduce the emission of VOCs in this process.⁶ Moreover, a novel car body coating cleaning production method was also proposed to improve production efficiency and further reduce the emission of VOCs.¹⁴ It has been previously reported that the whale optimization algorithm can increase the production efficiency by 42.1%, and achieve an exhaust gas purification rate of over 98.0%.¹⁴

4. Impacts

This study focused on the emissions of VOCs from industrial sources and their effects on regional O₃ pollution in Wuhan, China. Higher concentrations and different analogue profiles of VOCs emitted from vehicle-related industries were observed, compared with those from commodity manufacturing industries. Aromatic hydrocarbons with high toxicity were identified as the main categories from vehicle-related industries, and the VOC treatment device was proven to be efficient for them based on actual scenarios. Monitoring data further indicated the adverse impact of vehicle-related industries on regional O₃ pollution, and spraying was the main process releasing VOCs in vehicle-related industries. This is the first study reporting the emission of industrial VOCs in Wuhan and exploring their contribution to O₃ pollution. The practical significance of this research is manifested in multiple aspects. From the perspective of China, this study helps the public better understand the hazardous VOC analogues in the regional air, thereby enhancing their awareness of daily protection. Managers who determine whether to install treatment facilities or how to select raw materials in the related industries could refer to the results in this study, which could facilitate effective self-regulation by enterprises. As for the government, the results can provide hints for formulating key VOC control policies, promoting the

establishment of an efficient O₃ pollution prevention and control regulatory system. From an international perspective, China, as the world's second-largest economy,³⁸ plays an important role in international affairs. Meanwhile, Wuhan is one of the typical cities in the significant Yangtze River Economic Belt in China,³⁹ whose environmental governance experience has a widespread effect. The international community can precisely formulate corresponding control strategies and jointly promote global green and sustainable development, based on the emission characteristics of VOCs in the Wuhan industrial area revealed by this study.

Author contributions

Conceptualization: Hao Yanfen. Data curation: Yang Beirou, Han Tiantian, Xu Jing. Funding acquisition: Hao Yanfen. Investigation: Xiang Yuhan, Zhang Tianqi. Methodology: Yang Beirou, Han Tiantian, Xu Jing, Li Wenjuan. Project administration: Hao Yanfen. Supervision: Wang Pu, Liang Yong. Visualization: Xiang Yuhan, Zhang Tianqi. Writing – original draft: Xiang Yuhan, Zhang Tianqi. Writing – review & editing: Hao Yanfen, Wang Pu, Liang Yong.

Conflicts of interest

There are no conflicts to declare.

Data availability

(1) Data described in [Fig. 4] for this article are available at the monitoring and control platform of small air quality monitoring stations of Wuhan at <http://119.96.213.169:8083/index.html#/map/HomeTianMap>. It is not accessible to the public.

Supplementary information (SI): sampling sites, OFP values and concentrations of VOCs. See DOI: <https://doi.org/10.1039/d5ea00109a>.

Acknowledgements

This study was supported by National Natural Science Foundation of China (22406067, 42476261), China Scholarship Council (202508420136), Key Research and Development Program of Hubei Province of China (2023BBB067), and the Graduate Scientific Research Foundation of Jiangnan University.

References

- 1 T. Wang, L. Xue, Z. Feng, J. Dai, Y. Zhang and Y. Tan, Ground-level ozone pollution in China: a synthesis of recent findings on influencing factors and impacts, *Environ. Res. Lett.*, 2022, 17(6), 063003.
- 2 S. Liu, Y. Zhang, R. Ma, X. Liu, J. Liang, H. Lin, P. Shen, J. Zhang, P. Lu, X. Tang, *et al.*, Long-term exposure to ozone and cardiovascular mortality in a large Chinese



- cohort, *Environ. Int.*, 2022, **165**, 107280, DOI: [10.1016/j.envint.2022.107280](https://doi.org/10.1016/j.envint.2022.107280)FromNLM.
- 3 S. Safiri, K. Carson-Chahhoud, M. Noori, S. A. Nejadghaderi, M. J. M. Sullman, J. Ahmadian Heris, K. Ansarin, M. A. Mansournia, G. S. Collins, A. A. Kolahi, *et al.*, Burden of chronic obstructive pulmonary disease and its attributable risk factors in 204 countries and territories, 1990-2019: results from the Global Burden of Disease Study 2019, *Bmj*, 2022, **378**, e069679, DOI: [10.1136/bmj-2021-069679](https://doi.org/10.1136/bmj-2021-069679)FromNLM.
- 4 Y. Wang, O. Wild, X. Chen, Q. Wu, M. Gao, H. Chen, Y. Qi and Z. Wang, Health impacts of long-term ozone exposure in China over 2013-2017, *Environ. Int.*, 2020, **144**, 106030, DOI: [10.1016/j.envint.2020.106030](https://doi.org/10.1016/j.envint.2020.106030)FromNLM.
- 5 W. Guo, Q. Chen, Y. Yang, Y. Zhang, X. Liu, R. Zhang, Y. Zhu, G. Li, P. Liu and M. Chen, Investigating the mechanism of morning ozone concentration peaks in a petrochemical industrial city, *Atmos. Environ.*, 2022, **270**, 118897, DOI: [10.1016/j.atmosenv.2021.118897](https://doi.org/10.1016/j.atmosenv.2021.118897).
- 6 W. J. Liang, J. Z. Wang, C. H. Zhang and J. Liu, Synergetic emission reduction of VOCs and CO₂ in the automotive coating industry using life cycle assessment (LCA) technology, *J. Environ. Chem. Eng.*, 2025, **13**(2), 115534, DOI: [10.1016/j.jece.2025.115534](https://doi.org/10.1016/j.jece.2025.115534).
- 7 A. Garg, M. Desservettaz, A. Christodoulou, T. Christoudias, V. P. Kanawade, C. Savvides, M. Vrekoussis, S. Naqui, T. Jokinen, J. Byron, J. Williams, N. Mihalopoulos, E. Liakakou, J. Sciare and E. Bourtsoukidis, Heat and continental transport shape the variability of volatile organic compounds in the Eastern Mediterranean: Insights from multi-year observations and regional modeling, *EGU Sphere.*, 2025, 5124, DOI: [10.5194/egusphere-2025-5124](https://doi.org/10.5194/egusphere-2025-5124).
- 8 L. J. Wang Xinhui, L. Jiang, *et al.*, Identification of High-VOC Areas in Urban Areas Based on Satellites and Long-Term Time Series Changes, *China Environ. Sci.*, 2025, **45**(1), 66–77, DOI: [10.19674/j.cnki.issn1000-6923.2025.0006](https://doi.org/10.19674/j.cnki.issn1000-6923.2025.0006).
- 9 Z. Zhonghua, L. Q. Kai and T. Xiang, Emission Characteristics and Risk Assessment of VOCs Sources in Typical Industries in Jiangxi Province, *Environ. Sci.*, 2024, 1–15, DOI: [10.13227/j.hjlx.202406185](https://doi.org/10.13227/j.hjlx.202406185)FromCnki.
- 10 N. J. Qi Yijin, Z. Dongxu, Y. Yi, L. Han and Li Bowei, Characteristics and Risk Assessment of VOCs Emissions from Typical Industrial Enterprises in Zhengzhou City, *Environ. Sci.*, 2020, **41**, 3056–3065, DOI: [10.13227/j.hjlx.201911106](https://doi.org/10.13227/j.hjlx.201911106).
- 11 H. Xiao, J. Zhang, Y. Hou, Y. Wang, Y. Qiu, P. Chen and D. Ye, Process-specified emission factors and characteristics of VOCs from the auto-repair painting industry, *J. Hazard. Mater.*, 2024, **467**, 133666.
- 12 Y. Zhang, J. Liu, Y. Liu, J. Wang, T. Wang, L. Zhong and W.-P. Pan, Producing Pd single site on cerium oxides using ball milling process to accelerate catalytic VOCs removal efficiency: experimental and DFT+ U study, *J. Therm. Anal. Calorim.*, 2025, 1–26.
- 13 P. Rybarczyk, Removal of Volatile Organic Compounds (VOCs) from Air: Focus on Biotrickling Filtration and Process Modeling, *Processes*, 2022, **10**(12), 2531, DOI: [10.3390/pr10122531](https://doi.org/10.3390/pr10122531)PubliclyAvailableContentDatabase.
- 14 Q. Yang, X. N. Li, T. Yang, H. Wu and L. W. Zhang, An Improved Whale Optimization Algorithm for the Clean Production Transformation of Automotive Body Painting, *Biomimetics*, 2025, **10**(5), 273, DOI: [10.3390/biomimetics10050273](https://doi.org/10.3390/biomimetics10050273).
- 15 X. Liu, H. Zhang, Z. Lv, H. Bai and G. Li, Characterization identification and speciated emission inventory construction of anthropogenic volatile organic compounds (VOCs) in Beijing, China, *Atmos. Pollut. Res.*, 2025, **16**(4), 102452.
- 16 Z. Yue, Analysis of Variation Characteristics and Source of Atmospheric Ozone Pollution in the Yangtze River Delta Region, *Res. Environ. Sci.*, 2024, **37**(7), 1500–1512, DOI: [10.13198/j.issn.1001-6929.2024.05.09](https://doi.org/10.13198/j.issn.1001-6929.2024.05.09).
- 17 Y. S. Bao, Y. Deng, *et al.*, Source profiles and ozone formation potential of VOCs emitted from typical industries using organic solvents in Chengdu[J], *Acta Sci. Circumstantiae*, 2020, **40**(1), 76–82.
- 18 W. Tang, X. Yang, P. He, T. Shenwei, Q. Zhang, D. Wang and J. Lin, VOC Emission Spectrum and Industry-Specific Analysis in the Industrial Coating Industry of Hangzhou, China, *Coatings*, 2025, **15**(4), 429, DOI: [10.3390/coatings15040429](https://doi.org/10.3390/coatings15040429)PubliclyAvailableContentDatabase.
- 19 N. Zhenzhen, *Characteristics of VOCs and Species-Categorized Emission Inventory from Typical Evaporation Emission Sources*, China University of Geosciences, 2021.
- 20 L. Li, Z. L. Li, W. K. Fang, X. C. Wang, X. Pu, L. T. Wang, R. Yuan, W. D. Zhang and C. Z. Zhai, [Speciated Emission Inventory of VOCs from Industrial Sources and Their Ozone Formation Potential in Chongqing], *Huanjing Kexue*, 2022, **43**(4), 1756–1765, DOI: [10.13227/j.hjlx.202108015](https://doi.org/10.13227/j.hjlx.202108015)FromNLM.
- 21 K. S.-f. SU Wei-feng, Z. H. E. Huang, C. H. E. N. Nan, Bo ZHU, Q. U. A. N. Ji-hong and S.-hua QI, Real-time Composition and Sources of VOCs in Summer in Wuhan, *Environ. Sci.*, 2022, **43**(6), 2966–2978.
- 22 Y. Liu, J. Xu, Y. Zhou, A. Muhtar and L. Wang, Spatiotemporal Differentiation of the Coupling and Coordination of Production-Living-Ecology Functions in Hubei Province Based on the Global Entropy Value Method, *Int. J. Environ. Res. Public Health*, 2022, **19**(23), 16062, DOI: [10.3390/ijerph192316062](https://doi.org/10.3390/ijerph192316062)FromNLM.
- 23 Department of Economy and Information Technology of Hubei Province, *Concentrate Efforts to Open a New Situation and Work with All Our Might to Continue the Splendor - Part Four: The Operation of the Industrial Economy in the Province in 2021*, Department of Economy and Information Technology of Hubei Province, 2022, vol. 4, https://jxt.hubei.gov.cn/bmdt/ztlz/wqzt/jjjl/202201/t20220126_3982058.shtml.
- 24 A. Mozaffar and Y.-L. Zhang, Atmospheric Volatile Organic Compounds (VOCs) in China: a Review, *Curr. Pollut. Rep.*, 2020, **6**(3), 250–263, DOI: [10.1007/s40726-020-00149-1](https://doi.org/10.1007/s40726-020-00149-1).



- 25 DB42/1539—2019, *Emission standard of volatile organic compounds for surface coating of automobile manufacturing industry*, 2019.
- 26 L. Hui, X. Liu, Q. Tan, M. Feng, J. An, Y. Qu, Y. Zhang, Y. Deng, R. Zhai and Z. Wang, VOC characteristics, chemical reactivity and sources in urban Wuhan, central China, *Atmos. Environ.*, 2020, **224**, 117340.
- 27 EPA, *U. S. Detection of volatile organic compounds by gas chromatography/mass spectrometry*, 2018.
- 28 M. A. Venecek, W. P. Carter and M. J. Kleeman, Updating the SAPRC Maximum Incremental Reactivity (MIR) scale for the United States from 1988 to 2010, *J. Air Waste Manage. Assoc.*, 2018, **68**(12), 1301–1316.
- 29 M. Song and H. Chun, Species and characteristics of volatile organic compounds emitted from an auto-repair painting workshop, *Sci. Rep.*, 2021, **11**(1), 16586.
- 30 L. D. Zhu, X. Guan, J. Li, Y. B. Peng, X. Zhang, A. B. Gong, M. M. Li, H. Xie, S. R. Chen, J. Li, *et al.*, Characterization of VOCs emissions and associated health risks inherent to the packaging and printing industries in Shandong Province, China, *Sci. Total Environ.*, 2024, **946**, 174108, DOI: [10.1016/j.scitotenv.2024.174108](https://doi.org/10.1016/j.scitotenv.2024.174108).
- 31 W. R. Qian, Y. Q. Guo, X. P. Wang, X. X. Qiu, X. Ji, L. L. Wang and Y. Li, Quantification and assessment of chemical footprint of VOCs in polyester fabric production, *J. Cleaner Prod.*, 2022, **339**, 130628, DOI: [10.1016/j.jclepro.2022.130628](https://doi.org/10.1016/j.jclepro.2022.130628).
- 32 A. Tamrakar, S. Pervez, M. Verma, D. Majumdar, Y. F. Pervez, C. Candeias, P. Dugga, A. Mishra, S. R. Verma, M. K. Deb, *et al.*, BTEX in Ambient Air of India: a Scoping Review of their Concentrations, Sources, and impact, *Water, Air, Soil Pollut.*, 2022, **233**(10), 411, DOI: [10.1007/s11270-022-05863-8](https://doi.org/10.1007/s11270-022-05863-8).
- 33 G. hao, The Application of Zeolite rotor + Regenerative thermal Oxidizer in VOCs Treatment, *Zhejiang Chem. Ind.*, 2021, **52**(4), 37–41.
- 34 J. R. Zhang Yufan, Y. Qiao, Z. He and F. Xingqiao, Research Progress in the Treatment Method of Atmospheric Benzene Series Pollution, *J. North Univ. China (Natural Sci. Ed.)*, 2021, **42**(6), 530–541.
- 35 M. Shi, R. Zhang, Y. Wang, Y. Zhang, Y. Zhang and Y. Zhang, Health risk assessments of polycyclic aromatic hydrocarbons and chlorinated/brominated polycyclic aromatic hydrocarbons in urban air particles in a haze frequent area in China, *Emerging Contam.*, 2020, **6**, 172–178.
- 36 Z. J. HUANG Yu and P. QIU, Emission Levels and Composition Characteristics of VOCs from Different Process Links in Automobile Maintenance Industry in Wuhan City, *Res. Environ. Sci.*, 2021, **34**(8), 1825–1834.
- 37 Y. Wu, Research on the Emission Characteristics and Control Standard System of VOCs in Key Industrial Coating Industries in Shanghai, *J. East China Univ. Sci. Technol.*, 2020, 1–131.
- 38 H. Liping, China as the world's second largest economy: Qualifications and implications, *China and East Asia: After the Wall Street crisis*, 2013, vol. 33.
- 39 X. Ke, A. Mougharbel, H. Guo, D. Wang, Y. Wang and F. Min, Early warning simulation of urban ecological security in the Yangtze River Economic Belt: a case study of Chongqing, Wuhan, and Shanghai, *J. Environ. Plann. Manag.*, 2020, **63**(10), 1811–1833.

