

## CORRECTION

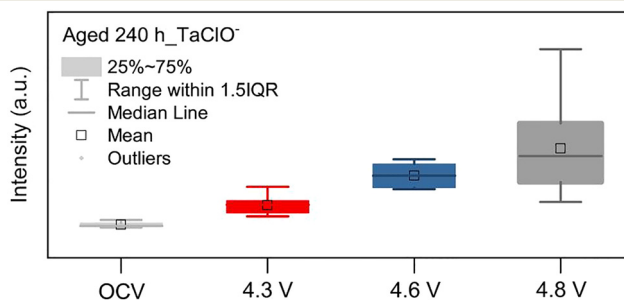
View Article Online  
View Journal | View IssueCite this: *Energy Environ. Sci.*, 2026, 19, 1393**Correction: Unraveling the interfacial compatibility of ultrahigh nickel cathodes and chloride solid electrolyte for stable all-solid-state lithium batteries**Feng Li,<sup>a</sup> Ye-Chao Wu,<sup>bc</sup> Xiao-Bin Cheng,<sup>b</sup> Yihong Tan,<sup>d</sup> Jin-Da Luo,<sup>b</sup> Ruijun Pan,<sup>c</sup> Tao Ma,<sup>e</sup> Lei-Lei Lu,<sup>a</sup> Xiaolei Wen,<sup>f</sup> Zheng Liang\*<sup>d</sup> and Hong-Bin Yao\*<sup>ab</sup>

DOI: 10.1039/d6ee90013e

rsc.li/ees

Correction for 'Unraveling the interfacial compatibility of ultrahigh nickel cathodes and chloride solid electrolyte for stable all-solid-state lithium batteries' by Feng Li *et al.*, *Energy Environ. Sci.*, 2024, 17, 4187–4195, <https://doi.org/10.1039/D4EE01302F>.

The authors regret an error in the preparation of Fig. 3b.

In the originally published version of this Article, Fig. 3b (Box dataset of TaClO<sup>-</sup> for 4.3, 4.6 and 4.8 V) was inadvertently plotted using the dataset intended for Supplementary Fig. 13b (Box dataset of ClO<sup>-</sup> for 4.3, 4.6 and 4.8 V), due to a copy-paste error during figure preparation. We sincerely regret this oversight and have now provided the corrected version of Fig. 3b using the right raw dataset.Fig. 3 (b) Boxplots of the normalized intensity of TaClO<sup>-</sup> fragments of the OCV and aged cathodes.

Although the original figure presented incorrect data inadvertently, the associated interpretation in the main text remains accurate. The interface variation discussion is independently supported by the signal intensity trend observed in Supplementary Fig. S11 and 12b, which shows a similar trend to Fig. 3b. This correction does not affect any other scientific descriptions, results, analyses, or conclusions in the paper.

An independent expert has viewed the corrected Fig. 3b and has concluded that it is consistent with the conclusions presented.

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.

<sup>a</sup> Division of Nanomaterials and Chemistry, Hefei National Research Center for Physical Sciences at the Microscale, University of Science and Technology of China, Hefei, Anhui 230026, China. E-mail: yhb@ustc.edu.cn<sup>b</sup> Department of Applied Chemistry, University of Science and Technology of China, Hefei, Anhui 230026, China<sup>c</sup> Hefei Gotion High-tech Power Energy Co., Ltd., Hefei, Anhui 230012, China<sup>d</sup> Frontiers Science Center for Transformative Molecules, School of Chemistry and Chemical Engineering, Shanghai Jiao Tong University, Shanghai, 200240, China. E-mail: liangzheng06@sjtu.edu.cn<sup>e</sup> Engineering Research Center of High-frequency Soft Magnetic Materials and Ceramic Powder Materials of Anhui Province School of Chemistry and Material Engineering, Chaozhou University, Hefei, Anhui 238024, China<sup>f</sup> Center for Micro and Nanoscale Research and Fabrication, University of Science and Technology of China, Hefei, Anhui 230012, China