



Cite this: *Sustainable Food Technol.*,  
2026, 4, 1869

# Optimisation of the microwave-assisted extraction process of bioactive compounds with antioxidant activity from cocoa pod husk (*Theobroma cacao* L.)

Esteban Jurado-Beizaga, <sup>a</sup> Erick Alvarez-Yanamango, <sup>\*bcd</sup> Oscar Herrera-Calderon <sup>a</sup> and Alfredo Ibañez <sup>d</sup>

Cocoa pod husk (CPH), the main by-product of cocoa production, represents up to 80% of the fresh weight of the fruit and is often discarded, despite being a rich source of bioactive compounds such as polyphenols, flavonoids and saponins. The objective of this study was to optimise the microwave-assisted extraction (MAE) of bioactive compounds with the highest antioxidant activity from CPH using the Box–Behnken design (BBD) and Response Surface Methodology (RSM). The effects of microwave power (285, 570, and 855 W), extraction time (2, 3, and 4 min) and liquid/solid ratio (30, 40, and 50 mL g<sup>-1</sup>) on the Total Phenol Content (TPC), Total Saponin Content (TSC) and antioxidant activity—DPPH Radical Scavenging Capacity (DRSC), ABTS Radical Scavenging Capacity (ARSC) and Ferric Reducing Antioxidant Power (FRAP)—of bioactive compounds were evaluated. The globally optimised conditions (855 W, 3.06 min, and 50 mL g<sup>-1</sup>) achieved high extraction efficiencies, and yielded a TPC of 2.724 mg<sub>GAE</sub> g<sup>-1</sup>, TSC of 0.241 mg<sub>EE</sub> g<sup>-1</sup>, and DRSC, ARSC, and FRAP of 81.966, 99.680, and 90.890 μmol<sub>TE</sub> g<sup>-1</sup>, respectively, with a desirability index of 0.84. Microwave power emerged as the main factor influencing bioactive recovery, while extraction time and liquid/solid ratio modulated diffusion and prevented thermal degradation. Notably, the protocol was implemented using a modified domestic microwave oven, offering a cost-effective and sustainable alternative to conventional MAE systems. Comprehensive UHPLC–Q–Orbitrap–MS/MS profiling revealed a diverse metabolomic signature, including malic, citric, tartaric, and gluconic acids, and the phenolic compound clovamide, confirming the chemical complexity and functional potential of the extract. The integrated optimisation and profiling framework reinforces the sustainable nature and methodological novelty of MAE in enhancing the value of CPH, supporting its role as a clean-label candidate for functional nutrition, health-promoting products, and circular bioeconomy initiatives.

Received 28th November 2025  
Accepted 15th December 2025

DOI: 10.1039/d5fb00924c

rsc.li/susfoodtech

## Sustainability spotlight

Cocoa pod husk (CPH), an abundant agro-industrial by-product, poses environmental and economic challenges due to its improper disposal, while conventional extraction techniques demand substantial energy and solvent input. This study optimises microwave-assisted extraction (MAE) to sustainably recover antioxidant-rich bioactive compounds—including phenolics and saponins—while significantly reducing resource consumption. The process integrates statistical design methodologies to enhance efficiency and scalability, offering a robust and adaptable valorisation strategy. These findings exemplify circular economy principles by converting agricultural waste into functional ingredients suitable for food, cosmetic, and pharmaceutical applications. The work directly supports SDGs 9 (Industry, Innovation and Infrastructure), 12 (Responsible Consumption and Production), and 13 (Climate Action), reinforcing the contribution of green technologies to agro-industrial sustainability.

## 1 Introduction

The cocoa bean is one of the most significant crops worldwide. It is estimated that world production will reach approximately 4.84 million tonnes in the period 2024/25, according to the International Cocoa Organization (ICCO).<sup>1</sup> This is evidence of the high global demand and economic impact of cocoa, which is not only limited to the chocolate industry, but also involves its by-products.

Cocoa pod husk (CPH) is the main by-product, representing 52–80% of the fresh weight of the fruit.<sup>2–8</sup> For every tonne of dry

<sup>a</sup>Department of Pharmacology, Bromatology and Toxicology, Faculty of Pharmacy and Biochemistry, National University of San Marcos, Lima 15001, Peru

<sup>b</sup>Agro-industrial Technologies and Processes Research Group (ITEPA PUCP), Pontificia Universidad Católica del Perú, Lima 15001, Peru. E-mail: erick.alvarez@pucp.edu.pe

<sup>c</sup>Engineering Department, Pontificia Universidad Católica del Perú, Lima 15001, Peru

<sup>d</sup>Institute for Omics Sciences and Applied Biotechnology (ICOBA PUCP), Pontificia Universidad Católica del Perú, Lima 15001, Peru



cocoa beans, ten tonnes of wet CPH are generated,<sup>9</sup> generating approximately 48.4 million tonnes globally, which could pose environmental problems, but also reflects a critical underutilization of a plant material that, until now, has been considered an unwanted waste by the cocoa and chocolate industries. Therefore, effective management of these wastes is fundamental in attempts to prevent food waste and develop circular economy concepts, within the food–energy–water (FEW) nexus, as their management significantly affects the availability of these three resources.<sup>10</sup> CPH is an essential source of bioactive compounds, particularly polyphenols, flavonoids, methylxanthines, and fibres, which have been associated with antioxidant, anti-inflammatory, and cardioprotective properties.<sup>9,11–17</sup> Thus, the valorisation of CPH would not only reduce the environmental impact of waste, but also generate integral solutions such as the production of biomass energy, water recovery, development of functional materials, recovery of bioactive compounds with antioxidant activity and enriched composting, with promising applications in the food, cosmetics, and pharmaceutical industries.<sup>10,18</sup> Within this framework, agro-industrial by-products, such as CPH, should not be considered as final waste, but as secondary raw materials with economic, environmental and social value. Transforming organic wastes into reusable inputs within the same or other production systems, promotes closed-material cycles.<sup>17</sup> Waste management approaches generally include the reuse and valorisation of by-products through innovative processes, their use as functional ingredients rich in bioactive compounds, and the extraction of valuable active ingredients.

Consequently, Microwave-Assisted Extraction (MAE) is positioned as an innovative non-conventional solvent alternative green technology for the recovery of bioactive compounds from CPH presenting significant advantages over conventional solvent extraction.<sup>19–23</sup> Its main benefits include a reduction in the volume of solvents used, greater time efficiency, more precise control of operating variables, a decrease in energy consumption and an increase in extraction yield.<sup>19</sup> However, its effectiveness does not depend solely on the use of microwaves as an energy source, but is strongly influenced by a series of operating parameters. The most decisive factors are irradiation power, extraction time and solid/liquid ratio.<sup>24</sup> Power controls the rate of dielectric heating and, therefore, cell disruption and metabolite release, which must be carefully optimised to avoid thermal degradation of sensitive compounds; and the liquid/solid ratio directly affects the mass transfer efficiency and concentration of the extract.<sup>24–26</sup> Therefore, this study aims to optimise the operating parameters of MAE—microwave power, extraction time and liquid/solid ratio—in order to maximise the recovery of bioactive compounds from CPH. In particular, it seeks to improve the extraction efficiency of total phenolic content (TPC) and total saponin content (TSC), as well as antioxidant activity, evaluated using the DPPH radical scavenging capacity (DRSC), ABTS radical scavenging capacity (ARSC) and ferric reducing antioxidant power (FRAP) methods, which was assessed as part of this optimisation process.

As a major novel contribution, unlike previous studies, this work proposes a balanced global optimisation that

simultaneously considers all response parameters, using a modified domestic microwave oven as a low-cost, high-efficiency alternative. It also incorporates the identification of the metabolomic profile of the optimised extract, which broadens the understanding of the compounds responsible for bioactivity and establishes a basis for future biotechnological and nutraceutical applications.

## 2 Materials and methods

### 2.1 Chemical and analytical instruments

All chemicals used in this study were of analytical grade, including: gallic acid, trolox, acetic acid (glacial) 100%, aluminium chloride hexahydrate, aluminium chloride trihydrate, iron(III) chloride hexahydrate, 2,20-Azino-bis (3-ethylbenzothiazoline-6-sulfonic acid) (ABTS), Folin–Ciocalteu reagent, 2,4,6-tripyridyl-s-triazine (TPTZ), and 2,2-diphenyl-1-picryl-hydrazil (DPPH) were purchased from Merck KGaA (Darmstadt, Germany). Anhydrous sodium carbonate, sodium acetate trihydrate and potassium persulfate were purchased from J.T.Baker (USA). NaOH was purchased from Macron Fine Chemicals (USA). UHPLC-Q-Orbitrap-MS/MS solvents were purchased from Merck (Darmstadt, Germany). Ultrapure water was obtained using a Millipore water purification system (Milli-Q Merck Millipore, Darmstadt, Germany). Absorbance was measured using a Genesys 10S UV-VIS spectrophotometer. UHPLC-Q-Orbitrap-MS/MS was measured using a UHPLC Dionex UltiMate 3000 system coupled to a Q-Exactive orbitrap (Thermo Fisher Scientific, Waltham, MA, USA).

### 2.2 Sample preparation

CPH was obtained from fine aroma cocoa of Amazon origin (*Theobroma cacao* L.) of the Forastero variety, provided by Kuyay chocolates, located in the Jahuanga zone, Bagua Grande district, Utcubamba province, Amazonas region, Peru (5° 46'19.6" S 78°32'57.4" W, 605 m altitude).

### 2.3 Microwave-assisted drying (MAD)

Microwave-assisted drying (MAD) was carried out following the methodology described by Sianoun *et al.*,<sup>27</sup> with slight modifications. Fresh CPH was manually sliced using a stainless-steel knife to produce sheets with a thickness of  $5 \pm 0.3$  mm. The samples were arranged in a single layer on a glass turntable to ensure uniform microwave exposure and prevent overlapping. Drying was performed using a microwave oven (Samsung MG40J5133AT; 95–950 W, 2450 MHz). The drying process was fixed at 95 W (10% power of the microwave oven).

The key experimental parameter was the sample-to-power ratio, where the loading density for MAD was maintained at 0.52 g of CPH per watt of microwave power ( $\text{g W}^{-1}$ ). This ratio was achieved by placing  $50.10 \pm 0.02$  g of sample under a microwave power of 95 W. The selected ratio was based on preliminary trials, which indicated that drying under these conditions yielded the highest TPC, increasing from  $1.50 \text{ mg}_{\text{GAE}} \text{ g}^{-1}$  in the fresh sample to  $2.40 \text{ mg}_{\text{GAE}} \text{ g}^{-1}$  after drying. These values were obtained using ultrasound-assisted extraction (UAE) as the



analytical method during preliminary experiments. It should be noted that these TPC values were obtained during preliminary experiments and are not included in the main dataset presented in this article.

All measurements were performed in triplicate. The dried samples were milled using a blade mill (MKM6003, Bosch, Slovenia) and sieved through an ASTM E11 No. 80–60 mesh (Retsch, Germany). Hence, the particle sizes were between 251 and 426  $\mu\text{m}$ . The resulting flour was packaged in trilaminar vacuum bags and stored at  $-80\text{ }^\circ\text{C}$  until further phytochemical and antioxidant activity analysis.

#### 2.4 Microwave-assisted extraction (MAE) optimisation

The MAE process for CPH was conducted using a modified microwave oven (Samsung MG40J5133AT), as illustrated in Fig. 1. Bioactive compounds were extracted following the protocol described by Rahayu *et al.*<sup>21</sup> The experimental design included three levels for each variable: microwave power (285, 570, and 855 W), extraction time (2, 3, and 4 min), and liquid/solid ratio (30, 40, and 50  $\text{mL g}^{-1}$ ). Extractions were performed in a boiling flask using particles whose sizes were in the range between 251 and 426  $\mu\text{m}$ , and an ethanol–water solution (50% v/v) as the solvent. The resulting extracts were centrifuged at 5000 rpm for 10 min, and the residues were washed with the same solvent and centrifuged again at 5000 rpm for 3 min. The final extract volume was adjusted to match the initial extraction volume using the same solvent, and then cooled for subsequent analysis.

It is important to note that the microwave system does not have active temperature control. Therefore, the extractions were performed in a boiling flask placed inside a water bath (Fig. 1). In this way, the water bath acted as a thermal buffer, preventing excessive temperature increases. The MAE protocol aimed to maintain the extraction at  $80 \pm 2\text{ }^\circ\text{C}$ . This temperature was defined because preliminary tests showed that extraction temperatures above  $90\text{ }^\circ\text{C}$  caused condenser saturation, increased margins of error, and were incompatible with the proposed modification model.

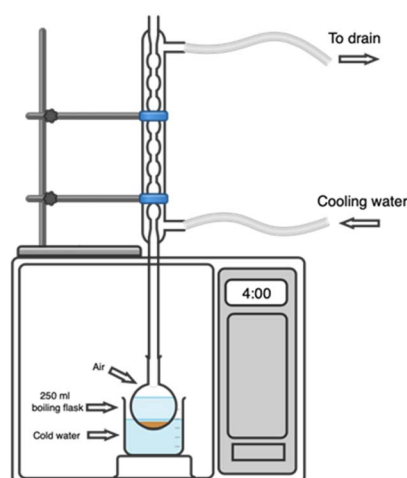


Fig. 1 Modified microwave oven for microwave-assisted extraction (MAE).

#### 2.5 Experimental design

A Box–Behnken design (BBD) with Response Surface Methodology (RSM) was used to optimise and determine the impact of the process variables (*A*: microwave power, *B*: extraction time, *C*: liquid/solid ratio) on the responses: TPC, TSC, ARSC, DPPH and FRAP. These factors and their levels are listed in Table 1. The relationship between the process variables and responses is expressed using an empirical second-order polynomial equation as follows:

$$Y = \beta_0 + \beta_1 X_1 + \beta_2 X_2 + \beta_3 X_3 + \beta_{12} X_1 X_2 + \beta_{13} X_1 X_3 + \beta_{23} X_2 X_3 + \beta_{11} X_1^2 + \beta_{22} X_2^2 + \beta_{33} X_3^2 + \varepsilon$$

where *Y* is the response,  $\beta_0$  the ordinate at the origin,  $\beta_i$  a linear coefficient,  $\beta_{ij}$  an interaction coefficient,  $\beta_{ii}$  a quadratic coefficient, and  $\varepsilon$  random error.

#### 2.6 Determination of bioactive compounds

Bioactive compounds of CPH extract were evaluated in terms of TPC and TSC. The TPC was determined according to the method of Singleton *et al.*<sup>28</sup> and was expressed as milligrams of gallic acid equivalents per gram ( $\text{mg}_{\text{GAE}} \text{g}^{-1}$ ) of dried extract sample (DS extract). The TSC was determined according to the method of Nguyen *et al.*<sup>12</sup> and was expressed as milligrams of escin equivalents per gram ( $\text{mg}_{\text{EE}} \text{g}^{-1}$ ) of DS extract.

The identification of secondary metabolites was carried out by UHPLC–Q–Orbitrap–MS/MS following the methodology adapted from Vargas-Arana *et al.*<sup>11</sup> Extracts were prepared by dissolving 10  $\mu\text{L}$  of sample (optimised CPH extract) in 90  $\mu\text{L}$  of acetonitrile (UHPLC grade). Samples were centrifuged at 4200 rpm for 5 min and transferred to a 2 mL glass vial.

An ultra-high-performance liquid chromatograph (UHPLC Dionex UltiMate 3000, Thermo Fisher Scientific, Waltham, MA, USA) equipped with an Acclaim™ C18 reversed-phase HPLC column (5  $\mu\text{m}$ ,  $4.6 \times 150\text{ mm}$ ) was used, with a flow rate of 0.7  $\text{mL min}^{-1}$ , and the injection volume was 10  $\mu\text{L}$ . The mobile phases were 0.1% formic acid in water (A) and 90% acetonitrile in water (B). The gradient used was (0.00 min, 5% B); (1.00 min, 5% B); (25.00 min, 95% B); (26.00 min, 100% B); (27.00 min, 100% B); (30.00, 5% B); and 2.5 min for column equilibration before each injection.

The Q-Exactive orbitrap (HESI II, Thermo Fisher Scientific, Waltham, MA, USA) was operated in negative ion mode (ESI<sup>-</sup>), using data-dependent acquisition (DDA). Orbitrap parameters were: AGC target:  $5 \times 10^{-6}$ , resolution: 120 000, maximum, IT:

Table 1 Factors and levels of the Box–Behnken design for optimisation<sup>a</sup>

Factors	Unit	Levels		
		–1	0	+1
(A) Microwave power	W	285	570	855
(B) Extraction time	min	2	3	4
(C) Liquid/solid ratio	$\text{mL g}^{-1}$	30	40	50

<sup>a</sup> Abbreviations: W, watts; min, minutes;  $\text{mL g}^{-1}$ , millilitres per gram.



150 ms, range:  $m/z$  100–600, HESI source (1 kV, negative mode), gas heater temp: 140 °C, capillary temperature: 300 °C, carrier gas:  $N_2$  (sheath gas flow rate: 10, sweep gas flow rate: 1, S-lens RF level: 80). Parameters for  $MS^2$  were: maximum IT: 50 ms, AGC target:  $2 \times 10^{-4}$ , resolution: 60 000.

### 2.7 Determination of antioxidant activity

CPH extract was tested for antioxidant activity utilizing ARSC, DRSC and FRAP. The ARSC assay was performed according to the method described by Re *et al.*<sup>29</sup> The DRSC assay was performed according to the method described by Brand-Williams *et al.*<sup>30</sup> The FRAP assay was performed according to the method described by Benzie *et al.*<sup>31</sup> All antioxidant activity assays were expressed as  $\mu\text{mol}$  of Trolox equivalents per gram ( $\mu\text{mol}_{\text{TE}} \text{g}^{-1}$ ) of DS extract.

### 2.8 Statistical analysis

Analysis of variance (ANOVA) was carried out to evaluate the statistical significance ( $p < 0.05$ ) of the factors. Mean comparisons were made using the Tukey HSD test ( $p < 0.05$ ). All data are presented as mean  $\pm$  standard deviation (SD). The analyses were repeated thrice unless indicated. The BBD and RSM were performed using Design-Expert version 13 (Stat-Ease Inc., Minneapolis, MN, USA).

## 3 Results and discussion

### 3.1 Microwave-assisted extraction (MAE) process

The BBD was employed to optimise the independent variables of MAE—microwave power (W), extraction time (min), and liquid/solid ratio ( $\text{mL g}^{-1}$ )—in relation to the response variables TPC, TSC, DRSC, ARSC, and FRAP. The experiment was

conducted using CPH flour with a particle size range of 251–426  $\mu\text{m}$ , and the results are summarised in Table 2.

The analysis showed that each response reached its highest individual value under different extraction conditions. The highest TPC ( $2.775 \text{ mg}_{\text{GAE}} \text{g}^{-1}$  DS extract) and the greatest DRSC activity ( $90.536 \mu\text{mol}_{\text{TE}} \text{g}^{-1}$  DS extract) were both obtained at 855 W, 2 min, and 40 mL  $\text{g}^{-1}$ . In contrast, the maximum TSC ( $0.246 \text{ mg}_{\text{EE}} \text{g}^{-1}$  DS extract) occurred at 855 W, 3 min, and 50 mL  $\text{g}^{-1}$ ; the highest ARSC activity ( $102.188 \mu\text{mol}_{\text{TE}} \text{g}^{-1}$  DS extract) at 285 W, 3 min, and 50 mL  $\text{g}^{-1}$ ; and the maximum FRAP value ( $94.795 \mu\text{mol}_{\text{TE}} \text{g}^{-1}$  DS extract) at 855 W, 4 min, and 40 mL  $\text{g}^{-1}$ .

While the individual maxima highlight the distinct sensitivity of each response to specific MAE parameters, these values are not intended to define separate operational targets. Rather, they inform the response surface behaviour that supports the subsequent global optimisation. The focus of this work lies in establishing integrated extraction conditions that ensure overall efficiency across all responses, rather than optimising them independently.

### 3.2 Optimisation and validation of the extraction of bioactive compounds and antioxidant activity of CPH by MAE

**3.2.1 Total phenolic content (TPC).** The ANOVA results for TPC indicated a highly significant model ( $p < 0.0001$ ), accounting for 93.23% of the variance ( $R^2 = 0.9323$ ; adjusted  $R^2 = 0.9174$ ). Among the evaluated variables, microwave power ( $A$ ) emerged as the most influential factor ( $F = 396.44$ ;  $p < 0.0001$ ), followed by the liquid/solid ratio ( $C$ ) and extraction time ( $B$ ), both of which were statistically significant. A notable interaction was observed between  $AB$ , while  $AC$  and  $BC$  showed no significance. Curvilinear effects were detected for power ( $A^2$ ,  $p < 0.0001$ ) and liquid/solid ratio ( $C^2$ ,  $p = 0.0187$ ), but not for time

Table 2 Experimental values of response variables (TPC, TSC, DRSC, ARSC and FRAP) obtained by MAE<sup>a</sup>

Run	Microwave power (W)	Extraction time (min)	L/S ratio ( $\text{mL g}^{-1}$ )	TPC ( $\text{mg}_{\text{GAE}} \text{g}^{-1}$ )	TSC ( $\text{mg}_{\text{EE}} \text{g}^{-1}$ )	DRSC ( $\mu\text{mol}_{\text{TE}} \text{g}^{-1}$ )	ARSC ( $\mu\text{mol}_{\text{TE}} \text{g}^{-1}$ )	FRAP ( $\mu\text{mol}_{\text{TE}} \text{g}^{-1}$ )
1	570	2	50	$2.623 \pm 0.013$	$0.239 \pm 0.002$	$75.126 \pm 1.608$	$94.749 \pm 2.165$	$86.333 \pm 1.196$
2	855	2	40	$2.775 \pm 0.061$	$0.219 \pm 0.002$	$90.536 \pm 2.539$	$91.888 \pm 3.120$	$87.708 \pm 0.778$
3	855	3	50	$2.712 \pm 0.023$	$0.246 \pm 0.004$	$81.983 \pm 1.439$	$101.433 \pm 0.549$	$89.382 \pm 1.164$
4	570	4	30	$2.409 \pm 0.036$	$0.218 \pm 0.002$	$76.316 \pm 1.192$	$92.743 \pm 2.220$	$88.621 \pm 0.848$
5	570	3	40	$2.571 \pm 0.026$	$0.223 \pm 0.006$	$82.257 \pm 1.158$	$98.557 \pm 1.572$	$89.493 \pm 0.905$
6	570	3	40	$2.551 \pm 0.025$	$0.223 \pm 0.005$	$82.819 \pm 1.083$	$97.212 \pm 1.166$	$87.966 \pm 1.671$
7	570	3	40	$2.560 \pm 0.020$	$0.226 \pm 0.004$	$83.929 \pm 2.214$	$98.159 \pm 1.584$	$90.024 \pm 0.867$
8	855	4	40	$2.699 \pm 0.040$	$0.231 \pm 0.003$	$87.841 \pm 0.508$	$98.647 \pm 2.551$	$94.795 \pm 1.011$
9	285	3	30	$2.193 \pm 0.024$	$0.190 \pm 0.005$	$78.296 \pm 3.422$	$94.716 \pm 0.970$	$89.099 \pm 1.347$
10	855	3	30	$2.498 \pm 0.032$	$0.197 \pm 0.003$	$77.890 \pm 1.086$	$97.991 \pm 1.515$	$82.067 \pm 1.327$
11	285	3	50	$2.284 \pm 0.019$	$0.194 \pm 0.004$	$75.199 \pm 0.799$	$102.188 \pm 1.442$	$85.493 \pm 1.046$
12	285	2	40	$1.985 \pm 0.032$	$0.185 \pm 0.004$	$76.299 \pm 1.243$	$84.762 \pm 1.267$	$75.335 \pm 0.751$
13	285	4	40	$2.359 \pm 0.028$	$0.201 \pm 0.003$	$74.496 \pm 1.890$	$89.214 \pm 1.205$	$92.578 \pm 1.173$
14	570	2	30	$2.424 \pm 0.026$	$0.187 \pm 0.002$	$76.128 \pm 0.964$	$92.822 \pm 0.409$	$71.798 \pm 1.676$
15	570	4	50	$2.616 \pm 0.020$	$0.218 \pm 0.003$	$85.199 \pm 2.767$	$95.843 \pm 0.766$	$83.174 \pm 1.170$
16	570	3	40	$2.554 \pm 0.023$	$0.225 \pm 0.005$	$83.408 \pm 1.270$	$99.373 \pm 0.628$	$87.600 \pm 2.270$
17	570	3	40	$2.591 \pm 0.043$	$0.226 \pm 0.003$	$82.080 \pm 0.726$	$99.036 \pm 1.010$	$87.334 \pm 0.678$

<sup>a</sup> The results were expressed as the sample dry extract. Data are presented as mean  $\pm$  SD from triplicate experiments. Abbreviations: TPC, total phenol content; TSC, total saponin content; DRSC, DPPH radical scavenging capacity; ARSC, ABTS radical scavenging capacity; FRAP, ferric reducing antioxidant power; GAE, gallic acid equivalent; EE, escin equivalent; TE, Trolox equivalent.



Table 3 Adequacy of the models obtained for the response variables TPC, TSC, DRSC, ARSC and FRAP<sup>a</sup>

Responses	R <sup>2</sup>	Adj. R <sup>2</sup>	p-value (model)	Significance terms	Lack-of-fit p	CV (%)
TPC	0.932	0.917	<0.0001*	A, C, AB, A <sup>2</sup>	<0.0001*	2.29
TSC	0.967	0.960	<0.0001*	A, B, C, AC, BC, A <sup>2</sup> , C <sup>2</sup>	0.0619	1.14
DRSC	0.689	0.621	<0.0001*	A, C <sup>2</sup>	<0.0001*	3.75
ARSC	0.792	0.746	<0.0001*	A, B <sup>2</sup>	<0.0001*	2.42
FRAP	0.852	0.820	<0.0001*	B, BC, C <sup>2</sup>	<0.0001*	2.80

<sup>a</sup> The p-value results were expressed as follows:  $p < 0.05$ , \*. Abbreviations: A, microwave power; B, extraction time; C, liquid/solid ratio; CV, coefficient of variation; TPC, total phenol content; TSC, total saponin content; DRSC, DPPH radical scavenging capacity; ARSC, ABTS radical scavenging capacity; FRAP, ferric reducing antioxidant power.

( $B^2$ ,  $p = 0.6728$ ). Although the pure error was low, the model showed a significant lack-of-fit ( $p < 0.0001$ ), possibly reflecting the influence of additional factors not captured by the current design (Tables 3 and S1). Nevertheless, the high coefficients of determination ( $R^2 = 0.9323$ ; adjusted  $R^2 = 0.9174$ ), together with the satisfactory validation performance (Table 4), support the robustness and predictive reliability of the model within the experimental scope evaluated.

Using BBD and RSM methodologies, the response surface graphs revealed that TPC increased with microwave power and liquid/solid ratio, while prolonged extraction time negatively affected yield (Fig. 2). Under specific experimental conditions, the highest individual TPC value ( $2.775 \text{ mg}_{\text{GAE}} \text{ g}^{-1}$  DS extract) was obtained at 855 W, 40 mL  $\text{g}^{-1}$ , and 2 min (Table 2). This local maximum reflects the combined curvilinear effects of power and liquid/solid ratio identified in the model, illustrating how each parameter influences TPC recovery.

However, this does not correspond to the overall optimum conditions. When all responses were simultaneously considered, the global optimisation (855 W, 50 mL  $\text{g}^{-1}$ , 3.06 min) provided a balanced extraction performance, yielding a slightly lower TPC value ( $2.724 \text{ mg}_{\text{GAE}} \text{ g}^{-1}$  DS extract) (Table 4), consistent with the negative effect of longer extraction times suggested by the AB interaction.

Several studies have supported the influence of extraction variables on TPC during MAE. Rincón *et al.*<sup>20</sup> applied a BBD to optimise MAE parameters for TPC extraction from CPH (100  $\mu\text{m}$ , variety TCS01) using 63% ethanol. Under optimal conditions (400 W, 240 s, and 67 mL  $\text{g}^{-1}$ ), they achieved a TPC of  $43.94 \text{ mg}_{\text{GAE}} \text{ g}^{-1}$  DS, identifying microwave power as the most significant factor, followed by the extraction time and liquid/solid ratio. Similarly, Nguyen *et al.*<sup>12</sup> optimised MAE parameters for saponin recovery from CPH ( $\leq 1400 \mu\text{m}$ ) using a Central

Composite design (CCD). While saponins were the primary target, a TPC of  $12.40 \text{ mg}_{\text{GAE}} \text{ g}^{-1}$  DS was reported under optimal conditions (600 W, 6 s  $\text{min}^{-1}$  pulsed irradiation, 40 min, 50 mL  $\text{g}^{-1}$ ), identifying methanol concentration and extraction time as key variables influencing phenolic recovery. In a study by Rahayu *et al.*,<sup>21</sup> MAE was conducted on CPH (177  $\mu\text{m}$ , Indonesia) using pure ethanol for varying times (4–10 min) at 800 W and 70 °C. The highest TPC ( $8.65 \text{ mg}_{\text{GAE}} \text{ mL}^{-1}$  DS) was obtained after 10 min, demonstrating the importance of time, although prolonged exposure may differ in effect depending on the solvent and particle size. Mashuni *et al.*<sup>19</sup> reported a TPC of  $853.67 \text{ mg}_{\text{GAE}} \text{ L}^{-1}$  equivalent to  $0.853 \text{ mg}_{\text{GAE}} \text{ mL}^{-1}$  DS for CPH (250–600  $\mu\text{m}$ , Forastero variety) extracted with 85% ethanol at 200 W for 20 min, showing low phenolic recovery under relatively low power and long extraction time.

Other studies without formal optimisation designs also reported diverse TPC values depending on variables such as cocoa variety, solvent extraction, particle size, and extraction method. For instance, Nguyen *et al.*<sup>32</sup> reported TPC values between 1.44 and  $12.22 \text{ mg}_{\text{GAE}} \text{ g}^{-1}$  DS for CPH ( $\leq 1400 \mu\text{m}$ , Trinitario variety) using water and water bath extraction. Valadez-Carmona *et al.*<sup>14</sup> obtained  $1893 \text{ mg}_{\text{GAE}} \text{ per } 100 \text{ g DS}$  equivalent to  $18.93 \text{ mg}_{\text{GAE}} \text{ g}^{-1}$  DS for CPH ( $\leq 425 \mu\text{m}$ ) extracted by agitation with acetone : water : acetic acid (70 : 29.5 : 0.5), mainly associated with drying treatments prior to extraction. Delgado-Ospina *et al.*<sup>5</sup> found TPC values ranging from 5.4 to  $16.6 \text{ mg}_{\text{GAE}} \text{ g}^{-1}$  DS for CPH (500  $\mu\text{m}$ ) using sonication with methanol:water and acetone:water mixtures, following heat pre-treatments. Vargas-Arana *et al.*<sup>11</sup> reported remarkably high TPC ( $111 \text{ mg}_{\text{GAE}} \text{ g}^{-1}$  extract) from convectively dried CPH ( $\leq 425 \mu\text{m}$ , CCN-51 variety) extracted with methanol + 1% formic acid *via* sonication. Martínez *et al.*<sup>33</sup> found in CPH (220–640  $\mu\text{m}$ ) TPC values of  $352.67\text{--}365.33 \text{ mg}_{\text{GAE}} \text{ per } 100 \text{ g DS}$  equivalent to  $3.52\text{--}3.65 \text{ mg}_{\text{GAE}} \text{ g}^{-1}$  DS extracted by

Table 4 Optimised model prediction for the extraction of bioactive compounds and antioxidant activity from CPH by MAE<sup>a</sup>

Responses	Predicted mean	Std dev	n	SE pred	95% Pl low	Data mean	95% PI high	Relative error %
TPC	2.770	0.057	5	0.038	2.692	2.724	2.847	1.67%
TSC	0.246	0.004	5	N/A	0.240	0.241	0.252	1.99%
DRSC	85.683	3.021	5	2.026	81.591	81.966	89.775	4.54%
ARSC	102.580	2.319	5	1.555	99.439	99.680	105.720	2.91%
FRAP	92.075	2.417	5	1.621	88.802	90.890	95.348	1.30%

<sup>a</sup> The results were expressed as the sample dry extract. Abbreviations: TPC, total phenol content; TSC, total saponin content; DRSC, DPPH radical scavenging capacity; ARSC, ABTS radical scavenging capacity; FRAP, ferric reducing antioxidant power.



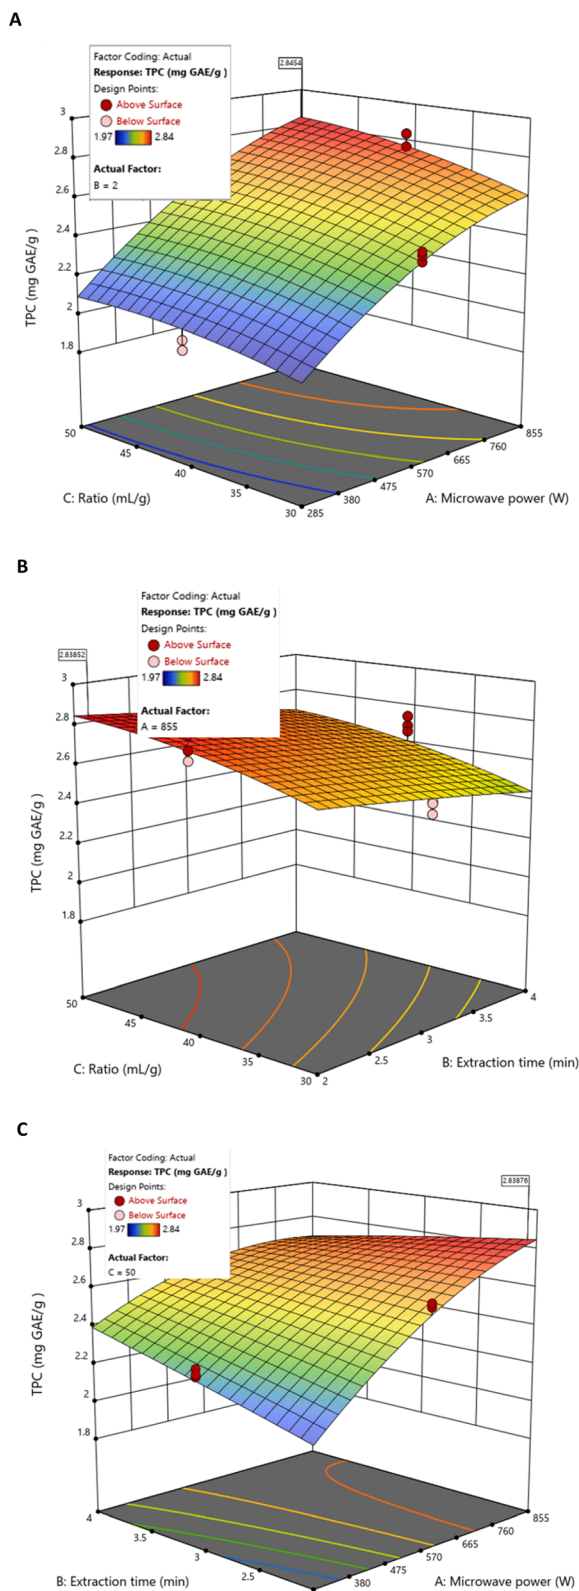


Fig. 2 Response surfaces of TPC by MAE as a function of fixed values for (A) extraction time (2 min), (B) microwave power (855 W), and (C) liquid/solid ratio (50 mL g<sup>-1</sup>).

agitation with methanol-acetone and 206.67–227 mg<sub>GAE</sub> per 100 g DS with ethanol equivalent to 2.06–2.27 mg<sub>GAE</sub> g<sup>-1</sup> DS. Comparative analysis with previous studies highlights that TPC extraction from CPH is governed by a complex interaction of factors. This multidimensional dependence highlights the variable but promising nature of MAE in various optimisation strategies.

Although our high-power, short-duration MAE approach yielded lower TPC values than those recorded with longer extraction times or higher solvent volumes, it offers an efficient compromise between processing speed and phenolic recovery. It should be noted that the intermediate particle size adopted in this study (251–426 μm) favoured effective mass transfer without negatively affecting operational performance, reaffirming its suitability for the sustainable extraction of phenolic compounds from agro-industrial waste such as CPH.<sup>34</sup>

On the other hand, comparatively higher TPC values can be attributed to the widespread use of intermediate polarity solvents, such as ethanol and methanol, which not only facilitate deeper penetration into lignocellulosic matrices but also exhibit superior absorption of microwave energy.<sup>35</sup> These physicochemical properties favour the solubilisation of bioactive compounds with intermediate polarity, particularly polyphenols.<sup>35</sup>

**3.2.2 Total saponin content (TSC).** The ANOVA results for TSC revealed a highly significant model ( $p < 0.0001$ ), explaining 96.73% of the data variability ( $R^2 = 0.9673$ ; adjusted  $R^2 = 0.9601$ ). Microwave power (A) was the dominant factor ( $F = 419.64$ ;  $p < 0.0001$ ), followed by the liquid/solid ratio (C) ( $F = 286.62$ ;  $p < 0.0001$ ) and extraction time (B) ( $F = 49.08$ ;  $p < 0.0001$ ). Strong interactions were observed between time and ratio (BC,  $F = 149.56$ ;  $p < 0.0001$ ) and between microwave power and liquid/solid ratio (AC,  $F = 94.56$ ;  $p < 0.0001$ ), whereas the microwave power-extraction time interaction (AB) was not significant ( $p = 0.1473$ ). All second-order terms were statistically significant, indicating curvilinear behaviour for microwave power ( $A^2$ ,  $F = 146.37$ ), extraction time ( $B^2$ ,  $F = 10.99$ ), and liquid/solid ratio ( $C^2$ ,  $F = 33.52$ ). The model showed good fit, with a non-significant lack-of-fit ( $p = 0.0619$ ) confirming its robustness and predictive reliability within the experimental range evaluated (Tables 3 and S2).

BBD and RSM analyses indicated that TSC increased with microwave power and liquid/solid ratio, while extraction time exerted only a minor positive influence (Fig. 3). Under specific experimental conditions, the highest individual TSC value (0.246 mg<sub>EE</sub> g<sup>-1</sup> DS extract) was observed at 855 W, 50 mL g<sup>-1</sup>, and 3 min (Table 2). This local maximum illustrates the stronger influence of microwave power and liquid/solid ratio on TSC recovery, as well as the relatively limited contribution of extraction time, consistent with the model results.

However, this point does not represent the overall optimal conditions. When all responses were simultaneously considered, the global optimisation (855 W, 50 mL g<sup>-1</sup>, 3.06 min) yielded a slightly lower TSC value (0.241 mg<sub>EE</sub> g<sup>-1</sup> DS extract) (Table 4), in agreement with the model predictions and the observed curvilinear effects.

The significantly higher yields reported in other studies are strongly influenced by the extraction time, solvent polarity, pre-



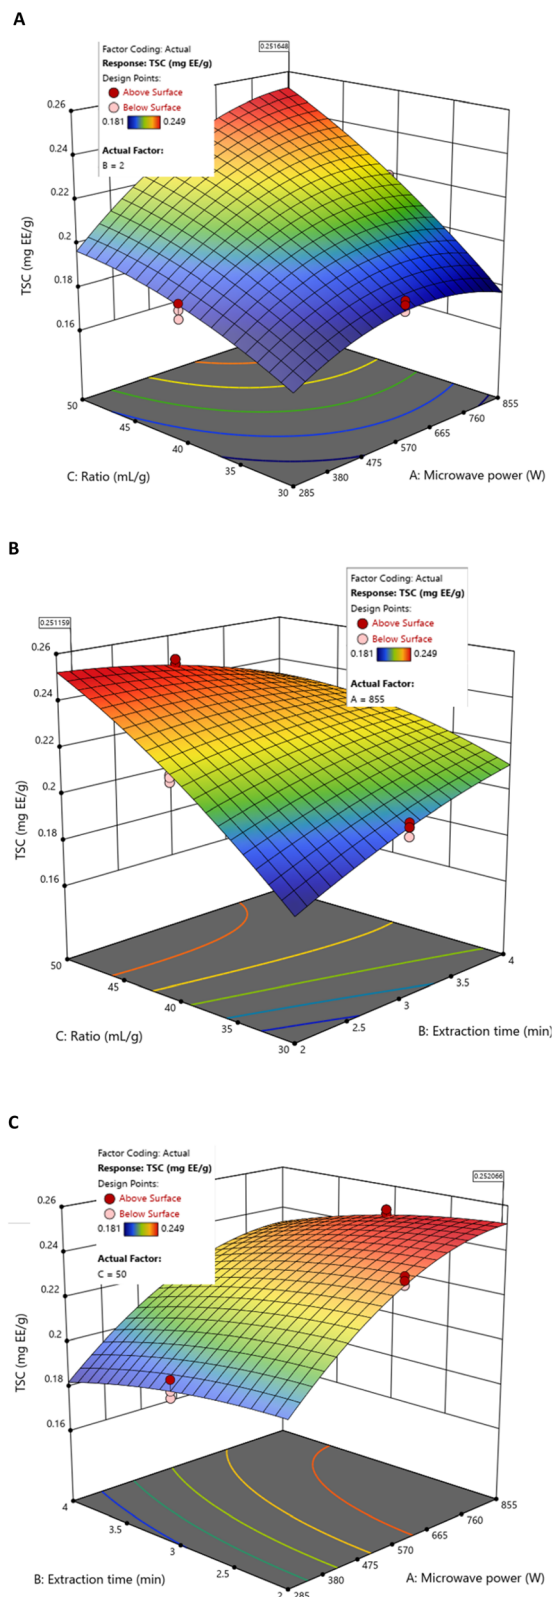


Fig. 3 Response surfaces of TSC by MAE as a function of fixed values for (A) extraction time (2 min), (B) microwave power (855 W), and (C) liquid/solid ratio (50 mL g<sup>-1</sup>).

treatment, and irradiation protocols, which should be considered depending on application priorities—yield *vs.* efficiency. In this regard, Nguyen *et al.*<sup>12</sup> optimised the MAE parameters for TSC extraction from CPH ( $\leq 1400 \mu\text{m}$ ) using a CCD and obtained a significantly higher TSC of 402 mg<sub>EE</sub> g<sup>-1</sup> DS, under conditions of 600 W, 6 s min<sup>-1</sup> irradiation, 40 min, and a ratio of 50 mL g<sup>-1</sup> ( $R^2 = 0.71$ ,  $p = 0.038$ ). The substantial difference in yield can be attributed to the use of methanol as a polar solvent, a pre-maceration stage, and prolonged extraction time, all of which improve cell wall rupture and solute diffusion. On the other hand, Nguyen *et al.*<sup>13</sup> reported moderate values (370 mg<sub>EE</sub> g<sup>-1</sup> DS) for CPH ( $\leq 1000 \mu\text{m}$ , Trinitario variety) under MAE conditions of 600 W, 30 min and 5 s min<sup>-1</sup> irradiation, with a triple preheating stage (20 s at 600 W), using water as the solvent. These are significantly higher than those obtained in the present study, highlighting how prolonged exposure and thermal cycles can significantly increase extraction efficiency, albeit with greater energy input. On the other hand, from a chemical perspective, water favours the extraction of saponins due to its ability to interact with the hydrophilic sugar chains that characterise these compounds. Saponins are amphiphilic glycosides, with a lipophilic aglycone (sapogenin) and one or more hydrophilic sugar chains.<sup>36</sup> This structural duality allows water, under conditions of heating and pressure such as those generated in MAE, to facilitate the solubilisation of the polar fractions and promote the breaking of hydrogen bonds between the saponins and the plant matrix.<sup>36</sup>

Similarly, conventional extraction methods yielded medium to high saponin yields. In this regard, values of 3.98–118.70 mg<sub>EE</sub> g<sup>-1</sup> DS were reported for CPH using soaking in distilled water for 30 min and bathing in water at 50 °C for 60 min, and UAE (100 W, 60 °C, 50 min) with water as the solvent, after a pre-maceration stage at 31 °C for 30 min.<sup>32,37</sup> The high saponin yield could be attributed to the synergistic effect of prolonged sonication and pre-treatment, which alter cell integrity and improve solute diffusion. In addition, ultrasound-induced acoustic cavitation generates microjets and shock waves that increase mass transfer and reduce solvent use.<sup>38,39</sup>

**3.2.3 DPPH radical scavenging assay (DRSC).** The ANOVA for DRSC confirmed a significant model ( $p < 0.0001$ ), accounting for approximately 69% of the total variance ( $R^2 = 0.6896$ ; adjusted  $R^2 = 0.6215$ ). Microwave power (A) was the principal factor influencing DRSC ( $F = 47.36$ ;  $p < 0.0001$ ), while the liquid/solid ratio (C) had a moderate but statistically non-significant effect ( $F = 3.19$ ;  $p = 0.0816$ ). Extraction time (B) did not contribute significantly ( $F = 1.37$ ;  $p = 0.2492$ ). Significant interactions were observed between time and ratio (BC,  $F = 8.02$ ;  $p = 0.0071$ ) and between power and ratio (AC,  $F = 4.28$ ;  $p = 0.0449$ ), whereas the power–time interaction (AB) was negligible ( $p = 0.8136$ ). Among the quadratic terms, only the liquid/solid ratio (C<sup>2</sup>) demonstrated curvilinear behaviour ( $F = 25.94$ ;  $p < 0.0001$ ).

The model's lack-of-fit was significant ( $p < 0.0001$ ), indicating room for further refinement (Tables 2 and S3), suggesting that additional variables or nonlinear interactions could further improve its predictive power. However, the acceptable coefficients of determination ( $R^2 = 0.6896$ ; adjusted  $R^2 = 0.6215$ ) and



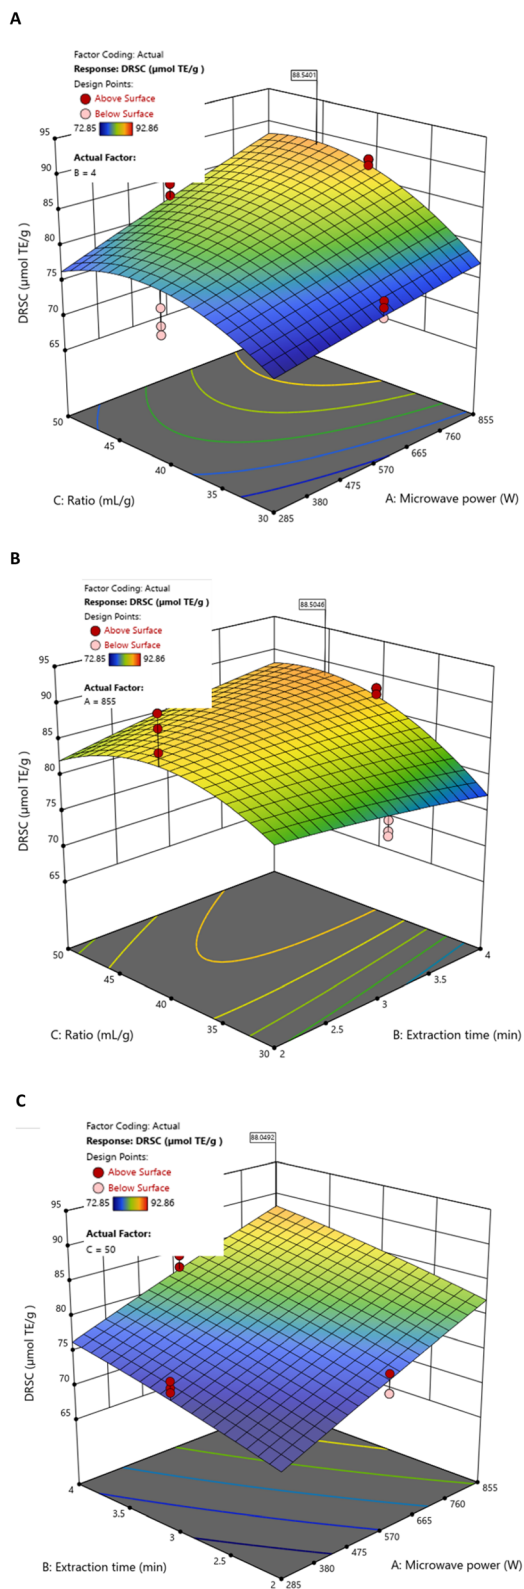


Fig. 4 Response surfaces of DRSC by MAE as a function of fixed values for (A) extraction time (4 min), (B) microwave power (855 W), and (C) liquid/solid ratio ( $50 \text{ mL g}^{-1}$ ).

consistent validation results (Table 4) support the reliability of the model for predicting DPPH radical scavenging activity under the MAE conditions studied.

Response surface analyses using BBD and RSM revealed that DRSC increased with microwave power and liquid/solid ratio, while extraction time exerted only a minor positive influence (Fig. 4). Under specific experimental conditions, the highest individual DRSC value ( $90.536 \mu\text{mol}_{\text{TE}} \text{g}^{-1}$  DS extract) was observed at  $855 \text{ W}$ ,  $40 \text{ mL g}^{-1}$ , and  $2 \text{ min}$  (Table 2). This local maximum reflects the strong contribution of microwave power and liquid/solid ratio to DPPH radical scavenging capacity, and is consistent with the significant *AC* and *BC* interactions identified in the model.

However, this individual maximum does not represent the overall optimal conditions. When all responses were jointly considered, the global optimisation ( $855 \text{ W}$ ,  $50 \text{ mL g}^{-1}$ ,  $3.06 \text{ min}$ ) resulted in a lower DRSC value ( $81.966 \mu\text{mol}_{\text{TE}} \text{g}^{-1}$  DS extract) (Table 4), in line with the negative linear trend associated with extraction time and the modest influence of this factor predicted by the model.

In contrast, Rincón *et al.*<sup>20</sup> optimised the MAE parameters in CPH (100  $\mu\text{m}$ , variety TCS01) using BBD and RSM, and reported significantly higher DRSC activity of  $430.8 \mu\text{mol}_{\text{TE}} \text{g}^{-1}$  DS under the final optimised conditions with lower microwave power ( $400 \text{ W}$ ,  $240 \text{ s}$ ,  $67 \text{ mL g}^{-1}$ ), where microwave power was also the most influential factor. Furthermore, this higher antioxidant activity observed may be due to the finer particle size, solvent composition, and amount of TPC recovered. On the other hand, various non-optimised studies have reported DRSC values ranging from  $87.42$  to  $133 \mu\text{mol}_{\text{TE}} \text{g}^{-1}$  DS,<sup>14,40</sup> with substantial variability attributed to differences in extraction method, particle size, solvent type, cacao variety, and pre-treatment strategies. This variability underscores that antioxidant activity is not solely governed by the parameters optimised in this study, but is also shaped by a complex interplay of physical (thermal degradation and Maillard reactions), chemical (enzymatic transformations of polyphenols), and biological (inherent profile of bioactive compounds in different cacao genotypes) factors.<sup>41</sup> These multidimensional influences highlight the need for broader integrative approaches when evaluating antioxidant capacity in plant matrices.

**3.2.4 ABTS radical scavenging assay (ARSC).** The ANOVA results for ARSC confirmed a significant model ( $p < 0.0001$ ;  $F = 17.39$ ), explaining 79.24% of the data variability ( $R^2 = 0.7924$ ; adjusted  $R^2 = 0.7468$ ). Microwave power (*A*) was the most influential factor ( $F = 25.45$ ;  $p < 0.0001$ ), followed by the liquid/solid ratio (*C*) ( $F = 17.94$ ;  $p = 0.001$ ) and extraction time (*B*) ( $F = 10.29$ ;  $p = 0.0026$ ). None of the interaction terms (*AB*, *AC*, *BC*) were statistically significant ( $p > 0.05$ ), indicating limited synergistic effects among variables. Quadratic effects revealed notable curvilinear behaviour for extraction time ( $B^2$ ,  $F = 90.17$ ;  $p = 0.0001$ ) and moderate curvature for the liquid/solid ratio ( $C^2$ ,  $F = 7.30$ ;  $p = 0.0100$ ), while microwave power ( $A^2$ ) did not demonstrate significance ( $p = 0.0924$ ). A significant lack-of-fit ( $F = 16.75$ ;  $p < 0.0001$ ) suggested that the current model may not fully capture the system's complexity (Tables 3 and S4). However, the solid adjustment indicators ( $R^2 = 0.7924$ ; adjusted



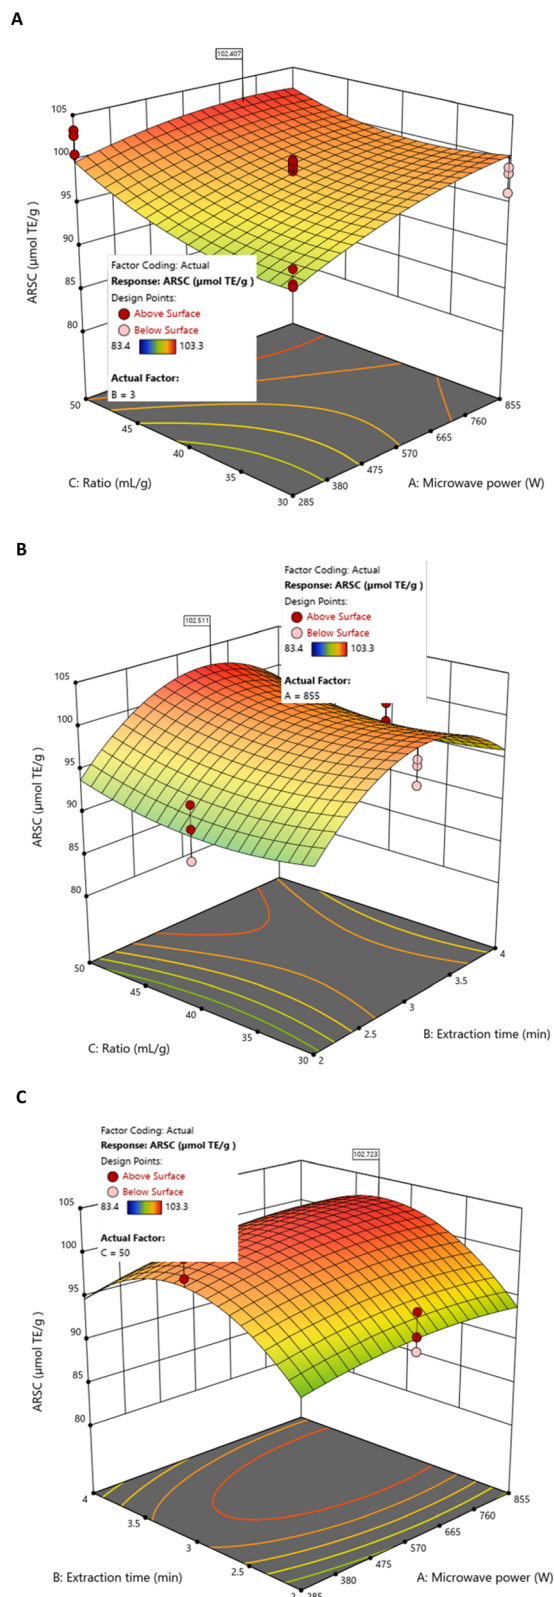


Fig. 5 Response surfaces of ARSC by MAE as a function of fixed values for (A) extraction time (3 min), (B) microwave power (855 W), and (C) liquid/solid ratio ( $50 \text{ mL g}^{-1}$ ).

$R^2 = 0.7468$ ) and the consistency of the validation (Table 4) support its predictive utility within the experimental scope studied, confirming that the model effectively captures the influence of microwave power and liquid/solid ratio on ARSC.

BBD and RSM analyses indicated that antioxidant activity increased with microwave power and liquid/solid ratio. Non-linear behaviour was also evident: moderate extraction times enhanced activity, whereas prolonged exposure led to slight reductions, likely due to degradation of thermo-sensitive compounds. Under specific experimental conditions, the individual optimum ( $855 \text{ W}$ ,  $50 \text{ mL g}^{-1}$ , and  $3 \text{ min}$ ) predicted an antioxidant capacity between  $102.407$  and  $102.723 \mu\text{mol}_{\text{TE}} \text{ g}^{-1}$  DS extract (Fig. 5). Within the experimental matrix, a similar individual maximum ( $102.188 \mu\text{mol}_{\text{TE}} \text{ g}^{-1}$  DS extract) was obtained at  $285 \text{ W}$ ,  $50 \text{ mL g}^{-1}$ , and  $3 \text{ min}$  (Table 2).

This behaviour reflects the dependence of ARSC on the liquid/solid ratio and the existence of an energy saturation zone suggested by the model, where additional increases in microwave power do not proportionally enhance the response.

However, neither of these individual maxima represents the global optimal conditions. When all responses were jointly considered, the overall optimisation ( $855 \text{ W}$ ,  $50 \text{ mL g}^{-1}$ ,  $3.06 \text{ min}$ ) yielded an ARSC value of  $99.680 \mu\text{mol TE g}^{-1}$  DS extract (Table 4), with a relative prediction error of  $2.91\%$ , confirming the model's reliability.

Studies using conventional methods and non-optimised protocols show considerable variability in ARSC. For example, Yapo *et al.*<sup>16</sup> reported  $51.87 \mu\text{mol}_{\text{TE}} \text{ g}^{-1}$  DS in CPH ( $250 \mu\text{m}$ ) extracted by boiling with  $80\%$  ethanol for  $20 \text{ min}$ . The freeze-dried CPH extract examined by Delgado-Ospina *et al.*<sup>5</sup> yielded a wider range ( $32.9\text{--}140 \mu\text{mol}_{\text{TE}} \text{ g}^{-1}$  DS), depending on the polarity and ratio of methanol:water and acetone:water mixtures under sonication-stirring. Vargas-Arana *et al.*<sup>11</sup> reported  $155.38 \mu\text{mol}_{\text{TE}} \text{ g}^{-1}$  DS in convection-dried CPH, citing the role of formic acid ( $1\%$ ) in improving phenolic solubilisation. In units not comparable with our studies, it was found in CPH that MAE is approximately three times higher than UAE in terms of antioxidant activity, which could be attributed to prolonged extraction time, repeated heating cycles, and increased solute diffusion due to the polarity and thermal conductivity of the solvent.<sup>13,37</sup> This trend is consistent with other studies comparing UAE and MAE in polyphenol-rich matrices, which reported that MAE produced up to  $23\%$  more ARSC compared to UAE, while reducing extraction time sixfold.<sup>13,37,42</sup> These findings suggest that MAE typically results in more efficient recovery and better ARSC values due to rapid energy transfer and thermal stimulation of solute diffusion.<sup>24</sup>

What emerges from this comparative analysis is a consistent pattern: ARSC is highly sensitive to extraction kinetics and solvent physicochemistry. More importantly, antioxidant potential appears intricately linked to the phenolic fingerprint including the abundance and accessibility of low-molecular-weight flavonoids and phenolic acids. Factors such as drying intensity, matrix disruption, and solvent polarity not only affect mass transfer but also modulate the liberation of structurally bound polyphenols.<sup>43–45</sup>



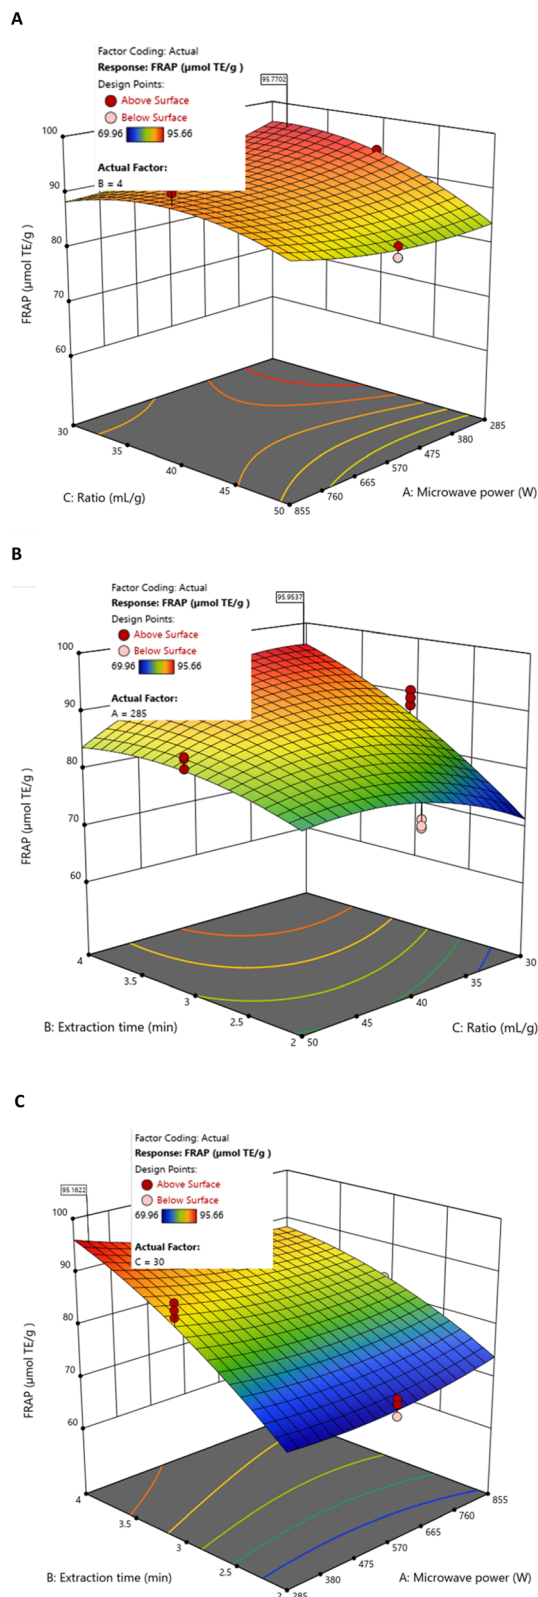


Fig. 6 Response surfaces of FRAP by MAE as a function of fixed values for (A) extraction time (4 min), (B) microwave power (285 W), and (C) liquid/solid ratio ( $30 \text{ mL g}^{-1}$ ).

**3.2.5 Ferric reducing antioxidant power (FRAP).** The ANOVA results for ferric reducing antioxidant power (FRAP) confirmed a significant model ( $p < 0.0001$ ;  $F = 26.38$ ), explaining 85.27% of data variability ( $R^2 = 0.8527$ ; adjusted  $R^2 = 0.8204$ ). Extraction time (B) was the most influential factor ( $F = 93.12$ ;  $p < 0.0001$ ), followed by the interaction between extraction time and liquid/solid ratio (BC,  $F = 51.28$ ;  $p < 0.0001$ ), the liquid/solid ratio (C,  $F = 10.34$ ;  $p = 0.0025$ ), and microwave power (A,  $F = 8.43$ ;  $p = 0.0059$ ). Additional interactions (AB and AC) were significant ( $p = 0.0007$  and  $p = 0.0003$ , respectively), highlighting combined effects among variables. Quadratic terms revealed notable curvilinear behaviour, with  $C^2$  being highly significant ( $F = 27.23$ ;  $p < 0.0001$ ), followed by  $B^2$  ( $F = 13.04$ ;  $p = 0.0008$ ) and a moderate contribution from  $A^2$  ( $F = 5.47$ ;  $p = 0.0244$ ). However, the model presented a significant lack-of-fit ( $F = 31.24$ ;  $p = 0.0001$ ), suggesting it may not fully capture the underlying variability (Tables 3 and S5). As in the case of DRSC and ARSC, the FRAP model showed a significant mismatch, possibly due to the multi-step redox mechanisms that govern antioxidant responses. However, the strong coefficients of determination ( $R^2 = 0.8527$ ; adjusted  $R^2 = 0.8204$ ) and the close agreement between experimental and predicted values (Table 4) validate the predictive reliability of the model under the MAE conditions studied.

BBD and RSM analyses indicated that microwave power and liquid/solid ratio exerted positive effects on FRAP values. The model also revealed non-linear behaviour, identifying an individual optimum at  $285 \text{ W}$ ,  $30 \text{ mL g}^{-1}$ , and  $4 \text{ min}$ , with predicted FRAP values between  $95.162$  and  $95.953 \mu\text{mol}_{\text{TE}} \text{ g}^{-1}$  DS extract (Fig. 6).

Within the experimental domain, the highest individual FRAP value measured ( $94.795 \mu\text{mol}_{\text{TE}} \text{ g}^{-1}$  DS extract) was obtained at  $855 \text{ W}$ ,  $40 \text{ mL g}^{-1}$ , and  $4 \text{ min}$  (Table 2). This observation illustrates the strong contribution of extraction time and liquid/solid ratio, as well as the curvilinear effects suggested by the model, particularly the negative quadratic behaviour of the liquid/solid ratio.

Importantly, these individual maxima do not correspond to the global optimal conditions. When all responses were simultaneously considered, the overall optimisation ( $855 \text{ W}$ ,  $50 \text{ mL g}^{-1}$ ,  $3.06 \text{ min}$ ) produced a slightly lower FRAP value ( $90.890 \mu\text{mol}_{\text{TE}} \text{ g}^{-1}$  DS extract) (Table 4), consistent with the negative interaction between extraction time and liquid/solid ratio and the curvilinear trend predicted by the model.

In comparison, studies such as that by Rincón *et al.*<sup>20</sup> reported higher values ( $144.32 \mu\text{mol}_{\text{TE}} \text{ g}^{-1}$  DS) under longer conditions ( $400 \text{ W}$ ,  $240 \text{ s}$ ,  $67 \text{ mL g}^{-1}$ ), identifying microwave power as the main factor influencing antioxidant recovery, which is consistent with the present findings, and confirming the influence of the energy supplied and the availability of solvent.

Conventional methods, such as water bath or stirring with organic solvents, showed lower values and greater dispersion ( $53 - 181 \mu\text{mol}_{\text{TE}} \text{ g}^{-1}$  DS)<sup>5,11,16</sup> demonstrating limited efficiency without energy assistance and the significant influence of drying type, solvent, and plant variety on FRAP activity, likely



Table 5 Predictive equations in real units for the optimised MAE responses of CPH<sup>a</sup>

Term	TPC	TSC	DRSC	ARSC	FRAP
	$\beta$	$\beta$	$\beta$	$\beta$	$\beta$
Intercept	$1.314 \times 10^{-1}$	$-3.204 \times 10^0$	$3.721 \times 10^1$	$4.757 \times 10^1$	$-6.083 \times 10^1$
A	$3.034 \times 10^{-3*}$	$4.930 \times 10^{-4*}$	$-5.616 \times 10^{-3*}$	$3.294 \times 10^{-2*}$	$-2.919 \times 10^{-2}$
B	$2.936 \times 10^{-1}$	$3.876 \times 10^{-1*}$	$-6.475 \times 10^0$	$3.642 \times 10^1$	$4.460 \times 10^1*$
C	$3.341 \times 10^{-2*}$	$3.778 \times 10^{-2*}$	$2.470 \times 10^0$	$-1.090 \times 10^0$	$3.946 \times 10^0$
<b>Interactions</b>					
AB	$-4.020 \times 10^{-4*}$	$-2.700 \times 10^{-5}$	$-7.330 \times 10^{-4}$	$1.996 \times 10^{-3}$	$-9.030 \times 10^{-3}$
AC	$1.100 \times 10^{-5}$	$1.800 \times 10^{-5*}$	$6.390 \times 10^{-4}$	$-3.620 \times 10^{-4}$	$9.680 \times 10^{-4}$
BC	$2.500 \times 10^{-4}$	$-6.218 \times 10^{-3*}$	$2.470 \times 10^{-1}$	$2.833 \times 10^{-2}$	$-4.996 \times 10^{-1*}$
<b>Quadratics</b>					
A <sup>2</sup>	$-1.270 \times 10^{-6*}$	$-7.510 \times 10^{-7*}$	$-2.380 \times 10^{-6}$	$-1.400 \times 10^{-5}$	$2.000 \times 10^{-5}$
B <sup>2</sup>	$-6.833 \times 10^{-3}$	$-1.643 \times 10^{-2}$	$-3.780 \times 10^{-1}$	$-6.195 \times 10^0*$	$-2.456 \times 10^0$
C <sup>2</sup>	$-3.930 \times 10^{-4}$	$-2.870 \times 10^{-4*}$	$-4.330 \times 10^{-2*}$	$1.763 \times 10^{-2}$	$-3.548 \times 10^{-2*}$

<sup>a</sup> The *p*-value results were expressed as follows:  $p < 0.05$ , \*. Abbreviations: A, microwave power; B, extraction time; C, liquid/solid ratio; TPC, total phenol content; TSC, total saponin content; DRSC, DPPH radical scavenging capacity; ARSC, ABTS radical scavenging capacity; FRAP, ferric reducing antioxidant power.

due to their effect on the preservation and accessibility of phenolic compounds.<sup>46</sup> Together, these findings suggest that FRAP activity depends on the interaction between extraction kinetics, the chemical composition of the matrix, and the thermal conditions applied, requiring a multivariable approach for future optimisation, including analysis of the specific phenolic profile and thermal stability of the active compounds.

Overall, the correlation analysis showed significant associations between TPC, TSC, and antioxidant responses (DRSC, ARSC, and FRAP). A strong positive correlation was observed between TPC and DRSC ( $r = 0.69$ ), indicating that phenolic compounds were primarily responsible for free radical scavenging capacity. Similarly, TPC showed a moderate correlation with ARSC ( $r = 0.52$ ) and FRAP ( $r = 0.44$ ), confirming the involvement of phenols in hydrogen transfer (HAT) and single electron transfer (SET) mechanisms.<sup>47</sup> In contrast, TSC showed a stronger correlation with FRAP ( $r = 0.56$ ) and a moderate correlation with ARSC ( $r = 0.46$ ), suggesting that saponins also contribute to the overall antioxidant potential, especially through electron donation reactions. These results show that the antioxidant activity of CPH extracts obtained by MAE is due to the combined and complementary effect of phenolic compounds and saponins, whose recovery depends largely on microwave power and the liquid/solid ratio used.

### 3.3 Validation of the models and regression equations

Global multi-response optimisation was carried out considering six responses: bioactive compounds (TPC and TSC) and antioxidant activity (DRSC, ARSC and FRAP). The composite desirability reached 0.840 and an algorithm was applied to identify the combination of factors that maximized the overall response, found to be 855 W, 3.06 min and 50 mL g<sup>-1</sup>.

To verify the predictive accuracy of the MAE model, a confirmation test was conducted in which the predicted values were compared with the newly measured data. Table 4 reports

the predicted mean, the experimentally obtained mean, and the 95% prediction intervals for each response. In every case the experimental values lie inside the corresponding interval, demonstrating that the model reliably forecasts future observations within the specified limits. All models exhibited high accuracy, with relative errors below 5% for most responses (TPC: 1.67%; TSC: 1.99%; ARSC: 2.91%; FRAP: 1.30%), except for DRSC (4.54%), which remained within acceptable limits for complex biological matrices (Table 4).

Table 5 summarises the final second-order models, expressed in real (uncoded) units, that describe the influence of microwave power (A), extraction time (B) and liquid/solid ratio (C) on each response CPH extract during MAE.

For TPC, microwave power and liquid/solid ratio significantly enhanced recovery, although curvilinear trends suggested potential thermal degradation or saturation effects at elevated levels. Notably, TPC showed a strong negative interaction between power and time, underlining the importance of controlled energy input. In contrast, TSC displayed a complex response profile, with all primary factors, interactions (AC and BC), and quadratic effects contributing significantly. This underscores the intricacy of saponin release mechanisms and suggests a narrower operating window for optimal yield. Antioxidant assays presented divergent behaviours. DRSC and ARSC confirmed microwave power as the primary enhancer of radical scavenging capacity, while ARSC exhibited nonlinear effects of time, possibly due to compound instability. FRAP, conversely, was most responsive to extraction time, with significant interaction and curvature effects, indicating a unique sensitivity among assays to thermal and solvent dynamics.

Overall, the findings indicate that selective optimisation is crucial: while high power favours polyphenols and radical scavenging activities, prolonged exposure may compromise compound integrity. The integration of curvilinear and interaction terms in the models enhances predictive reliability and



supports tailored parameter adjustment to maximise functional compound recovery.

### 3.4 Characterisation of the phytochemical profile in CPH extract obtained by MAE using UHPLC-Q-Orbitrap-MS/MS

Chromatography by UHPLC-Q-Orbitrap-MS/MS in negative ionisation mode allowed the identification of phytochemical compounds from the CPH extract, obtained by MAD and 50% hydroalcoholic extraction based on optimised MAE parameters (855 W, 3.06 min and 50 mL g<sup>-1</sup>). Several compounds were detected and tentatively identified due to the lack of proper standards. These include organic acids, such as tartaric acid (C<sub>4</sub>H<sub>6</sub>O<sub>6</sub>), [M-H]<sup>-</sup> m/z 149.0084, citric acid (C<sub>6</sub>H<sub>8</sub>O<sub>7</sub>), [M-H]<sup>-</sup> m/z 191.0193, gluconic acid (C<sub>6</sub>H<sub>12</sub>O<sub>7</sub>), [M-H]<sup>-</sup> m/z 195.0506 and malic acid (C<sub>4</sub>H<sub>6</sub>O<sub>5</sub>), [M-H]<sup>-</sup> m/z 133.0136. Malic and citric acids have previously been reported in CPH, coexisting with other weak acids, which underscores its potential as a source of food-grade pectin.<sup>48</sup>

In agreement with our findings, Ramos-Escudero *et al.*<sup>49</sup> identified malic, tartaric, citric and gluconic acids with molecular ions [M-H]<sup>-</sup> m/z 133.0163, 149.0108, 191.0214, and 195.053, respectively, using HPLC-ESI-qTOF-MS in hydroalcoholic CPH extracts. Similarly, Abdul Karim *et al.*<sup>50</sup> reported the same acids with molecular ions [M-H]<sup>-</sup> m/z 133, 149, 191 and 195 by LC-MS/MS in the hydroalcoholic CPH extracts, while Vargas-Arana *et al.*<sup>11</sup> detected tartaric and gluconic acids [M-H]<sup>-</sup> m/z 149.0086 and 195.0507, respectively, in methanolic CPH extracts analysed by UHPLC-MS.

Additionally, the phenolic compound clovamide (C<sub>18</sub>H<sub>17</sub>NO<sub>7</sub>) with a molecular ion [M-H]<sup>-</sup> m/z 358.093 was detected and provisionally identified. This compound has also been reported by Gomez *et al.*<sup>51</sup> with [M-H]<sup>-</sup> m/z 358.2 using HPLC-DAD-ESI-IT-MS/MS in hydroalcoholic CPH extracts.

In summary, UHPLC-Q-Orbitrap-MS/MS analyses confirmed the presence of key organic acids (malic, tartaric, citric, and gluconic) and phenolic compounds such as clovamide in CPH extracts by MAE, in line with previous reports. These results reinforce the potential of CPH as a valuable source of bioactive compounds for applications in the food and nutraceutical industries.

## 4 Conclusion

Overall, the globally optimised multi-response MAE protocol (855 W, 3.06 min, and 50 mL g<sup>-1</sup>), with a desirability index of 0.84, demonstrated a rapid, energy-efficient, and scalable approach for recovering a chemically diverse range of bioactive compounds from CPH. The method yielded 2.724 mg<sub>GAE</sub> g<sup>-1</sup> TPC, 0.241 mg<sub>EE</sub> g<sup>-1</sup> TSC, and antioxidant capacities of 81.966, 99.680, and 90.890 μmol<sub>TE</sub> g<sup>-1</sup> for DRSC, ARSC, and FRAP assays, respectively, surpassing conventional extractions in both efficiency and antioxidant recovery.

Microwave power was identified as the key driver of extraction efficiency, particularly for phenolic and antioxidant indices, whereas the liquid/solid ratio and extraction time influenced compound recovery by enhancing diffusion before

thermal degradation occurred. Importantly, the use of a modified domestic microwave provides an accessible and sustainable alternative to laboratory-scale MAE systems, supporting broader technological adoption in resource-limited contexts.

Beyond its quantitative performance, UHPLC-Q-Orbitrap-MS/MS profiling revealed a complex metabolomic signature, including malic, tartaric, citric, and gluconic acids, as well as clovamide, further substantiating the chemical richness of CPH. Collectively, these findings highlight the methodological novelty and practical feasibility of the optimised MAE protocol, positioning CPH as a valuable clean-label source of bioactives for functional foods and nutraceuticals, while contributing to the circular economy and sustainable revalorisation of agro-industrial by-products.

## Author contributions

Esteban Jurado-Beizaga (E. J. B.) and Erick Alvarez-Yanamango (E. A. Y.) conceived and designed the experimentation; E. J. B. performed the experiments and wrote the original manuscript; Oscar Herrera-Calderon (O. H. C.), Alfredo Ibañez (A. I.), and E. A. Y. validated and reviewed the final manuscript.

## Conflicts of interest

The authors declare no conflicts.

## Data availability

The data supporting the results of this study are available in the article. Additional datasets generated during this research and the raw output files for the calculations are available from the corresponding author (Erick Alvarez-Yanamango, erick.alvarez@pucp.edu.pe) upon request.

Supplementary information (SI): ANOVA results for TPC, TSC, DRSC, ARSC and FRAP, regression coefficients and significance of the Box-Behnken models, and interaction curves of MAE parameters. See DOI: <https://doi.org/10.1039/d5fb00924c>.

## Acknowledgements

This research was funded by the National Program for Scientific Research and Advanced Studies (PROCIENCIA) of the National Council of Science, Technology and Technological Innovation (CONCYTEC) through the project with agreement PE501086489-2024-PROCIENCIA, entitled: Development of functional micro and nano additives for the food and cosmetics industry from cocoa (*Theobroma cacao* L.) waste, applying the circular economy approach. The authors acknowledge the support of the Agro-industrial Technologies and Processes Research Group (ITEPA), the Pontifical Catholic University of Peru and the National University of San Marcos. Erick Alvarez-Yanamango is grateful for the Doctoral Scholarship in Engineering from the Pontifical Catholic University of Peru (PUCP).



## References

- 1 Statistics – International Cocoa Organization, <https://www.icco.org/statistics/>, (accessed 29 June 2025).
- 2 L. F. Zambrano-Mite, Y. Villasana, M. L. Bejarano, C. Luciani, D. Niebieskikwiat, W. Álvarez, D. F. Cueva, D. Aguilera-Pesantes and L. M. Orejuela-Escobar, *Heliyon*, 2023, **9**, e17258.
- 3 S. B. Anoraga, R. Shamsudin, M. H. Hamzah, S. Sharif and A. D. Saputro, *Heliyon*, 2024, **10**, e35537.
- 4 L. Porto de Souza Vandenberghe, K. Kley Valladares-Diestra, G. Amaro Bittencourt, A. Fátima Murawski de Mello, Z. Sarmiento Vásquez, P. Zwiercheczewski de Oliveira, G. Vinícius de Melo Pereira and C. Ricardo Soccol, *Bioresour. Technol.*, 2022, **344**, 126252.
- 5 J. Delgado-Ospina, R. Lucas-González, M. Viuda-Martos, J. Fernández-López, J. Á. Pérez-Álvarez, M. Martuscelli and C. Chaves-López, *Heliyon*, 2021, **7**, e06799.
- 6 F. Lu, J. Rodriguez-Garcia, I. Van Damme, N. J. Westwood, L. Shaw, J. S. Robinson, G. Warren, A. Chatzifragkou, S. McQueen Mason, L. Gomez, L. Faas, K. Balcombe, C. Srinivasan, F. Picchioni, P. Hadley and D. Charalampopoulos, *Curr. Opin. Green Sustainable Chem.*, 2018, **14**, 80–88.
- 7 N. Muñoz-Almagro, L. Valadez-Carmona, J. A. Mendiola, E. Ibáñez and M. Villamiel, *Carbohydr. Polym.*, 2019, **217**, 69–78.
- 8 L. C. Vriesmann and C. L. de Oliveira Petkowicz, *Int. J. Biol. Macromol.*, 2017, **101**, 146–152.
- 9 G. I. Edo, P. O. Samuel, G. O. Oloni, G. O. Ezekiel, F. O. Onoharigho, O. Oghenegueke, S. C. Nwachukwu, O. A. Rapheal, M. O. Ajokpaoghene, M. C. Okolie, R. S. Ajakaye, W. Ndudi and P. C. Igbo, *Nat. Resour. Hum. Health*, 2023, **3**, 426–448.
- 10 K. M. Kibler, D. Reinhart, C. Hawkins, A. M. Motlagh and J. Wright, *Waste Manage.*, 2018, **74**, 52–62.
- 11 G. Vargas-Arana, C. Merino-Zegarra, M. Tang, M. W. Pertino and M. J. Simirgiotis, *Antioxidants*, 2022, **11**, 595.
- 12 V. T. Nguyen, M. D. Le, T. T. T. Nguyen, T. T. Khong, V. H. Nguyen, H. N. Nguyen, B. N. D. Huynh, H. T. M. Tran and T. S. Trang, *J. Food Process. Preserv.*, 2021, **45**, e15134.
- 13 V. T. Nguyen, A. X. Tran and V. A. T. Le, *Powder Technol.*, 2021, **386**, 136–143.
- 14 L. Valadez-Carmona, A. Ortiz-Moreno, G. Ceballos-Reyes, J. A. Mendiola and E. Ibáñez, *J. Supercrit. Fluids*, 2018, **131**, 99–105.
- 15 R. Campos-Vega, K. H. Nieto-Figueroa and B. D. Oomah, *Trends Food Sci. Technol.*, 2018, **81**, 172–184.
- 16 B. M. Yapó, V. Besson, B. B. Koubala and K. L. Koffi, *Am. J. Food Nutr.*, 2013, **1**, 38–46.
- 17 J. Korhonen, A. Honkasalo and J. Seppälä, *Ecol. Econ.*, 2018, **143**, 37–46.
- 18 Z. S. Vásquez, D. P. de Carvalho Neto, G. V. M. Pereira, L. P. S. Vandenberghe, P. Z. de Oliveira, P. B. Tiburcio, H. L. G. Rogez, A. Góes Neto and C. R. Soccol, *Waste Manage.*, 2019, **90**, 72–83.
- 19 Mashuni, F. H. Hamid, Muzuni, L. O. Kadidae, M. Jahiding, L. O. Ahmad and D. Saputra, *AIP Conf. Proc.*, 2020, **2243**, 030013.
- 20 C. M. Rincón, C. E. Narváez and L.-F. Gutiérrez, *Tesis MSc Extracción asistida por microondas de compuestos fenólicos de los subproductos del beneficio del cacao (Theobroma cacao L.)*, Universidad Nacional de Colombia, 2023.
- 21 P. P. Rahayu, D. Rosyidi, Purwadi and I. Thohari, *Biodiversitas*, 2019, **20**, 3626–3631.
- 22 I. Rahmawati, B. A. Fachri, Y. H. Manurung, Nurtsulutsiyah and M. Reza, *IOP Conf. Ser.: Earth Environ. Sci.*, 2021, **743**, 012091.
- 23 T. Belwal, C. Cravotto, S. Ramola, M. Thakur, F. Chemat and G. Cravotto, *Foods*, 2022, **11**(6), 798.
- 24 G. V. Barbosa-Cánovas, A. Board, X. D. Chen and R. W. Hartel, *Microwave-assisted Extraction for Bioactive Compounds: Theory and Practice*, Food Engineering Series Torino, 2013, vol. 4, pp. 24–29.
- 25 C. H. Chan, R. Yusoff and G. C. Ngoh, *Chem. Eng. Technol.*, 2015, **38**, 489–496.
- 26 H. K. Kala, R. Mehta, K. K. Sen, R. Tandey and V. Mandal, *Trends Anal. Chem.*, 2016, **85**, 140–152.
- 27 N. Sianoun, P. Pongveela, N. Chairerk and J. Chungsiriporn, *Eng. J.*, 2023, **27**(8), 1–12.
- 28 V. L. Singleton, R. Orthofer and R. M. Lamuela-Raventós, *Methods Enzymol.*, 1999, **299**, 152–178.
- 29 R. Re, N. Pellegrini, A. Proteggente, A. Pannala, M. Yang and C. Rice-Evans, *Free Radical Biol. Med.*, 1999, **26**, 1231–1237.
- 30 W. Brand-Williams, M. E. Cuvelier and C. Berset, *LWT–Food Sci. Technol.*, 1995, **28**, 25–30.
- 31 I. F. F. Benzie and J. J. Strain, *Anal. Biochem.*, 1996, **239**, 70–76.
- 32 V. T. Nguyen, T. G. Tran and N. Le Tran, *Drying Technol.*, 2022, **40**, 2021–2033.
- 33 R. Martínez, P. Torres, M. A. Meneses, J. G. Figueroa, J. A. Pérez-Álvarez and M. Viuda-Martos, *Food Res. Int.*, 2012, **49**, 39–45.
- 34 S. R. Dewi, L. A. Stevens, A. E. Pearson, R. Ferrari, D. J. Irvine and E. R. Binner, *Food Bioprod. Process.*, 2022, **134**, 210–222.
- 35 A. Kumar, R. Gehlot, A. Saini and R. Phogat, *J. Food Sci.*, 2024, **89**, 9317–9335.
- 36 R. R. T. Majinda, *Methods Mol. Biol.*, 2012, **864**, 415–426.
- 37 V. T. Nguyen, T. H. N. Tran and C. A. Pham, *Waste Biomass Valorization*, 2025, **16**, 459–470.
- 38 S. R. Shirsath, S. H. Sonawane and P. R. Gogate, *Chem. Eng. Process.*, 2012, **53**, 10–23.
- 39 M. J. Goswami, U. Dutta and D. Kakati, in *Ultrasound-Assisted Extraction for Food, Pharmacy, and Biotech Industries*, ed. T. Sarkar and S. Pati, Humana, New York, NY, New York, 2024, pp. 103–128.
- 40 L. Valadez-Carmona, C. P. Plazola-Jacinto, M. Hernández-Ortega, M. D. Hernández-Navarro, F. Villarreal, H. Necochea-Mondragón, A. Ortiz-Moreno and G. Ceballos-Reyes, *Innovative Food Sci. Emerging Technol.*, 2017, **41**, 378–386.
- 41 J. Oracz and E. Nebesny, *Int. J. Food Prop.*, 2016, **19**, 1242–1258.



- 42 A. Bouchez, P. Vauchel, S. Périno and K. Dimitrov, *Foods*, 2023, **12**, 1750.
- 43 Y. Zeng, W. Zhou, J. Yu, L. Zhao, K. Wang, Z. Hu and X. Liu, *Antioxidants*, 2023, **12**, 418.
- 44 A. Antony and M. Farid, *Appl. Sci.*, 2022, **12**, 2107.
- 45 B. Dulo, T. De Somer, M. Moyo, E. Nakyese, J. Githaiga, K. Raes and S. De Meester, *Biomass Convers. Biorefin.*, 2024, **14**, 23565–23579.
- 46 L. Da, S. Borges, G. Pace, P. Lima, F. Artés, M. Euzébio De Souza, L. De Souza Freitas, H. Ibiapina De Jesus, N. De Fátima, A. Santos, M. Roberto Da and S. Melo, *Australian Journal of Crop Science*, 2019, **13**, 1835–2707.
- 47 M. Platzer, S. Kiese, T. Tybussek, T. Herfellner, F. Schneider, U. Schweiggert-Weisz and P. Eisner, *Front. Nutr.*, 2022, **9**, 882458.
- 48 J. Paola Jarrín-Chacón, J. Núñez-Pérez, R. del Carmen Espín-Valladares, L. Armando Manosalvas-Quiroz, H. María Rodríguez-Cabrera and J. Manuel Pais-Chanfrau, *Foods*, 2023, **12**, 590.
- 49 F. Ramos-Escudero, A. Rojas-García, M. de la L. Cádiz-Gurrea and A. Segura-Carretero, *Ultrason. Sonochem.*, 2024, **106**, 106887.
- 50 A. Abdul Karim, A. Azlan, A. Ismail, P. Hashim, S. S. Abd Gani, B. H. Zainudin and N. A. Abdullah, *BMC Complementary Altern. Med.*, 2014, **14**, 1–13.
- 51 P. Gomez, C. Reyes and J. G. Figueroa, *Molecules*, 2025, **30**, 3497.

