

Green Chemistry

Cutting-edge research for a greener sustainable future

Accepted Manuscript

This article can be cited before page numbers have been issued, to do this please use: L. Vaccaro, F. Campana and D. Lanari, *Green Chem.*, 2026, DOI: 10.1039/D6GC01508E.



This is an Accepted Manuscript, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this Accepted Manuscript with the edited and formatted Advance Article as soon as it is available.

You can find more information about Accepted Manuscripts in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this Accepted Manuscript or any consequences arising from the use of any information it contains.

Green foundation box

1. By integrating a cradle-to-gate Life Cycle Assessment into the valuation of CuAAC transformations, the study provides a holistic quantification of the human health and environmental impacts, supporting the identification of those factors that can enhance process sustainability
2. We demonstrated that optimized solvent selection and catalyst/solvent recycling lowered the carbon footprint to 0.362 Kg CO₂ eq./g (5-21% lower than alternatives), reduced Endpoint damage up to ~ 28%, and that eliminating non-essential ligands cut emissions by 14.5%
3. Further greening could arise from replacing phenyl acetylene, the main environmental hotspot, developing alternative feedstock or synthetic routes, and minimizing post-processing solvents through improved isolation and circular solvents recovery strategies



Clicking the sustainability: Nobel-awarded copper catalysed azide-alkyne cycloadditions (CuAAC) through Life Cycle Assessments analysis

DOI: 10.1039/D6GC01508E

Received 00th January 20xx,
Accepted 00th January 20xx

DOI: 10.1039/x0xx00000x

Filippo Campana,^a Daniela Lanari^{*b} and Luigi Vaccaro^{*a}

Copper-catalyzed azide-alkyne cycloadditions (CuAAC) represent a class of chemical reactions belonging to the broader group of so-called “click reactions.” In this scenario, CuAAC, which contributed to Sharpless being awarded his second Nobel Prize in 2022, has assumed a primary role in synthetic chemistry. It is widely recognized as a privileged method for preparing triazole moieties, which are important scaffolds, particularly in the synthesis of active pharmaceutical ingredients (APIs). CuAAC reactions are characterized by high regio- and stereoselectivity, as well as 100% atom economy, resulting in minimal waste generation. This advantage is often highlighted by evaluating green chemistry metrics. However, such metrics do not always provide a fully comprehensive assessment of the advantages and drawbacks of a specific synthetic pathway, as they mainly focus on the amount of waste generated relative to the amount of product synthesized. Under these circumstances, Life Cycle Assessment (LCA) emerges as a powerful tool capable of evaluating the overall environmental impact of a chemical process. In this study, the sustainability aspects of a series of CuAAC procedures have been investigated using LCA, and the data have been validated through uncertainty analysis. This approach enables identification of the most environmentally friendly procedures among those examined, as well as the critical process stages that limit their overall sustainability.


1. Introduction

As announced by The Royal Swedish Academy of Sciences, on the 5th of October 2022, M. Meldal and B. Sharpless (together with C. Bertozzi for bio-orthogonal click chemistry), were awarded on the Nobel Prize in Chemistry because “*Presented what is now the crown jewel of click chemistry: the copper catalysed azide-alkyne cycloaddition (CuAAC). This is an elegant and efficient chemical reaction that is now in widespread use. Among many other uses, it is utilised in the development of pharmaceuticals, for mapping DNA and creating materials that are more fit for purpose*”.¹

The philosophy of click chemistry was initially introduced by Sharpless and co-workers to describe a synthetic methodology based on a small set of highly efficient, selective, and reliable reactions that enable the rapid assembly of simple molecular moieties into more complex entities. Click chemistry is, in fact, defined as a collection of powerful and modular reactions for the fast synthesis of useful new compounds and combinatorial libraries, typically through the formation of heteroatom-linked connections, and is characterized by mild reaction conditions, high yields, high degree of regioselectivity and stereospecificity, and the limited generation of easily removable and inoffensive side products.^{2,3} Among click reactions, CuAAC is definitely the most investigated one, particularly because of the relevant utilization of the derived products, i.e., 1,4-disubstituted-1,2,3-triazoles. This family of heterocyclic compounds has attracted sustained attention because of its pronounced biological activity. Numerous studies have demonstrated that members of this class display significant antibacterial and antiviral

properties, making them valuable motifs in the development of therapeutic agents and pharmacologically relevant molecules.⁴ In recent decades, however, the relevance of the triazole scaffold has expanded well beyond medicinal chemistry. Owing to its efficiency, selectivity, and tolerance toward many functional groups, this reaction has become a cornerstone in modern synthetic methodology. It is now routinely employed in materials science to assemble complex macromolecular architectures, including dendrimers⁵ and functional polymers,⁶⁻⁸ where the triazole ring serves as a robust and reliable linkage that imparts structural stability and tunable physicochemical properties. Furthermore, the incorporation of azide and alkyne moieties into biological molecules has been successfully applied in bioconjugation.⁹ Chemically, CuAAC is defined as a [3+2] dipolar cycloaddition catalyzed, as suggested by its name, by Cu(I) species. These are typically generated in situ by reduction of copper(II) salts, such as copper sulfate (CuSO₄), using suitable reducing agents (sodium ascorbate or ascorbic acid), or by oxidation of metallic Cu(0) (Scheme 1). Alternatively, Cu(I) salts may be directly employed; however, due to their thermodynamic instability, they can be readily oxidized to the inactive Cu(II) form.^{10,11} From a mechanistic point of view, the generally accepted mechanism is that proposed by Worrell and colleagues,¹² requiring the involvement of two copper atoms binding the alkyne to form the acetylide complex, which is further attacked by the nucleophilic azide to form a six-membered ring, which, after the formation of the new C-N bond, affords the desired triazole.

a. CuAAC classic protocols

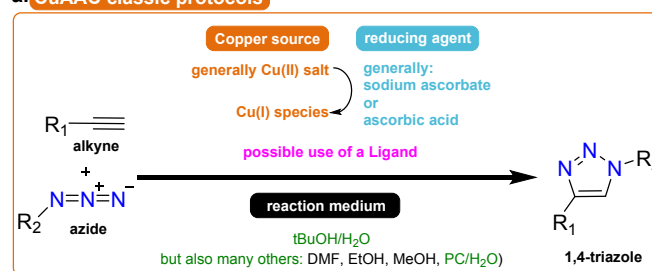


^a Laboratory of Green S.O.C., Dipartimento di Chimica, Biologia e Biotecnologie, Università degli Studi di Perugia, Via Elce di Sotto 8, 06123 Perugia, Italy. E-mail: luigi.vaccaro@unipg.it.

^b Dipartimento di Scienze Farmaceutiche, Università degli Studi di Perugia, Via del Liceo 1, 06123 Perugia, Italy.

[†]Supplementary information (SI) available: LCA inventories, Life cycle impact assessment data. See DOI:



b. CuAAC mechanism

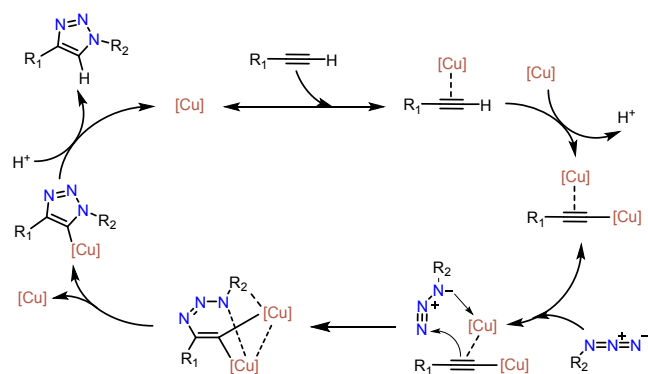

Scheme 1 a) Common protocols for CuAAC reactions. In green are highlighted the solvent mixture considered in the assessment; b) Mechanism of the CuAAC.

If the CuAAC characteristics and the revolutionary twelve principles of green chemistry developed a few years earlier are considered, it is evident that the two concepts are closely connected, and the first represents the implementation of the more general principles listed by Warner and Anastas.¹³ Indeed, one of the defining features of click chemistry, especially the CuAAC, is its quantitative atom economy,¹⁴ a core concept of green chemistry, ensuring the incorporation of all atoms from the starting materials into the final product. Furthermore, the close connection between these two philosophies is reinforced by the use of catalysts, which enhance reaction efficiency by lowering the activation energy barrier, thereby saving energy.¹⁵ Click chemistry methodologies also incorporate green chemistry principles, notably reducing waste through alternative, less material-intensive purification strategies (such as precipitation and crystallization rather than column chromatography) and avoiding or replacing hazardous solvents with safer, more sustainable options. These are widely recognized as critical determinants of the environmental sustainability of chemical processes, as they generally constitute the largest mass fraction in most transformations and are extensively used in product purification and isolation.¹⁶ The adoption of renewable and less toxic media, as well as the careful selection and development of efficient solvent recovery and recycling strategies, can significantly reduce the environmental concerns associated with a given process.¹⁷⁻²⁰ To date, chemists have several options at their disposal for evaluating, both quantitatively and qualitatively, the actual footprint associated with a specific procedure and, moreover, the improvements introduced. Mass metrics, such as the E-factor,²¹ introduced by Sheldon in 1994, and process mass intensity (PMI),²² are among the most widely used tools for evaluating a process's sustainability. The E-Factor, representing the mass of waste generated with respect to the mass of the final product, offers a straightforward quantitative indication of waste generated per kilogram of product. Despite its usefulness, both the E-factor and PMI exhibit significant limitations. In particular, without differentiating between safe and dangerous by-products, they treat all waste as equivalent,

failing to account for toxicological or environmental consequences. To address this shortcoming, the environmental quotient (EQ) was proposed as an empirically derived weighting factor that reflects and differentiates the hazard associated with each waste type, thereby enabling a more appropriate evaluation.

At this stage, to properly and comprehensively assess the environmental and human health sustainability associated with chemical transformations and synthesis, Life Cycle Assessment (LCA) is the most appropriate method (Fig. 1).

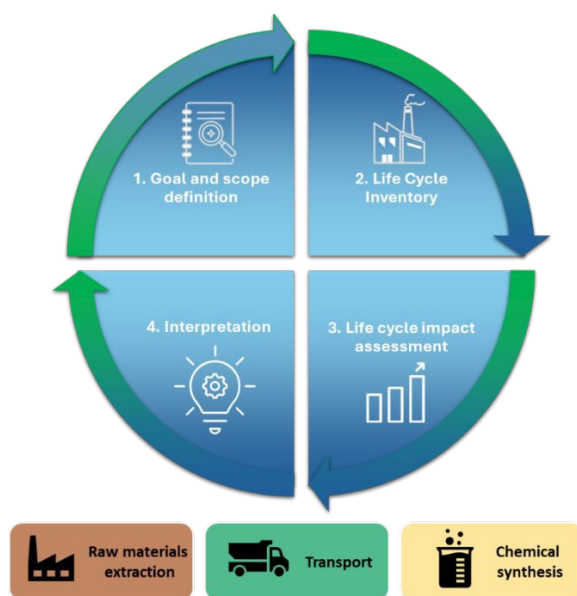


Fig. 1 LCA analysis stages applied to cradle-to-gate chemical processes.

This is a specific computational analysis that considers all life stages of the procedure under investigation, from raw material extraction to product use and disposal/recycling.²³

In contrast to mass-based metrics, LCA considers not only the impacts associated with a given process but also the related human health and environmental consequences,²⁴ making it a more precise and faithful-to-reality evaluation.

In this context, over the past decades, LCA has been increasingly adopted to evaluate the environmental performance of chemical synthesis. Very recently, Folkerts and co-workers reported an integrated LCA-guided approach for the synthesis of Letemovir, showing how iterative sustainability assessment can identify environmental hotspots and support route optimization beyond conventional metrics.²⁵ Similarly, Tannert et al. applied LCA to compare petrochemical and enzymatic epoxidation routes for the synthesis of a bio-based diepoxy monomer. The enzymatic pathway showed generally lower environmental impacts, while highlighting the strong influence of yield, solvent recycling, and waste generation on process sustainability. Their work also emphasized the importance of comprehensive LCA analyses beyond conventional green chemistry metrics.²⁶ More recently, LCA has also been employed to assess greener amidation methodologies for pharmaceutical synthesis, demonstrating that saccharin-based routes combined with solvent and reagent recycling strategies



can significantly reduce greenhouse gas emissions and overall environmental impacts in the production of active pharmaceutical ingredients (APIs).²⁷

Accordingly, the herein presented work investigates the environmental burdens associated with CuAAC by evaluating a series of strategies previously employed for the synthesis of triazole moieties.

Because our principal objective was to investigate the synthetic process solely through a cradle-to-gate analysis, all procedures considered were assumed to yield the same benchmark compound, i.e., 1-benzyl-4-phenyl-1*H*-1,2,3-triazole, obtained from the reaction between phenyl acetylene and benzyl azide. Several aspects of the selected procedures have been analysed, including the effects of previously cited starting materials, copper-based catalysts such as copper sulfate, copper metal and CuBr(PPh₃)₃ catalyst (*vide infra*), ligands and solvents (tert-butanol and Polarclean®), revealing that the proper choice of all these components can significantly reduce the impact associated with the CuAAC methodologies.

2. Methods

This study adhered to the four phases outlined in the LCA methodology.^{28,29} Initially, the goal and scope were defined, as was the study typology. Next, the procedures for constructing material inventories were detailed for each synthetic process, along with the assumptions underlying them. Ultimately, the impact assessment approach and method were outlined.

2.1 Goal and scope definition

The main aim of the LCA study conducted herein is to evaluate the environmental profile of a series of synthetic procedures used to prepare 1,4-triazoles via CuAAC and to identify which components or procedures most hinder their sustainability.

Experimental procedures for the synthesis of the benchmark triazole 1-benzyl-4-phenyl-1*H*-1,2,3-triazole were extracted from the literature. The five most notable examples in terms of excellent yields, selectivity, and variety of catalysts and conditions were chosen to evaluate their impact through an LCA study (Table 1).³⁰⁻³⁴

The system boundary was defined following a cradle-to-gate approach, and the functional unit was established as 1 g of the target product (Fig. 2). As all the investigated procedures were carried out at laboratory scale, this amount was considered an appropriate and representative reference unit for evaluating and comparing their environmental impacts.


Resource exploitation and emissions to water, air, and soil were shaped by both the extraction and manufacturing of all materials, thereby framing the environmental profile and subsequent human health impacts for each chemical route analyzed.^{35,36}

It was assumed that all processes were conducted at a single site. Environmental impacts from raw material transportation were accounted for, based on transport distances of 100 km by lorry (>16 t) and 600 km by train. Additionally, the impacts associated with chemical plant infrastructure, including manufacturing facilities and equipment, were incorporated (4.00 × 10⁻¹³ unit).

2.2 Inventory analysis

While setting up the LCA analysis, adopting a retrosynthetic strategy, new inventories for several chemicals have been prepared to be utilized in the evaluation. When an existing inventory dataset was available in the literature, it was

Table 1. Details of the Literature procedure investigated.^a

Ref.	Catalyst	Ligand	Reductant	Solvent	T (°C)	Time (h)
30	CuSO ₄ (1 mol%)		Na-Asc. (4 mol%)	tBuOH/H ₂ O (2:1)	Not specified	24
31	Cu turnings [Cu(0)]	none	none	tBuOH/H ₂ O (1:1)	RT	12-24
32	CuSO ₄ (1 mol%)	none	Na-Asc. (10 mol%)	tBuOH/H ₂ O (1:1)	RT	6-12
33	CuSO ₄ (2 mol%)	none	Na-Asc. (10 mol%)	PC/H ₂ O (4:1)	50	24
34	CuBr(PPh ₃) ₃ (0.5 mol%)	none	none	neat	rt	7-24

^aFor all procedures, a 95% isolated yield was assumed to minimize the effect of small yield variations on the comparative LCA results and enable a more objective assessment of the environmental impact of reagents, solvents, and process conditions; Na-Asc.: Sodium ascorbate; tBuOH: tert-butanol; PC: Polarclean®; Ligand: (1-benzyl-1*H*-1,2,3-triazol-4-yl)methanamine; Reactions scale: 3-0.5 millimoles.



considered, adjusted according to the assumptions provided, and used for constructing other inventories.

General assumptions were made regarding process energy (0.0002 MJ per gram of the compound) and electricity consumption (0.000333 kWh per gram of the compound) for all unavailable compounds that required specific modeling.

Given the European Union's statements that energy production and use account for over 75% of greenhouse gas emissions across Europe,³⁷ the contribution of electricity in the final synthetic steps that afford the desired molecule has been intentionally omitted, as it is nearly identical across all the procedures studied.

This exclusion from the system boundary has been further motivated by different factors. First, because the reaction is carried out at near-room temperature, the energy demand associated with stirring can be considered negligible. In addition, DFT calculations reported by Himo and colleagues demonstrated that the azide-alkyne cycloaddition is a highly

exothermic reaction, releasing approximately 60.8 kcal/mol.³² Under these conditions, the intrinsic chemical energy of the reactants represents the main driving force of the process, while external energy inputs play only a marginal role compared with the need to control the spontaneous heat release for safety purposes.

Accordingly, the present analysis, primarily focused on atomic efficiency, emphasizes the impact of the chemicals involved, with particular attention to the environmental and human health implications associated with the selection of catalysts, reducing agents, and, most importantly, solvents, whose significant contribution to the environmental footprint of chemical processes is widely recognized.

Particularly, the emissions considered, consistent with LCA studies of chemical processes and representing the primary contributors to the associated impacts, were calculated and assumed as follows:²³

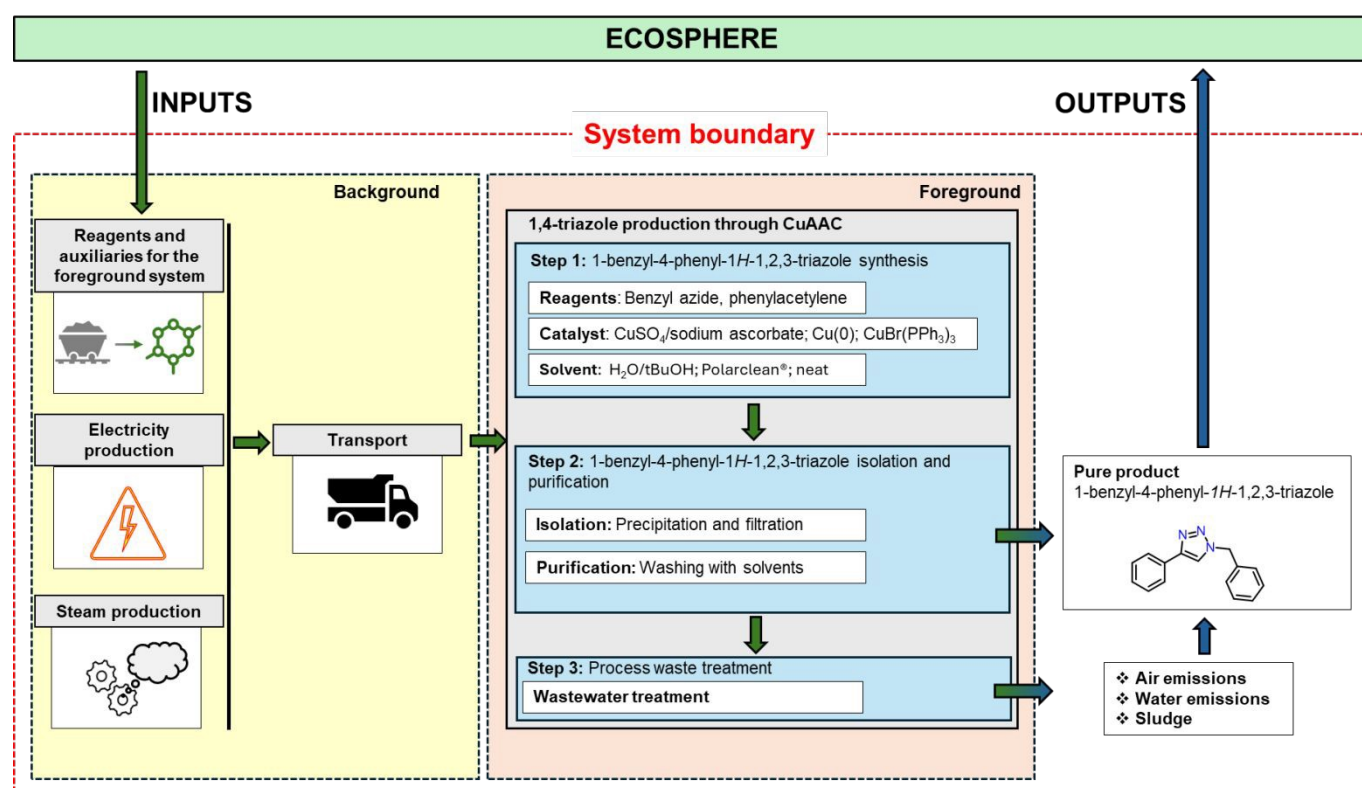


Figure 2. Cradle-to-gate system boundary employed for the present LCA study, encompassing the synthesis of 1-benzyl-4-phenyl-1H-1,2,3-triazole.

- 0.20% of volatile input materials were considered to be emitted in the atmosphere as a consequence of the procedural operations;
- 24.50% of the wastewater treatment was presumed to be oxidized and released into the air as CO₂ (in the case of organic materials);
- 65.80% of the organic compounds were retained in the sludge;
- 9.70% was modeled to be discharged into rivers;
- No emissions to the soil were determined, as no agricultural destination for the digested sludge was considered.

Assumptions regarding data gaps (e.g., ethyl acetate amount used in the Lal et al.³⁴ procedure) were made based on our expertise and are clearly outlined in the corresponding inventory tables, as well as the use of proxies when some specific chemicals inventories were not available and they could be replaced with existing ones that are chemically similar (as an example, isobutanol ecoinvent inventory was used instead of tBuOH). To provide further insight, the present limitations are listed in Table SI-23.

Specifically, the inventory for Polarclean® was not newly developed, as an existing one from the literature (see SI) was used.



Finally, to evaluate the absolute impact of the chemical synthesis, the yields of all procedures were standardized to 95%.

2.3 Impact assessment

The impact assessment was performed using SimaPro 9.6 software and the ReCiPe 2016 method, considering 18 impact categories (*Global warming, Stratospheric ozone depletion, Ionizing radiation, Ozone formation, Human health, Fine particulate matter formation, Ozone formation, Terrestrial ecosystems, Terrestrial acidification, Freshwater eutrophication, Marine eutrophication, Terrestrial ecotoxicity, Freshwater ecotoxicity, Marine ecotoxicity, Human carcinogenic toxicity, Human non-carcinogenic toxicity, Land use, Mineral resource scarcity, Fossil resource scarcity, Water consumption*).³⁸

Midpoint impact categories and Endpoint damage areas (*Human health, Ecosystems, and Resources*) were analyzed hierarchically over a 100-year period. Long-term emissions, which affect scenarios beyond 100 years, were excluded. The results from the various protocols examined are presented and analyzed in Midpoints, with outcomes weighted and normalized in Endpoint damage areas. This enables a comparison of our approach with others using a single indicator as a benchmark for global environmental impact. During this process, Midpoint characterization results are transformed into intermediate units, which are then weighted and normalized to represent the relative impact in millipoints (mPts), reflecting their severity within a global context.

3. Results and discussion

Before describing the methodologies and their overall impacts, we first examined the limitations and advantages of selecting and using one catalyst over another, as well as one solvent over another.

The catalysts adopted in the reference procedures are CuSO_4 , copper turnings $[\text{Cu}(0)]$, and tris(triphenylphosphine)copper(I) bromide $[\text{CuBr}(\text{PPh}_3)_3]$ as reported in Table 1.

$\text{CuBr}(\text{PPh}_3)_3$ (Fig. 3) is usually the most impactful catalyst, mainly because of its multistep production route, which requires the depletion of a significant amount of fossil-derived components. In contrast, CuSO_4 exhibits the most benign profile, even less impactful than metallic copper, despite being produced from it. In fact, given the amount of Cu in CuSO_4 , the impact of the extraction and purification of the pure metal is significantly reduced. This is also reflected in the *Human carcinogenic toxicity, Human non-carcinogenic toxicity, and Mineral resource scarcity* impact categories, where the mining process significantly influences the final product's human health footprint. In contrast, CuSO_4 is more sensitive in *Freshwater ecotoxicity* than metallic copper because its high-water solubility leads to a more rapid release and bioavailability of Cu^{2+} ions. Besides reagents and catalysts, the other component that shapes the sustainability of a synthetic route is undoubtedly solvents. They, in fact, are used not only to

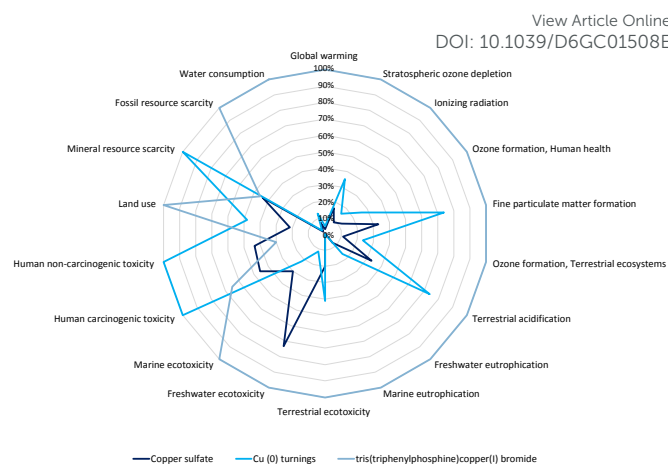


Fig. 3 Midpoint analysis comparison among the different catalysts adopted in the investigated procedures (ReCiPe 2016).

solubilize reactants, stabilize transition states, or transfer mass and heat, but they are also used in the post-processing and purification phases to isolate the pure product.^{39,40}

Among the solvents used in the procedures analysed, tBuOH and Polarclean® are reported. The first one is a tertiary alcohol industrially produced through isobutene hydration.⁴¹ The second one, on the other hand, is a mixture of two components, the major one being methyl 5-(dimethylamino)-2-methyl-5-oxopentanoate, which is produced from methyleneglutarodinitrile (MGN), a by-product of Nylon 6,6 production.⁴² In the last decades, Polarclean® has been used for several purposes, ranging from polymerizations,⁴³ membranes fabrication,¹⁸ solid-phase peptide⁴⁴ and obviously organic chemical synthesis, such as radical-mediated cyclization promoted by metal catalysts,⁴⁵ oxidation and rearrangement of the carbonyl group⁴⁶ and copper-mediated 1,3-dipolar cycloadditions.³³

From an environmental point of view, generally Polarclean® shows a worse ecological profile compared to tBuOH because of the multistep synthesis necessary for its production (Fig. 4).⁴⁷

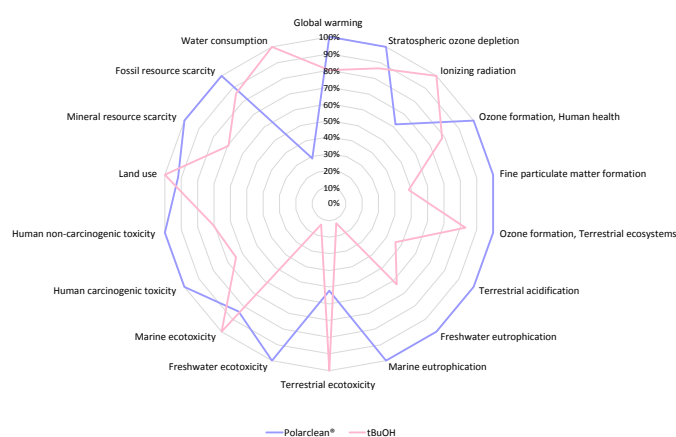


Fig. 4 Midpoint characterization of Polarclean® and tBuOH (ReCiPe 2016).

Some exceptions can nevertheless be identified, especially in the categories of *Water consumption* and *Terrestrial*



ecotoxicity. This is because PolarClean® is produced from recycled starting material, whereas tBuOH is derived from isobutene obtained directly from crude oil refining.

Following analysis of the key components that influence the environmental footprint of the selected CuAAC procedures, an overall evaluation was conducted.

Firstly, focusing on the procedure developed by Chan et al.³⁰ (Fig. 5), we observed that the main contribution to the impact is represented by phenyl acetylene with an average impact across the 18 categories of 56.4%, followed by the additive (18.5%) and finally benzyl azide (17.1%). Although phenyl acetylene and benzyl azide are the necessary partners for the

CuAAC transformation, (1-benzyl-1*H*-1,2,3-triazol-4-yl)methanamine is used as a ligand to enhance the reaction rate, thereby stabilizing the Cu(I) species formed upon CuSO₄ reduction by sodium ascorbate. This means that the role of the ligand is beneficial but not essential to the reaction course, and from an environmental point of view, it can be avoided, greatly boosting the procedure's sustainability.

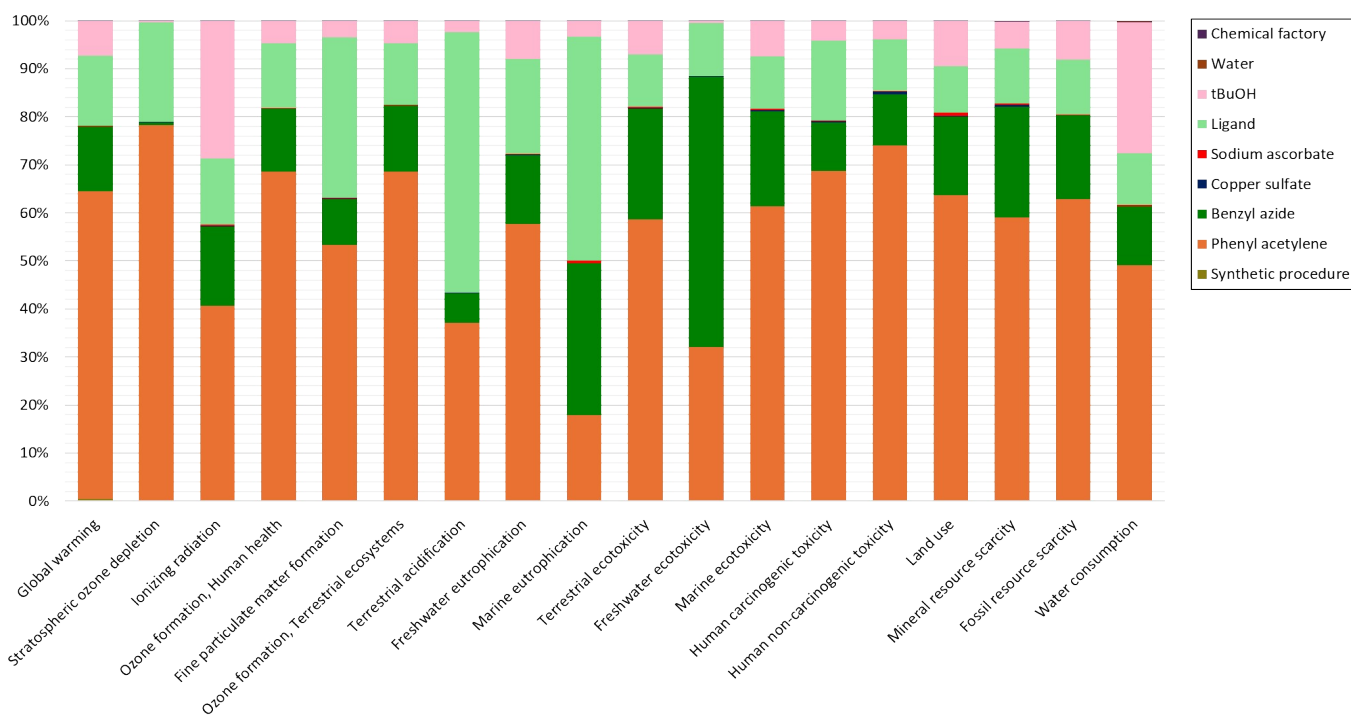


Fig. 5 Midpoint characterisation of the Chan et al.³⁰ procedure (ReCiPe 2016).

The possibility of avoiding the use of a ligand in the synthesis of triazole moieties was already demonstrated by Rostovtsev et al.,³¹ as well as the possibility of catalysing the reaction using Cu(0) turnings (Fig. 6).

For this procedure, the Midpoint analysis highlighted that phenyl acetylene remains the most impactful component across most categories, whereas metallic copper turnings have a highly impactful effect on the *Human carcinogenic toxicity*, *Human non-carcinogenic toxicity*, and *Mineral resource scarcity* category.

Generally, avoiding the use of the ligand is the key factor contributing to the lower environmental impact, resulting in a reduced global warming potential (GWP).

Specifically, while the procedure including the ligand³⁰ showed an impact of 0.456 kg CO₂ eq/g, the one that avoided its use³¹ led to a 14.5% reduction to 0.390 kg CO₂ eq/g. Further

environmental improvements were reported by Himo et al.³² by avoiding the use of the ligand and adopting a catalytic system based on CuSO₄ with sodium ascorbate as the reductant.

These experimental conditions enabled an additional reduction in the carbon footprint (0.382 kg CO₂ eq/g) compared with the previously discussed strategies.

This improvement primarily resulted from using a copper salt rather than metallic copper as the catalyst.

Indeed, although CuSO₄ requires a synthetic step for its production, its significantly lower copper content by weight reduces the overall mining and extractive impact associated with the metal (Fig. 7).



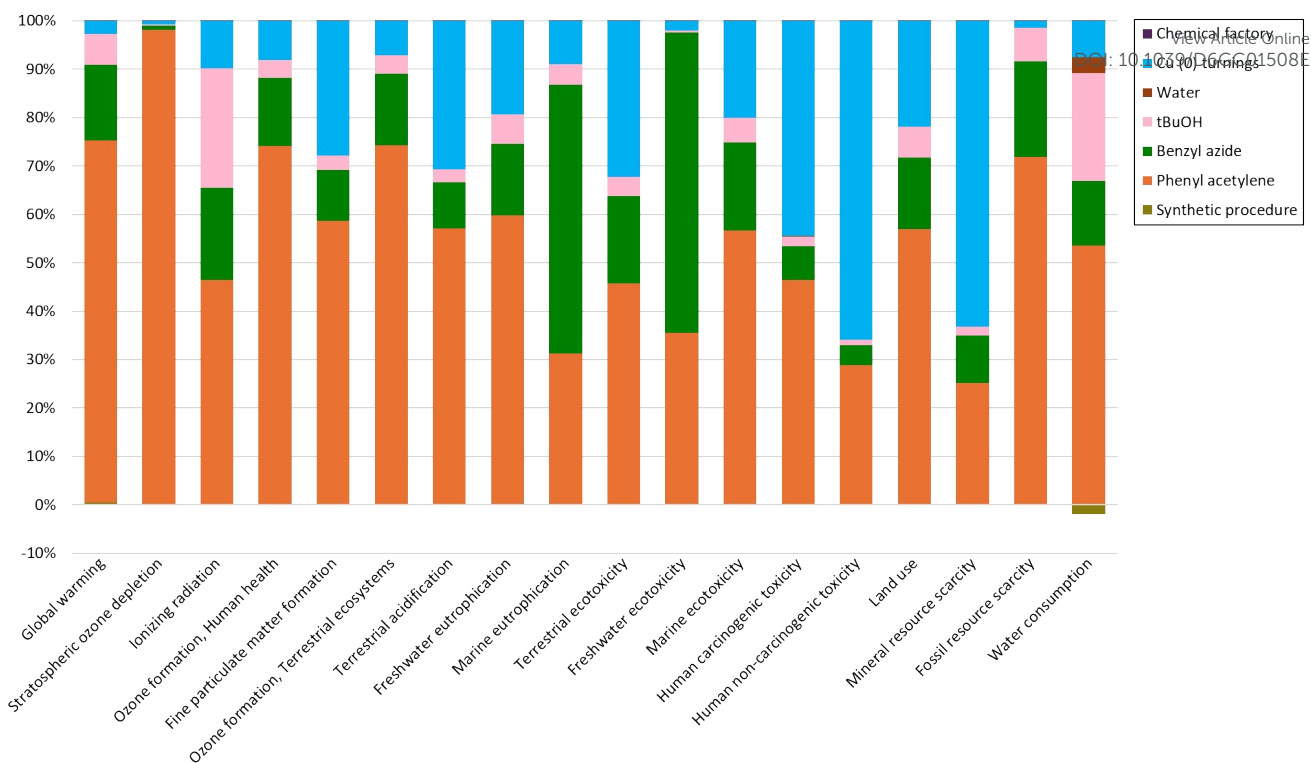


Figure 6. Midpoint characterization of the Rostovtsev³¹ et al. procedure

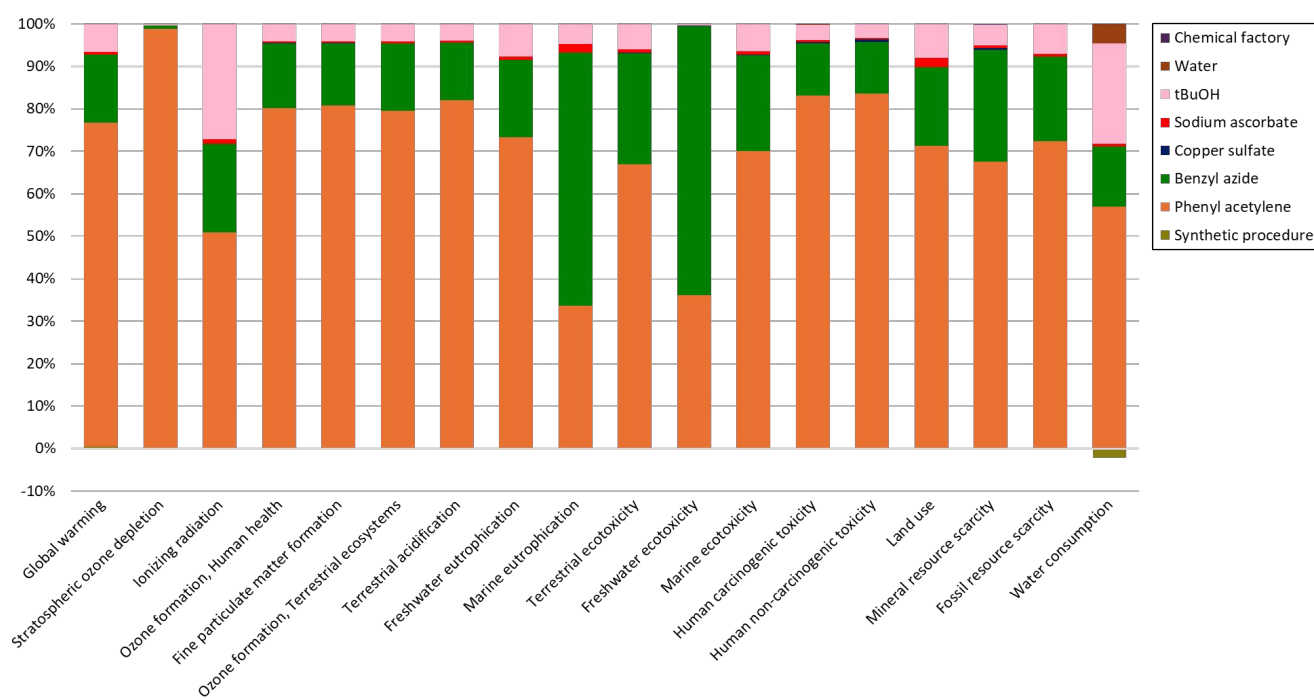


Fig. 7 Midpoint analysis of the Himo et al.³² synthetic route (ReCiPe 2016).

Once the optimal catalyst has been identified and superfluous components removed, tBuOH and, most notably, phenylacetylene and benzyl azide remain the principal

contributors to the overall impact. Further improvements in sustainability could nonetheless be achieved by adopting an alternative solvent that facilitates product precipitation,



thereby enabling straightforward recovery and reuse. This is the case for Polarclean[®], which, when combined with water in a 4:1 (v/v) mixture, ensures good solubility of the reagents and allows straightforward isolation by simple under-vacuum filtration of the insoluble product, without the need for additional water to promote product precipitation.

As reported in the procedure developed in 2018 by Luciani et al.,³³ when using this commercial ester-amide reaction media,

it can be clearly seen that the environmental footprint is dominated by the reactants phenylacetylene and benzyl azide (Fig. 8), as the impact of the solvents and the catalysts is negligible because of their recovery for 5 consecutive runs.

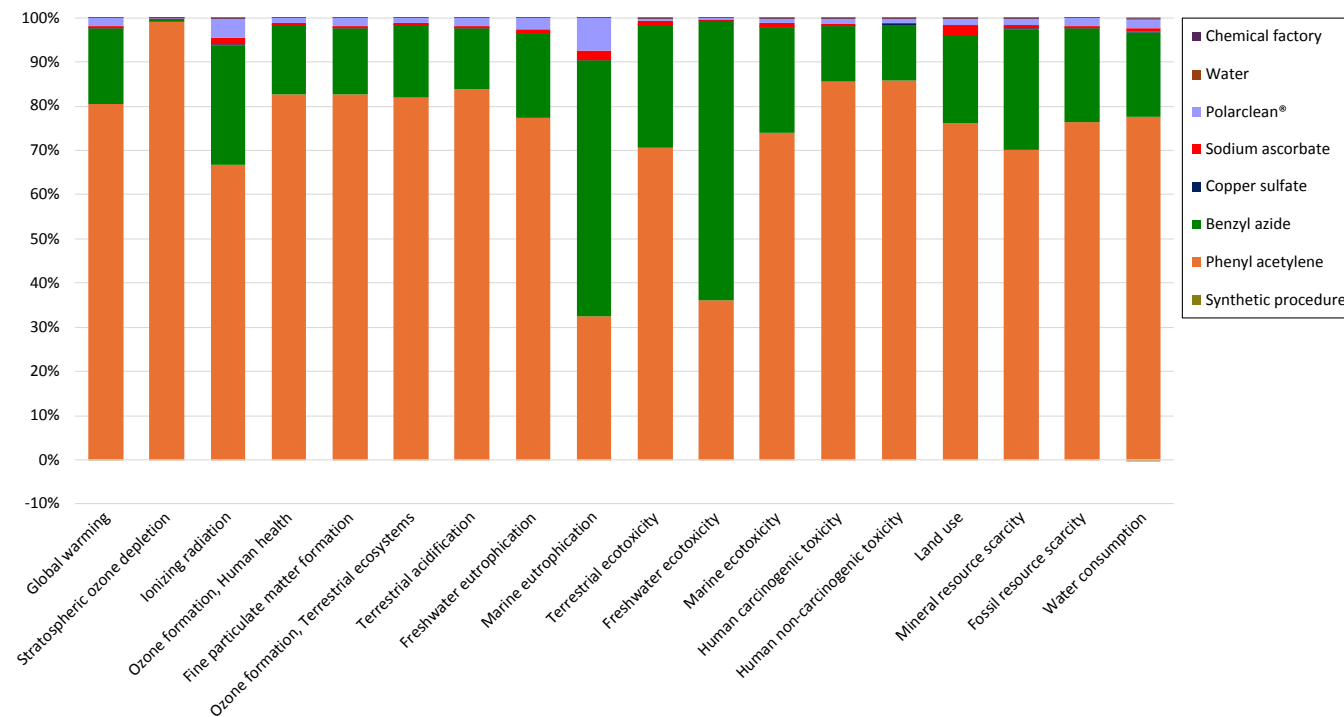


Fig. 8 Luciani et al.³³ CuAAC method (solvent and catalyst recovery and reuse) analyzed through Midpoint characterisation (ReCiPe 2016).

Using this green approach, the procedure discussed earlier reduced the carbon footprint to a minimum of 0.362 kg CO₂ eq/g.

The pivotal environmental role of the solvent is further highlighted when the same procedure is analyzed without considering solvent and catalyst recovery.

In this case, the environmental impact is 0.390 kg CO₂ eq/g, which is 7.73% higher than that of the procedure that entails recovery.

In the context of CuAAC, solvent-free procedures have also been developed. This is the case for the methodology reported by Lal et al.,³⁴ which achieved excellent yields under neat conditions by adopting a tailor-made copper catalyst, namely tris(triphenylphosphine)copper(I) bromide [CuBr(PPh₃)₃].

Here, despite the complexity of the catalyst synthesis, the overall environmental impact remains limited, even though it is higher than that reported by Luciani et al. (0.429 vs 0.362 kg CO₂ eq/g, respectively).³³

Indeed, while in this latter the contribution of the solvent mixture to the total carbon footprint is negligible, accounting for only 1.78% of the overall impact, in this instance, solvents contribute 16% of the total footprint. This increase is mainly due to the need to use a non-negligible volume of an extractive medium, namely ethyl acetate, to isolate the pure product.

In principle, this impact could be further reduced by developing an alternative isolation strategy that minimizes the use of post-processing solvents (Fig. 9).



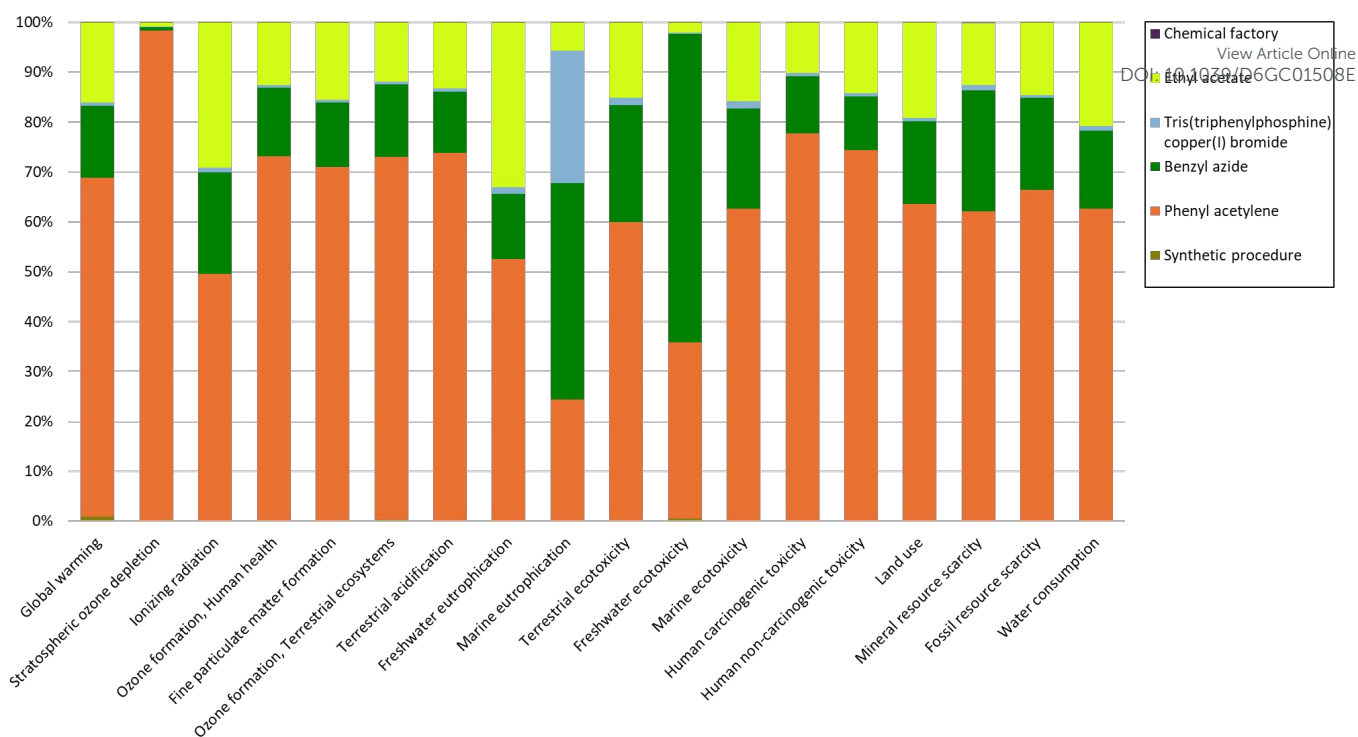


Fig. 9 Midpoint analysis of Lal et al.³⁴ synthetic CuAAC procedure (ReCiPe 2016).

In the first part of the analysis, we evaluated the different methods, focusing on their Midpoint characterization, i.e., quantifying the “potential” environmental impact at the intermediate stage of the cause-and-effect chain. During this stage, we compared the various routes, highlighting their impact in terms of GWP, expressed as the equivalent kilograms of CO₂ of their carbon footprints. As is well known, comparing two or more synthetic methodologies solely by their GWP is not entirely accurate, as environmental and human health sustainability depends on multiple factors across different categories. For this reason, we also performed an Endpoint characterization to enable a comprehensive comparison of all the evaluated methodologies. The Endpoint assessment quantifies the ultimate effects on the areas of protection, *Human Health*, *Ecosystems*, and *Resources*, by translating the impacts calculated at the Midpoint level using specific “damage factors”. This approach is particularly important in chemical transformations, where certain environmental flows may appear minor or negligible within the non-comparable scales of a Midpoint profile. However, when integrated through category-specific damage factors and aggregated at the Endpoint level, these underlying indicators can become dominant, significantly reshaping the understanding of the overall environmental burden.

With this strategy, we were able to quantify the overall impact of the methodologies using numerical scores expressed in mPts, enabling a clearer, more comprehensive “sustainability rank”. In Table 2, the details specified confirm that the impact is not dominated by GWP alone but by a mediated combination of all impact categories. For example, while the Lal et al.³⁴ methodology is the second most impactful from a GWP perspective, at the Endpoint level, it ranks third, indicating that

all Midpoint categories influence the final Endpoint level and the global impact. As shown in Fig. 10, Endpoint analysis is clearly highlighted as a fundamental contributor to the global footprint, which is also mediated by *Fine particulate matter formation* (FPMF).

Table 2. GWP, mPts score, and Endpoint unit values of the procedures considered (ReCiPe 2016).

Procedure	GWP (Kg CO ₂ eq/g)	mPts	DALY	Species.yr	USD2013
Chan et al., <i>Org. Lett.</i> , 2004, 6 , 2853-2855	0.456	17.2	9.59E-7	2.31E-9	0.0853
Rostovtsev et al., <i>Angew. Chem.</i> 2002, 114 , 2708–2711	0.390	16.1	9.0E-7	1.9E-9	0.0756
Himo et al., <i>JACS</i> , 2005, 127 , 210-216	0.382	13	7.18E-7	1.7E-9	0.0748
Lal et al., <i>J. Org. Chem.</i> 2011, 76 , 2367-2373	0.429	14.6	8.09E-7	1.89E-9	0.0796
Luciani et al., <i>Green Chem.</i> , 2018, 20 , 183–187	0.362	12.4	6.89E-7	1.62E-9	0.0709

This category significantly affects human health. This conclusion relies on the methodology’s components, above all, copper metal, whose derived extraction and utilization impacts are similar to those of PM2.5.

In particular, the procedures proposed by Chan et al.³⁰ and Rostovtsev et al.³¹ proved to be the least favorable, primarily due to the substantial contribution of the FPMF category. In the former case, the latter accounts for 47.38% (8.15 mPts) of the total impact, whereas in the latter it accounts for 45.96% (7.40



mPts). Notably, in the procedure by Chan et al.,³⁰ the substantial FPMF contribution arises primarily from phenylacetylene (53.3%) and ligand (33.4%). Conversely, in the Rostovtsev et al.³¹ method, in addition to phenylacetylene, a major portion of the impact comes from the use of Cu(0) turnings as the catalyst

(27.8%). Among the remaining routes, the procedure reported by Luciani et al.³³ is confirmed to be the most environmentally friendly.




Fig. 10 Endpoint comparison through the investigated methodologies (ReCiPe 2016, influence of the impact categories on the single score).

favorable. This result is mainly attributed to the recyclability of both the solvent mixture and the catalytic system, which, by reducing toxic emissions and climate-change-related impacts, improves the overall sustainability of the process. With respect to the methodologies proposed by Himo et al.³² and Lal et al.,³⁴ the main impact in the former is associated with the tBuOH: H₂O solvent mixture, whereas in the latter it is driven primarily using CuBr(PPh₃)₃ as catalyst and the large amount of ethyl acetate required for product isolation.

3.1 Uncertainty analysis

To assess the reliability of the comparative LCA regarding the five triazole synthesis procedures, a stochastic uncertainty analysis was performed using Monte Carlo simulations (1000 runs). The uncertainty parameters for the inventory data were defined through a Pedigree Analysis, evaluating five quality criteria: reliability, completeness, temporal correlation, geographical correlation, and further technological correlation. This assessment focused specifically on the *Global warming* and *Fine Particulate Matter Formation* categories, using the ReCiPe

2016 Midpoint (H) method. The results, summarized in Table 3, show that the Coefficient of Variation (CV) ranges from 9.4% to 19.2%, indicating a high overall stability of the LCA model. The analysis highlights a clear distinction between the procedures based on data quality and those based on inventory specificity. The most recent methodologies, specifically Luciani et al.³³ and Lal et al.,³⁴ exhibit the highest statistical robustness, with CV values below 10%. These low uncertainty levels reflect the use of specific and updated datasets from the Ecoinvent database, confirming the scientific reliability of these strategies. In contrast, the procedures by Himo et al.,³² Rostovtsev et al.,³¹ and Chan et al.³⁰ show higher uncertainty (CV between 14% and 19%). This increased variability is a result of an increased temporal distance and because of a deliberate and transparent methodological choice: due to the absence of tBuOH in the ecoinvent 3.11 database, isobutanol was adopted as a conservative technological proxy. To rigorously account for the uncertainty introduced by this substitution, a maximum Pedigree score (technological correlation = 5) was assigned, resulting in a geometric standard deviation (SD2) of 2.29 for this



input. Consequently, the higher CV for these procedures does not represent a flaw in the chemical synthesis itself, but rather an honest quantification of the uncertainty inherent in the available literature data.

Table 3. Monte Carlo uncertainty analysis results (1000 runs, 95% confidence interval) for *Global warming and Fine particulate matter Formation* impact categories using ReCiPe 2016 Midpoint (H) method.

Reference	Impact category	CV (%)	95% confidence interval
Chan et al., <i>Org. Lett.</i> 2004, 6, 2853-2855	Global Warming (Kg CO ₂ eq./g)	15.6	0.336-0.607
	Fine Particulate matter Formation (Kg PM _{2.5} eq.)	15.1	0.00057-0.00103
Rostovtsev et al., <i>Angew. Chem.</i> 2002, 114, 2708–2711	Global Warming (Kg CO ₂ eq.)	16.5	0.274-0.529
	Fine Particulate matter Formation (Kg PM _{2.5} eq.)	14.2	0.000529-0.000923
Himo et al., <i>JACS</i> , 2005, 127, 210-216	Global Warming (Kg CO ₂ eq.)	18.4	0.273-0.561
	Fine Particulate matter Formation (Kg PM _{2.5} eq.)	19.2	0.000363-0.000762
Lal et al., <i>J. Org. Chem.</i> 2011, 76, 2367-2373	Global Warming (Kg CO ₂ eq.)	9.61	0.357-0.521
	Fine Particulate matter Formation (Kg PM _{2.5} eq.)	9.98	0.000481-0.00071
Luciani et al., <i>Green Chem.</i> , 2018, 20, 183–187	Global Warming (Kg CO ₂ eq.)	9.4	0.302-0.433
	Fine Particulate matter Formation (Kg PM _{2.5} eq.)	9.64	0.000416-0.000603

Despite the variability introduced by proxies, the comparative hierarchy remains statistically significant. Regarding GWP, the procedure by Luciani et al.³³ emerged as the most efficient and robust solution. Its 95% confidence interval (0.302-0.433 kg CO₂ eq.) is the narrowest among the studied examples and remains consistently below the upper uncertainty limits of the competing procedures. A similar trend was observed for *Fine Particulate Matter Formation*, where the Luciani et al.³³ procedure offers the best compromise between low environmental impact and statistical certainty.

4. Conclusions

In this work, a cradle-to-gate LCA approach has been used to investigate the sustainability aspects of copper-catalysed azide-alkyne cycloadditions of a series of benchmark methodologies. In this study, it has been demonstrated that reaction and work-up solvents significantly influence both human health and environmental sustainability. Accordingly, a proper reaction design that utilizes more benign solvents, along with an appropriate recovery and reuse strategy, can undoubtedly enhance the overall ecological profile. In this regard, Polarclean® has been confirmed as an effective solvent that, in addition to enabling excellent reaction yields, can significantly reduce the process's environmental impact due to its recyclability. Indeed, this process exhibits a lower carbon footprint (0.362 kg CO₂ eq/g), being 5.24–20.62% less carbon-intensive and reducing impacts on human health, ecosystems, and resource depletion by 4.62–27.91% compared to the other methodologies evaluated; moreover, Pedigree Analysis combined with Monte Carlo simulations confirms the environmental superiority of the procedure proposed by Luciani

et al.,³³ even under the most conservative probabilistic scenarios.

DOI: 10.1039/D6GC01508E

Despite considerable efforts to improve CuAAC transformations, several drawbacks remain, hindering the full greenness of these processes. As demonstrated throughout this work, phenylacetylene constitutes the main environmental hotspot, as it is industrially produced from styrene or from halogenated (mono- or dihalogenated) styrene derivatives. For this reason, further investigation aimed at identifying alternative renewable raw materials and more sustainable synthetic routes for its production represents the keystone to effectively and sharply cut the overall environmental footprint of CuAAC.

Author contributions

F. C.: investigation, methodology, inventories construction, data analysis, writing, review, editing; D. L.: investigation, methodology, inventories construction, data analysis, writing, review, editing; L. V.: conceptualization, project administration, and manuscript review/editing.

Conflicts of interest

There are no conflicts to declare.

Data availability

Supplementary information: Materials life cycle inventory and LCA impact assessment dataset.

Acknowledgements

This work has been funded by the European Union – NextGenerationEU under the Italian Ministry of University and Research (MUR) National Innovation Ecosystem grant ECS00000041 – VITALITY. We acknowledge Università degli Studi di Perugia and MUR for support within the project Vitality. The University of Perugia is acknowledged for financial support to the university project “Fondo Ricerca di Ateneo, edizione 2022”. MUR is also thanked for PRIN-PNRR 2022 project “20223ARWAY – REWIND” and for the PRIN project no.20207CNBE4 “FAITH”.

Notes and references

- <https://www.kva.se/en/news/the-nobel-prize-in-chemistry-2022/> (accessed March 2026).
- H. C. Kolb, M. G. Finn and K. B. Sharpless, *Angew. Chem., Int. Ed.*, 2001, **40**, 2004–2021.
- F. Campana, G. Brufani, D. Lanari and L. Vaccaro, The sustainability aspects of click chemistry transformations, in *Topics in Heterocyclic Chemistry*, Springer, Berlin, 2025, DOI: 10.1007/7081_2025_95.
- G. Brufani, F. Valentini, G. Rossini, L. Rosignoli, Y. Gu, P. Liu and L. Vaccaro, *Green Synth. Catal.*, 2023, **4**, 154–159.



- 5 P. Wu, A. K. Feldman, A. K. Nugent, C. J. Hawker, A. Scheel, B. Voit, J. Pyun, J. M. J. Fréchet, K. B. Sharpless and V. V. Fokin, *Angew. Chem., Int. Ed.*, 2004, **43**, 3928–3932.
- 6 D. J. V. C. Van Steenis, O. R. P. David, G. P. F. van Strijdonck, J. H. van Maarseveen and J. N. H. Reek, *Chem. Commun.*, 2005, 4333–4335.
- 7 R. Hoogenboom, *Chem*, 2023, **9**, 2416–2424.
- 8 M. Meldal, *Macromol. Rapid Commun.*, 2008, **29**, 1016–1051.
- 9 Q. Wang, T. R. Chan, R. Hilgraf, V. V. Fokin, K. B. Sharpless and M. G. Finn, *J. Am. Chem. Soc.*, 2003, **125**, 3192–3193.
- 10 P. Veerakumar, N. Velusamy, P. Thanasekaran, K.-C. Lin and S. Rajagopal, *React. Chem. Eng.*, 2022, **7**, 1891–1920.
- 11 J. E. Hein and V. V. Fokin, *Chem. Soc. Rev.*, 2010, **39**, 1302–1315.
- 12 B. T. Worrell, J. A. Malik and V. V. Fokin, *Science*, 2013, **340**, 457–460.
- 13 P. T. Anastas and J. C. Warner, *Green Chemistry: Theory and Practice*, Oxford University Press, New York, 1998.
- 14 B. Li, C. Xu, X. Zhu, J. Yu, X. Zhang and Y. Fan, *Green Chem.*, 2025, **27**, 6342–6361.
- 15 D. P. Vala, M. P. Parmar and H. M. Patel, *Green Chem.*, 2026, **28**, 2724–2735.
- 16 F. Campana, D. Lanari, A. Marrocchi and L. Vaccaro, Green solvents for organic electronics processing, in *Sustainable Strategies in Organic Electronics*, Elsevier, Amsterdam, 2022, ch. 12, pp. 426–445.
- 17 F. G. Delolo, L. Duarte Almeida, G. M. Vieira, E. N. dos Santos and E. V. Gusevskaya, *Green Chem.*, 2025, **27**, 4816–4866.
- 18 B. K. Voon, Y. J. Yap and W. F. Yong, *Green Chem.*, 2025, **27**, 11705–11738.
- 19 F. Valentini, G. Brufani, G. Rossini, F. Campana, D. Lanari and L. Vaccaro, *ACS Sustainable Chem. Eng.*, 2023, **11**, 3074–3084.
- 20 S. Trastulli Colangeli, F. Campana, F. Ferlin and L. Vaccaro, *Green Chem.*, 2024, **27**, 633–641.
- 21 R. A. Sheldon, *CHEMTECH*, 1994, **24**, 38–47.
- 22 S. Eichwald, H. Ostovari, H. Minten, J. Meyer-Waßewitz, D. Förtsch and N. von der Assen, *Green Chem.*, 2025, **27**, 10153–10168.
- 23 a) F. Campana, K. Zhou, J. A. Yunda, A. Nazari, D. Bonifazi, S. Melinte and L. Vaccaro, *Chem. Eng. J.*, 2025, **504**, 158822; b) J. Osorio-Tejada, F. Ferlin, L. Vaccaro and V. Hessel, *Green Chem.*, 2022, **24**, 325–337; c) R. Hischer, S. Hellweg, C. Capello and A. Primas, *Int. J. Life Cycle Assess.*, 2005, **10**, 59–67; d) G. Doka, Life Cycle Inventories of Waste Treatment Services. ecoinvent report No. 13. Swiss Centre for Life Cycle Inventories, Dübendorf, 2009.
- 24 D. Cespi, *Green Chem.*, 2025, **27**, 12107–12114.
- 25 S. Folkerts, M. G. Hoepfner, G. Guillén-Gosálbez, J. Pérez-Ramírez and E. M. Carreira, *J. Am. Chem. Soc.*, 2025, **147**, 40944–40957.
- 26 R. Tannert, S. Barth, J. Hildebrandt, A. Taubert and J. Weber, *ChemSusChem* 2025, **18**, e202402248.
- 27 S. L. Khamkar, R. Mohan, J. Santhosh, H. M. Shinde, K. L. Handore, S. V. Mohan and D. S. Reddy, *Commun. Chem.*, 2025, **8**, 184.
- 28 ISO, ISO 14044. International, *Standards Organization. Environmental Management - Life Cycle Assessment. Requirements and Guidelines; 2006*, AENOR, Madrid, 2006.
- 29 European Commission - Joint Research Center, Institute for Environment and Sustainability, *ILCD Handbook: General Guide for Life Cycle Assessment - Detailed Guidance*, Ispra, Italy, 2010.
- 30 T. R. Chan, R. Hilgraf, K. B. Sharpless and V. V. Fokin, *Org. Lett.*, 2004, **6**, 2853–2855.
- 31 V. V. Rostovtsev, L. G. Green, V. V. Fokin and K. B. Sharpless, *Angew. Chemie - Int. Ed.*, 2002, **41**, 2596–2599.
- 32 F. Himo, T. Lovell, R. Hilgraf, V. V. Rostovtsev, L. Noodleman, K. B. Sharpless and V. V. Fokin, *J. Am. Chem. Soc.*, 2005, **127**, 210–216.
- 33 L. Luciani, E. Goff, D. Lanari, S. Santoro and L. Vaccaro, *Green Chem.*, 2018, **20**, 183–187.
- 34 S. Lal and S. Díez-González, *J. Org. Chem.*, 2011, **76**, 2367–2373.
- 35 F. Campana, D. Lanari, F. De Angelis and L. Vaccaro, *Green Chem.*, 2025, **27**, 11903–11913.
- 36 F. Campana, D. Lanari, F. De Angelis and L. Vaccaro, *EES Sol.*, 2025, **1**, 982–989.
- 37 https://commission.europa.eu/strategy-and-policy/priorities-2019-2024/european-green-deal/energy-and-green-deal_en (accessed March 2026)
- 38 M. A. J. Huijbregts, Z. J. N. Steinmann, P. M. F. Elshout, G. Stam, F. Verones, M. Vieira, M. Zijp, A. Hollander and R. van Zelm, *Int. J. Life Cycle Assess.*, 2017, **22**, 138–147.
- 39 V. Hessel, N. N. Tran, M. R. Asrami, Q. D. Tran, N. V. D. Long, M. Escribà-Gelonch, J. O. Tejada, S. Linke and K. Sundmacher, *Green Chem.*, 2022, **24**, 410–437.
- 40 a) F. Campana and L. Vaccaro, New Developments in the Application of Waste-derived/Circular Economy-Derived Solvents, in *Encyclopedia of Green Chemistry*, ed. B. Török, Elsevier, Amsterdam, 2025, pp. 546–558; b) F. Ferlin, F. Valentini, F. Campana and L. Vaccaro, *Green Chem.*, 2024, **26**, 6625–6633.
- 41 J. Brzeski and P. Skurski, *Heliyon*, 2019, **5**, e02133.
- 42 B. K. Voon, Y. J. Yap and W. F. Yong, *Green Chem.*, 2025, **27**, 11705–11738.
- 43 D. Stević, R. Kukobat, S. G. Atlagić and S. Popović, *Chem. Eng. Technol.*, 2026; **49**, e70157.
- 44 A. Kumar, A. Sharma, B. G. de la Torre and F. Albericio, *Green Chem. Lett. Rev.*, 2021, **14**, 545–550.
- 45 F. Campana, A. Maselli, C. Falcini, A. Selvi, O. Piermatti and L. Vaccaro, *Sustain. Chem. Pharm.*, 2024, **40**, 101632.
- 46 H. Kabzan, P. Kisszékelyi, J. Filo, M. Cigáň, E. Rakovský and R. Šebesta, *European J. Org. Chem.*, 2025, **28**, e202500956.
- 47 L. Cseri and G. Szekely, *Green Chem.*, 2019, **21**, 4178–4188.



Supplementary information: Materials life cycle inventory and LCA impact assessment dataset.

