Accepted Manuscript



This is an *Accepted Manuscript*, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this Accepted Manuscript with the edited and formatted Advance Article as soon as it is available.

You can find more information about *Accepted Manuscripts* in the **Information for Authors**.

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard <u>Terms & Conditions</u> and the <u>Ethical guidelines</u> still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this *Accepted Manuscript* or any consequences arising from the use of any information it contains.



RSCPublishing

ARTICLE

Inducing microscopic thermal lesions for the dissection of functional cell networks on a chip

Cite this: DOI: 10.1039/x0xx00000x

Philipp Rinklin, ^a Dzmitry Afanasenkau, ^b Simone Wiegand, ^{b,c} Andreas Offenhäusser^{a,d} and Bernhard Wolfrum^{a,d}

Received ooth January 2012, Accepted ooth January 2012

DOI: 10.1039/x0xx00000x

www.rsc.org/

We present a versatile chip-based method to inflict microscopic lesions on cellular networks or tissue models. Our approach relies on resistive heating of microstructured conductors to impose highly localized thermal stress on specific regions of a cell network. We show that networks can be precisely dissected into individual subnetworks using a microwire crossbar array. To this end, we pattern a network of actively beating cardiomyocyte-like cells into smaller subunits by inflicting thermal damage along selected wires of the array. We then investigate the activity and functional connectivity of the individual subnetworks using a Ca²⁺ imaging-based signal propagation analysis. Our results demonstrate the efficient separation of functional activity between individual subnetworks on a microscopic level. We believe that the presented technique may become a powerful tool for investigating lesion and regeneration models in cellular networks.

Introduction

Over the past two decades, the development of lab-on-a-chip devices for biological or biomedical research has become a major aspect of interdisciplinary science at the interface of biology, chemistry, and physics¹. Lab-on-a-chip systems provide the possibility of massively parallelized experiments to achieve results with statistical significance and reduce material and time consumption. This is of particular value in biological research dealing with cells or cellular networks where the complexity of the investigated system generates intrinsically noisy data². Driven by advances in microfabrication technologies, the ability to manipulate cellular networks down to a single cell level has reached an unprecedented level^{3,4}. Recent examples demonstrate subcellularly resolved action potential recording⁵, parallelized single-vesicle release measurements^{6,7}, or the high-throughput mechanical manipulation of individual cells².

Simplified cellular networks, such as small scale neuronal circuits, often serve as model systems in biological or biomedical research^{8–10}. The controlled generation of lesions in these model systems poses an important tool that helps to elucidate the functions of complex networks by disrupting their natural connectivity in defined locations¹⁰. In this context, *in vitro* models of spinal cord injury are of particular clinical relevance as lesion studies conducted on these models may point towards effective therapeutic strategies for regeneration^{10–14}. Other common *in vitro* model of lesion and subsequent regeneration include wound assays induced by scratching ^{15,16} or

electrical means¹⁷. In particular when read out electronically, these allow highly reproducible and quantitative data acquisition from biological model systems¹⁷.

A very common technique to generate highly resolved lesions in tissue models is laser-mediated ablation^{18–21}. A typical *in vitro* approach uses a laser, which is coupled to the beam path of a microscope and the target tissue or target cells are thermally destroyed by high energy deposition^{22,23}. This technique provides excellent flexibility since varying laser patterns can be implemented. However, microscope setups with coupled lasers require extensive alignment procedures and can be costly²³. Furthermore, the use of advanced cell analysis systems including microfluidic cell culture setups and intransparent functional substrates (e.g. silicon-based microscopic sensor arrays⁵) can make it difficult or impossible to integrate laser-based stimulation.

Recent research has sought to combine the precise generation of highly resolved lesions with the advantages of lab-on-a-chip techniques 13,24-29. To this end, microfluidic techniques have been effectively applied to induce lesion sites in models of axotomy 30-34. However, while allowing for high sample numbers by means of parallelization, these systems intrinsically impose certain constraints. Due to the flow-based nature of microfluidic systems, intersecting or orthogonal lesion patterns are difficult to realize. Furthermore, the generation of local lesions without otherwise constraining the culture's growth is problematic. An ideal solution to this problem is given by the direct integration of a reliable lesion-inducing method into the surface of the chip, which is used for cell culture.

Here, we present the application of microwire crossbar arrays for the introduction of localized thermal lesions to on-chip cell cultures. The arrays consist of two orthogonal layers of microwires that are structured and isolated using standard microfabrication technology (see Figure 1b and c). When passing an electrical current through a given set of wires, resistive heating causes a temperature increase in the wires. Similar to electrocautery used in medical operations^{35,36}, this increase in temperature can be used to locally impose thermal stress on cells cultured directly on the chip (see Figure 1a). We demonstrate the generation of highly resolved lesions and the dissection of small functionally separated subunits from a homogeneous cell network, making use of the microwire crossbar architecture.

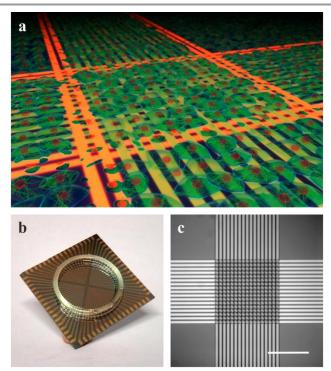


Figure 1: Microwire crossbar arrays for inducing localized thermal lesions. (a) 3D schematic of a localized thermal lesion experiment. Passing current through a set of wires (indicated in orange) leads to cell death in a confined region. (b) Photograph of an encapsulated microwire array chip (chip dimension: 2.4 x 2.4 cm²). (c) Photomicrograph of the actual microwire array consisting of two orthogonal layers of 17 parallel wires (scale bar: 150 µm).

Results and Discussion

Temperature distribution

In order to examine the thermal profile of the microwire arrays, fluorescence lifetime imaging microscopy (FLIM) was performed. In all experiments, a set of two neighboring wires was used, as the width of this set (24 µm) approximately corresponds to the lateral cross-section of a single cell. To evaluate the temperature distribution at the location of the cell layer, two horizontal or two vertical wires were supplied with 2 W each and the resulting temperature profiles were recorded in a focal plane 5 µm away from the chip's surface. Figure 2 shows an exemplary thermograph of the chip with 2 W applied to the two left wires of the vertical set of wires (frame similar to Fig. 1c). The heated microwires result in temperatures of approximately 65 °C in the liquid above the active wires. Due to the cylindrical nature of the temperature profile, these dimensions can be assumed to approximately account to the direction normal to the chip's surface, too. Low penetration depth thus limits the method to tissue models that are a single or a few layers in thickness. In the center region, the second layer of wires (extending along the y-axis) follows the topography of the first layer of wires (extending along the xaxis). This leads to an increased power density in this region and thus to a wider zone of temperatures above 55 °C (approx. 50 μm compared to 30 μm for the outer regions). The average temperature in the vicinity of the wires is increased to 45-50 °C. The high temperature region directly above the heated wires should thus induce cell death while, at short exposure times of a few minutes, the viability of the cells in the surrounding parts should not be affected³⁷.




Figure 2: FLIM thermograph of the microwire array with 2 W of electrical power applied to the two left vertical wires (frame similar to Figure 1c).

Network dissection

A layer of HL-1 cells was grown on the crossbar arrays and thermal stimulation was applied to induce confined lesions on the cell network. To assess the inflicted lesions, fluorescent staining for live and dead cells was performed approximately 18 h after the lesion was inflicted. Exemplary fluorescence images for lesion along one, two, and four lines are shown in Figures 3a-c, respectively (frames similar to Figs. 1c and 2). In each case 2 W were applied to a minimal set of 2 wires as described above. The current was applied in successive pulses of 1 min with a break of 1 min in between. For each set of wires, two pulses were used.

The fluorescence signal displayed in red, indicating dead cells, is limited to the area directly above the heated wires while the green fluorescence, showing live cells, is prevalent in the remaining parts of the culture. The red fluorescent dye used in the experiments was ethidium homodimer (EtHD), which stains the nuclei of dead cells. The green dye (calcein) selectively

Page 3 of 6 Lab on a Chip

Lab on a Chip ARTICLE

stains the cytoplasm of cells with an active metabolism. Comparing Figures 2 and 3 it can be seen that cell death is limited to the high-temperature region determined in the FLIM experiments. The width of this region of dead cells was 43 \pm 3.8 μm (n = 18) for the hottest parts of the wires, compared to 28 \pm 3.3 μm (n = 18) over the cooler parts of the wires (see Figure 2). Furthermore, the images show that the width of this region spans at least a single cell as intended to ensure successful dissection of the network on a functional level.




Figure 3: Fluorescence staining of HL-1 cells one day after lesion. **(a-c)** HL-1 cells stained with calcein (green, live cells) and EtHD (red, dead cells) after lesion on one, two, and four sides (**a**, **b**, and **c**, respectively; scale bars: 200 μ m; frames similar to Figure 1c and 2).

Signal propagation

To evaluate the effect of thermally induced lesion on coordinated network activity, Ca2+ imaging and subsequent propagation analysis was performed. For these experiments HL-1 cells were chosen as a model system³⁸. These cells have been shown to be an excellent cardiac model for the study of action potential propagation as they periodic action potentials^{39–41}. generate spontaneously Furthermore, the electrical activity in cardiomyocytes is directly correlated with intracellular Ca²⁺ fluctuations⁴². Intact Ca²⁺ propagation in the network is thus a good indicator of the general network activity. In order to visualize the Ca²⁺ propagation in the network, correlograms of the Ca²⁺ activity were calculated and plotted using digital video processing of the recorded fluorescence videos (a more detailed description of the data processing is given in the Supplementary Information). To this end, the activity of the individual pixels in the fluorescence videos was evaluated. Pixels in regions of correlated activity were identified by the same color (either red or green) and inactive pixels were marked gray as shown in Figure 4. Within the correlated regions, the brightness of the color reflects the signal delay, thus indicating the direction of signal propagation from dark to bright areas.




Figure 4: Ca²⁺ propagation analysis of HL-1 cultures after lesion (imaging was performed immediately after the lesion in the case of (a) and approx.. 18 h after the lesion in the cases of (b) and (c)). Pixels with correlated activity are identified by the same color. Inactive pixels are displayed in gray. The relative signal delay within one group is shown by the brightness of the corresponding color. As can be seen, lesion along one or two parallel lines (a and b, respectively) retains

connectivity in the network by peripheral coupling. However, lesions along two orthogonal pairs of lines (c), dissects a small subnetwork with uncorrelated activity (indicated in green).

Figures 4a-c show exemplary correlograms of HL-1 cultures after lesion on one, two, and four sides, respectively (compare Supplementary Videos 1-3). In agreement with the temperature measurements and the live/dead staining (Figures 2 and 3a, respectively), no Ca²⁺ activity could be detected along the heated wires (n = 35 in the case of single lesions). The surrounding network, however, displays Ca²⁺ propagation indicating a low effect on the biological functionality of these areas. As can be seen in Figure 1b, the microwires widen in the peripheral parts of the chip. This causes the influence of the resistive heating to decrease in these areas and retains coupling in larger network. The Ca²⁺ activity in the left and right part of Figure 4a thus remains correlated after the lesion due to this peripheral coupling (see Fig. S4 in the Supplementary Information).

To assess the lesion efficiency, only samples showing clear Ca²⁺ propagation were investigated (approximately 70% depending on culture status and passage number). In the experiments where a single lesion was inflicted, none of the samples showed activity at the lesion site, while 80% (n = 35) of the samples showed clearly separated propagation patterns on both sides of the lesion. The remaining 20% were either not successfully separated or displayed indeterminant propagation patterns. In combination, this indicates an effective destruction of the target tissue while maintaining the biological function of the surrounding cells. Similarly, in the case of a double lesion (Fig. 4b) no activity was detected along the heated wires while the surrounding network remains active. A large-scale signal propagation from right to left due to the peripheral coupling as well as propagation inside the individual active stripes can be seen.




Figure 5: Exemplary frames from the Ca²⁺ imaging sequence of the sample shown in Figure 4c (frame size corresponds to approx. $466 \times 466 \ \mu m^2$). While the center square has its peak intensity at approximately 0.9 s, all of the outer squares show activity between 2.6 and 2.9 s.

In order to dissect functional subunits of the network, lesions were introduced on all four sides of the array (see correlogram in Fig. 4c). As in Figures 4a and b, no activity can be seen over the heated wires and the outer parts retain correlated activity via peripheral coupling. The center square's activity, however, was not correlated with the outer sections of the network (see Supplementary Video 3). Figure 5 shows exemplary frames from the Ca²⁺ imaging sequence of the sample shown in Figure 4c. As can be seen, the center squares activity peaks at different times compared to the remaining squares. In addition to the

propagation analysis, we investigated the activity of the individual regions in the frequency domain (compare Supplementary Fig. 3). As discussed in the Supplementary Material, this analysis yielded differing frequencies and different periodicities in the case of a successful lesion. In summary, the results unequivocally show that the center square's activity is completely independent from that of the outer regions. Thus, we demonstrate the microscopic dissection of functionally autonomous subnetworks of less than 100 cells by localized heating using a substrate with an incorporated microwire crossbar array.

Lesion parameters

In addition to the propagation analysis presented above, the effect of varying the electrical power used to heat the microwires was investigated. To this end, a series of pulses with increasing electrical power was applied to the samples. The duration of each pulse was 1 min and the pulses were separated by a break of 1 min. Corresponding Ca²⁺ imaging sequences were recorded during and in between the pulses and analyzed as described above. Figure 6a shows the percentage of separated samples at a given time during the experiment (n = 26). A sharp increase in separated samples can be noted after applying 1.5 W to two neighboring wires. After the application of 2 W, more than 90% of the samples exhibit clearly separated propagation patterns.

Figure 6b shows the frequency of the surrounding network's Ca²⁺ activity. Since the frequency of the Ca²⁺ activity in HL-1 cells varies (depending on the sample, the passage number, etc.), the data were normalized with respect to the frequency before the application of any stimuli. A clear increase in the frequency can be seen during the application of electrical power. This increase becomes more pronounced with increasing electrical power. The induced heating of the peripheral regions (compare Figure 2) causes an increase in the beating frequency as previously described⁴³. In between the stimuli, the network's activity returns to its original frequency, indicating the surrounding areas do not show signs of permanent cell damage.




Figure 6: Effect of increasing electrical power on the separation efficiency and the frequency of the surrounding network's activity. (a) Percentage of separated samples during the sequential application of pulses of increasing electrical power. (b) Frequency of the Ca²⁺ activity in the surrounding of the lesion site during the sequential application of pulses of increasing electrical power.

Materials and Methods

Chip fabrication

Microwire crossbar arrays were fabricated in the clean room using state-of-the-art microfabrication methods. Briefly, pdoped silicon wafers (Si-Mat Silicon Materials, Kaufering, Germany) were insulated by thermally growing 1 µm of silicon oxide under wet conditions. Subsequently, the first layer of wires (comprised of 17 wires with a width of 10 µm and an interwire spacing of 4 µm) was structured via photolithography using a double layer resist (LOR3B and NLOF2020, microresist technology, Berlin, Germany). After exposure and development (MIF326, microresist technology, Germany), a metal stack of Ti/Al/Ti (15/300/10 nm in thickness, respectively) was deposited in a sputter deposition process (LLS Evo II, Oerlikon Systems, Liechtenstein). An insulating stack of silicon dioxide/silicon nitride/silicon dioxide (100/50/100 nm in respectively) was then deposited using plasma enhanced chemical vapor deposition (Sentech Instruments GmbH, Berlin, Germany). After structuring the second set of microwires, a polyimide layer (PI-2610, HD Microsystems GmbH, Germany) was spin coated (6000 rpm, 30 s) to passivate the chip for cell culture conditions. To open the chip's contact pads, a single layer resist lithography (AZ-5340, AZ Electronic Materials GmbH, Wiesbaden, Germany) with subsequent wet chemical etching in AZ-326 (metal ion free, MicroChemicals, Ulm, Germany) and resist stripping in acetone was performed. The chip fabrication was then completed by gluing a glass ring to the chip using poly(dimethylsiloxane) (Sylgard 184, Dow Corning cooperation, Midland, USA).

Thermography

Thermal images of the chips were recorded using fluorescence lifetime imaging microscopy (FLIM). To this approximately 20 µL of Rhodamine B (0.3 mg mL⁻¹ in MilliQ) were encapsulated on the chip using silicon grease and a glass cover slip. The sample was then mounted in a laser scanning microscope (Olympus IX-71 with FV3-294 confocal unit and PicoQuant FLIM system) and the fluorescent decay data were recorded using a 485 nm laser and a long pass emission filter at 500 nm (HQ 500 LP, Leica Microsystems GmbH, Wetzlar, Germany). The data was preliminarily processed with the SymPho Time software (PicoQuant) to produce lifetime images. Subsequently, the temperature images were calculated from the lifetime images by means of custom Python scripts using a calibration curve from Müller et al. 44.

Cell culture

Cardiomyocyte-like HL-1 cells were kindly provided by the Claycomb lab and cultured on the chips as follows: Prior to culture, the chips were cleaned in 70% EtOH and dried with pressurized nitrogen. The inner area of the rings (compare Figure 1b) was then incubated in a mixture of fibronectin (5 µg mL⁻¹, Sigma) and gelatin (0.02 μg mL⁻¹, Fischer Scientific) for Lab on a Chip ARTICLE

Lab on a Chip

approximately 60 min and rinsed once with bidistilled water. HL-1 cells were then plated to be confluent on the third day *in vitro* (DIV 3). The culture medium (Claycomb Medium purchased from JRH Biosciences supplemented with 10% fetal bovine serum, 100 U mL⁻¹ Penicillin, 100 µg mL⁻¹ Streptomycin, 2 mM L-glutamine purchased from Life Technologies, and 0.1 mM norepinephrine purchased from Sigma) was exchanged daily and the samples were incubated under physiological conditions (37 °C, 5% CO₂).

Thermal lesion and calcium imaging

Page 5 of 6

Thermal stimuli were applied on DIV 2 in normal growth medium. The stimuli were applied using a home-built power supply operated by a custom LabView software. This power supply was capable of applying voltages of up to 25 V per channel. The maximum current applicable per channel was approximately 200 mA. Concerning the average resistance of the individual wires of the array (approximately 50 Ω), this corresponds to a maximum applicable power of 2 W per channel. To reliably induce lesions, 2 W per wire were applied to two neighboring wires for 1 min. After a subsequent recovery time of 1 min, the application was repeated once. In the case of multiple lesions the next stimulus was then applied in the same manner. Detailed information on the thermal profiles based on simulated data is given in the supplementary information.

Ca²⁺ imaging of the samples was performed on DIV 3. To this end, each sample was incubated with a calcium sensitive fluorescent dye (fluo-4 purchased from life technologies) for 15-30 min. The medium was then exchanged, the sample was transferred to the measurement setup, and Ca2+ imaging sequences of 1-2 min were recorded using an emCCD camera (ImagEMC9100-13, Hamamatsu Photonics Deutschland GmbH, Herrsching am Ammersee, Germany) coupled to an upright microscope (Zeiss Axiotech Vario, Carl Zeiss Microscopy GmbH, Göttingen, Germany). To filter the fluorescence of fluo-4, a BP 450-490 excitation filter was used in combination with an FT 510 beam splitter and a long pass emission filter at 515 nm (Zeiss Filter Set 9, Carl Zeiss Microscopy GmbH, Göttingen Germany).

Fluorescent staining

In order to stain for live and dead cells, calcein-AM and ethidium homodimer (purchased from life technologies) were used, respectively. The samples were stained according to the supplier's recommendations and the staining solution was exchanged for phosphate buffered saline after an incubation time of approximately 15 min. Fluorescent imaging was performed immediately after incubation using an AxioImager Z1 (Carl Zeiss Microscopy GmbH, Göttingen, Germany).

Ca²⁺ imaging analysis

A detailed description of the data analysis is given in the supplementary material. Briefly, each pixel's intensity trace was normalized by calculating $(I\text{-}I_{mean})/I_{mean}$, where I_{mean} represents the pixel's average intensity. Active pixels where

then discriminated from inactive pixels by calculating each pixel's root-mean-square (rms) intensity. A binary mask of the active and inactive pixels was analyzed for connected regions to yield the patterns shown in Figure 4. The intensity traces where then smoothed using a Gaussian filter with a width of 300 ms. For correlation analyses, each pixel was cross-correlated with the average intensity trace of its corresponding region. To find groups of regions with correlated activity, the average intensity traces of all regions where cross-correlated and regions with a correlation of more than 70% were grouped together. Each group of regions was then shifted to a common time scale using the cross-correlation of the average intensity traces of the group's individual regions.

Conclusion

We presented the use of microwire crossbar arrays for inducing defined thermal lesions on cell networks *in vitro*. As an exemplary application, we dissected an active network of cardiomyocyte-like HL-1 cells into smaller autonomous subunits. Analyses of Ca²⁺ propagation patterns revealed the clear separation of functional activity in isolated subnetworks.

We think that our approach will be useful for future investigations of functional cellular networks. In particular, it will be a powerful tool for studies of axotomy and subsequent regeneration⁴⁵. Here, our method can be used to cut axons grown across the microwires. Furthermore, we believe that the generation of lesions of variable width by using a varying number of wires is of benefit in the context of scratch wound assays. In combination with electronic read-out our method could allow automated studies of healing processes.

Apart from applying the crossbar architecture presented in this work, arbitary lesion patterns can be generated by modifying the geometry of the structured microwires. By locally varying the lateral dimension of the microwires, and thereby the electrical resistivity, it should be possible to limit the high temperature zones to certain parts of the wire facilitating shortsegment or point-shaped lesions. The use of standard microfabrication technologies renders this concept easy to integrate into analytical chip-based platforms such as highdensity microelectrode arrays. In addition, when using transparent materials such as indium tin oxide on glass wafers, our method can be directly combined with long-term imaging methods (e.g. genetically encoded calcium or voltage sensors combined with live-cell imaging)^{46,47}. Combining the possibility to apply lesions to a given cell culture model with a parallel method for analyzing the network's response will enable high-throughput necessary for biological and biomedical studies.

Acknowledgements

We thank Norbert Wolters for building the power supply used in the lesion experiments, Marko Banzet for clean-room processing, and Vanessa Maybeck for help with the cell culture. We thank Prof. W. Claycomb for providing of HL-1 cells.

Additionally, we acknowledge funding by the Helmholtz Young Investigators program.

Notes and references

- a Institute of Bioelectronics (ICS-8/PGI-8), Forschungszentrum Jülich and JARA - Fundamentals of Future Information Technology, Forschungszentrum Jülich, 52425 Jülich, Germany.
- b Institute of Complex Systems 3 Soft Condensed Matter, Forschungszentrum Jülich, 52428 Jülich, Germany.
- c Chmistry Department Physical Chemistry, University Cologne, D-50939 Cologne, Germany.
- d IV. Institute of Physics, RWTH Aachen University, 52076 Aachen,

Electronic Supplementary Information (ESI) available: [details of any supplementary information available should be included here]. See DOI: 10.1039/b000000x/

- 1. A. van den Berg and P. Bergveld, *Lab Chip*, 2006, **6**, 1266–73.
- 2. P. Tseng, J. W. Judy, and D. Di Carlo, Nat. Methods, 2012, 9, 1113-
- 3. A. Blau, Curr. Opin. Colloid Interface Sci., 2013, 18, 481–492.
- 4. M. E. Spira and A. Hai, Nat. Nanotechnol., 2013, 8, 83-94.
- 5. D. J. Bakkum, U. Frey, M. Radivojevic, T. L. Russell, J. Müller, M. Fiscella, H. Takahashi, and A. Hierlemann, Nat. Commun., 2013, 4,
- 6. J. Wang, R. Trouillon, and Y. Lin, Anal. Chem., 2013, 5600-5608.
- 7. A. Yakushenko, E. Kätelhön, and B. Wolfrum, Anal. Chem., 2013, **85**, 5483–90.
- 8. C. E. Thomson, M. McCulloch, a Sorenson, S. C. Barnett, B. V Seed, I. R. Griffiths, and M. McLaughlin, Eur. J. Neurosci., 2008, 28, 1518-35.
- 9. J.-M. Peyrin, B. Deleglise, L. Saias, M. Vignes, P. Gougis, S. Magnifico, S. Betuing, M. Pietri, J. Caboche, P. Vanhoutte, J.-L. Viovy, and B. Brugg, Lab Chip, 2011, 11, 3663-73.
- 10. S. Boomkamp, M. Riehle, and J. Wood, Glia, 2012, 60, 441-456.
- 11. J. Fawcett and R. Keynes, Annu. Rev. Neurosci., 1990, 13, 43-60.
- 12. M. C. Shearer, S. P. Niclou, D. Brown, R. a Asher, A. J. G. . Holtmaat, J. M. Levine, J. Verhaagen, and J. W. Fawcett, Mol. Cell. Neurosci., 2003, 24, 913-925.
- 13. B. Vahidi, J. W. Park, H. J. Kim, and N. L. Jeon, J. Neurosci. Methods, 2008, 170, 188-96.
- 14. I. B. Wanner, A. Deik, M. Torres, A. Rosendahl, J. T. Neary, V. P. Lemmon, and J. L. Bixby, Glia, 2008, 56, 1691-709.
- 15. Z. Környei, a Czirók, T. Vicsek, and E. Madarász, J. Neurosci. Res., 2000, 61, 421-9.
- 16. K. Pinco, W. He, and J. Yang, Mol. Biol. Cell, 2002, 13, 3203-3217.
- 17. C. R. Keese, J. Wegener, S. R. Walker, and I. Giaever, Proc. Natl. Acad. Sci. U. S. A., 2004, 101, 1554-9.
- 18. C. I. Bargmann and L. Avery, Methods Cell Biol., 1995, 48, 225-250.
- 19. A. Vogel and V. Venugopalan, Chem. Rev., 2003, 103, 577-644.
- 20. M. Yanik, H. Cinar, and A. Chisholm, Nature, 2004, 432, 822.
- 21. A. J. Canty, L. Huang, J. S. Jackson, G. E. Little, G. Knott, B. Maco, and V. De Paola, Nat. Commun., 2013, 4, 2038.
- 22. L. Soustelle, B. Aigouy, M.-L. Asensio, and A. Giangrande, Neural Dev., 2008, 3, 11.
- 23. S. T. Sweeney, A. Hidalgo, J. S. de Belle, and H. Keshishian, Cold Spring Harb. Protoc., 2012, 2012, 726-32.

- 24. A. M. Taylor, S. W. Rhee, C. H. Tu, D. H. Cribbs, C. W. Cotman, and N. L. Jeon, Langmuir, 2003, 19, 1551-1556.
- 25. P. S. Dittrich and A. Manz, Nat. Rev. Drug Discov., 2006, 5, 210-8.
- 26. J. W. Park, B. Vahidi, A. M. Taylor, S. W. Rhee, and N. L. Jeon, Nat. Protoc., 2006, 1, 2128-36.
- 27. S. Guo, F. Bourgeois, T. Chokshi, and N. Durr, Nat. Methods, 2008, **5**, 531–533.
- 28. Y. Kim, K. Karthikeyan, S. Chirvi, and D. P. Davé, Lab Chip, 2009, 9, 2576-81.
- 29. J. W. Park, H. J. Kim, M. W. Kang, and N. L. Jeon, Lab Chip, 2013, **13**. 509-21.
- 30. A. Taylor, M. Blurton-Jones, and S. Rhee, Nat. Methods, 2005, 2, 599-605.
- 31. I. H. Yang, R. Siddique, S. Hosmane, N. Thakor, and A. Höke, Exp. Neurol., 2009, 218, 124-8.
- 32. A. M. Taylor, N. C. Berchtold, V. M. Perreau, C. H. Tu, N. Li Jeon, and C. W. Cotman, J. Neurosci., 2009, 29, 4697-707.
- 33. D. Kilinc, J.-M. Peyrin, V. Soubeyre, S. Magnifico, L. Saias, J.-L. Viovy, and B. Brugg, Neurotox. Res., 2010, 19, 149-161.
- 34. B. Deleglise, B. Lassus, V. Soubeyre, A. Alleaume-Butaux, J. J. Hjorth, M. Vignes, B. Schneider, B. Brugg, J.-L. Viovy, and J.-M. Peyrin, PLoS One, 2013, 8, e71103.
- 35. L. Malis, J. Neurosurg., 1996, 85, 970-975.
- 36. F. D. Sheski and P. N. Mathur, Clin. Chest Med., 1999, 20, 123-38.
- 37. O. Emohare, M. I. Hafez, A. Sandison, R. R. H. Coombs, and I. D. McCarthy, *Acta Orthop. Scand.*, 2004, **75**, 610–7.
- 38. W. C. Claycomb, N. a Lanson, B. S. Stallworth, D. B. Egeland, J. B. Delcarpio, A. Bahinski, and N. J. Izzo, Proc. Natl. Acad. Sci. U. S. A., 1998, 95, 2979-84.
- 39. S. M. White, P. E. Constantin, and W. C. Claycomb, Am. J. Physiol. Heart Circ. Physiol., 2004, 286, H823-9.
- 40. S. Pelloux, J. Robillard, R. Ferrera, A. Bilbaut, C. Ojeda, V. Saks, M. Ovize, and Y. Tourneur, Prog. Biophys. Mol. Biol., 2006, 90, 270-
- 41. B. Hofmann, E. Kätelhön, M. Schottdorf, A. Offenhäusser, and B. Wolfrum, Lab Chip, 2011, 11, 1054-8.
- 42. D. Bers, Nature, 2002, 415.
- 43. L. Giovangrandi, K. H. Gilchrist, R. H. Whittington, and G. T.A. Kovacs, Sensors Actuators B Chem., 2006, 113, 545-554.
- 44. C. B. Müller, K. Weiss, A. Loman, J. Enderlein, and W. Richtering, Lab Chip, 2009, 9, 1248-53.
- 45. F. Bradke, J. W. Fawcett, and M. E. Spira, Nat. Rev. Neurosci., 2012, **13**, 183-93.
- 46. B. J. Baker, H. Mutoh, D. Dimitrov, W. Akemann, a Perron, Y. Iwamoto, L. Jin, L. B. Cohen, E. Y. Isacoff, V. a Pieribone, T. Hughes, and T. Knöpfel, Brain Cell Biol., 2008, 36, 53-67.
- 47. M. Mank and O. Griesbeck, Chem. Rev., 2008, 108, 1550-64.