

RSC Advances



This is an *Accepted Manuscript*, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. This *Accepted Manuscript* will be replaced by the edited, formatted and paginated article as soon as this is available.

You can find more information about *Accepted Manuscripts* in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this *Accepted Manuscript* or any consequences arising from the use of any information it contains.

COMMUNICATION

Novel Approach to the Processing of Meso-Macroporous Thin Films of Graphite and *in-situ* Graphite-Noble Metal Nanocomposites†

Cite this: DOI: 10.1039/x0xx00000x

DOI: 10.1039/x0xx00000x

www.rsc.org/advances

Mohammed Es-Souni^{*a}, Dimitri Schopf^a, Claus-henning Solterbeck^a and Matthias Dietze^a

We report a versatile and novel approach to the processing of supported macro-mesoporous nanographite and *in situ* nanographite-noble metal nanocomposites films. The precursor is a porous PVDF film that is processed template-free from solution. Among the potential applications of our films we show their suitability for high-performance supercapacitors.

Carbon based materials are of paramount importance in various applications, including fuel cells^{1,2}, gas sensing³, hard coatings⁴ and energy storage^{1,5-8}. Among the flurry of structures and morphologies of these materials graphite in its various forms is probably most familiar and finds widespread applications (see references above and references therein). Additional functionalities may be generated by designing graphite-metal nanocomposites. For instance carbon and diamond-like-carbon (DLC)-Ag-nanoparticles (Ag-NPs) were applied as bactericidal coatings⁹; Ag-NPs incorporated into DLC were also shown to improve life time in aerospace applications involving oxygen ion bombardment⁴. Ag-Sn-graphite nanocomposites are suitable as electrodes for fuel cells¹⁰, and carbon-Pt-nanocomposites are well known as electrocatalyst^{1,2}. Carbon nanomaterials are also particularly suitable for high-performance supercapacitors^{1,6-8,11} because they can exhibit high surface area, adequate mesoporosity and high chemical stability. For instance carbon nanotubes (CNT) were reported with specific capacitances in the range from 100 to 180 F/g, depending on electrode morphology and on whether the CNT are multi or single walled¹¹.

Today state of the art double layer capacitors rely, however, on activated porous graphite that is unsurpassed both from the point of view of material and production cost. These advantages are however mitigated by the relatively low specific capacitance that can be achieved with this material^{6,11}. The main limiting factor has been identified in the inadequate pore structure that rather consists of more micropores (pore diameter < 2 nm) and less mesopores, thus

limiting electrolyte penetration¹². Designing graphite electrodes with high mesoporosity can therefore boost the performance of these materials while maintaining their cost-effectiveness.

In the present communication we describe a versatile method for preparing supported porous monolithic and *in situ* metal-graphite nanocomposites, starting from porous polyvinylidene fluoride (PVDF). We demonstrate that these films are promising candidates for supercapacitor applications, but other applications, as outlined above, may readily be explored.

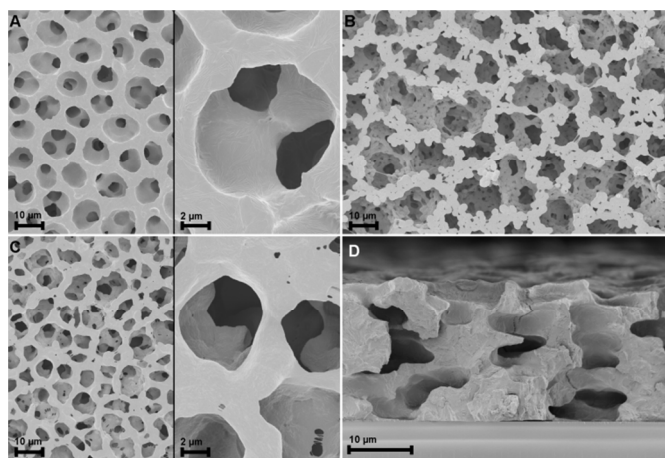


Fig. 1 Secondary electron (SE) micrographs of porous PVDF-films. (A) dual magnification SE micrographs of a PVDF-TrFE copolymer film showing ordered, hierarchical porosity; notice that the pore walls are rather smooth. (B) A PVDF film that was processed using a high oxidant concentration and displaying larger pores. (C) A PVDF film that was processed with a smaller oxidant concentration than above; the pores become smaller and ordering increases. (D) Is a cross section SE micrograph of a PVDF-TrFE film to demonstrate pore connectivity.

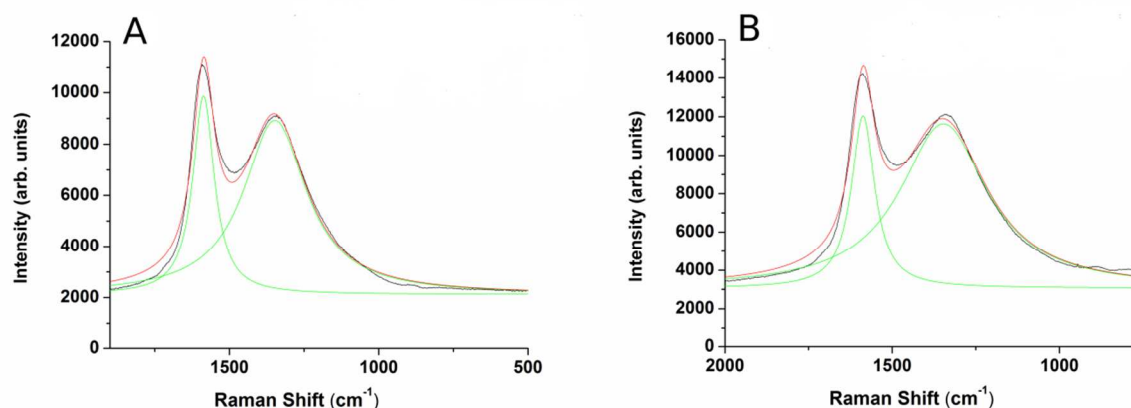


Fig. 2 The Raman scattering spectra of the nanographite films. A) plain graphite film; B) the graphite-Ag nanocomposite film. The broad peak centred at 1347 cm^{-1} is the D band, the narrower centred at 1586 cm^{-1} is the G band.

For the preparation of porous PVDF films we refer to our previous publication¹². Briefly, the PVDF powder is dissolved in N,N-dimethylformamide ($\text{C}_3\text{H}_7\text{NO}$, DMF). To this solution we add ammonium nitrate (NH_4NO_3 which is also well soluble in DMF). The final solution obtained is clear and has a honey-like viscosity of approximately $280\text{ mPa}\cdot\text{s}$. The solution can be applied to a substrate, in our case a stainless steel sheet or oxidized silicon, using solution deposition methods, and may also be screen printed. It is during deposition that the system self-organizes so that specific exothermic reactions occur¹², giving rise to hierarchical open porosity, as illustrated in Fig. 1. For the in situ nanocomposites, either AgNO_3 or chloroplatinic acid (H_2PtCl_6) is added to the polymeric solution. The films are subsequently pyrolysed in a tube furnace at 550°C for 30 to 60 minutes under flowing nitrogen.

Careful XRD experiments using grazing incidence and long acquisition time (Fig. 1S, supplementary information) did not reveal any lines characteristic of graphite or graphite oxides¹³ thus implying that the graphite phase is amorphous. The Raman scattering spectra confirm the findings of XRD, and show the G and D peaks characteristic of amorphous nanographite³, Fig. 2. The intensity ratio I_D/I_G may help estimating the domain size using the empirical formula devised by^{3, 14}:

$$d(\text{nm}) = \frac{560}{E_{\text{laser}}^4} \left(\frac{I_D}{I_G} \right) \quad (1),$$

where E_{laser} (eV) is the energy of the laser excitation, in our case 2.33 eV . The domain size obtained is 22 nm (see below for comparison with microscopic images). The Ag- and Pt-nanocomposites show very similar Raman spectra with negligible changes in the G peak width and the I_D/I_G peak ratio, denoting no

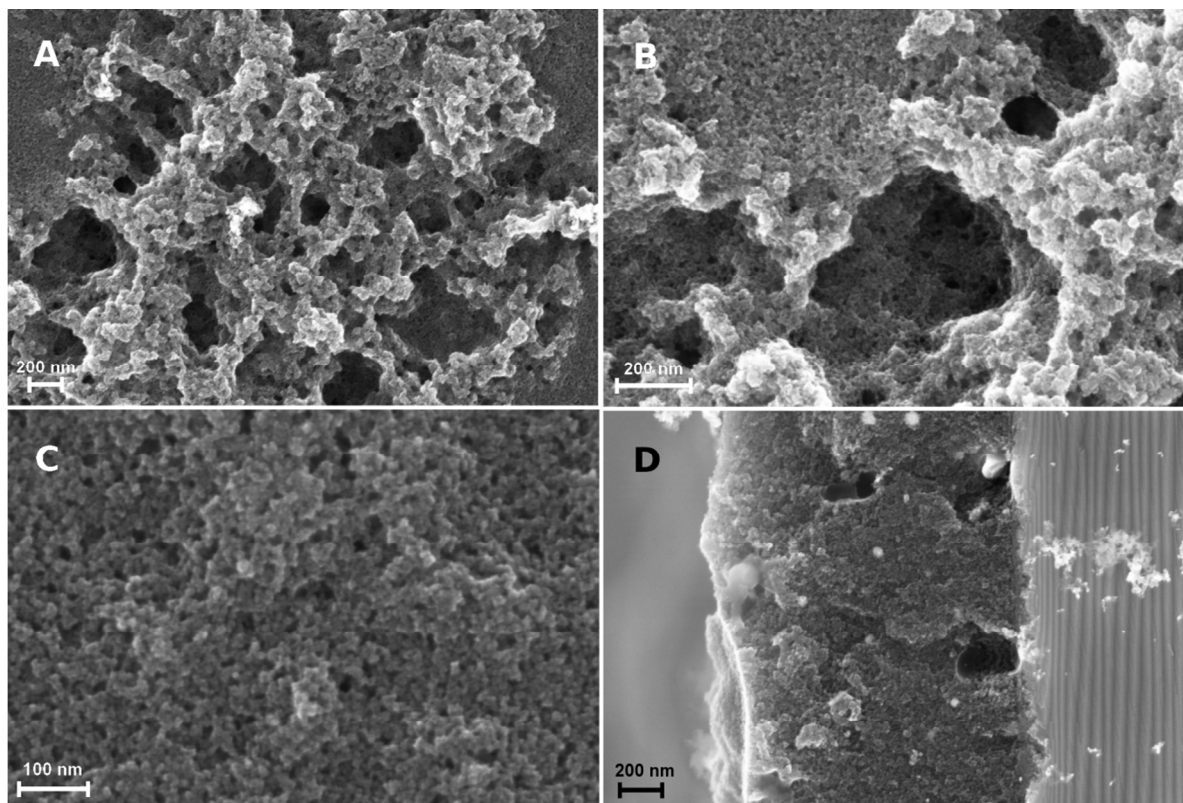


Fig. 3 SEM micrographs of the graphite films: (A) and (B) show the macroporous areas at different magnifications; (C) shows the mesoporous areas and (D) is a cross-section micrograph of a film on oxidized silicon.

remarkable changes in the microstructural dimensions.

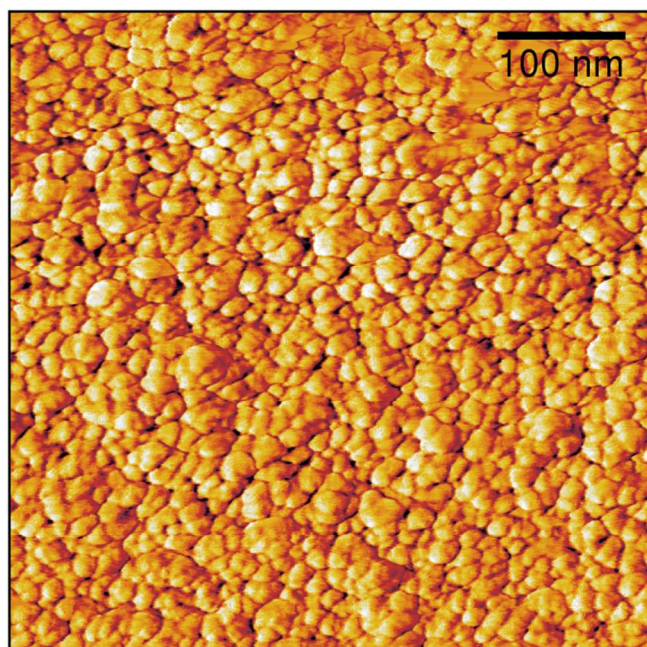


Fig. 4 AFM phase micrograph showing the morphology of the graphite nanoplatelets.

The topography of the graphite layer largely replicates that of the porous PVDF film, but there are areas where only mesoporosity can be seen. This might be amenable to partial melting of the PVDF film and collapse of the pores during pyrolysis. Cracks are not present despite the high thermal expansion mismatch between the stainless steel substrate and the graphite film. Fig. 3 shows the topography of the graphite film with its macro-mesoporous structure with a pore size range from approximately 10 to 250 nm. The cross section of Fig. 3d shows that the film is approximately 1 μm thick with an overall uniform appearance, and a porosity network throughout the film thickness. The grain morphology and the apparent grain size are better revealed by the AFM micrographs shown in Fig. 4. The films consist of stacks of nano-platelets having an almost uniform size distribution with of 20 to 40 nm, rather consistent with the Raman scattering data. Micrographs of the *in situ* nanocomposite of graphite and silver are shown in Fig. 5. The Ag-NPs are scattered throughout the graphite film surface with a broad size range from 20 to 80 nm, but isolated particles with larger size were also observed. It is interesting to note that the Ag-NPs are present not only on the surface but also over the full film thickness. These films are particularly suitable for applications involving abrasion but necessitating a continuous supply of, e.g. Ag-ions, for bactericidal coatings.

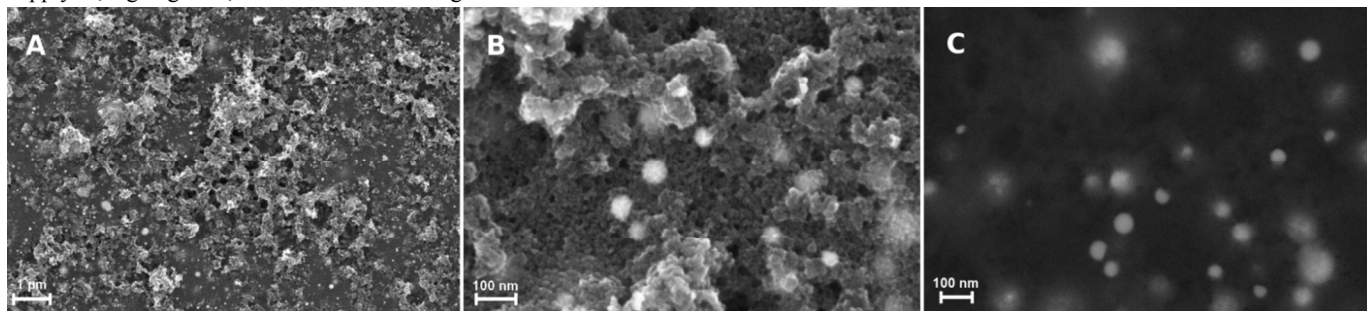


Fig. 5 SEM micrographs of the graphite-Ag-nanocomposite film: A) at low magnification showing overall film morphology (the bright spots are Ag-NPs); B) at higher magnification; C) is a BS SEM micrograph of B) displaying the morphology of the Ag-NPs (some of them are beneath the surface, hence the diffuse contrast). This journal is © The Royal Society of Chemistry 2012

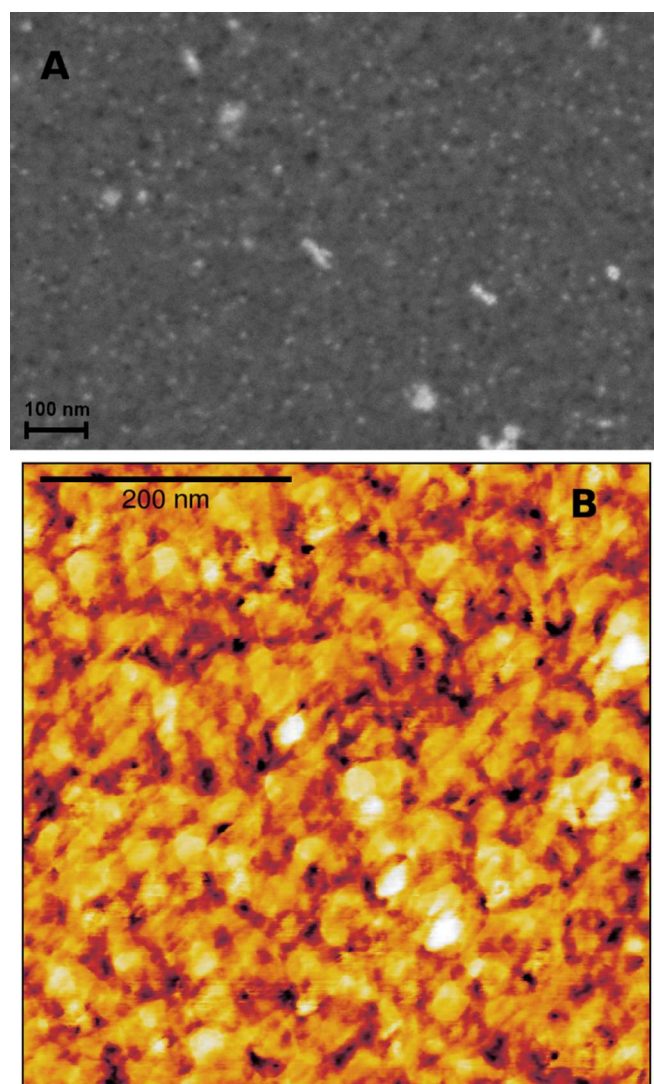


Fig. 6 A) Backscattered (BS) SEM micrograph the graphite-Pt-nanocomposite film (the bright spots denote chemical (z-number) contrast of the Pt-NPs); B) is the AFM-phase image showing the distribution of Pt-NPs (black spots).

The graphite-Pt nanocomposites are characterized by much smaller Pt-NPs as illustrated in Fig. 6 (see also Fig. 1S, and Fig. 2S, supplementary information for XRD and EDS analysis, respectively). Although the SEM micrograph shows large isolated clusters, the overall size determined from the AFM phase image, Fig. 6b, ranges from 10 to 18 nm, in agreement with the size obtained from the XRD 111-Pt peak using the Sherrer formula. Also in this case, the Pt-NPs are present both on the surface and in the regions

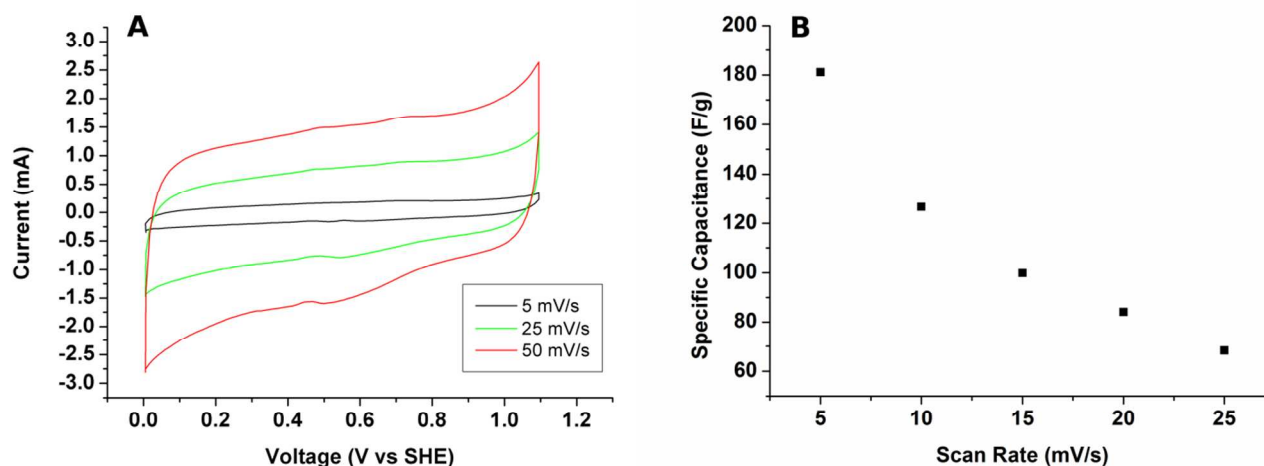


Fig. 7 A) Current vs voltage (CV) curves of the graphite films in a 0.5M H₂SO₄ electrolyte for 3 different voltage scans; B) Plot of the specific capacitance as a function of the scan rate.

We have chosen to explore the charge storage capacity of the macro-mesoporous graphite films in an aqueous solution of 0.5M H₂SO₄. Other applications involving the nanocomposite films will be reported in a later stage. The cyclic voltammograms of the films that have the microstructure shown in Fig. 3 are displayed in Fig. 7. The CV curves are fairly similar to those known for carbon materials, and the specific capacitances of 180±40 F/g obtained lie in the range of those known for porous activated carbon and other carbon nanomaterial electrodes. In comparison to the plain film (see Fig. 3S, on-line supporting information) the specific capacitance increases by approximately three-fold which underscores the role played by the porosity for this specific application. It should, however, be pointed out that our nanographite films did not undergo any activation treatment. Further, because the charge collector (stainless steel) also supports the film during pyrolysis the formation of an oxide scales during this treatment (see Fig. 2S where the oxide layer is Fe₃O₄) should lead to a high contact resistance, consequently impacting negatively film performance. We surmise that film performance could be boosted by employing supports with a thin Au-layer and using an activation treatment.

Conclusions

In conclusion we have shown a versatile processing route for porous carbon processing on a substrate, starting from a porous PVDF film. Amorphous nanographite platelets are obtained at the fairly low pyrolysis temperature of 550°C. The graphite films can be deposited on any thermally resistant substrates making a broad range of applications possible. Via the addition of metal salts to the precursor solution we have shown the possibility for in situ graphite-metal nanocomposite processing on graphite-Ag-NPs and graphite-Pt-NPs with rather homogenous distribution of the particles throughout the film thickness. Finally we have shown one potential application of the porous nanographite films for energy storage

Notes and references

^a Institute for Materials & Surface Technology, University of Applied Sciences, Kiel, Germany. E-mail: mohammed.es-souni@fh-kiel.de

Financial support of this work is provided by the European Commission, INTERREG IVA, Southern Denmark-Schleswig-K.E.R.N, Project#111-1.2-12.

† Electronic Supplementary Information (ESI) available. See DOI: 10.1039/c000000x/processing procedure and Fig. S1 to S3

- 1 E. Antolini, *Applied Catalysis B: Environmental*, 2009, **88**, 1–24.
- 2 Yuyan Shao, Jun Liu, Yong Wang and Yuehe Lin, *J. Mater. Chem.*, 2009, **19**, 46–59.
- 3 A. Serra, A. Buccolieri, E. Filippo, D. Manno, *Sensors and Actuators B*, 2012, **161**, 359–365.
- 4 F.R. Marciano, L.F. Bonetti, R.S. Pessoa, J.S. Marcuzzo, M. Massi, L.V. Santos, V.J. Trava-Airoldi, *Diamond & Related Materials*, 2008, **17**, 1674–1679.
- 5 K. Kierzek, E. Frackowiak, G. Lota, G. Gryglewicz, J. Machnikowski, *Electrochimica Acta*, 2005, **49**, 515
- 6 Li Li Zhang and X. S. Zhao, *Chem. Soc. Rev.*, 2009, **38**, 2520–2531.
- 7 Joseph N. Barisci, Gordon G. Wallace, Ray H. Baughman, *Journal of Electroanalytical Chemistry*, 2000, **488**, 92–98.
- 8 A. Alonso, V. Ruiz, C. Blanco, R. Santamaria, M. Granda, R. Menéndez, S.G.E. de Jager, *Carbon*, 2006, **44**, 441–446.
- 9 M.L. Morrison, R.A. Buchanan, P.K. Liaw, C.J. Berry, R.L. Brigmon, L. Riester, H. Abernathy, C. Jin, R.J. Narayan, *Diamond & Related Materials*, 2006, **15**, 138 – 146.
- 10 X. Wang, Z. Wen, B. Lin, J. Lin, X. Wu, X. Xu, *Journal of Power Sources*, 2008, **184**, 508–512.
- 11 T. Chen, L. Dai, *Materials Today*, 2013, **16**, 272–280.
- 12 M. Es-Souni, Ma. Es-Souni, M. Dietze, *RSC Adv.*, 2011, **1**, 579–583.
- 13 A. B. Bourlinos, D. Gournis, D. Petridis, T. Szabó, A. Szeri, I. Dékány, *Langmuir*, 2003, **19**, 6050.
- 14 D.S. Knight, W.B. White, *J. Mater. Res.*, 1989, **4**, 385–393.

Graphical abstract

Novel Approach to the Processing of Meso-Macroporous Thin Films of Graphite and *in-situ* Graphite-Noble Metal Nanocomposites†

Mohammed Es-Souni^{*a}, Dimitri Schopf^a, Claus-Henning Solterbeck^a and Matthias Dietze^a

On-substrate macro-mesoporous nanographite films as well as *in-situ* graphite-noble metal nanocomposites are processed from porous PVDF precursors and shown to possess outstanding supercapacitance properties

