

RSC Advances



This is an *Accepted Manuscript*, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. This *Accepted Manuscript* will be replaced by the edited, formatted and paginated article as soon as this is available.

You can find more information about *Accepted Manuscripts* in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this *Accepted Manuscript* or any consequences arising from the use of any information it contains.

Calculating the Volume of Elongated Bubbles and Droplets in Microchannels from a Top View Image

Michiel Musterd, Volkert van Steijn*, Chris R. Kleijn, and Michiel T. Kreutzer

Received Xth XXXXXX 20XX, Accepted Xth XXXXX 20XX

First published on the web Xth XXXXXX 200X

DOI: 10.1039/b000000x

We present a theoretical model to calculate the volume of non-wetting bubbles and droplets in segmented microflows from given dimensions of the microchannel and measured lengths of bubbles and droplets. Despite the importance of these volumes in interpreting experiments of reaction kinetics and transport phenomena, an accurate model like the one we present here did not yet exist. The model has its theoretical basis in the principle of interfacial energy minimization and is set up such that volume calculations are possible for a wide variety of channel geometries. We successfully validated our model with the 3D numerical energy minimization code SURFACE EVOLVER for the three most commonly used channel geometries in the field of microfluidics and provide accurate user-friendly equations for these geometries.

Introduction

Many microfluidics applications rely on multiphase flow, typically in the form of elongated droplets in a continuous phase^{1,2}. These droplets can for example be used as small reaction chambers for the synthesis of advanced materials^{3–7}, the growth and screening of cells^{8–12}, bacteria^{13–15} and enzymes¹⁶, the study of mass transfer rates^{17–19}, and even for DNA sequencing²⁰. For quantitative analysis it is important to know the volume and surface area of the droplets. This, however, presents a problem as virtually all visualization is done with optical microscopes that only provide a two-dimensional top-view image of the droplets, leaving the three-dimensional shape unknown^{21,22}. A method to accurately determine the volume based on microscope images is therefore of great use.

The simplest way to estimate the volume, V , of a confined, non-wetting droplet such as the ones shown in Fig. 1 is to describe its shape as a block that has the length, L , of the droplet and the cross sectional area A_{ch} of the channel, giving $V = A_{ch}L$. For a rectangular channel, with width W and height H , this gives the estimate $V = HWL$. Many researchers^{21–23} implicitly use this simple estimate when using the dimensionless length L/W as a proxy for the dimensionless volume V/HW^2 . A more accurate estimation takes into account the rounded caps at the front and back of the droplet and the fact that the droplet does not invade the corners of the channels. To account for the latter, the cross sectional shape of a non-wetting droplet in rectangular channels is often assumed to consist of two semi-circles with a diameter H , con-

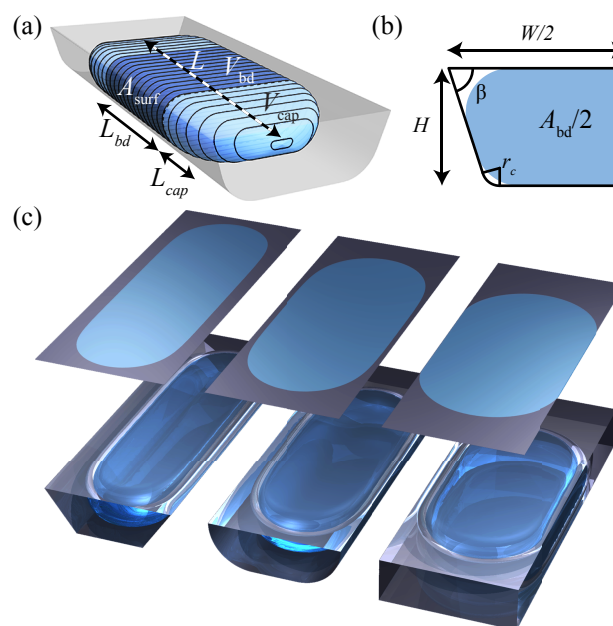


Fig. 1 (a) A non-wetting droplet of volume V and length L can be described with a body of volume V_{bd} , length L_{bd} , and surface area A_{surf} and two caps of volume V_{cap} and length L_{cap} . (b) Cross-sectional view showing half of the generalized channel geometry, which is characterized by a height H , width W , top corner angle β and rounded bottom corner radius r_c . (c) Rendered 3-D droplet shapes and corresponding 2-D top-views for the three most commonly used channel geometries in the field of microfluidics: a trapezoidal channel (left), a rectangular channel with rounded corners (middle) and a rectangular channel with straight corners (right).

Department of Chemical Engineering, Delft University of Technology, Julianalaan 136, 2628 BL Delft, The Netherlands, E-mail: v.vansteijn@tudelft.nl

nected by straight lines of length $W - H$, thus replacing A_{ch} by $\pi H^2/4 + H(W - H)$ in the estimate of the droplet volume. This approximation, however, turns out to be accurate only for shallow channels, where $H \ll W$. Moreover, this still does not account for the rounded caps at the front and the back. Although other approximations are reported¹⁸, there is currently no physically sound model to calculate the volume of droplets from two-dimensional micrographs. Additionally, while most previous work focused on channels with a rectangular cross section, no relations have been developed and systematically tested for non-rectangular microchannels like those obtained by isotropic or crystallographic etching.

In this paper, we fill this gap by developing a theoretical model that enables the reader to accurately predict volumes of confined non-wetting droplets (contact angle of π) from measured droplet lengths and known channel dimensions. We set up the model such that this volume estimation is possible for a wide variety of channel geometries by considering the generalized channel shape shown in Fig. 1b. This shape is characterized by a channel width W , height H , top corner angle β , and rounded bottom corner with radius r_c . We develop solutions of the form $V = f(L, H, W, \beta, r_c)$ for this generalized channel shape and work out simplified approximations for the three most commonly used microchannel geometries shown in Fig. 1c. For the reader who is mainly interested in the final result, we structured the paper such that we directly provide these simplified approximations in Eq. 1, followed by full solutions in Fig. 3. After that, we present all the theoretical foundations and the numerical validation. We base our model on quasi-static droplet shapes, which is a valid approach for surface-tension dominated flows where the lubricating film around droplets is much thinner than the height and width of the channel, i.e. for sufficiently low values of the capillary number $Ca \lesssim 10^{-3}$. Readers interested in flows at higher Ca can use the simple extension of our model presented in the discussion section.

The results of this study provide a valuable tool to precisely quantify the volume of droplets from top-view images. This is for example useful to further improve our understanding of the physics of droplet flows, because physical models are often based on volumetric quantities such as flow rates and volumes. From an application point of view, our model enables the precise monitoring of chemical and biotechnological processes in segmented microflows. Mass transfer rates in liquid-liquid extractions and gas-liquid dissolution experiments benefit for example from an accurate method to determine droplet or bubble volumes and surface areas. This information is also important for the design of non-spherical particles for delivery purposes. Also in the field of biotechnology, where the growth of microorganisms inside droplets is tracked by counting the microorganisms in top-view images, accurate knowledge on the volume of the droplets enables the precise calcu-

lation of the cell concentration. Lastly, we think that volume calculations from simple length measurements might be useful for point-of-care devices, where it is not possible to integrate expensive measurement techniques like confocal microscopy and absorbance imaging²⁴ or include a collection chamber on the chip where droplets can relax to a sphere such that their volume is easily obtained from the measured diameter.

Summary of the main results

Approximate solutions for common channel geometries, $V = f(L, H, W)$

As explained later, a good and simple calculation of the droplet volume is

$$V = \left[HW - (4 - \pi) \left(\frac{2}{H} + \frac{2}{W} \right)^{-2} - cH^2 \right] \left(L - \frac{W}{3} \right) \quad (1)$$

where we have determined c for the three most commonly used channel geometries shown in Fig. 1c: (i) channels with a trapezoidal cross section obtained from anisotropic etching of silicon along the $\langle 111 \rangle$ crystal plane ($r_c = 0$, $\beta = 54.7^\circ$)²⁵, (ii) rectangular channels with circular lower corners from isotropic etching ($\beta = 90^\circ$, $r_c = H$), and (iii) rectangular channels with sharp corners from anisotropic etching or soft lithography ($r_c = 0$, $\beta = 90^\circ$). Throughout this paper, we focus on channel geometries with an aspect ratio $H/W \leq 1$, because such aspect ratios are widely used in the field of microfluidics.

For the three geometries in Fig. 1c, we determined the constant c by fitting Eq. 1 over the full range of channel aspect ratios and droplet lengths studied in this work ($0.1 \leq H/W \leq 1$ and $2 \leq L/W \leq 9$) against droplet volumes calculated with the 3D surface energy minimization of SURFACE EVOLVER²⁶. We find $c = 0.77$, $c = 0.41$, and $c = 0$, respectively. For droplet lengths $L \geq 3W$, volumes calculated by Eq. 1 are at least within 5% of the volumes calculated by SURFACE EVOLVER as shown in Fig. 2, and the error is up to an order of magnitude smaller than the error for the simple $V = A_{ch}L$ approximation. More accurate solutions and solutions for the generalized channel geometry in Fig. 1b, i.e. for other values of β or r_c , are given below.

Full solutions for generalized channel geometries, $V = f(L, H, W, \beta, r_c)$

The recipe to calculate droplet volumes from measured droplet lengths and known channel geometry is given in Fig. 3. Depending on the channel geometry, different cross sectional shapes are possible, resulting in different expressions for the droplet volume. The different shapes can be classified based

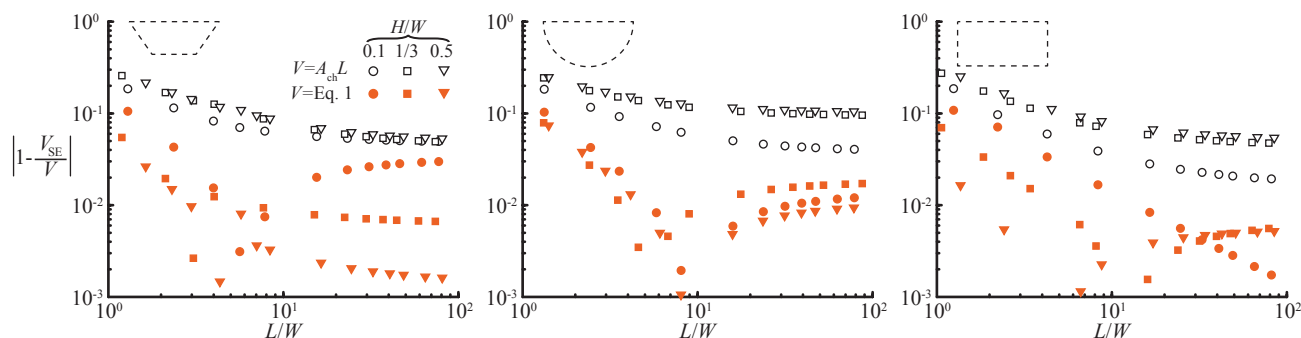


Fig. 2 Comparison of the exact droplet volume V_{SE} calculated with SURFACE EVOLVER, with V from Eq. 1 (closed symbols) and V from the simple estimate $V = A_{ch}L$ (open symbols). The proposed approximation, Eq. 1, yields a volume estimate that is at least within 10% of the exact droplet volumes, which is up to 1 order of magnitude better than the simple estimate $V = A_{ch}L$. The minimum in some of the curves of Eq. 1 originates from the overestimation of the cap volume and the underestimation of the body volume. The contribution of the body increases with L/W such that for short droplets the total error is positive and for long droplets negative and hence the minimum.

on two questions: (Q1) “does the interface conform to the bottom corners of the channel?” If the answer is “no”, the interface is flattened at the side walls and the remaining question is (Q2a) “is the interface also flattened at the bottom wall?” Yet, if the answer to Q1 is “yes”, the interface is flattened at the bottom wall and the remaining question is (Q2b) “is the interface also flattened at the side walls?” This classification hence leaves four possible interface shapes shown in Fig. 5, with the corresponding expressions for the volume calculation in the four panels of Fig. 3. Selecting which of the panels to use hence starts with answering two questions. Using the corresponding criteria at the top of Fig. 3, this is simply done by filling in the known channel dimensions. Consider for example a channel with a rectangular cross section with straight corners. Then the answer to the first question is “no”, because $r_c = 0$ while the term on the left is always larger than zero. In fact, this term is the radius of curvature, r_b , of the interface in the bottom corners of the channel for an unconformed interface. Subsequently calculating the radius of curvature, r_t , of the interface in the top corners of the channel, it is straightforward to show that for rectangular channels the answer to Q2a is “yes” irrespective of the values of H and W . This makes sense, because non-wetting droplets in rectangular channels with straight corners do not fill the corners and the curved parts of the interface in the corners are separated by thin flat films on the walls²⁷. Hence, the expressions in panel (a) should be used to calculate the droplet volume. Importantly, this panel is not exclusive to rectangular channels with straight corners. It, for example, also applies to trapezoidal channels that are sufficiently wide such that the curved corners are separated by flat films. Note that the shapes shown in the other panels are only a few examples of the possible shapes belonging to these panels. Hence, it is recommended to use the two criteria as a guide to select the appropriate panel for the volume calculation.

tion.

Model validation

We validate our theoretical model with the 3D numerical energy minimization code SURFACE EVOLVER²⁶. We illustrate the accuracy for the three most commonly used channel geometries shown in Fig. 1c for a wide range of channel aspect ratios ($0.1 \leq H/W \leq 1$) and droplet lengths ($2 \leq L/W \leq 9$). For this entire range, droplet volumes predicted by theory and found in simulations agree within 5% as shown in Fig. 4. The largest deviation is found for shallow channels and short droplets, i.e. $H/W = 0.1$ and $L/W = 2$, whereas the difference reduces with larger aspect ratios and droplet lengths to as little as 0.5% for $H/W \geq 0.5$ and $L/W \geq 6$.

Uncertainty in calculated droplet volume due to experimental inaccuracies

In this section, we briefly explain how to calculate the uncertainty in droplet volume, $u(V)$, for a known uncertainty in the droplet length $u(L)$ and known uncertainties, $u(W)$, $u(H)$, $u(\beta)$, $u(r_c)$, in channel dimensions. Assuming that these uncertainties are independent we can write

$$(u(V))^2 = \left(\frac{\partial V}{\partial W} u(W)\right)^2 + \left(\frac{\partial V}{\partial H} u(H)\right)^2 + \left(\frac{\partial V}{\partial \beta} u(\beta)\right)^2 + \left(\frac{\partial V}{\partial r_c} u(r_c)\right)^2 + \left(\frac{\partial V}{\partial L} u(L)\right)^2 \quad (2)$$

Applying Eq. 2 to the desired equation panel in Fig. 3 it is then straightforward to calculate the uncertainty in V from fabrication tolerances and expected errors in droplet length.

To illustrate the use of Eq. 2 we work out a typical case for a rectangular microchannel with straight corners with

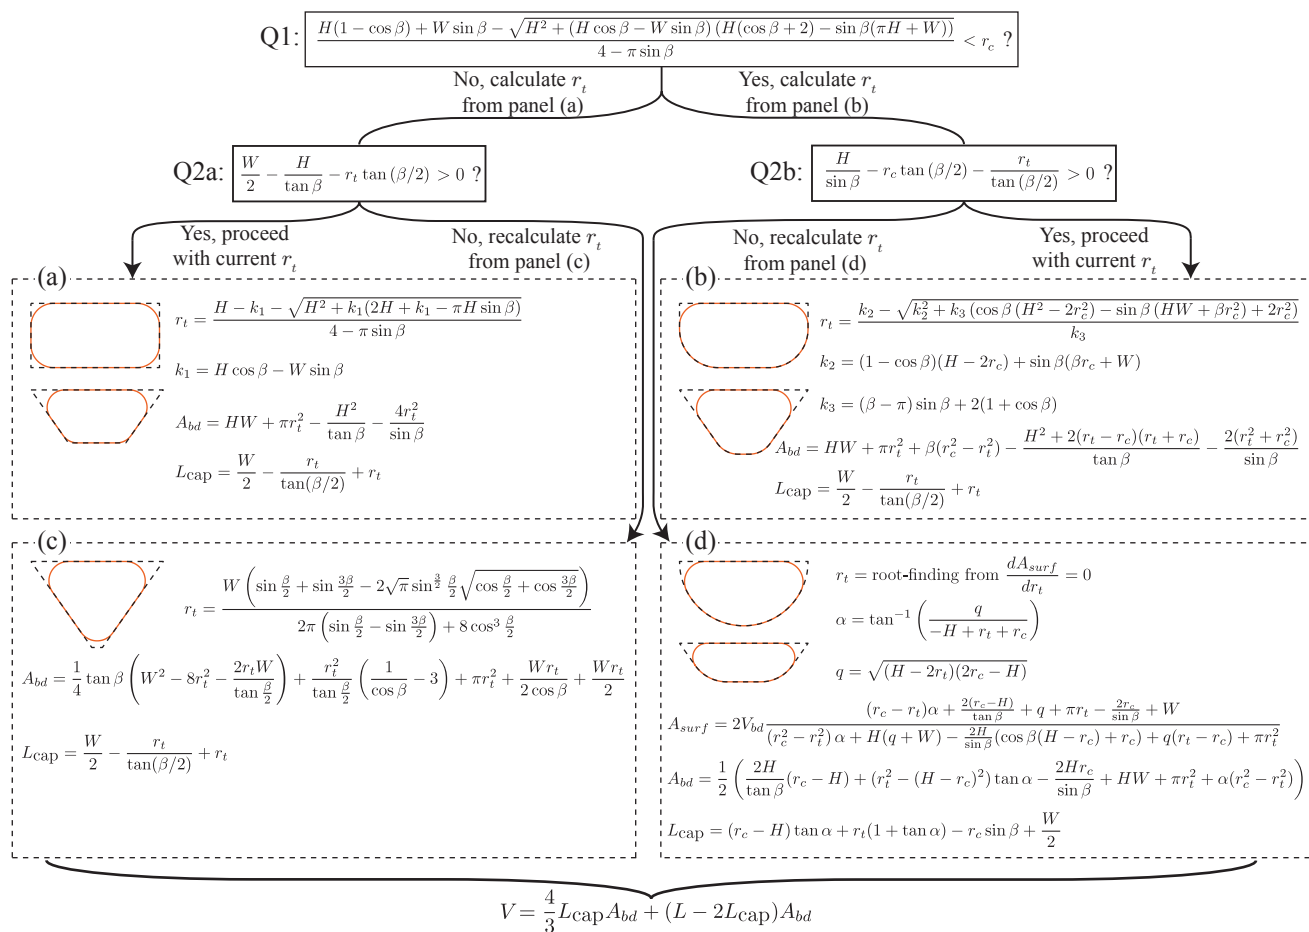


Fig. 3 Recipe to calculate the volume of a droplet from its measured length, L , and the known channel dimensions (W , H , β , r_c). The criteria at the top guide the reader to one of the four equation panels that contain all the equations needed to calculate the droplet volume from the droplet length using the equation at the bottom.

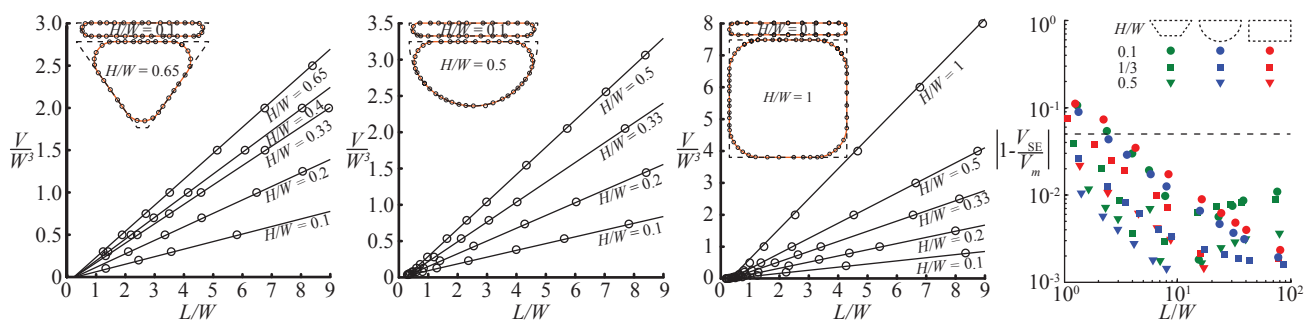


Fig. 4 Validation of the theoretical model in Fig. 3 was done by comparing the results from the model (lines) with simulations performed with SURFACE EVOLVER (circles) for the three most commonly used channel geometries. The graphs show the non-dimensional droplet volume V/W^3 as a function of the non-dimensional droplet length L/W for a wide range of channel aspect ratios, with some cross-sectional shapes calculated by the model (lines) and SURFACE EVOLVER (circles) in the insets. The direct comparison of the error shown on the right shows that our model agrees with the simulations within 5% (indicated by dashed line) for droplets of length $L \geq 3W$, with a reduction in error for larger droplets.

$H = 50 \pm 2 \mu\text{m}$ and $W = 100 \pm 2 \mu\text{m}$ and a droplet with $L = 500 \pm 10 \mu\text{m}$, i.e. relative errors of 4%, 2% and 2%. Working out the derivatives of V to W , H and L (not shown) and filling in the numbers we find $V = 2.21 \pm 0.11 \text{ nL}$ or a relative error of 4.9%.

Full model

Our model describes the shape of quasi-statically moving droplets that do not wet the channel walls. This quasi-static approach is valid for droplets moving at speeds that are sufficiently low to neglect droplet deformation due to viscous and inertial forces. The dimensionless numbers expressing these contributions relative to surface tension are the capillary number, Ca , and the Weber number, $We = ReCa$, with Re the Reynolds number. For most microfluidic applications, Ca , Re , and hence We are small such that the quasi-static approach is valid. More quantitatively, the calculations of Bretherton²⁸ showed that deformations due to viscous forces are negligible for $Ca = \mu u / \gamma < 5 \cdot 10^{-3}$, with μ the viscosity of the carrier fluid, u the speed of the droplet, and γ the interfacial tension. More recently, Kreutzer *et al.*²⁹ showed numerically that this boundary can be put somewhat higher at $Ca < 10^{-2}$. Additionally, Bretherton²⁸ stated that inertial effects can be neglected for $We = \rho u^2 W / \gamma < 1$, with ρ the density of the carrier fluid. The droplet shapes calculated in Kreutzer *et al.*²⁹ confirm that at $We \sim 1$, the length of a droplet is appreciably different from the value at $We \rightarrow 0$. As Re and Ca are both small in microfluidic flows, the condition $We < 1$ is met for most applications.

Besides droplet deformations due to viscous and inertial forces, we also ignore deformations due to gravity. This is justified, as gravity is generally small compared to surface tension. More quantitatively, the ratio of these forces captured by the Bond number, $Bo = \Delta\rho H^2 g / \gamma$, is typically much smaller than 0.1, where $\Delta\rho$ is the density difference between the fluids and g is the gravitational acceleration.

Under the conditions that (i) surface tension forces are much larger than viscous, inertial, and gravitational forces, and (ii) droplets are surrounded by a thin lubricating film such that there is no direct contact between the droplets and the walls (often achieved by the use of surfactants or surface treatment of the walls), droplets confined by the walls of a channel take the shape for which the surface energy, i.e. surface area, is minimum. This explains why the shape only depends on the channel geometry and droplet volume, and not on fluid parameters. Although we use the word ‘‘droplet’’ throughout this paper, our work hence is equally valid for gas bubbles.

We now derive a relation between the volume and length of a droplet by describing the shape of a droplet with two curved caps connected by a body that is confined by the channel walls as illustrated in Fig. 1a. We first determine the volume of the

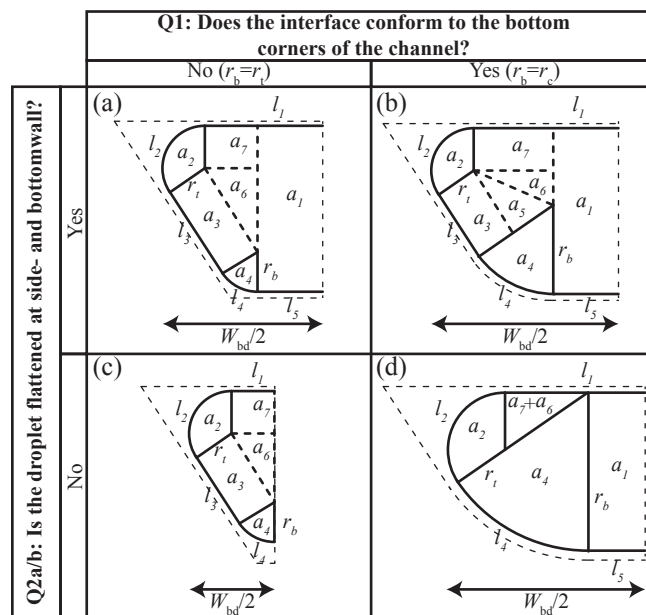


Fig. 5 Geometric description of the four possible droplet shapes inside the generalized channel geometry considered in this work. These shapes can be categorized based on the two questions shown at the top and side. All shapes are fully characterized once the radius of curvature at the top, r_t , is known, which is found through energy minimization. The resulting expression can be found in the corresponding panels (a)–(d) in Fig. 3. Note that we only present the left side of the channels for display purposes.

body based on energy minimization and then propose a description of the caps.

Volume of the body

Considering the droplet shown in Fig. 1a, we define its body as the part that has sides of length L_{bd} parallel to the channel walls. Along this length, the cross sectional droplet shape is constant and can be described by one of the four possible shapes shown in Fig. 5. Comparing the shapes in (a,c) with those in (b,d), the important difference is the conformation of the interface to the bottom corner of the channel. The shapes in Fig. 5(b,d) do conform such that the radius of the interface at the bottom equals the radius of the rounded corner, i.e. $r_b = r_c$. This leaves the radius at the top, r_t , as the only unknown in the description of the cross-sectional droplet shape. By contrast, the bottom interface in Fig. 5(a,c) does not take the shape of the channel. Because the interface is now free at both the top and the bottom, the curvatures are equal²⁷, i.e. $r_b = r_t$. For all four cases, r_t is thus the only unknown.

The general approach to find the cross-sectional shape, i.e. r_t , is to minimize the surface area of the entire body, A_{surf} , for a

fixed body volume, $V_{bd} = A_{bd}L_{bd}$, with A_{bd} the cross-sectional area

$$A_{bd} = 2 \sum a_i \quad (3)$$

The surface area of the body, A_{surf} , simply equals the circumference of the cross section, $l_{bd} = 2 \sum l_i$, times the length of the body, i.e. $A_{\text{surf}} = 2L_{bd} \sum l_i$. Using elementary geometry, it is straightforward to find expressions for the lengths l_i and the areas a_i for the four cases in Fig. 5. These can be subsequently used to find expressions for A_{bd} , V_{bd} , and A_{surf} , which only depend on the unknown radius r_t . This radius is found by minimizing the area A_{surf} for given V_{bd} , such that the cross-sectional shape is known.

We now illustrate this general approach for the cross-sectional shape shown in Fig. 5a. Using geometry to express the lengths, l_i , and the areas, a_i , in terms of the radii r_t and r_b and the channel dimensions W , H , β , and r_c , we find

$$\begin{aligned} l_1 &= \frac{W}{2} - \frac{r_t}{\tan(\beta/2)}, \quad l_2 = (\pi - \beta)r_t \\ l_3 &= \frac{H}{\sin\beta} - r_b \tan(\beta/2) - \frac{r_t}{\tan(\beta/2)} \\ l_4 &= \beta r_b, \quad l_5 = \frac{W}{2} - \frac{H}{\tan\beta} - r_b \tan(\beta/2) \end{aligned} \quad (4)$$

and

$$\begin{aligned} a_1 &= l_5 H, \quad a_2 = \frac{\pi - \beta}{2} r_t^2, \quad a_3 = l_3 r_t \\ a_4 &= \frac{\beta}{2} r_b^2, \quad a_5 = \frac{r_b - r_t}{2} l_3 \\ a_6 &= \frac{l_1 - l_5}{2} \left(\left(\frac{W}{2} - l_5 \right) \tan\beta - \frac{r_b}{\cos\beta} - r_t \right) \\ a_7 &= r_t (l_1 - l_5) \end{aligned} \quad (5)$$

where we have neglected the thickness of the wetting film between a droplet and the wall under the assumption of quasi-static motion.

Using $r_b = r_t$ for the case in Fig. 5a, we hence find the following expressions for the surface area

$$A_{\text{surf}} = 2L_{bd} \left(H \tan \frac{\beta}{2} - \frac{4r_t}{\sin\beta} + \pi r_t + W \right) \quad (6)$$

for the body area

$$A_{bd} = \left(HW - \frac{H^2}{\tan\beta} - \frac{4r_t^2}{\sin\beta} + \pi r_t^2 \right) \quad (7)$$

and for the body volume

$$V_{bd} = L_{bd} \left(HW - \frac{H^2}{\tan\beta} - \frac{4r_t^2}{\sin\beta} + \pi r_t^2 \right) \quad (8)$$

This volume should remain constant when we minimize the surface area. This is simply done by substituting V_{bd} into A_{surf} through L_{bd} , resulting in

$$A_{\text{surf}} = 4V_{bd} \frac{(W + \pi r_t) \sin\beta - H \cos\beta - 4r_t + H}{(HW + \pi r_t^2) \sin\beta - H^2 \cos\beta - 4r_t^2} \quad (9)$$

Now minimizing A_{surf} with respect to the only unknown r_t , $dA_{\text{surf}}/dr_t = 0$, we find an expression for the radius r_t in terms of all known channel dimensions

$$r_t = \frac{H(1 - \cos\beta) + W \sin\beta}{4 - \pi \sin\beta} - \frac{\sqrt{H^2 + (H \cos\beta - W \sin\beta)(H(\cos\beta + 2) - \sin\beta(\pi H + W))}}{4 - \pi \sin\beta} \quad (10)$$

For a rectangular channel, $\beta = 90^\circ$, Eq. 10 reduces to

$$r_t = \frac{H + W - \sqrt{H^2 + (\pi - 2)HW + W^2}}{4 - \pi}, \quad (11)$$

which is a well-known result²⁷. Knowing r_t fixes the entire cross-sectional shape of the body in Fig. 5a. The volume of the body can then be calculated using Eq. 8 once the body length L_{bd} is known, which we address shortly.

For the other three cases shown in Fig. 5b-d, the analysis is similar. In short, one uses $r_b = r_c$ instead of $r_b = r_t$ to obtain the resulting expressions for the case in Fig. 5b, while $l_5 = 0$ should be used in Eqs. (4) and (5) for the case in Fig. 5c. The case in Fig. 5d needs special attention. For the special case with $r_c = H$ shown in Fig. 5d, resulting expressions for r_t and A_{bd} are found using $r_b = r_c$ and $l_3 = 0$. However, for the more generic case where $r_c \neq H$, finding the root of r_t cannot be done analytically and should be done using root finding. For all four cases, the resulting expressions for r_t and A_{bd} are summarized in Fig. 3.

Volume of the caps

Calculating the shape and volume of the caps could in principle be done using the same energy minimization approach. It, however, involves solving the highly non-linear Young-Laplace equation in 3D, such that it is not possible to obtain an analytical expression for the generalized case. We therefore use a much simpler, but accurate method to reconstruct the shape of the caps. Although this description of the droplet caps is not exact, it is a fair estimate as evidenced by the good match of the droplet volume prediction and the Surface Evolver simulation shown in Fig. 4. This reconstruction is illustrated in Fig. 6a. We require that the cross-section of the droplet cap continuously and smoothly connects to the body at $y = 0$ and monotonically decreases to $A(y) = 0$ at $y = L_{\text{cap}}$. Additionally, we require $A(y)$ to reproduce a hemispherical cap

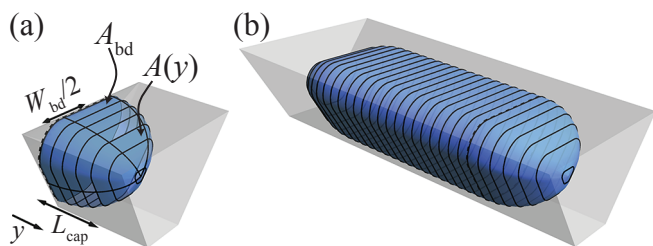


Fig. 6 (a) Geometric reconstruction of the cap is done by extruding the cross sectional shape of the body, A_{bd} , along the length of the cap L_{cap} , while decreasing the area quadratically according to $A(y) = A_{bd} (1 - y^2/L_{cap}^2)$. (b) Resulting droplet shape.

when viewed from top or bottom, as is commonly found in experiments. The function $A(y) = A_{bd} (1 - y^2/L_{cap}^2)$ is the only choice that allows this condition and the other ones. It may be noted that this description results in a shape that looks elliptical from whatever angle the cap is viewed in a 2D projection, thus closely approximating the physically realistic shape as shown in Fig. 6b. The volume of the cap can then simply be calculated as the integral

$$V_{cap} = \int_0^{L_{cap}} A_{bd} \left(1 - \frac{y^2}{L_{cap}^2} \right) dy = \frac{2}{3} L_{cap} A_{bd} \quad (12)$$

We hereby assume that the length of the cap equals half of the body of the droplet, $W_{bd}/2$, thus matching the requirement of a hemispherical cap when viewed from top or bottom. As illustrated for the four shapes in Fig. 5, this width is simply defined as the distance of the side of the droplet to the centerline such that

$$L_{cap} = W_{bd}/2 = l_1 + r_t. \quad (13)$$

With l_1 and r_t determined in the previous section, the cap length can be determined and the resulting expressions are summarized in Fig. 3.

Total droplet volume

The total droplet volume is just the sum of the body volume and the volume of the caps

$$V = 2V_{cap} + V_{bd} = \frac{4}{3} L_{cap} A_{bd} + (L - 2L_{cap}) A_{bd} \quad (14)$$

where we expressed the length of the body in terms of the measured droplet length, L , and the known cap length according to $L_{bd} = L - 2L_{cap}$. As mentioned before, the expressions for A_{bd} and L_{cap} are all summarized in Fig. 3. This figure hence is a concise summary of this paper and all that is needed to calculate drop volumes from measured drop lengths.

Approximate solutions

Returning to the approximation of the droplet volume postulated in Eq. 1, we can now show the origin of this approximation. Substituting the approximation $L_{cap} = W/2$ in Eq. 14 we obtain

$$V = A_{bd} \left(L - \frac{W}{3} \right) \quad (15)$$

Considering a rectangular channel, the cross sectional area equals $A_{bd} = HW - (4 - \pi)r_t^2$. The unknown radius of curvature, r_t , can be found by matching the curvature, $1/r_t$, of the interface near the corners to the curvature at the front of the droplet, which approximately equals $2/H + 2/W$. Using $r_t \approx (2/H + 2/W)^{-1}$ we find

$$V = \left[HW - (4 - \pi) \left(\frac{2}{H} + \frac{2}{W} \right)^{-2} \right] \left(L - \frac{W}{3} \right) \quad (16)$$

The trapezoidal and round corner channels are clearly far from rectangular such that a correction term is needed. We observe that a simple quadratic correction term, $-cH^2$, for the channel height is sufficient, while higher order terms in W and L do not change the approximation significantly and were left out to keep the approximation as simple as possible. This yields the volume approximation of Eq. 1.

Discussion

We now address the validity and implications of two important assumptions used in our model. The first assumption is that the droplet is sufficiently long such that it has a straight body. We observed in SURFACE EVOLVER simulations that this assumption breaks down for droplets shorter than $L < 2W$. Despite this fact, our model is accurate within 12% for droplets with a length $W < L < 2W$. Shorter droplets either take the shape of a pancake or a sphere, such that their volume is easily calculated using $V = \pi HL^2/4$ or $V = \pi L^3/6$ respectively.

The second assumption is that the lubricating film around non-wetting droplets is negligibly thin, which is valid for static and slowly moving droplets.³⁰ However, for faster moving droplets the thickness of the lubricating film, δ , should be accounted for. Wong *et al.*³¹ showed that this thickness is a complex function of the distance to the droplet caps and channel walls, but on average can be estimated as $\delta/2W = 0.643r_t/W(3Ca)^{2/3}$. The assumption in our model that the droplet is separated by an infinitely thin film can be easily modified to take this finite thickness, δ , into account: instead of using H and W , one should use $W - 2\delta$ and $H - 2\delta$ in the recipe of Fig. 3. Although the righthand side of the expression for r_t now depends on r_t itself, its value is simply found by solving the equation iteratively. We note that using r_t for a

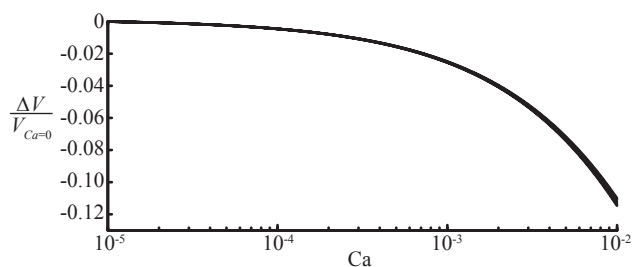


Fig. 7 Effect of the capillary number on the difference in calculated volume for moving and static droplets for a given droplet length of $L/W = 5$ in rectangular channels with straight corners and an aspect ratio $H/W \leq 1$.

zero film thickness to calculate δ without subsequently recalculating r_t (valid for small values of Ca for which $\delta \ll r_t$)³² results in a maximum deviation of 2% in the prediction of the volume, which might be sufficiently accurate for some applications. We illustrate the influence of the finite film thickness for rectangular channels with straight corners in Fig. 7. For a measured droplet length of $L = 5W$, the graph shows the relative difference between the volume of a moving droplet and a static droplet. For the example considered here, the film thickness can be safely neglected for $Ca < 10^{-3}$, because the 2.5% difference likely falls within experimental error. For relatively large values, the difference increases to a maximum of 12% for $Ca = 10^{-2}$. For $Ca > 10^{-3}$, the film thickness should hence be taken into account as proposed.

Concluding remarks

We have developed a theoretical model to compute the volume of non-wetting bubbles and droplets in a microchannel based on the principle of interfacial energy minimization. The only input to the model is the geometry of the microchannel and the length of the droplet, which can be determined easily from top- or bottom view micrographs. Our model has been validated by comparison with three-dimensional energy minimization calculations using Surface Evolver. We have illustrated the good agreement between theory and calculations for three most commonly used channel geometries in the field of microfluidics: a rectangular channel, an isotropically etched channel, and a crystallographically etched channel. We expect that the simple theoretical model will be useful for the droplet microfluidics community and aids quantitative analysis and design of droplet microflows.

Acknowledgments


We thank Bernhard Righolt for insightful discussions on the geometric calculations. This research was carried out within the framework of the ISPT project HESTRE.

References

- 1 S.-Y. Teh, R. Lin, L.-H. Hung and A. Lee, *Lab Chip*, 2008, **8**, 198–220.
- 2 C. Baroud, F. Gallaire and R. Danga, *Lab Chip*, 2010, **10**, 2032–2045.
- 3 V. Sebastian Cabeza, S. Kuhn, A. A. Kulkarni and K. F. Jensen, *Langmuir*, 2012, **28**, 7007–7013.
- 4 M. T. Rahman, P. G. Krishnamurthy, P. Parthiban, A. Jain, C. P. Park, D.-P. Kim and S. A. Khan, *RSC Adv.*, 2013, **3**, 2897–2900.
- 5 I. Lignos, L. Protesescu, S. Stavrakis, L. Piveteau, M. J. Speirs, M. A. Loi, M. V. Kovalenko and A. J. deMello, *Chem. Mater.*, 2014, **26**, 2975–2982.
- 6 T. Nisisako and T. Torii, *Adv. Mater.*, 2007, **19**, 1489–1493.
- 7 D. Dendukuri, K. Tsoi, T. A. Hatton and P. S. Doyle, *Langmuir*, 2005, **21**, 2113–2116.
- 8 R. R. Pompano, W. Liu, W. Du and R. F. Ismagilov, *Annu. Rev. Anal. Chem.*, 2011, **4**, 59–81.
- 9 A. Theberge, F. Courtois, Y. Schaerli, M. Fischlechner, C. Abell, F. Hollfelder and W. Huck, *Angew. Chem.*, 2010, **49**, 5846–5868.
- 10 J. J. Agresti, E. Antipov, A. R. Abate, K. Ahn, A. C. Rowat, J.-C. Baret, M. Marquez, A. M. Klibanov, A. D. Griffiths and D. A. Weitz, *P. Natl. Acad. Sci. USA*, 2010, **107**, 4004–4009.
- 11 M. T. Guo, A. Rotem, J. A. Heyman and D. A. Weitz, *Lab Chip*, 2012, **12**, 2146–2155.
- 12 B. L. Wang, A. Ghaderi, H. Zhou, J. Agresti, D. A. Weitz, G. R. Fink and G. Stephanopoulos, *Nat. Biotech.*, 2014, **32**, 473–478.
- 13 S. Jakiela, T. S. Kaminski, O. Cybulski, D. B. Weibel and P. Garstecki, *Angew. Chem.*, 2013, **125**, 9076–9079.
- 14 K. Leung, H. Zahn, T. Leaver, K. M. Konwar, N. W. Hanson, A. P. Pagé, C.-C. Lo, P. S. Chain, S. J. Hallam and C. L. Hansen, *P. Natl. Acad. Sci. USA*, 2012, **109**, 7665–7670.
- 15 J. Cao, D. Kürsten, K. Krause, E. Kothe, K. Martin, M. Roth and J. Köhler, *Appl. Microbiol. Biot.*, 2013, **97**, 8923–8930.
- 16 R. Arayanarakool, L. Shui, S. W. M. Kengen, A. van den Berg and J. C. T. Eijkel, *Lab Chip*, 2013, **13**, 1955–1962.
- 17 S. G. R. Lefortier, P. J. Hamersma, A. Bardow and M. T. Kreutzer, *Lab Chip*, 2012, **12**, 3387–3391.
- 18 M. Sauzade and T. Cubaud, *Phys. Rev. E*, 2013, **88**, 051001.
- 19 P. Mary, V. Studer and P. Tabeling, *Anal. Chem.*, 2008, **80**, 2680–2687.
- 20 A. R. Abate, T. Hung, R. A. Sperling, P. Mary, A. Rotem, J. J. Agresti, M. A. Weiner and D. A. Weitz, *Lab Chip*, 2013, **13**, 4864–4869.
- 21 T. Cubaud, M. Sauzade and R. Sun, *Biomicrofluidics*, 2012, **6**, –.
- 22 P. Garstecki, M. J. Fuerstman, H. A. Stone and G. M. Whitesides, *Lab Chip*, 2006, **6**, 437–446.
- 23 M. Abolhasani, M. Singh, E. Kumacheva and A. Gunther, *Lab Chip*, 2012, **12**, 4787–4795.
- 24 D. Malsch, M. Kielpinski, N. Gleichmann, G. Mayer and T. Henkel, *Exp. Fluids*, 2014, **55**, –.
- 25 P. Abgrall and A.-M. Gué, *J. Micromech. Microeng.*, 2007, **17**, R15.
- 26 K. A. Brakke, *Exp. Math.*, 1992, **1**, 141–165.
- 27 H. Wong, S. Morris and C. Radke, *J. Colloid. Interf. Sci.*, 1992, **148**, 317–336.
- 28 F. P. Bretherton, *J. Fluid Mech.*, 1961, **10**, 166–188.
- 29 M. T. Kreutzer, F. Kapteijn, J. A. Moulijn, C. R. Kleijn and J. J. Heiszwolf, *AIChE J.*, 2005, **51**, 2428–2440.
- 30 V. S. Ajaev and G. Homsy, *Annu. Rev. Fluid Mech.*, 2006, **38**, 277–307.
- 31 H. Wong, C. J. Radke and S. Morris, *J. Fluid Mech.*, 1995, **292**, 71–94.

32 P. Aussillous and D. Quéré, *Physics of Fluids (1994-present)*, 2000, **12**, 2367–2371.

Graphical abstract and one-liner for table of contents

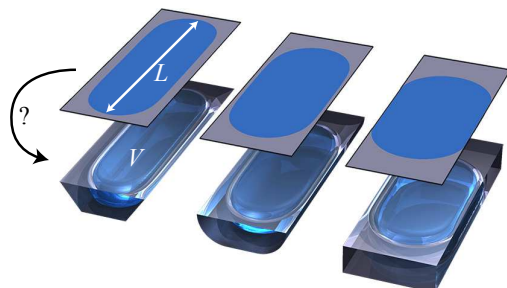

We present a theoretical model to calculate the volume of bubbles and droplets in segmented microflows from given dimensions of the microchannel and measured lengths of bubbles and droplets.