ChemComm

Accepted Manuscript



This is an *Accepted Manuscript*, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this Accepted Manuscript with the edited and formatted Advance Article as soon as it is available.

You can find more information about *Accepted Manuscripts* in the **Information for Authors**.

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard <u>Terms & Conditions</u> and the <u>Ethical guidelines</u> still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this *Accepted Manuscript* or any consequences arising from the use of any information it contains.



Journal Name

RSCPublishing

COMMUNICATION

Microemulsion Flame Pyrolysis for Hopcalite Nanoparticle Synthesis: A new Concept for Catalyst Preparation

Cite this: DOI: 10.1039/x0xx00000x

Received ooth January 2012, Accepted ooth January 2012

DOI: 10.1039/x0xx00000x

www.rsc.org/

T. Biemelt^a, K. Wegner^a, J. Teichert^a and S. Kaskel**, a,b

A new route to highly active hopcalite catalysts via flame spray pyrolysis of an inverse microemulsion precursor is reported. The nitrate derived nanoparticles are around 15 nm in diameter and show excellent conversion of CO at ambient conditions, outperforming commercial reference hopcalite materials produced by co-precipitation.

Carbon monoxide is a gas with toxic effects on humans when inhaled at concentrations as low as 100 ppm. Especially miners, firefighters or soldiers can be confronted with lethal amounts. Hence, it is of special importance to improve protection systems for the decontamination of air. A common way to remove CO from breathing air is used in respirator masks containing active filter media based on either physisorption, chemisorption, or catalytic removal. In the case of catalytic toxic gas conversion by oxidation with ambient O2, many catalytically active components such as oxide supported noble metals² or transition metal oxides³ are established. Although catalyst research for the oxidation of CO was revived with the discovery of Haruta et al., who found gold nanoparticles dispersed on α-Fe₂O₃ to be very active even at temperatures as low as -70 °C⁴, gold catalysts are prone to poisoning and thus the more robust well-known copper manganese mixed oxide "Hopcalite" is still the commercial catalyst of choice for this

Hopcalite has been produced by sol-gel processes⁶, supercritical anti-solvent precipitation⁷, redox methods⁸, or most commonly coprecipitation including several partly time consuming preparation steps such as: dissolving the precursors, precipitation, ageing, filtering, washing, drying and subsequent calcination⁹. This procedure causes contamination with sodium ions resulting from Na₂CO₃-containing precipitation solutions, which is known to reduce the catalytic activity to some extent.¹⁰ Furthermore it is crucial to adjust synthesis parameters such as aging time and calcination temperature thoroughly for receiving the optimal performing hopcalite catalyst.^{9,11}

A homogeneous distribution of oxide forming ions on the atomic level is also achieved by the flame spray pyrolysis (FSP) process. It

is characterised by the generation of combustible aerosols, containing volatile metal-organic precursors dissolved in a fuel. However, as a major drawback compared to often used metal nitrates, metal-organic precursors usually exhibit high prices or can only be prepared at lab-scale level. Hence, it is of great interest to combine the benefits of inexpensive metal nitrates and the FSP-process, since the relatively low number of synthesis steps is advantageous. At the same time applying a scalable and industrially established process contamination with alkali metal ions is avoided.

Considering these requirements for the production of hopcalite by FSP, we used the platform of thermodynamically stable and spontaneously forming inverse microemulsions. They can be understood as a tool box with variable composition but well defined microstructure. Moreover, they contain monodisperse water droplets smaller than 10 nm in diameter, which should lead to homogeneous doping effects and nanosized particles, simultaneously ensuring sufficiently high nitrate concentrations in a non-polar organic solvent. Metastable emulsions, consisting of large micelles with diameters in the micrometer range, were used for the generation of single and mixed oxides in the emulsion combustion method, but resulted in micron-sized, usually hollow and broad size-distributed spheres.¹³

For the preparation of nanostructured stable microemulsions, manganese and copper nitrate (molar ratio 2:1) were dissolved in deionised water and dispersed in n-heptane with the help of the nonionic surfactant MARLOPHEN NP-5. The turquoise solutions were fed to a nozzle, generating micelle containing n-heptane/ O_2 aerosols, which were instantaneously ignited by an annular surrounding supporting flame. A glass fibre filter was used to separate the black nanoparticles from the exhaust gas stream (more detailed information on hopcalite synthesis is available in the experimental part of ESI).

Two inverse microemulsions differing in the total metal content were prepared. Aiming at the formulation of precursors with preferably small micelles, we used the work of Henle et al. as a starting point and applied formulations with $R_w = 2$ $(R_w = n(H_2O) \cdot n(surfactant)^{-1})$. These resulted in precursor

ChemComm Page 2 of 5 COMMUNICATION

solutions with very small micelle sizes in the range of 5 nm for 0.05 M as well as 0.10 M overall metal concentrations. Micelle diameters and properties of the FSP derived particles are summarised in Table 1. Injecting these precursor solutions into the FSP nozzle resulted in two voluminous powders (powder density $\rho_{\text{dump}} = 0.15 \text{ g cm}^{-3}$) denoted by ME-1 and ME-2.

Table 1: Properties of microemulsion derived FSP-hopcalites with respect to the initially applied overall metal concentrations.

ME-	c _{metal} (M)	d _{micelle} ^a (nm)(PDI)	$S_{\text{BET}}^{\text{b}}$ (m ² g ⁻¹)	d _{BET} ^c (nm)	Mn/Cu ^d (mol mol ⁻¹)
1	0.10	4.7 (0.067)	97	11.3	1.96 ± 0.01
2	0.05	4.7 (0.034)	114	9.6	1.93 ± 0.02

a determined by dynamic light scattering

Fig. 1a) shows sample ME-1, consisting of two types of particles. The main fraction is characterised by very small partly agglomerated chain-like nanoparticles ca. 10 - 15 nm in diameter. Additionally, larger spheres with diameters ranging from 50-300 nm were observed. These two types of particles result from different formation mechanisms within the spray flame. On the one hand, precursor evaporation and subsequent vapour combustion occurs forming small mono-disperse nanoparticles. On the other hand, precipitation of the precursor at the aerosol droplet surface and subsequent calcination resulting in poly-disperse, larger and sometimes hollow spheres is possible.¹⁷ For catalytic applications the first route of the two mentioned formation pathways is preferred, due to the fact that the catalytically available surface area for those particles is higher compared to the precipitation/calcination pathway derived spheres.




Fig. 1: a) and b): SEM micrographs of samples ME-1 and ME-2, respectively. c) and d): TEM micrographs of sample ME-2.

In comparison, SEM and TEM micrographs of sample ME-2 in Fig. 1b), 1c) and d) show higher homogeneity, and a reduced number of larger spheres, visible especially in Fig 1b). Nevertheless, besides small either amorphous or crystalline nanoparticles with approximately 10 nm in diameter, larger spherical particles ca. 50 nm in diameter were observed by TEM investigations (Fig. 1c and d). For the amorphous nanoparticles chain-like structures were prominent. Analysing the two differently sized types of particles in ME-1 using electron dispersive X-ray spectroscopy (EDX) revealed differences in Mn:Cu ratios of 1.52 for areas with small particles and an elevated ratio of 9.34 mol mol⁻¹ for the large spheres. Thus, some segregation in physical binary oxide mixtures occurred during the pyrolysis process. This can be explained by an inhomogeneous temperature profile of the flame including sharp temperature gradients causing different particle formation mechanisms in dependence on the trod flame-path during pyrolysis. Moreover, $Mn(NO_3)_2$ and $Cu(NO_3)_2$ show divers behaviour during heating. While Mn(NO₃)₂ decomposes at \sim 140 °C, Cu(NO₃)₂ is more stable against decomposition as reasoned from a melting temperature of 256 °C. These differences may result in a delayed decomposition especially for precursor droplets, not passing the hottest spot of the flame exhibiting temperatures higher than 2000 °C¹⁸.

Journal Name

Nitrogen physisorption experiments at 77 K revealed IUPAC Type II isotherms indicating non-porous nanoparticulate catalysts (Fig. S2). Applying the multipoint BET-method, surface areas of 97 and 114 m² g⁻¹ were extracted for ME-1 and ME-2, respectively. The slightly dissimilar specific surface areas result from varying metal ion concentrations within the water phase of the two inverse microemulsions. Both precursors consisted of identical micelle sizes as confirmed by dynamic light scattering measurements (DLS). Dynamic viscosities and refractive indices, resulting from different metal salt concentrations (Table S1), were taken into account for these experiments. Identical micelle diameters imply differences in ion densities within the micelles, inducing a higher degree of agglomeration for nanoparticles derived from ME-1 compared to ME-2 and favouring the precipitation/calcination particle generation pathway caused by reduced energy supply for fast decomposition of the nitrate precursors, as well.

Average particle sizes d_{BET} were calculated assuming mono-disperse spherical particles taking specific surface area and the crystallographic specific mass of $Cu_{1.5}Mn_{1.5}O_4$ ($\rho = 5.485 \text{ g cm}^{-3}$) into account. 18 This calculation yields average particle diameters of 11.3 and 9.6 nm for ME-1 and ME-2, respectively. The values should be understood as an approximation, since a bimodal size distribution was observed especially for sample ME-1.

FSP-derived hopcalite is composed of two crystalline phases as indicated by powder X-ray diffraction (XRD) in Fig. S1, S6 and S7. The major component was calculated to be Cu_{1.5}Mn_{1.5}O₄ with 81.2 and 90.4 wt.-% for ME-1 and ME-2, respectively. Hausmannite (Mn₃O₄) as a minor by-product accounts for 18.8 and 9.6 wt.-% applying profile fitting and phase quantification by Rietveld refinement for both samples. From these mass fractions the determination of Mn:Cu ratios theoretically should yield values of 1.47 and 1.22 mol mol⁻¹ for ME-1 and ME-2, respectively. In contrast, ICP-OES revealed bulk Mn:Cu ratios of nearly 2.0 mol mol⁻¹ for both samples, indicating the presence of a manganese-rich amorphous phase which was not detected by XRD. According to full profile fitting for crystallite size analysis, Cu_{1.5}Mn_{1.5}O₄ consists of crystallites 13.2 and 17.6 nm in diameter, and much larger Mn₃O₄ crystallites of 261 and 64 nm were found for samples ME-1 and ME-2, respectively, confirming the bimodal size distribution detected by microscopic investigations. The determined crystallite sizes are larger compared to the particle sizes derived from physisorption measurements. Hence, the particles of the amorphous Mn-rich phase are presumably smaller than 10 nm, thus

b calculated from multipoint BET-method for $0.05 < p/p_0 < 0.2$ 15

 $[^]c$ $d_{BET}=6\cdot(S_{BET}\cdot\rho_{hopealite})^{-1}$ assuming mono-disperse spherical primary particles with $\rho_{hopealite}=5.485$ g cm 3 16 detected by ICP-OES

Page 3 of 5 ChemComm

Journal Name COMMUNICATION

significantly contributing to the overall specific surface areas of both powders.

Catalytic testing was performed in a fixed bed tubular reactor equipped with two IR-sensors ensuring simultaneous quantification of CO and CO₂. In a typical test setup 100 mg of catalyst were exposed to a mixture of 0.67 vol.% CO, 66.00 vol.% N₂ and 33.33 vol.% O₂ (70 mL min⁻¹). As a reference catalyst material, commercially available hopcalite Carulite 300 ($S_{\rm BET}$ = 310 m² g⁻¹) was chosen.

The catalytic activity was evaluated by plotting the conversion of CO versus catalyst bed temperature. Strongly pronounced differences in CO oxidation performances among the tested samples were observed (Fig. 2). The densified particles of ME-1 showed CO conversion levels as high as 23 % at ambient temperature and nearly 100 % at 90 °C.

As there was contact with water during the densification step and furthermore with the combustion products of the FSP process, a possibly with adsorbed water molecules, CO_2 or hydroxyls contaminated particle surface was treated with an in situ activation step during the catalytic tests. Hence, the catalysts were inert heated to 300 °C, which is the upper most temperature without inducing significant sintering of the nanoparticles, and afterwards flushed with pure O_2 for 1 h.




Fig. 2: Conversion of CO versus catalyst bed temperature for samples ME-1, ME-2 and Carulite 300.

During the activation process desorbing CO and CO₂ was monitored to collect some information on the nature of molecules possibly covering and poisoning the catalyst surface (Fig. S4). The conversion level did not significantly increase for sample ME-1 as a consequence of activation. This observation is in agreement with the almost complete absence of desorbing CO and CO2 during activation. In contrast, the as-received sample ME-2 shows low conversion of CO at ambient temperature and even at higher temperatures there is no significant activity. Activation drastically increased the conversion of CO over ME-2 up to a level of 35 % at room temperature. The desorption profile recorded during activation reveals the generation of CO₂ in the case of flushing the system with O₂ at 300 °C, indicating the presence of carbonaceous residues at the particle surface presumably poisoning the catalyst in the nonactivated state. They either originate from adsorbed CO2, or mostlikely from imperfectly oxidised organic compounds such as n-heptane or MARLOPHEN NP-5, suggesting that the amount of NO₃, acting as co-oxidant, is insufficient for complete combustion of C-containing precursor constituents.

In the activated state both FSP derived samples show significantly higher conversion levels of CO at ambient temperature compared to the commercial reference material. This difference is even more pronounced comparing the CO reaction rates normalised to the specific surface area at ambient temperature: The conversion of CO is approximately four times higher for the FSP-derived samples. Performance differences between ME-1 and ME-2 in the activated state probably originate from different amounts of crystalline Mn₃O₄, as it is known to be less active than compared to pure hopcalite. 19 Furthermore, slightly larger hopcalite crystallites of ME-2 contribute to a smaller increase of activity in the case of elevated temperatures. One possible reason for the fast reaction rates might originate from the amorphous Mn-rich particles acting as support for Cu_{1.5}Mn_{1.5}O₄ crystallites and increasing CO and O₂ adsorption and bond cleavage rates. The deactivation profiles of ME-1, ME-2 and Carulite 300 show the strongest decrease of COconversion in the first minutes on stream for Carulite 300, suggesting a higher stability for FSP-derived particles (Fig. S5). The most stable performance was observed for ME-2 at ambient temperature.

Conclusions

A scalable and versatile synthesis of hopcalite nanoparticles by flame spray pyrolysis was presented for the first time.

The application of inverse microemulsion precursors containing manganese/copper nitrate led to hopcalite nanopowders being composed of mixtures containing nanocrystalline Cu_{1.5}Mn_{1.5}O₄ particles (approximately 15 nm in diameter) and larger particles of hausmannite as a minor crystallographic phase with an additional Mn-rich amorphous phase. By decreasing the initial metal ion concentration, the ratio of small nano-crystallites and larger spheres (50-300 nm), resulting from a precipitation/calcination formation mechanism within the flame was increased. The larger particles were found to be mainly composed of manganese oxide.

Compared to the commercial reference hopcalite material Carulite 300, the FSP derived nanopowders show better CO conversion performances, especially at ambient temperature. Additionally, they are more long term stable. An activation step removes residual carbonaceous deposits at the catalyst surface improving the activity further.

The presented microemulsion flame process generally enables application of inexpensive water soluble salts for the continuous, scalable and contamination-free production of non-segregated separated complex oxide nanoparticles for various applications. This is achieved by usage of thermodynamically stable and spontaneously forming inverse microemulsions containing very small uniform micelles in the lower nanometer range.

Notes and references

^aDepartment of Inorganic Chemistry, Dresden University of Technology, Bergstrasse 66, D-01062 Dresden, Germany.

^bFraunhofer Institute for Material and Beam Technology, Winterbergstraße 28, D-01277 Dresden, Germany.

*Prof. Dr. Stefan Kaskel, E-mail: stefan.kaskel@chemie.tu-dresden.de; Tel: +49 351 46333632; Fax: +49 351 46337287

We would like to thank Dr Gudrun Auffermann (MPI for Chemical Physics of Solids, Dresden, Germany) for conducting elemental analyses. Alexander Weiz (Department of Inorganic Chemistry II, Dresden University of Technology, Dresden, Germany) and Dr Martin R. Lohe (Department of Inorganic Chemistry II, Dresden University of Technology, Dresden, Germany) are gratefully acknowledged for their

support with preparing STEM and TEM micrographs. We would also like to thank the German Federal Ministry of Education and Research (BMBF) for financial support (03X0126C).


Electronic Supplementary Information (ESI) available: additional characterization of the inverse microemulsions, nanoparticles and further catalytic measurements. See DOI: 10.1039/c000000x/

- T. Gerhardt, M. Göthert, G. Malorny and H. Wilke, *Int. Arch. Für Arbeitsmedizin*, 1971, 28, 127–140.
- 2 J. Saavedra, C. Powell, B. Panthi, C. J. Pursell and B. D. Chandler, J. Catal., 2013, 307, 37–47.
- 3 X. Xie, Y. Li, Z.-Q. Liu, M. Haruta and W. Shen, *Nature*, 2009, 458, 746–749
- 4 M. Haruta, N. Yamada, T. Kobayashi and S. Iijima, J. Catal., 1989, 115, 301–309.
- 5 A. Bliss, J. Am. Chem. Soc., 1955, 77, 5773-5780.

COMMUNICATION

- 6 M. Krämer, T. Schmidt, K. Stöwe and W. F. Maier, Appl. Catal. Gen., 2006, 302, 257–263.
- 7 Z.-R. Tang, C. D. Jones, J. K. W. Aldridge, T. E. Davies, J. K. Bartley, A. F. Carley, S. H. Taylor, M. Allix, C. Dickinson, M. J. Rosseinsky, J. B. Claridge, Z. Xu, M. J. Crudace and G. J. Hutchings, *ChemCatChem*, 2009, 1, 247–251
- E. C. Njagi, C.-H. Chen, H. Genuino, H. Galindo, H. Huang and S. L. Suib, *Appl. Catal. B Environ.*, 2010, 99, 103–110.
- G. J. Hutchings, A. A. Mirzaei, R. W. Joyner, M. R. H. Siddiqui and S. H. Taylor, Catal. Lett., 1996, 42, 21–24.
- A. A. Mirzaei, H.R. Shaterian, R. W. Joyner, M. Stockenhuber, S. H. Taylor and G. H. Hutchings, *Catal. Comm.*, 2003, 4, 17-20.
- 11 G. J. Hutchings, A. A. Mirzaei, R. W. Joyner, M. R. H. Siddiqui and S. H. Taylor, *Appl. Catal. Gen.*, 1998, 166, 143–152.
- 12 R. Mueller, L. M\u00e4dler and S. E. Pratsinis, Chem. Eng. Sci., 2003, 58, 1969–1976.
- 13 T. Tani, N. Watanabe, K. Takatori and S. E. Pratsinis, J. Am. Ceram. Soc., 2003, 86, 898–904.
- J. Henle, P. Simon, A. Frenzel, S. Scholz and S. Kaskel, *Chem. Matter.*, 2007, 19, 366-373.
- J. Rouquerol, D. Avnir, C. W. Fairbridge, D. H. Everett, J. H. Haynes, N. Pernicone, J. D. Ramsay, K. S. W. Sing and K. K. Unger, *Pure Appl. Chem.*, 1994, 66, 1739-1785.
- 16 H. K. Kammler, L. Mädler and S. E. Pratsinis, Chem. Eng. Technol., 2001, 24, 583–596.
- 17 R. Strobel and S. E. Pratsinis, J. Mater. Chem., 2007, 17, 4743.
- 18 L. M\u00e4dler, H. K. Kammler, R. Mueller and S. E. Pratsinis, J. Aerosol Sci., 2002, 33, 369–389.
- 19 S. Royer and D. Duprez, ChemCatChem, 2011, 3, 24-65.

Page 5 of 5

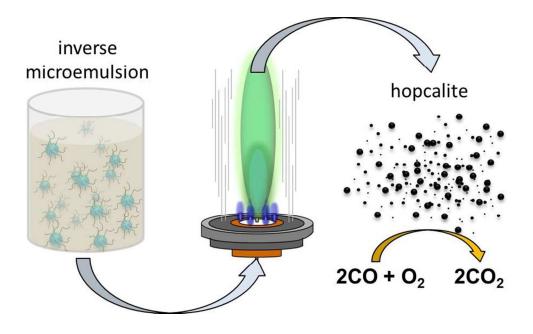

156x92mm (150 x 150 DPI)