Journal of Materials Chemistry A

Discerning Molecular-Level CO2 Adsorption Behavior in Amine-Modified Sorbents within a Controlled CO2/H2O Environment towards Direct Air Capture

Journal:	*Journal of Materials Chemistry A*
Manuscript ID	TA-ART-08-2024-005578
Article Type:	Paper
Date Submitted by the Author:	09-Aug-2024
Complete List of Authors:	Song, Ah-Young; University of California Berkeley, Chemical and Biomolecular Engineering; Lawrence Berkeley National Laboratory, Materials Sciences Division Young, John; Heriot Watt University, Research Centre for Carbon Solutions Wang, Jieyu; University of California Berkeley, Chemical and Biomolecular Engineering Fricke, Sophia; University of California Berkeley, Chemical and Biomolecular Engineering Piscina, Katia; Heriot-Watt University, Research Centre for Carbon Solutions Giovine, Raynald; University of California Berkeley, College of Chemistry Pines Magnetic Resonance Center - Core Facility García, Susana; Heriot-Watt University, Research Centre for Carbon Solutions Van der Spek, Mijndert; Heriot-Watt University, Research Centre for Carbon Solutions Reimer, Jeffrey; University of California Berkeley, Chemical and Biomolecular Engineering; Lawrence Berkeley National Laboratory, Materials Sciences Division

PAPER

Discerning Molecular-Level CO_2 Adsorption Behavior in Amine-Modified Sorbents within a Controlled CO_2/H_2O Environment towards Direct Air Capture

Received 00th January 20xx,
Accepted 00th January 20xx

DOI: 10.1039/x0xx00000x

Ah-Young Song,[a,b] John Young,[c] Jieyu Wang,[a] Sophia N. Fricke,[a] Katia Piscina,[c] Raynald Giovine,[d] Susana Garcia,[c] Mijndert van der Spek [c] and Jeffrey A. Reimer [a,b]*

Sorbents designed for direct air capture (DAC) play a crucial role in the pursuit of achieving net-zero carbon dioxide emissions. This study elucidates CO_2 adsorption from dilute, humidified CO_2 streams onto an amine-modified benchmark DAC adsorbent via solid-state NMR spectroscopy. Various NMR techniques, including 1D ^{1}H MAS, ^{13}C MAS, 2D ^{1}H-^{13}C HETCOR NMR, and ^{1}H R_2 and $R_{1\rho}$ relaxometry reveal the impact of CO_2 partial pressure and H_2O on CO_2 adsorption behavior. We find that CO_2 concentration governs the stepwise formation of ammonium carbamate, carbamic acid, and physisorbed CO_2, where relative humidity (RH) at a desired low (<400ppm) CO_2 loading affects total CO_2 uptake. The relaxation studies reveal the cooperative or competitive nature of H_2O-CO_2 sorption in CO_2-dilute humid gas, and in particular polymer swelling upon humidification. From those results, we demonstrate that the observed absorption capacity enhancement by humidity is caused by pore opening due to sorbent swelling, and not by bicarbonate formation. This NMR-discerned speciation provides insights into sorption behavior at different RHs in dilute CO_2 gas streams, simulating real-world atmospheric conditions, and governs the design of efficient and adaptable material-process combinations for solid sorbent DAC.

Introduction

Direct air capture (DAC) is a promising technology towards net-zero carbon dioxide emissions and beyond,[1] notable for its independence from point source emission locations and its ability to operate without the need for costly infrastructure, such as long CO_2 pipelines.[2] Particularly, DAC is identified as a critical tool to address hard-to-abate emissions, which are challenging to eliminate due to technical limitations, economic constraints, or considerations of social justice.[3] It also enables the net-negative emission scenarios needed to keep global warming under 1.5 ℃ or 2 ℃, aligning with international climate targets.[3] One DAC technology currently being scaled is solid sorbent DAC, where air is contacted with a solid porous material that is regenerated using elevated temperature, vacuum, or both. A crucial aspect of solid sorbent DAC is the sorbent's capability to efficiently extract CO_2 from a humid and ultradilute-CO_2, i.e. 400 ppm, stream, in contrast to the CO_2-rich (e.g. 4 – 20%) streams targeted with the point source CO_2 capture.[4]

Effective DAC sorbents must meet essential criteria such as high CO_2 capacity, high selectivity over other components found in air, rapid sorption/desorption kinetics, thermal/chemical stability, cost-effective regeneration, and affordability.[4] These inherent material characteristics of the sorbents are directly linked to the CO_2 adsorption mechanisms. Additionally, CO_2 adsorption is influenced by combined external environmental factors and ambient conditions such as temperature, CO_2 partial pressure, the presence of water vapor in the air, as well as other competing gases including N_2, and O_2.[5,6] Indeed, the concentration of water is typically orders of magnitude higher than the concentration of CO_2 in ambient air, and thus water may compete with CO_2 for adsorption sites and/or enhance CO_2 adsorption via physical or chemical mechanisms. Consequently, environmental factors can fundamentally alter the adsorption amount and dynamics of a given material, thereby obfuscating field operation and control of DAC units.

Amongst the many potential sorbent materials, amine-modified sorbents are widely studied for DAC due to their high CO_2 capacity at ultradilute-CO_2 concentrations and their high selectivity for CO_2 over N_2 and H_2O. As a result, they are the only class of adsorbents used in DAC processes at scale today.[7] Thus, there has been some effort in the past two decades to study the impact of humidity on equilibrium CO_2 uptake in amine-modified adsorbents. There remains, however, challenges to validate working hypotheses for sorption dynamics with reliable experimental studies.[2,8–12] Generally, it appears that the CO_2 uptake is enhanced in the presence of water at low relative humidities, yet uptake becomes less favorable at higher humidity levels. Previous studies have attributed enhanced CO_2

[a] Department of Chemical and Biomolecular Engineering, University of California, Berkeley, Berkeley, CA 94720, USA. E-mail: reimer@berkeley.edu
[b] Materials Sciences Division, Lawrence Berkeley National Laboratory, Berkeley, CA 94720, USA
[c] Research Centre for Carbon Solutions, Heriot-Watt University, Edinburgh, EH14 4AS, United Kingdom
[d] College of Chemistry Pines Magnetic Resonance Center - Core Facility, University of California, Berkeley, CA 94720, USA

† Electronic supplementary information (ESI) available. See DOI: 10.1039/x0xx00000x

adsorption capacity to the formation of ammonium bicarbonate over ammonium carbamate, thereby doubling the potential stoichiometry of adsorption.[13] However, this hypothesis has proven difficult to affirm given that the prolonged timescales required to form bicarbonate are not consistent with observed CO_2 adsorption.[14,15] Some studies have either not observed bicarbonate formation or reported only a very subtle presence of this species in humid CO_2 environments.[16–18] Instead, these studies have reported the formation of other major species, such as ammonium carbamate. Nevertheless, previous research on these species still does not entirely account for the observed enhanced CO_2 uptake. In-depth experimental examination of water-CO_2 co-adsorption mechanisms in amine-functionalized adsorbents is largely missing, and therefore the exact nature of the observed adsorption phenomena is yet to be well understood. Absent a molecular understanding relating air composition to process behavior, DAC process performance is compromised, which has large implications for DAC plant siting decisions, as well as design and optimization of processes and materials.[5,6]

In this study, we clarify why and how H_2O impacts CO_2 adsorption in amine functionalized polymer resins. Lewatit® VP OC 1065 is used as an off-the-shelf benchmark sorbent as it exhibits a higher CO_2 adsorption capacity compared to other resins having the same supportive material.[19] Previous research into this material has provided analyses of pore structure,[20] concentrations of functional groups,[20] oxidative degradation phenomenology,[21,22] material regeneration,[20] thermal and chemical stability over long-term exposure,[23] and performance in CO_2 and H_2O sorption.[20] Additionally, researchers have investigated the molecular interactions between this sorbent and CO_2 using DRIFTS FTIR spectroscopy; they suggested formation of carbamate/carbamic acid and possibly bicarbonate under dry conditions, yet they concluded that the exact nature of captured species was undetermined.[20] Computational investigations have examined preferred adsorption processes in the presence of water, discussing direct amine-H_2O interactions and amine catalyzed formation of carbamic acid,[24] suggesting that carbamic acid formation is the preferred pathway. Previous studies on CO_2 adsorption capacity have shown that water does not impede CO_2 adsorption between 0 – 60 % RH;[10] however, the role of water in adsorption may vary with changes in partial pressure.[25] Nevertheless, research to understand adsorption pathways in the presence of water remains limited. We surmise that a deeper molecular understanding of water/amine/CO_2 interactions is currently lacking, and it is key to the design of sorbent-based DAC processes.

Expanding on those earlier discoveries, this study focuses on elucidating the interaction of amine-functionalized polymer resins with CO_2 under both dry and wet conditions using ^{13}C and ^{1}H solid-state NMR (ssNMR) spectroscopy. By varying CO_2 partial pressure and relative humidity, this NMR study identifies and quantitates chemisorbed species to assess enhanced or reduced CO_2 adsorption capacity. We find conclusive evidence that bicarbonate is not formed under humid conditions, contrary to earlier hypotheses. Furthermore, the CO_2 adsorption reaction within Lewatit® VP OC 1065 is primarily dictated by the CO_2 partial pressure during adsorption. NMR relaxometry reveals polymer pore swelling at higher humidity levels, and this modulates the competitive and cooperative adsorption of H_2O and CO_2. These findings allow the adjustment of current co-adsorption models to enhance their predictive capabilities and provide more robust insights on adsorbent performance.

Results and discussion

Impact of CO_2 partial pressure on adsorption (under dry conditions)

The material Lewatit® VP OC 1065, featuring primary amine groups presumed to serve as chemisorption sites for CO_2, was selected as a prototypical material to investigate the role of CO_2 partial pressure in its adsorption mechanism for DAC application. Activated materials were loaded at varying $^{13}CO_2$ partial pressures (pCO_2 = 1000, 35 or 8 mbar) under dry conditions and analyzed using solid-state NMR spectroscopy. The ^{13}C CPMAS spectra presented in Fig.1 demonstrate distinct chemisorption peaks between 155-170 ppm at various CO_2 loadings, with at least two discernible environments at 164 and

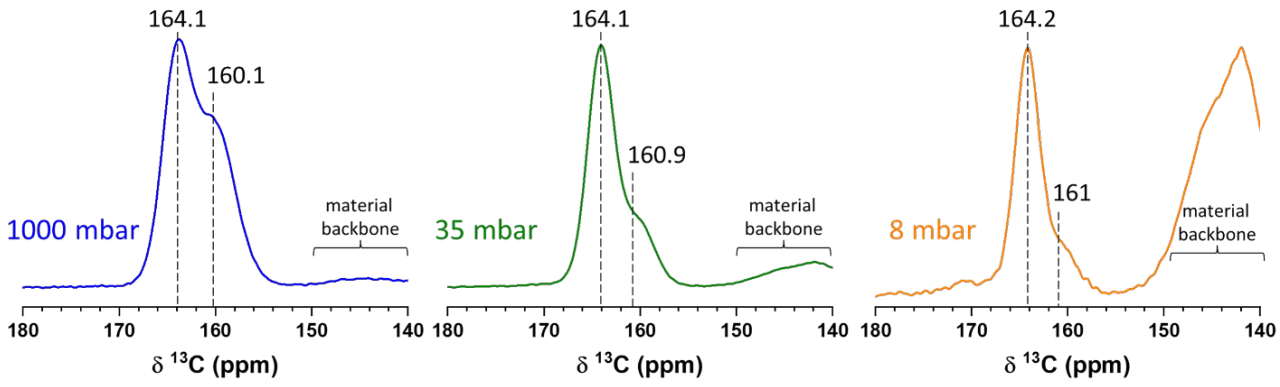

Fig. 1 ^{13}C solid-state CPMAS (contact time 2 ms) NMR of CO_2 adsorbed at various pressures (1000 mbar in blue, 35 mbar in green or 8 mbar in orange) within Lewatit® VP OC 1065. Signals observed between 140 to 150 ppm originate from the backbone in Lewatit® VP OC 1065, where not affected by CO_2 adsorption.

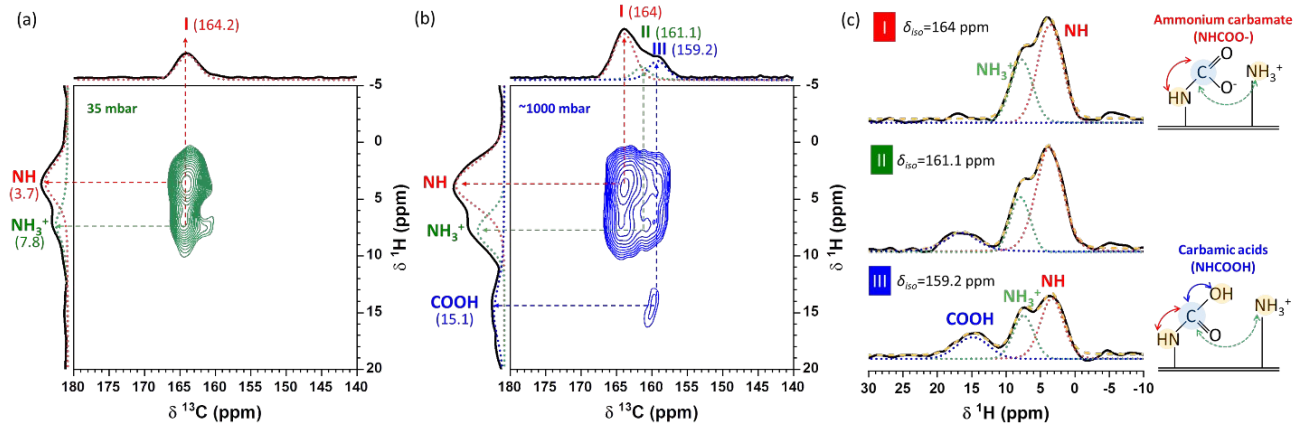

Fig. 2 2D ^{1}H-^{13}C FSLG-HETCOR spectra recorded with a contact time of 50 µs for Lewatit® VP OC 1065 loaded with (a) 35 mbar or (b) approx. 1 bar of $^{13}CO_2$. The chosen contact time of 50 µs highlights protonated carbon sites. (c) Individual ^{1}H projection for each ^{13}C environment (I, II, and III in (b)) observed in the 2D spectrum in (b) at approximately 1 bar of $^{13}CO_2$ are deconvoluted with colored dashed lines: NH (red), NH_3^+ (green), and COOH (blue).

160 ppm. Additionally, Fig. S1a employs direct polarization ^{13}C DPMAS and reveals a physisorption peak at 125 ppm, observed only at approximately 1000 mbar. Detailed spectral analysis (Fig. S1b) further describes the characteristic peaks of the sorbent materials at 40-50 ppm, 120-130 ppm, and 140-150 ppm.

To better identify the different chemisorbed species, 2D ^{1}H-^{13}C HETeronuclear CORrelation (HETCOR) NMR was employed to probe the through space close proximities between ^{1}H and ^{13}C nuclei. ^{13}C-^{1}H FSLG-HETCOR, where the FSLG protocol enhances the ^{1}H resolution in 2D HETCOR spectra, are shown in Fig. 2. This 2D correlation map clearly demonstrates variation in the formation of ammonium carbamate and carbamic acid across different CO_2 loadings. At a CO_2 partial pressure (pCO_2) of 35 mbar, the ^{13}C resonance at 164 ppm is associated exclusively with NH (3.7 ppm) and NH_3^+ (7.8 ppm) (Fig. 2a). In contrast, at approximately 1000 mbar (Fig. 2b), the resulting ^{13}C spectrum can be deconvoluted into three environments: I at 164 ppm, II at 161.1 ppm, and III at 159.2 ppm. The ^{1}H projections for each ^{13}C environment reveal different close proximities between carbons and protons (Fig. 2c). The three ^{13}C resonances at 164, 161.1, and 159.2 ppm (environment I, II, and III, respectively) correlate with ^{1}H signals of NH at 3.7 ppm and NH_3^+ at 7.8 ppm. In addition, the ^{13}C site at 159.2 ppm (environment III) correlates with COOH at 15.1 ppm, while the ^{13}C site at 161.1 ppm (environment II) exhibits a weaker correlation with COOH (Fig. 2c) than environment III at 159.2 ppm. Based on this observation, we surmise that environment II may not be a distinct species but rather a mixed species comprising both ammonium carbamate and carbamic acid; this observation is consistent with previous NMR studies of melamine porous network polymer adsorbents.[26] These results demonstrate that ammonium carbamate ($NHCOO^-$) is dominantly formed at pCO_2 = 35 mbar, while both ammonium carbamate ($NHCOO^-$) and ammonium carbamic acid (NHCOOH) contribute to CO_2 adsorption at pCO_2 = 1000 mbar.

Speciation of the local ^{13}C environment at I (164 ppm) and III (159.2 ppm) is further clarified by exploiting the ^{13}C chemical shift anisotropy (CSA) of these sites. While the CSA is typically averaged out during MAS, at slower spinning speeds the spinning sidebands of the NMR spectra are observed and these sidebands may be used to estimate the CSA for each isotropic chemical shift.[27] The ^{13}C CSA associated with each chemical shift is shown in Fig. S2 and can be used to distinguish between protonated (COOH) and deprotonated (COO^-) species (see SI for details).[28,29] This analysis corroborates the HETCOR spectra, validating the identification of ammonium carbamate (site I) and carbamic acid (site III). Furthermore, a significant decrease in resonance at 159 ppm in Fig. S3, detected after exposing the CO_2-loaded materials at 1000 mbar to the ambient air, provides clear evidence for carbamic acid to be associated with environment III; this moiety is an unstable species in the air.

In summary, the variations in CO_2 partial pressure determine the interaction mechanisms with Lewatit® VP OC 1065 in the absence of water. Fig. 3 illustrates that the adsorption occurs as a stepwise process with respect to the partial pressure of CO_2: at low CO_2 loading, adsorption is mainly governed by the formation of ammonium carbamate; as the CO_2 loading gradually increases, the formation of carbamic acid accompanies the formation of ammonium carbamate. At higher CO_2 pressures, we surmise that mixed ammonium carbamate and carbamic acid pairs appear. Moreover, physisorption appears exclusively at the highest CO_2 loading (1000 mbar). These NMR analyses are consistent with previously computed isosteric heats of adsorption ($-\Delta H_{ads}$) under dry conditions as a function of CO_2 loading (Fig. 3, bottom).[25] These heats of adsorption reveal a step-wise change with CO_2 loading, and the present NMR results provide a basis for their molecular interpretation.

Co-adsorption of H_2O and CO_2

Water vapor plays a complex role in CO_2 adsorption, and can serve both as a facilitator and an inhibitor of adsorption,

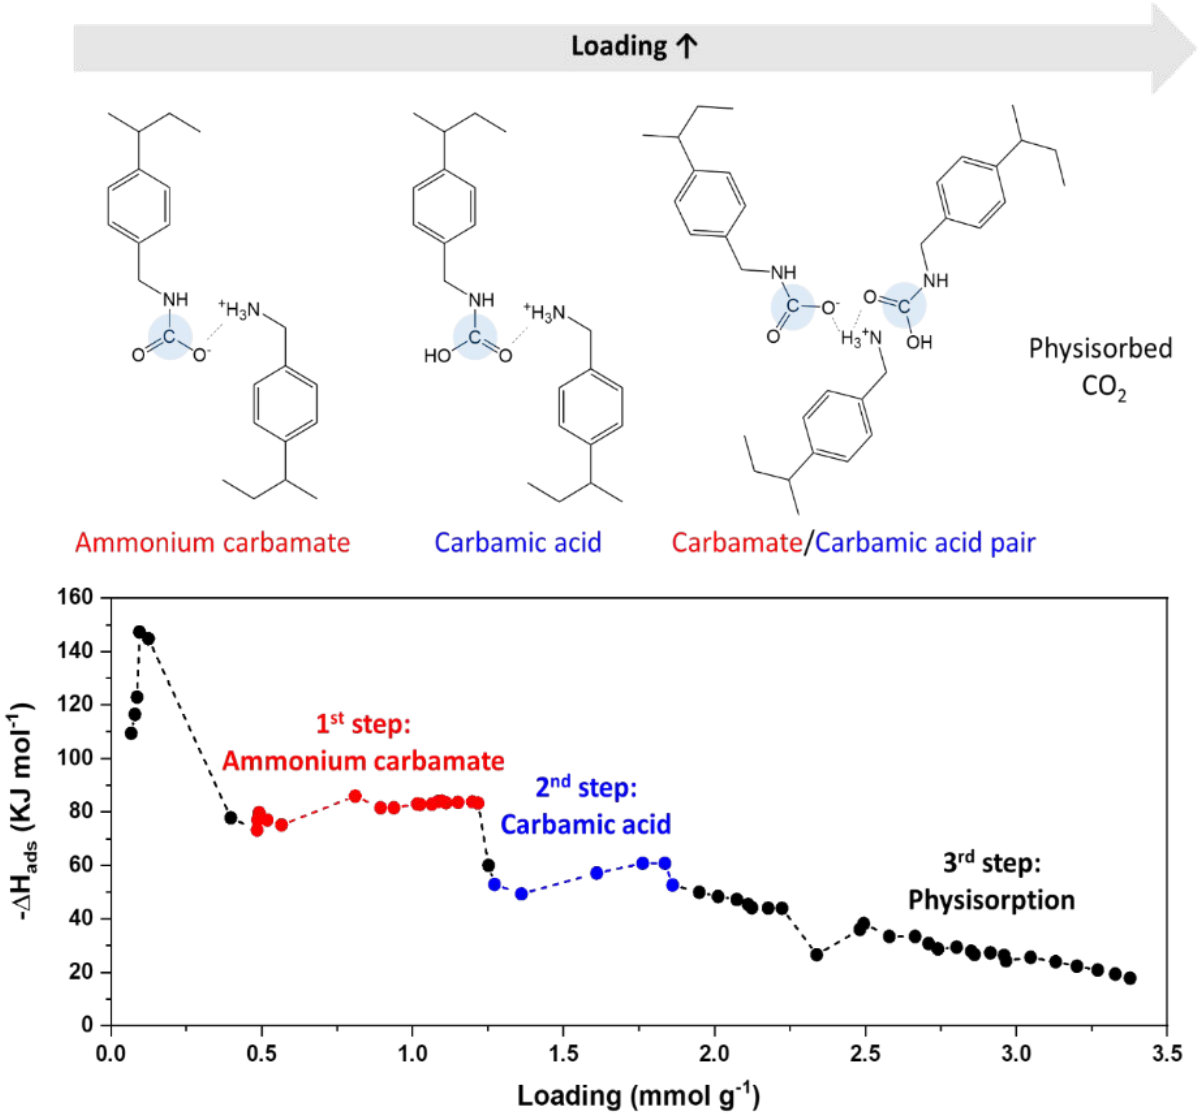

Fig. 3 Proposed stepwise CO_2 adsorption process at increasing CO_2 partial pressures: illustration of molecular structures (top) and the computed isosteric heat of adsorption (bottom). Isosteric heats of adsorption ($-\Delta H_{ads}$) calculated from the isotherm data described previously (Reproduced from Ref.22 with permission from the Royal Society of Chemistry).

depending on the environmental conditions and on the type of adsorbent used.[30] Acting as a free base, water can initiate various reaction pathways such as hydrolysis of carbamates to bicarbonate, as reported in both theoretical calculation and NMR studies on aqueous amine solution.[31,32] Additionally, grand canonical Monte Carlo (GCMC) studies showed the hydration of materials can generate additional adsorption active sites at the terminal water molecules in MIL-101,[33] boosting CO_2 adsorption, especially under low-pressure mixed gases. Conversely, water can also have detrimental effects on CO_2 adsorption by competing for adsorption sites. This competition can arise when water molecules weaken the interaction between CO_2 and the adsorbent surface through e.g., a reduction in the electric field,[34] or dominate the binding occupancy due to their strong dipole moments.[35] The formation of water clusters can further obstruct CO_2 adsorption.[36] We utilized the apparatus shown in Fig. S4 to systemically investigate the influence of water on CO_2 adsorption onto Lewatit® VP OC 1065. Activated materials were loaded with varying amounts of water to establish relative humidities (RHs) of 0%, 30%, and 80% (labelled RH0, RH30, and RH80, respectively) at a controlled CO_2 concentration of approximately 0.15 mbar (equivalent to 150 ppm). The chosen CO_2 concentration, set below atmospheric levels (~ 400 ppm), aims to observe potentially maximized adsorption effects and to maximize the detection sensitivity for all species, including potential minor species. It has been previously reported that adsorption efficiency doubled at 0.2 mbar CO_2, 25 °C, and increased more than 2.5 times at 0.1 mbar CO_2, 70 °C, and decrease as the pressure increases.[25] This approach allowed us to probe the molecular interactions at low partial pressure under different humidity conditions via solid-state NMR.

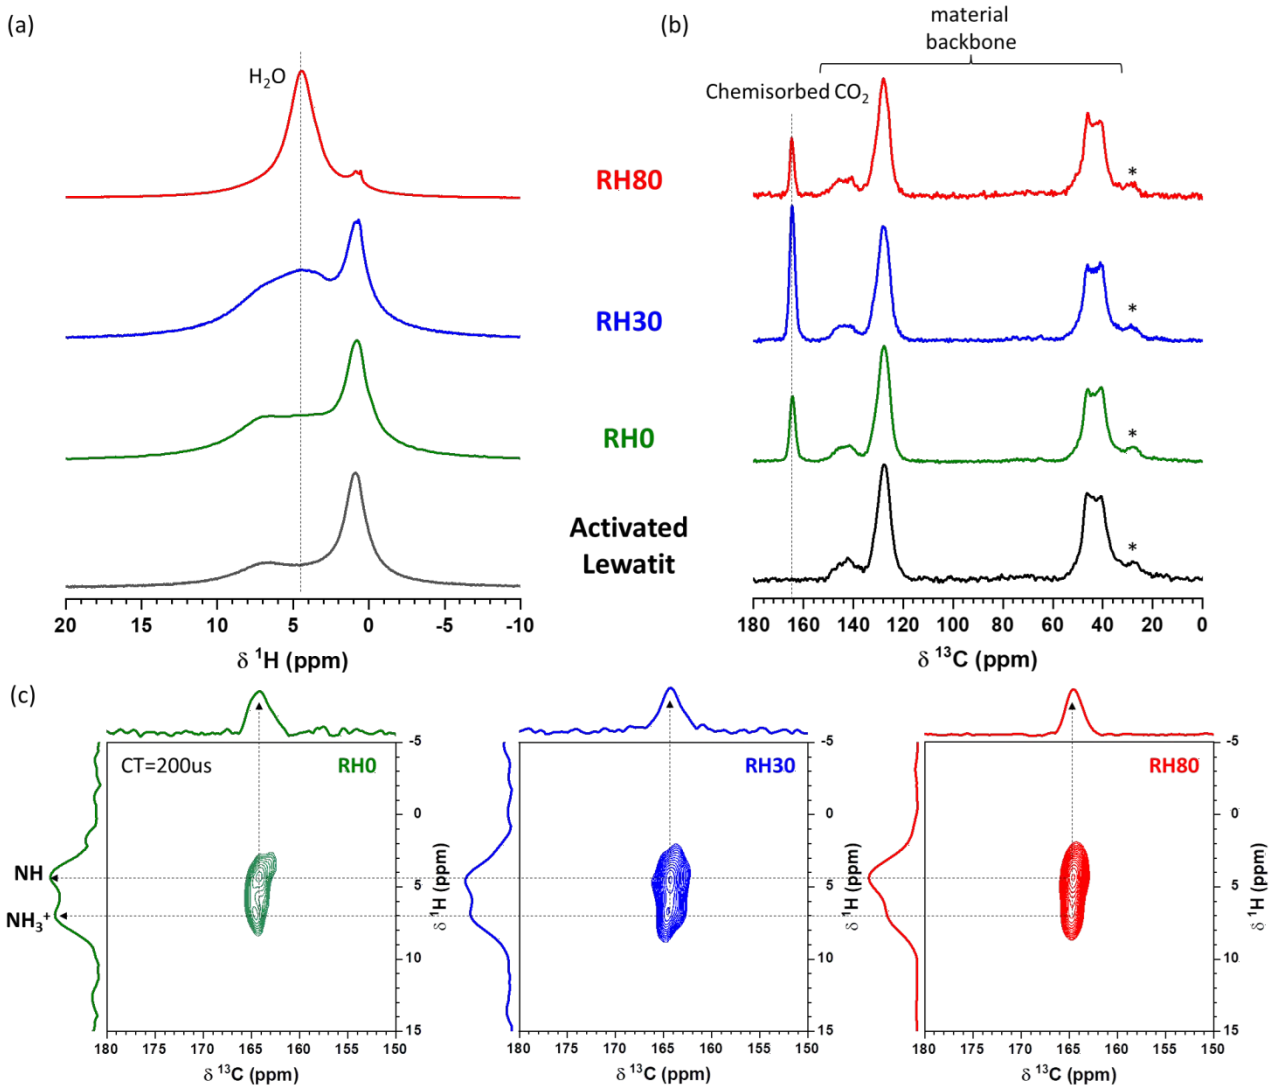

Fig. 4 Solid-state MAS NMR spectra of Lewatit® VP OC 1065 dosed with co-adsorption (N_2, CO_2, and H_2O) at low pCO_2 with variable RHs (RH0, RH30, and RH80). (a) ^{1}H DEPTH NMR; (b) ^{13}C CPMAS NMR with 200 µs of contact time; (c) ^{13}C-^{1}H FSLG-HETCOR 2D spectra with 200 µs of contact time. Activated Lewatit refers to a state where sample pretreatment (high vacuum) lead to no adsorbed species. In ^{13}C CPMAS NMR spectra, * indicates spinning sideband and signals at 40-50 ppm, 120-130 ppm, and 140 to 150 ppm arise from the backbone in Lewatit® VP OC 1065, where not affected by CO_2 adsorption.

Water adsorption may not be easily discernible in ^{1}H NMR because its chemical shift at 4.5 ppm overlaps with the broader ^{1}H NMR signals from Lewatit® VP OC 1065, which displays overlapping peaks spanning from 0 to 10 ppm. Nevertheless, Fig. 4a reveals a gradual increase in the H_2O signal intensity at 4.5 ppm as the RH increases, and an intense signal is observed for H_2O at 80% RH. This indicates that higher RH results in increased water adsorption. More interestingly, for CO_2 adsorption across all RHs, a single resonance is consistently observed around 164.5 ppm as a chemisorption in ^{13}C CPMAS NMR spectra (Fig. 4b). The formation of a chemisorbed species around 164.5 ppm is confirmed by 2D ^{13}C-^{1}H HETCOR (Fig. 4c), demonstrating clear correlations between the ^{13}C site at 164.5 ppm with proton signals emanating from NH and NH_3^+ groups. This establishes that ammonium carbamate forms at the tested CO_2 partial pressure, regardless of the RH percentage. However, water can dissolve CO_2 under humid conditions and lead to the formation of moieties such as bicarbonate or carbonate.[31,37] Those dissolved moieties may experience high mobility, and thus may remain undetected in CPMAS NMR studies.[38,39] Therefore, ^{13}C direct excitation was utilized to discern the presence of mobile dissolved species. The single resonance near 164.5 ppm (highlighted area in Fig. 5a) and the lack of additional resonances near it clearly demonstrate the exclusive formation of ammonium carbamate across all conditions, both dry and wet, at the controlled pCO_2.

It is worth noting that only when the partial pressure of CO_2 greatly exceeds 400 ppm atmospheric levels do we observe species other than ammonium carbamate. The 2D ^{13}C-^{1}H HETCOR spectra recorded on the 80% RH and 1 bar pCO_2 sample

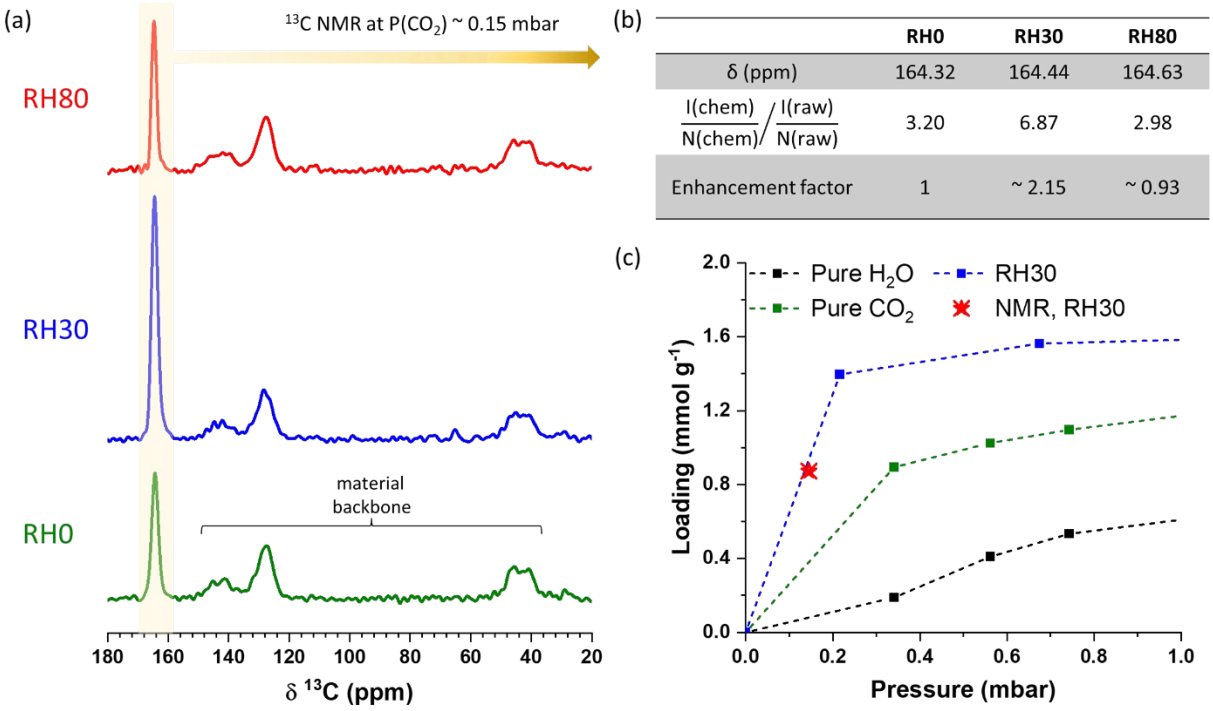

	RH0	RH30	RH80
δ (ppm)	164.32	164.44	164.63
$\frac{I(chem)}{N(chem)} / \frac{I(raw)}{N(raw)}$	3.20	6.87	2.98
Enhancement factor	1	~ 2.15	~ 0.93

Fig. 5 Quantitative CO_2 adsorption at various relative humidities. (a) Solid-state ^{13}C NMR obtained by direct excitation under MAS on samples exposed to a mixture gas N_2+CO_2+H_2O at 25 °C with RH0 (bottom, green), RH30 (middle, blue), and RH80 (top, red). (b) Tabulated values of quantified CO_2 adsorption corresponding to the NMR spectra shown in (a). In table, I(chem or raw) represents the integral area associated with chemisorbed species or sorbent itself in the spectra, and N(chem or raw) denotes the number of carbons associated with chemisorbed species or sorbent itself. (c) Comparison of the adsorbed CO_2 obtained from NMR (N_2+CO_2+H_2O) with the isotherm experiments CO_2, RH30 (CO_2+H_2O), and water at 25 °C. Isotherm experiments were described previously and reproduced from Ref.22 with permission from the Royal Society

suggests the formation of other interactions among CO_2, H_2O, and the material (Fig. S5). This spectrum suggests the possibility of ammonium carbamate and urea presence at high CO_2 loadings as indicated by the correlations at δ(^{13}C) = 161 and 158.1 ppm, respectively. The observed correlation remains challenging to identify a particular species without ambiguities and a more in-depth study would be needed to understand their species formed at high pCO_2 and high RHs.

Following the detection of chemisorbed species in the presence of water at low CO_2 loading, further analysis elucidates the impact of H_2O on CO_2 adsorption capacities through quantitative analysis of the spectra shown in Fig. 5. The quantification of adsorbed CO_2 was estimated from the ratios of integrated areas of the resonance corresponding to chemisorbed CO_2 to that associated with the polymer material. This approach allows for the determination of an enhancement factor,[25] simplifying the comparison of adsorbed CO_2 under different conditions relative to that under dry conditions. Our analysis shows that the adsorbed CO_2 doubles at 30% RH compared to the dry condition (0% RH). In other words, water aids in CO_2 adsorption at 30% RH by enhancing the formation of ammonium carbamate, but this increase does not manifest at 80% RH. Estimated CO_2 adsorption at 30% RH from NMR results aligns with the adsorbed CO_2 calculated at the corresponding pressure from the isotherm experiments conducted previously (Fig. 5c).[25] This finding is also in accordance with the previous isotherm experiments at different RHs that showed a two-fold increase in CO_2 adsorption at 30% RH and a subsequent small reduction in adsorption as RH increases.[25]

NMR relaxometry to explore water impact

The NMR results above suggest that the presence of water does not yield additional chemical bonding or reactions between CO_2 and the sorbents at low partial pressures of CO_2. Nevertheless, we find that variation in relative humidities increases the total CO_2 uptake at 30% RH, but not at 80% RH. We surmise that this effect arises from changes in the properties of the resins with hydration and/or molecular dynamics between guest molecules and sorbents. We deployed ^{1}H NMR relaxation studies to examine these questions upon water adsorption. The changes in ^{1}H NMR relaxation rates indicate a change in the correlation times (τ_c), which characterize motion of protons (e.g. a shorter correlation time indicates faster proton motion). These constructs derive from the original Bloembergen-Pound-Purcell (BPP) theory and have been further elaborated in subsequent NMR treatises.[40,41]

While it is expected that polymer can swell with adsorbates, ^{1}H NMR relaxation provides insight into the expansion behavior of polymer resin pores during water adsorption. Particularly, the spin-spin relaxation (R_2=1/T_2) measurement presents a well-established relationship between transverse relaxation rates and physical characteristics of porous media through exchange

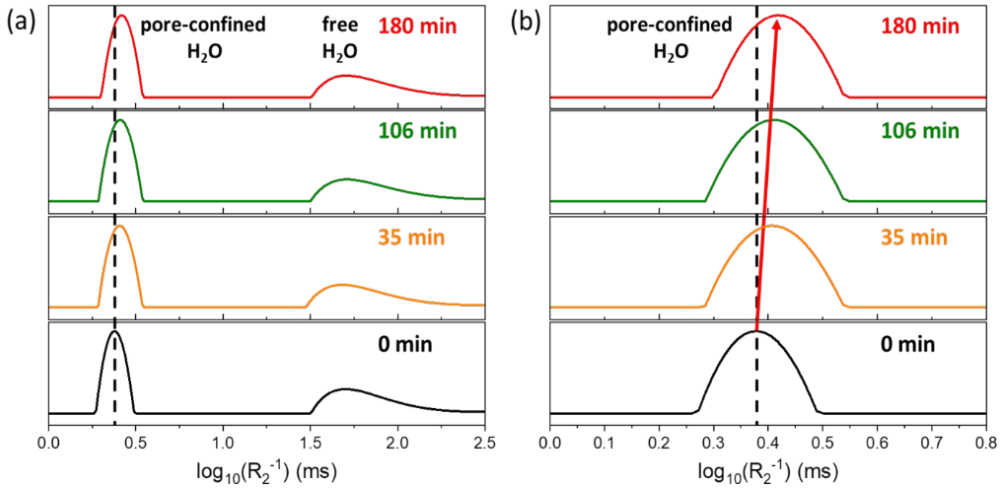

Fig. 6 Changes in transverse relaxation rates ($R_2^{-1} = T_2$) of water saturated within material, measured at a resonant ^1H frequency of 13.11 MHz. (a) R_2 distribution interpreted as pore-confined H_2O (faster R_2, i.e. shorter T_2) and free H_2O (slower R_2, i.e. longer T_2); (b) magnified view of (a), highlighting the changing R_2 distribution of pore-confined H_2O. Dashed black and solid red lines are a guide to the eye.

between unbound and sorbent-bound states, as presented in Equation S1.[42–44] Thus, Fig. 6 and Fig. S6 shows two well-separated distributions given by water molecules within the pores (pore-confined H_2O) and those outside the pores (free H_2O), at least when water is beyond the saturation point. Since R_2 is proportional to correlation time, free H_2O with faster molecular motion characterized by shorter correlation time, results in lower R_2 relaxation rates (longer T_2 relaxation times). The time evolution of these R_2 profiles following water adsorption indicates an approximate 8 % decrease in the transverse relaxation rates (R_2) of pore-confined water (Fig. 6b). We thus conclude that there is a discernable surface-to-volumetric expansion of the pores by ≈8 % with long exposure to water, i.e., polymer swelling. The specific, time-evolving shapes of pores are difficult to measure directly and are not revealed by this type of relaxation analysis. A detailed study, however, of parameters such as tortuosity as a function of water adsorption measured via PFG NMR would assist in connecting pore expansion to specific geometric changes in the pores. Such studies would provide further insight into mass transfer kinetics of sorption.

Polymer swelling upon water adsorption is further confirmed by R_2 measurements using heavy water (D_2O), highlighting proton signals from the polymer sorbent and not the adsorbed water. This is demonstrated through two complementary experiments: one varying over time with saturated D_2O adsorption and the other varying with RH levels. In both experiments, a decrease in R_2 indicates faster local motion (shorter correlation times) of polymer, as explained by BPP theory. The time variant R_2 profiles (Fig. S6c-d) show a noticeable decrease in R_2 with saturated D_2O adsorption. Although precise analysis with D_2O is limited by a low signal-to-noise ratio and a complicated R_2 distribution as seen via Inverse Laplace transform (ILT) analysis, we nevertheless see adsorbed

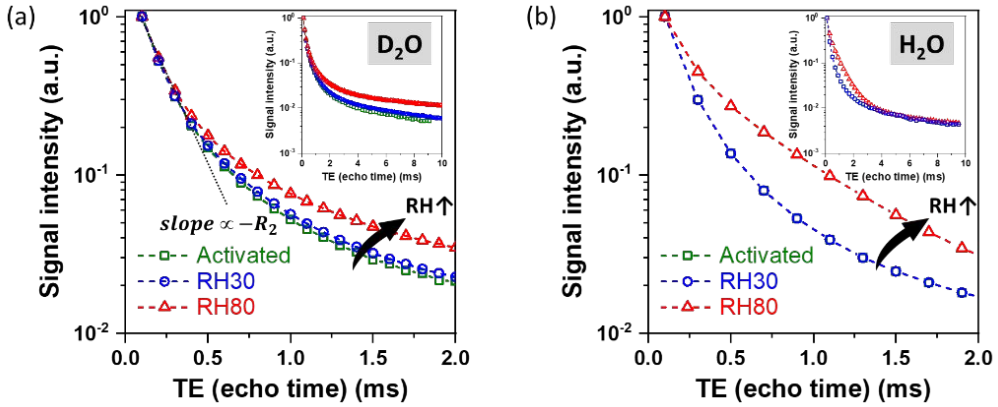

Fig. 7 ^1H NMR relaxation decay curves obtained at 9.4 T of activated and water ($D_2O/H_2O + N_2$) adsorbed materials at 25 °C with RH30, and RH80 for $R_2 = (1/T_2)$ relaxations. Considering potential deuterium exchange in polymer, the data presented in D_2O is used after reactivating D_2O adsorbed sample in (a). Measurements with Activated and RH30 in (b) are overlapped in the graph.

water as "lubricating" local chain motion in the Lewatit® VP OC 1065, consistent with studies of other polymers.[45] Furthermore, RH variant measurements reveal a clear decrease in R_2 as RH levels increase by comparing the slopes of each signal decay without ILT analyses (Fig. 7a). While estimating the R_2 value from these measurements encounters limitations such as signal loss during the initial echo period, these changes suggest that the incorporation of D_2O molecules into the sorbent increases local motions of polymer segments,[46] characterized by shorter correlation times (decreased R_2 rates) for protons specific to the polymer. The gradual decrease in R_2 as RH level increases indicates enhanced polymer segmental mobility of the sorbent,[46] a "lubrication" that likely enhances CO_2 adsorption by enabling easier access of guest molecules to adsorption sites. This increase in polymer mobility with RH level is not limited to our chosen sorbent but has also been observed in PEI:Al_2O_3, using fluorescence and NMR characterizations.[16]

These differing R_2 experiments have been tailored to observe the system of interest from different perspectives. The low magnetic field measurement is highly sensitive to protons in water while it is less sensitive to protons in sorbent. To complement a low signal-to-noise ratio with D_2O measurement at low magnetic field, the experiments at high magnetic fields are conducted to probe the signal directly from the sorbent itself.

Spin-lattice relaxation serves as a further guide to understanding how water interacts with the adsorption properties of Lewatit® VP OC 1065 during water adsorption. Here, we choose to use proton NMR spin-lattice relaxation rates in the rotating frame ($R_{1\rho} = T_{1\rho}^{-1}$), measured under a spin-lock field (B_{sl}). This measurement is chosen because it allows to detect bound water motion at mid-kHz range.[45] For very slow motion ($\omega_1\tau_c \gg 1$), $R_{1\rho}$ is inversely proportional to correlation time. Specifically, faster motion with shorter correlation time increases $R_{1\rho}$ (shorter $T_{1\rho}$ relaxation times) as given by BPP theory. Fig. 8 isolates humidity effects on the relaxation mechanisms using only N_2 and D_2O (or H_2O). The bound water motion is observed in Fig. 8b, showing a pronounced increase in $R_{1\rho}$ with increasing humidity when using H_2O, whereas $R_{1\rho}$ remains unchanged when using D_2O (as presented in Fig. 8a). Consequently, in this slow motional timescale, the higher $R_{1\rho}$ observed with increased RH level suggests faster water molecular motion. This trend is shown as a steeper slope and persists also in experiments performed with co-adsorption of CO_2, where $R_{1\rho}$ also increases with RH level (see Fig. S7b). These results suggest that bound water motion is also "lubricated" by increased relative humidity.

Further, at 30% RH, the relaxation measurements of $R_{1\rho}$ and R_2 reveal different response to the faster correlation time of water molecular motion. While the faster correlation time affects $R_{1\rho}$ as depicted in Fig. 8b, R_2 shows minimal change even under conditions where H_2O contributes to relaxation in Fig. 7b. This demonstrates that motion of bound water adsorbed at 30% RH is sensitively detected by $R_{1\rho}$, and reflects changes in the correlation times for local water motion at millisecond timescales (kilohertz frequencies); however, it is hardly detected by R_2, which can detect microsecond (MHz) frequencies and zero-frequency. Thus, this lack of influence on R_2 can imply that the water adsorbed at up to 30% RH is tightly bound to the sorbent or includes a few additional layers of water, which do not significantly affect R_2 measurements. The water protons in both scenarios may not have sufficient freedom to contribute to R_2 relaxation. Therefore, $R_{1\rho}$ is more effective than R_2 in discerning motion of bound water at this humidity level.

As RH level increases from 30% RH to 80% RH, it is important to note that R_2 begins to respond to faster correlation times, becoming sensitive to changes in water molecular motion. A less steep slope in Fig. 7b indicates a noticeable reduction in the R_2 relaxation rate, alongside an increase in $R_{1\rho}$ shown by a steeper slope (Fig. 8b). Both relaxation rates reflect a response to the faster motional correlation time, consistent with enhanced molecular mobility due to the adsorption of additional water molecules. This suggests that the water adsorption extends beyond the tightly bound state, which R_2 cannot clearly detect at 30% RH, and likely involves multiple layer adsorption and potentially progressing to capillary water condensation, yielding increased mobility. For the sorbents

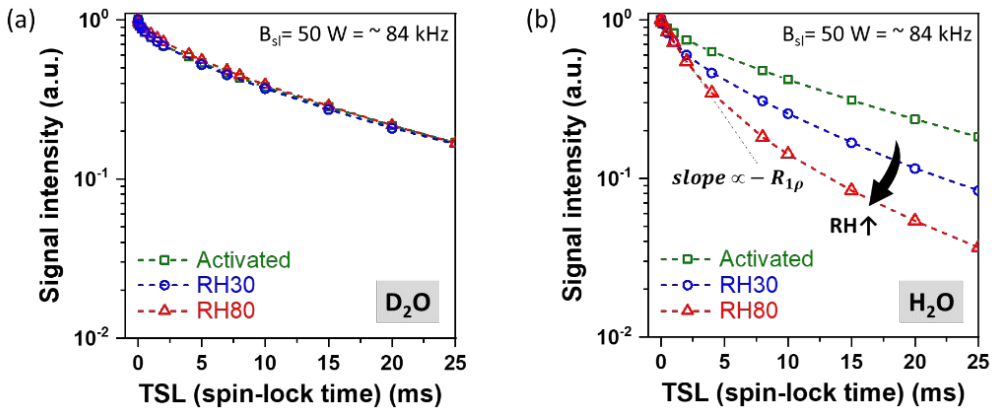

Fig. 8 ^{1}H NMR relaxation decay curves obtained at 9.4 T of activated and water ($D_2O/H_2O + N_2$) adsorbed materials at 25 °C with RH30, and RH80 for $R_{1\rho}(=1/T_{1\rho})$ relaxations. Considering potential deuterium exchange in polymer, the data presented in D_2O is used after reactivating D_2O adsorbed sample in (a).

exposed at 80% RH with CO_2, a consistent trend is observed where $R_{1\rho}$ increases and R_2 decreases as RH level rises (see Fig. S7). Furthermore, this enhanced water adsorption at 80% RH is corroborated by the well-resolved and intense signal around 4.5 ppm attributed to bulk water in Fig. 4a. This increased water content within pores may block potential CO_2 adsorption sites or pathways, thereby impeding CO_2 adsorption at 80% RH. This observation aligns with the general trend of increased water sorption at high RH levels,[36,47] where water sorption escalates from monolayer to multilayer, and eventually leading to capillary condensation of water molecules.[47] Furthermore, a similar transition from enhanced adsorptive to competitive behavior with increasing RH has also been observed in other studies using FTIR. Indeed, FTIR study on polyimide covalent organic frameworks further has identified peaks corresponding to water uptake at varying RH levels and highlighting water molecules readily occupy adsorption sites, suggesting a strong affinity for water adsorption at higher RH values (around 38 - 42% RH) in H_2O-CO_2 adsorption.[36]

We conclude that increasing RH induces pore swelling, concomitant with a significant increase in water adsorption. This leads to a complex interplay between CO_2 and H_2O adsorption, impacting adsorption capacity. This corroborates the dominant CO_2 adsorption over H_2O adsorption at 30% RH, as observed in the enhanced CO_2 uptake in both the isotherm experiment and NMR experiment.[25] At 30% RH, when only tightly bound water adsorption or only a few more layers may compete with CO_2 in the swollen pores, the CO_2 adsorption capacity is enhanced. Conversely, at 80% RH, the substantial amount of water adsorption likely attracts more water and reduces CO_2 adsorption capacity despite the expanded pores within the sorbent. Finally, lubrication of molecular motion for both the polymer and bound water occurs with increasing RH exposure.

Conclusions

The CO_2 adsorption behavior in polymer resin Lewatit® VP OC 1065 for DAC applications was investigated using solid-state NMR. The CO_2 partial pressure and the relative humidity were found to be key factors influencing the sorption. In the absence of water, the effect of CO_2 partial pressure on both chemisorption and physisorption processes highlights a stepwise process characterized by the sequential formation of ammonium carbamate, carbamic acid, and ultimately physisorption, all contingent upon the CO_2 loading levels. Additionally, the relative humidity at low CO_2 loadings influences total CO_2 sorption, with increased sorption capacity at 30% RH, and decreased CO_2 sorption capacity at 80% RH. At the low CO_2 partial pressures, however, we found that the RH does not change the CO_2-amine binding mechanism, even while changing the overall CO_2 uptake; this is in contrast with previous studies theorizing the formation of bicarbonate species thereby improving the stoichiometry. Bicarbonate is not observed in any of the experiments undertaken here.

Instead, we found that the impact of water on CO_2 uptake is accounted for by considering the molecular dynamics of water and the surrounding sorbent polymer induced by water adsorption. We assert that the adsorption of water into the pores leads to pore expansion over time, opening migration pathways and thereby increasing the availability of CO_2 sorption sites (i.e., amino groups). The specific RH levels affect the extent of pore expansion and local water molecular motion. Two distinct NMR relaxation regimes suggest a transition from water molecules that are tightly bound or form only a few layers on the adsorbate at 30% RH to water molecules that exhibit capillary condensation and include more multilayered structures at 80% RH. This observation likely contributes to variations in CO_2 adsorption capacity under different RH conditions, with corresponding changes in the relaxation rates.

Our analysis conclusively shows that, in ultra dilute CO_2 streams, the effect of water on CO_2 adsorption is not chemical but physical. Specifically, our findings contribute to understanding the underlying water/carbon dioxide co-adsorption phenomena in amine-modified polymer resins. The presence of water induces the pore opening due to polymer swelling and thereby affecting CO_2 sorption without altering the chemical reaction route. These insights are critical to underpin optimized DAC materials and process designs moving forward. Finally, the experimental framework demonstrated here allows future studies to address the same questions for other amine-modified DAC adsorbents classes.

Experimental Methods

Sample preparation and NMR analysis under dry and wet conditions

The sorbent material used in this study, Lewatit® VP OC 1065, underwent activation by heating at 100 ℃ under ultra-high vacuum (~ 10^{-3} torr) for several hours before gas adsorption. Subsequently, the activated samples were subjected to both dry and wet conditions.

For dry adsorption experiments, the activated samples in the packed rotor were subjected to varying partial pressures of $^{13}CO_2$ (Sigma-Aldrich Carbon-^{13}C dioxide <3 atom % ^{18}O, 99.0 atom % ^{13}C) using a home-built ex-situ dry gas apparatus. The partial pressures used were 8, 35, and approximately 1000 mbar, and each adsorption lasted for one hour. NMR experiments for the dry gas adsorbed samples were carried out at 11.75 T using a Bruker 4 mm dual-channel CPMAS probe. ^{13}C MAS NMR spectra were acquired at room temperature with a MAS rate of 10 kHz. The ^{1}H→^{13}C cross-polarization (CP) transfer under MAS (CPMAS) experiments were obtained with a contact time of τ_{CP} = 2 ms, during which a constant RF-field equal to 52 kHz was applied on the ^{13}C, while the ^{1}H RF-field amplitude was linearly ramped from 30 to 59 kHz. During ^{13}C acquisition, high-power ^{1}H decoupling was applied using the two-pulse phase-modulated (tppm15) decoupling scheme with an RF-field amplitude set to 50 kHz.[48] A total of 128-2k transients were averaged with a repetition time of 2 s.

The 2D ^{1}H-^{13}C CP-based heteronuclear correlation (CP-HETCOR) spectra were acquired using a contact time of 50 μs and 70 kHz of on-resonance frequency switched Lee-Goldberg

(FSLG) homonuclear decoupling during the t_1 evolution period.[49] During ^{13}C acquisition, high-power ^{1}H decoupling was applied using the tppm15 decoupling scheme with an RF-field amplitude set to 50 kHz. In total, 80 t_1 increments were recorded (Δt = 26.95 µs), each made of 200 transients with a repetition time of 2 s, leading to an overall experimental time of ~9 hours.

Direct excitation carbon spectra were acquired using high-power ^{1}H decoupling was applied using the tppm15 decoupling scheme with an RF-field amplitude set to 25-50 kHz. They were employed to probe physiosorbed CO_2 and quantify carbon in the adsorbed samples with a recycle delay of 2 s and 120 s with 16-2k and 256 transients, respectively. The chemical shift anisotropy (CSA) tensors were estimated from the low-speed MAS ^{13}C spectra collected at a MAS rate of 3 kHz with a recycle delay of 120 s. The spectral deconvolutions were performed using Dmfit software.[50]

Under humid conditions at a controlled low partial pressure of CO_2, the activated samples were loaded into an ex-situ co-adsorption apparatus, where the partial pressure of $^{13}CO_2$ in the gas mixture and the amount of H_2O vapor precisely controlled by manipulating their flow rates. Relative humidity (RH) levels of 0 %, 30 %, and 80 % were explored, with each adsorption lasting 3-4 hours. NMR experiments discussed for the humid gas adsorbed samples were conducted at 9.4 T, monitoring at a MAS rate of 10 kHz using a Bruker 3.2 mm probe. A rotor-synchronized DEPTH pulse was employed to suppress background ^{1}H signals.[51] ^{13}C CPMAS spectra were measured with a contact time of τ_{CP} = 0.2 ms, during which a constant RF-field equal to 61 kHz was applied on the ^{13}C, while the ^{1}H RF-field amplitude was linearly ramped from 71 to 89 kHz. During ^{13}C acquisition, high-power ^{1}H decoupling was applied using Small Phase Incremental Alternation with 64 steps (SPINAL-64) decoupling scheme with an RF-field amplitude set to 89 kHz.[52] A total of 2k-4k transients were averaged with a repetition time of 1.5-2 s resulting in experimental times of 1-2 hours. Carbon quantification was accomplished by direct excitation with SPINAL-64 decoupling scheme set to 89 kHz. A total of 160 transients were averaged with a recycle delay of 140 s resulting into 6 hours and 13 mins experimental time. Additionally, 2D ^{1}H-^{13}C HETCOR spectra were recorded with a contact time of 200 µs during the CP transfer and FSLG of around 89 kHz during ^{1}H evolution period while keeping the rest of CP parameters. In total, 64 t_1 increments were recorded (Δt = 44.8625 µs), each made of 16-512 transients with a repetition time of 1.5-2 s resulting in experimental times of 0.5 -12 hours.

For all 2D HETCOR spectra under dry and wet conditions, proton chemical shifts were referenced by ^{1}H-^{1}H FSLG pulse sequence immediately after acquiring the 2D HETCOR without altering any parameters.[53] Short cross-polarization contact times (50 µs) were used throughout this work to emphasize carbon-13 peaks proximate to protons, albeit at a significant loss of signal-to-noise. For 2D HETCOR experiments dosed at 150 ppm CO_2, the contact time was increased to 200 µs to improve sensitivity.

R_2 and $R_{1\rho}$ relaxation measurements at 9.4 T were performed at room temperature. R_2 relaxation was conducted by using a rotor synchronized spin-echo pulse sequence with a spinning rate of 20 kHz. Echo time were varied from 100 µs up to around 10 ms with a time interval of 100 to 200 µs. $R_{1\rho}$ relaxation measured at a MAS rate of 10 kHz was collected with the sequence consisting of 90° excitation pulse followed with a spin-locking time (TSL) from 50 µs to 20 ms, using 12 to 16 TSL points with a spin-locking field strength of around 84 kHz followed by a rotor-synchronized spin echo detection (using 180° refocusing pulse).

The D_2O adsorption experiments were conducted to investigate the interaction between deuterium oxide and activated materials, with a specific focus on revealing the molecular dynamics of water and its impact on the sorbent resin. Nitrogen (N_2) was chosen as the carrier gas and was directed through a bubbler containing D_2O to saturate the gas with D_2O vapor, achieving the targeted relative humidity level. To maintain consistency with parallel experiments conducted under similar humid conditions, the duration of D_2O exposure was adjusted accordingly, ensuring uniform exposure times across all experiments.

^{1}H and ^{13}C chemical shift were referenced with respect to tetramethylsilane using the CH_2 resonance of adamantane as a secondary external reference at $\delta_{iso}(^{13}C)$ = 38.48 ppm and $\delta_{iso}(^{1}H)$ = 1.8 ppm.

Low magnetic field transverse relaxation measurement (R_2)

This experiment aims to measure the swelling of Lewatit® VP OC 1065 in H_2O using low magnetic field ^{1}H T_2 relaxation at room temperature. The 0.3 T unilateral magnet NMR-MOUSE (MObile Universal Surface Explorer) PM25 was interfaced to a Magritek Kea II spectrometer to detect transverse relaxation of the polymer over 3 hours, during which time 52 CPMGs were recorded.[54–58] For all experiments, π/2 pulse lengths were 2.5 µs and the repetition time for signal averaging was 10 s. A total of 1000 echoes separated by a delay of 55 µs were recorded, and 128 scans were signal averaged. To cancel artifacts arising from pulse imperfections, the initial π/2 rf pulse and the receiver were phase cycled between +x and −x while holding the π rf pulse phase constant at +y. Inversion of the multiexponential time decay to a distribution of R_2 was accomplished with Laplace inversion using the Lawson and Hanson algorithm in Prospa software v3.61.[59,60] A smoothing value of 0.9 was chosen by minimizing χ^2 without oversmoothing.

These experiments detect two significant R_2 relaxation rates, and the shorter T_2 relaxation time is attributed to water imbibed within the porous polymer network. Subsequent observation of the polymer swelling over 24 hours was detected in a similar way.

Adsorption isotherm experiments and the calculation of the isosteric heat of adsorption

Single and binary component CO_2 and water isotherms for Lewatit were measured using the DVS Vacuum system from Surface Measurement Systems. The DVS uses a gravimetric magnetic suspension balance to measure the mass of the

sample throughout adsorption and desorption. Samples of between 30-60 mg were first outgassed in the DVS at a temperature of 100 °C. A turbomolecular pump was used to achieve pressures of 10^{-5} bar and ensure thorough outgassing of the sample prior to adsorption. Once the sample was outgassed and the system was brought down to the adsorption temperature, the pressure of adsorbate was increased stepwise, and the mass was allowed to equilibrate before moving to the next pressure step. Desorption branches were similarly obtained by decreasing the pressure in the same stepwise manner. The DVS can operate in dynamic or static mode. Dynamic mode is when the gas/vapour flows through the chamber whereas static mode is when the gas is pulsed into the chamber. Water isotherms were measured using dynamic mode and CO_2 isotherms were measured using static mode.

Co-adsorption isotherms were measured using semi-static mode. For these measurements, Lewatit was outgassed as above and the first adsorption step pre-adsorbed the sample with water at a determined relative humidity while the following pressure doses were CO_2. Working under the assumption that CO_2 does not affect water adsorption,[10] subsequent mass increases were attributed to CO_2 adsorption. Desorption was not performed for co-adsorption experiments as there is currently no way to differentiate between water and CO_2 desorption in the DVS.

The isosteric heat of adsorption was calculated using the Clausius-Clapeyron equation. The heat of adsorption across many different CO_2 loadings was obtained by interpolating the isotherms.

Author contributions

A. S. conceived and designed the research, conducted experiments and analysis, and wrote the original draft. J. Y. performed the measurement of adsorption isotherms and participated in discussion. J. W. and S. N. F. conducted R_2 measurements at low magnetic field and analyzed the data. K. P., S. G., and M. v. S. participated in discussions and offered valuable comments and experimental analyses. R. G. assisted with setting NMR pulses and participated in discussion. All authors edited the manuscript. J. A. R. supervised the research.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

A. S. and S. N. F. gratefully acknowledges support as a Pines Magnetic Resonance Center Postdoctoral Fellow. The *USorb-DAC Project* is supported by a grant from The Grantham Foundation for the Protection of the Environment to the Rocky Mountain Institute (RMI). The *PrISMa Project* (No. 299659) is funded through the ACT programme (Accelerating CCS Technologies, Horizon2020 Project No. 294766). Financial contributions made from the Department for Business, Energy & Industrial Strategy (BEIS) together with extra funding from the NERC and EPSRC research councils, United Kingdom; The Research Council of Norway, (RCN), Norway; the Swiss Federal Office of Energy (SFOE), Switzerland; and the US-Department of Energy (US-DOE), USA, are gratefully acknowledged. We thank Drs. Hasan Celik, and Pines Magnetic Resonance Center's Core NMR Facility (PMRC Core) for spectroscopic assistance. The instrument used in this work is supported by the National Science Foundation under Grant No. 2018784.

Notes and references

1 Caretta, M.A., A. Mukherji, M. Arfanuzzaman, R.A. Betts, A. Gelfan, Y. Hirabayashi, T.K. Lissner, J. Liu, E. Lopez Gunn, R. Morgan, S. Mwanga, and S. Supratid, in *Climate Change 2022: Impacts, Adaptation, and Vulnerability.*, Cambridge, UK and New York, NY, USA, pp. 551–712.

2 E. S. Sanz-Pérez, C. R. Murdock, S. A. Didas and C. W. Jones, *Chem. Rev.*, 2016, **116**, 11840–11876.

3 R. Bergman, Andrew Anatoly, *The Case for Carbon Dioxide Removal: From Science to Justice • Carbon Dioxide Removal Primer*, CDR Primer.

4 A. Sodiq, Y. Abdullatif, B. Aissa, A. Ostovar, N. Nassar, M. El-Naas and A. Amhamed, *Environmental Technology & Innovation*, 2023, **29**, 102991.

5 J. F. Wiegner, A. Grimm, L. Weimann and M. Gazzani, *Ind. Eng. Chem. Res.*, 2022, **61**, 12649–12667.

6 M. Sendi, M. Bui, N. Mac Dowell and P. Fennell, *One Earth*, 2022, **5**, 1153–1164.

7 L. Küng, S. Aeschlimann, C. Charalambous, F. McIlwaine, J. Young, N. Shannon, K. Strassel, C. N. Maesano, R. Kahsar, D. Pike, M. van der Spek and S. Garcia, *Energy Environ. Sci.*, 2023, **16**, 4280–4304.

8 M. W. Hahn, M. Steib, A. Jentys and J. A. Lercher, *J. Phys. Chem. C*, 2015, **119**, 4126–4135.

9 H. Zhang, A. Goeppert, G. K. S. Prakash and G. Olah, *RSC Adv.*, 2015, **5**, 52550–52562.

10 R. Veneman, N. Frigka, W. Zhao, Z. Li, S. Kersten and W. Brilman, *International Journal of Greenhouse Gas Control*, 2015, **41**, 268–275.

11 R. Serna-Guerrero, E. Da'na and A. Sayari, *Ind. Eng. Chem. Res.*, 2008, **47**, 9406–9412.

12 R. A. Khatri, S. S. C. Chuang, Y. Soong and M. Gray, *Energy Fuels*, 2006, **20**, 1514–1520.

13 J. Yu and S. S. C. Chuang, *Energy Fuels*, 2016, **30**, 7579–7587.

14 S. A. Didas, M. A. Sakwa-Novak, G. S. Foo, C. Sievers and C. W. Jones, *J. Phys. Chem. Lett.*, 2014, **5**, 4194–4200.

15 K. Li, J. D. Kress and D. S. Mebane, *J. Phys. Chem. C*, 2016, **120**, 23683–23691.
16 G. A. Russell-Parks, N. Leick, M. A. T. Marple, N. A. Strange, B. G. Trewyn, S. H. Pang and W. A. Braunecker, *J. Phys. Chem. C*, 2023, **127**, 15363–15374.
17 Z. Bacsik, N. Ahlsten, A. Ziadi, G. Zhao, A. E. Garcia-Bennett, B. Martín-Matute and N. Hedin, *Langmuir*, 2011, **27**, 11118–11128.
18 N. Hedin and Z. Bacsik, *Current Opinion in Green and Sustainable Chemistry*, 2019, **16**, 13–19.
19 M. Parvazinia, S. Garcia and M. Maroto-Valer, *Chemical Engineering Journal*, 2018, **331**, 335–342.
20 W. R. Jr. Alesi and J. R. Kitchin, *Ind. Eng. Chem. Res.*, 2012, **51**, 6907–6915.
21 W. Buijs, *Ind. Eng. Chem. Res.*, 2019, **58**, 17760–17767.
22 A. P. Hallenbeck and J. R. Kitchin, *Ind. Eng. Chem. Res.*, 2013, **52**, 10788–10794.
23 Q. Yu, J. de la P. Delgado, R. Veneman and D. W. F. Brilman, *Ind. Eng. Chem. Res.*, 2017, **56**, 3259–3269.
24 W. Buijs and S. de Flart, *Ind. Eng. Chem. Res.*, 2017, **56**, 12297–12304.
25 J. Young, E. García-Díez, S. Garcia and M. van der Spek, *Energy Environ. Sci.*, 2021, **14**, 5377–5394.
26 H. Mao, J. Tang, G. S. Day, Y. Peng, H. Wang, X. Xiao, Y. Yang, Y. Jiang, S. Chen, D. M. Halat, A. Lund, X. Lv, W. Zhang, C. Yang, Z. Lin, H.-C. Zhou, A. Pines, Y. Cui and J. A. Reimer, *Science Advances*, 2022, **8**, eabo6849.
27 J. Herzfeld and A. E. Berger, *The Journal of Chemical Physics*, 1980, **73**, 6021–6030.
28 Z. Gu and A. McDermott, *J. Am. Chem. Soc.*, 1993, **115**, 4282–4285.
29 T. Čendak, L. Sequeira, M. Sardo, A. Valente, M. L. Pinto and L. Mafra, *Chemistry – A European Journal*, 2018, **24**, 10136–10145.
30 J. M. Kolle, M. Fayaz and A. Sayari, *Chem. Rev.*, 2021, **121**, 7280–7345.
31 R. B. Said, J. M. Kolle, K. Essalah, B. Tangour and A. Sayari, *ACS Omega*, 2020, **5**, 26125–26133.
32 P. V. Kortunov, M. Siskin, L. S. Baugh and D. C. Calabro, *Energy Fuels*, 2015, **29**, 5919–5939.
33 Y. F. Chen, R. Babarao, S. I. Sandler and J. W. Jiang, *Langmuir*, 2010, **26**, 8743–8750.
34 F. Brandani and D. M. Ruthven, *Ind. Eng. Chem. Res.*, 2004, **43**, 8339–8344.
35 C. Y. Chuah, W. Li, Y. Yang and T.-H. Bae, *Chemical Engineering Journal Advances*, 2020, **3**, 100021.
36 H. Veldhuizen, S. A. Butt, A. Van Leuken, B. Van Der Linden, W. Rook, S. Van Der Zwaag and M. A. Van Der Veen, *ACS Appl. Mater. Interfaces*, 2023, **15**, 29186–29194.
37 J. Hack, N. Maeda and D. M. Meier, *ACS Omega*, 2022, **7**, 39520–39530.
38 C.-H. Chen, D. Shimon, J. J. Lee, F. Mentink-Vigier, I. Hung, C. Sievers, C. W. Jones and S. E. Hayes, *J. Am. Chem. Soc.*, 2018, **140**, 8648–8651.
39 C.-H. Chen, E. L. Sesti, J. J. Lee, F. Mentink-Vigier, C. Sievers, C. W. Jones and S. E. Hayes, *J. Phys. Chem. C*, 2021, **125**, 16759–16765.
40 N. Bloembergen, E. M. Purcell and R. V. Pound, *Phys. Rev.*, 1948, **73**, 679–712.
41 M. H. Levitt, *Spin Dynamics: Basics of Nuclear Magnetic Resonance*, John Wiley & Sons, 2013.
42 L. R. Stingaciu, A. Pohlmeier, P. Blümler, L. Weihermüller, D. van Dusschoten, S. Stapf and H. Vereecken, *Water Resources Research*, , DOI:10.1029/2008WR007459.
43 P. J. Barrie, in *Annual Reports on NMR Spectroscopy*, Academic Press, 2000, vol. 41, pp. 265–316.
44 Z. Zhao, B. Wang, R. Tan, W. Liu and M. Zhang, *Magnetic Resonance in Chemistry*, 2022, **60**, 427–433.
45 Y. Aso, S. Yoshioka, J. Zhang and G. Zografi, *Chem Pharm Bull (Tokyo)*, 2002, **50**, 822–826.
46 B. Wiesner, B. Kohn, M. Mende and U. Scheler, *Polymers (Basel)*, 2018, **10**, 1231.
47 X. Ma, W. Shen, X. Li, Y. Hu, X. Liu and X. Lu, *Sci Rep*, 2020, **10**, 13434.
48 A. E. Bennett, C. M. Rienstra, M. Auger, K. V. Lakshmi and R. G. Griffin, *The Journal of Chemical Physics*, 1995, **103**, 6951–6958.
49 B.-J. van Rossum, H. Förster and H. J. M. de Groot, *Journal of Magnetic Resonance*, 1997, **124**, 516–519.
50 D. Massiot, F. Fayon, M. Capron, I. King, S. Le Calvé, B. Alonso, J.-O. Durand, B. Bujoli, Z. Gan and G. Hoatson, *Magnetic Resonance in Chemistry*, 2002, **40**, 70–76.
51 D. G. Cory and W. M. Ritchey, *Journal of Magnetic Resonance (1969)*, 1988, **80**, 128–132.
52 B. M. Fung, A. K. Khitrin and K. Ermolaev, *Journal of Magnetic Resonance*, 2000, **142**, 97–101.
53 B. Kumari, M. Brodrecht, T. Gutmann, H. Breitzke and G. Buntkowsky, *Appl Magn Reson*, 2019, **50**, 1399–1407.
54 B. Blümich and J. Anders, *Magnetic Resonance*, 2021, **2**, 149–160.
55 J. Perlo, F. Casanova and B. Blümich, *Journal of Magnetic Resonance*, 2005, **176**, 64–70.

56 G. Eidmann, R. Savelsberg, P. Blümler and B. Blümich, *Journal of Magnetic Resonance, Series A*, 1996, **122**, 104–109.
57 H. Y. Carr and E. M. Purcell, *Phys. Rev.*, 1954, **94**, 630–638.
58 S. Meiboom and D. Gill, *Review of Scientific Instruments*, 1958, **29**, 688–691.
59 C. L. Lawson and R. J. Hanson, *Solving least squares problems*, Prentice-Hall, Englewood Cliffs, NJ, 1974.
60 R. F. Ling, *Journal of the American Statistical Association*, 1977, **72**, 930–931.

Discerning Molecular-Level CO_2 Adsorption Behavior in Amine-Modified Sorbents within a Controlled CO_2/H_2O Environment towards Direct Air Capture

Ah-Young Song[a,b], John Young[c], Jieyu Wang[a], Sophia N. Fricke[a], Katia Piscina[c], Raynald Giovine[d], Susana Garcia[c], Mijndert van der Spek[c], Jeffrey A. Reimer[a,b]*

All data supporting the findings of this study are available within the main article and the electronic supplementary information. All relevant data are available from the corresponding authors upon reasonable request.