



Artificial Intelligence Assisted Nanogenerator Applications

Journal:	<i>Journal of Materials Chemistry A</i>
Manuscript ID	TA-REV-10-2024-007127.R1
Article Type:	Review Article
Date Submitted by the Author:	08-Nov-2024
Complete List of Authors:	Xu, Shumao; UCLA, Bioengineering Manshaii, Farid ; UCLA, Bioengineering Xiao, Xiao; University of California Los Angeles, Bioengineering Chen, Jun; University of California Los Angeles, Bioengineering

SCHOLARONE™
Manuscripts

Artificial intelligence assisted nanogenerator applications

Shumao Xu,^a Farid Manshahi,^a Xiao Xiao,^a Jun Chen^{a,*}

^aDepartment of Bioengineering, University of California, Los Angeles, Los Angeles, CA 90095, USA

*Correspondence to: jun.chen@ucla.edu (J.C.)

ABSTRACT

Piezoelectric and triboelectric nanogenerators are at the forefront of converting ambient mechanical energy into electricity. They have experienced a significant leap in functionality and autonomy through integration with artificial intelligence (AI). This integration not only boosts nanogenerator performance for autonomous operations by improving mechanical-to-electrical energy conversion efficiency but also forges new pathways in robotics and intelligent systems. It enhances the responsiveness and adaptability of these devices. Looking ahead, combining nanogenerators with AI is set to play a crucial role in promoting sustainable and eco-friendly energy solutions. Their dual contribution to advancing the capabilities of intelligent systems and promoting environmental sustainability marks a significant advancement in the use of nanogenerators in robotics. This review underscores the essential role of AI in refining nanogenerators, highlighting a path toward achieving energy autonomy and sustainability.

Keywords: piezoelectric nanogenerators (PENGs); triboelectric nanogenerators (TENGs); artificial intelligence (AI); machine learning (ML); self-powered sensing; sustainable energy; self-powered robotics

1 Introduction

In the dynamically advancing field of renewable energy technologies, piezoelectric and triboelectric nanogenerators (PENGs and TENGs) emerge as cutting-edge approaches for converting ambient mechanical energy into electricity.¹⁻¹⁰ Since their inception over a decade ago, these technologies have developed rapidly, sparking renewed interest in sustainable energy amidst a global energy crisis and concerns associated with traditional fossil fuels. Utilizing piezoelectric and triboelectric effects, PENGs and TENGs can harvest energy from various environmental sources, including motion, temperature changes, and structural vibrations, thereby surpassing conventional energy harvesters in terms of electrical efficiency.¹¹⁻¹⁷

The efficacy of PENGs and TENGs significantly depends on their design and material composition, which opens significant opportunities and challenges for improving their electrical characteristics. This has led to a vigorous multidisciplinary research effort, dedicated to optimizing these technologies for a wide range of applications, from energy harvesting to sensing, monitoring, soft robotics, and electronic skins (e-skins).^{8, 18-40}

The integration of artificial intelligence (AI) with PENGs and TENGs has initiated a novel phase in boosting their functionality.^{41, 42} AI provides a solution to the challenges of developing portable, reliable, and eco-friendly energy sources.⁴³⁻⁴⁵ By mimicking human cognitive processes, AI greatly enhances computational efficiency in the structural design and material selection for nanogenerators.⁴⁶⁻⁴⁸ Early endeavors to integrate AI with PENGs and TENGs have delivered promising results in tackling design, prediction, and optimization challenges,⁴⁹ signifying a pivotal shift from conventional statistical approaches. AI excels in uncovering complex relationships among variables,^{23, 50} significantly enhancing the exploration of design and materials for these nanogenerators.

This synergy between AI and nanogenerators not only drives forward the frontier of energy harvesting technologies but also heralds a new era in robotics and intelligent systems. In this realm, AI-empowered nanogenerators enhance robotic perception, cognition, and interaction with their surroundings. This review aims to shed light on recent progress in nanogenerators, with a focus on the transformative impact of AI integration and its potential to revolutionize robotics and intelligent systems towards a more sustainable future.

2 Fundamentals of PENGs and TENGs

PENGs and TENGs are pioneering energy harvesting technologies that transform mechanical energy from the environment into electricity. This transformation is grounded in Maxwell's displacement current theory, with PENGs exploiting the piezoelectric effect and TENGs harnessing the triboelectric effect alongside electrostatic induction.

Introduced in 2006, PENGs work by converting mechanical stress or deformation directly into electrical energy through the piezoelectric effect.⁵¹ This phenomenon is observed in materials that generate an electrical charge in response to mechanical stress. Typically, a PENG consists of a piezoelectric material sandwiched between two electrodes in a metal-insulator-metal configuration. Upon mechanical deformation, these structures produce a voltage that drives an electrical current through an external circuit. Commonly used materials like ZnO or PVDF are selected to optimize the conversion efficiency from mechanical stress to electrical energy.

TENGs, which emerged in 2012, operate based on the triboelectric effect.⁵² This involves generating electrical energy through the contact and separation of two different materials, which leads to the surface becoming positively charged and negatively charged. The movement between these charged surfaces creates an electrostatic potential, which in turn drives an electrical current through a connected load. TENGs can be designed in various configurations to suit different types of mechanical energy inputs, including vertical contact separation, lateral sliding, single-electrode, and freestanding triboelectric layer modes. The key to enhancing TENG performance lies in the selection of materials with opposite triboelectric polarities, optimizing the efficiency of triboelectric charge transfer and electrical output.

3 Computation for nanogenerator integrations

AI-augmented nanogenerators bring new capabilities to on-device and cloud-based processing by supporting continuous learning mechanisms that allow systems to adapt over time.⁵³ Handling noisy data is critical for on-device and cloud-based systems, as sensor readings from nanogenerators are often affected by background interference and environmental factors.⁵⁴ Robust statistical models, such as regression and resistant measures of central tendency, help maintain performance by down-weighting the impact of outliers and noise.^{55, 56} These models provide a stable baseline by focusing on the core data patterns, reducing the influence of erratic data points. Outlier detection methods, such as isolation forests or distance-based algorithms, identify and manage data points that deviate significantly from expected patterns, further improving the reliability of the model in noisy environments.⁵⁷

Data preprocessing and filtering steps can enhance data quality before it is fed into models. Low-pass filters can remove high-frequency noise from the data.⁵⁸ By integrating continuous learning with robust noise management techniques, AI-augmented nanogenerators can maintain high accuracy, adaptability, and resilience across various applications.

3.1 On-device processing

On-device processing is essential for real-time applications like wearable monitoring, tactile sensing, and health management, where low latency is critical to provide immediate feedback, ensuring functionality and user satisfaction.⁵⁹ In prosthetics and smart clothing for health monitoring, slight delays in response time can disrupt

user control, coordination, and timely health alerts.⁶⁰ Rapid on-device processing helps prevent these issues by supporting energy-intensive algorithms like Convolutional Neural Networks (CNNs) and Deep Neural Networks (DNNs) for image classification and predictive modeling,⁶¹ as well as less demanding algorithms like Artificial Neural Networks (ANNs), Deep Belief Networks (DBNs), and linear techniques such as Principal Component Analysis (PCA), Linear Classification Algorithms (LCA), and Linear Discriminant Analysis (LDA) (Fig. 1).

On-device datasets, such as biometric data, sensor readings, and activity logs, are processed in real time to provide immediate insights.⁶² Efficient algorithms prioritize responsiveness within resource constraints, making them ideal for real-time motor control and sensor feedback. These algorithms often operate in bursts, activating only during specific time windows when sufficient energy is available, thus conserving power.⁶³ For example, Recurrent Neural Networks (RNNs) may analyze heart rate data intermittently, performing computations during peak energy generation.⁶³ However, on-device systems are limited by processing power and energy efficiency, restricting the complexity of algorithms and potentially hindering tasks like complex image processing or extensive data analysis.⁶⁴

In addition to energy efficiency, balancing energy consumption and decision accuracy is critical in energy-limited applications like wearables and Internet of Things (IoT) devices, where small batteries and low-latency responses are essential for effective user interaction.⁶⁵ While wearables face strict energy constraints, larger IoT or robotic systems have fewer power limitations. Efficient algorithms are necessary to maintain high accuracy and reliability, particularly for real-time monitoring. Pruning,⁶⁶ quantization,⁶⁷ and lightweight models like MobileNets⁶⁸ streamline neural networks by reducing complexity, memory footprint, and computational load, enhancing processing speed without significantly compromising accuracy.

Adaptive processing also adjusts model intensity based on task demands; for instance, RNNs, particularly Long Short-Term Memory (LSTM) networks, may activate only when vital signs deviate significantly, such as in abnormal heart rates, switching to simpler models under stable conditions to conserve energy.^{69,70} This approach extends battery life and efficiency in health monitoring while enabling quick responses to health changes.

Continuous health monitoring systems should ensure high accuracy in tracking vital signs, necessitating energy-efficient algorithms capable of sustaining long-term operation. In contrast, environmental sensors, which monitor slowly changing conditions, need only intermittent data collection, allowing for reduced power consumption.⁷¹ To maximize efficiency and precision, AI-augmented nanogenerators employ lightweight models for less critical tasks and shift to complex algorithms when necessary, optimizing energy use.⁷² Additionally, integrating energy harvesting and storage solutions, like nanogenerators and supercapacitors, buffer power supply for peak demands, ensuring consistent performance. Advances in energy conversion efficiency of nanogenerators, alongside microbatteries and supercapacitors, stabilize power for intensive tasks,

like deep learning and real-time analytics.⁷³ Low-power hardware and application-specific integrated circuits (ASICs) enhance efficiency, supporting self-powered applications.⁷⁴ By effectively combining these strategies, AI-augmented nanogenerators can maximize functionality while minimizing energy consumption, ultimately enhancing user experience across various applications.

3.2 Cloud-based processing

Cloud-based processing excels in handling computationally intensive, less latency-sensitive tasks, allowing extensive datasets to be offloaded for advanced data analysis and pattern recognition.⁷⁵ Security and document management applications benefit from this, as tasks like data encryption and complex pattern analysis require high processing power but are not critically time-sensitive. A hybrid approach is often used, with on-device processing for immediate feedback and cloud processing for in-depth analysis, such as long-term trend detection in gait analysis.⁷⁶ While latency-sensitive applications require fast response times, on-device processing can meet this need but may lack resources for complex analyses.⁷⁷ In contrast, cloud solutions handle intricate tasks, including deep learning and extensive pattern recognition, though data transmission may introduce delays,⁷⁸ as cloud speeds range from hundreds of milliseconds to seconds depending on network conditions and task complexity.⁷⁹ Transmission rates vary widely, with 4G long-term evolution (LTE) networks typically offering 10-50 Mbps,⁸⁰ while cloud tasks require higher bandwidth. On-device systems also conserve power to prolong battery life, while cloud servers, although more energy-intensive, support larger loads.⁸¹ Integrating AI with nanogenerators for on-device and cloud-based processing enables adaptive, intelligent systems, balancing real-time responsiveness with complex data capabilities.

4 AI-integrated nanogenerators

AI algorithms play a pivotal role in predicting and improving the efficiency, responsiveness, and adaptability of nanogenerators, paving the way for developments in robotics, self-powered sensing, energy-efficient actuation, and intelligent human-machine interactions.^{22, 23, 38, 82-98}

The implementation of AI encompasses supervised learning models (classification and regression) and unsupervised models (clustering and dimensionality reduction).^{99, 100} Unsupervised learning models like DBNs to capture complex hierarchical data representations, and Hopfield Neural Networks (HNNs) to perform associative memory tasks, operate on unlabeled data to identify inherent structures or patterns without predefined outputs. In contrast, supervised learning, such as Support Vector Machines (SVMs) for classifying data by identifying the optimal hyperplane that separates different classes¹⁰¹ and decision trees to split data based on feature values for interpreting user activities,¹⁰² are trained on labeled data, where each input is paired with its corresponding output, allowing the algorithm to learn patterns and make predictions. ANNs are trained on labeled data for tasks like classification and regression,¹⁰³ while LCA and LDA serve for dimensionality

reduction and class separation, respectively.¹⁰⁴ LCA uses linear decision boundaries to classify labeled data, and LDA identifies the linear combination of features that best separates classes, maximizing inter-class distance while minimizing within-class variance by leveraging the mean and variance of each class.

K-Nearest Neighbors (KNN) is a supervised, instance-based algorithm that classifies data points by proximity to labeled training instances,¹⁰⁵ enabling rapid gesture recognition by comparing real-time sensor data with recorded movements for quick responses.^{47, 106-109} CNNs, versatile in machine learning, are primarily used in supervised tasks like image classification, object detection, and segmentation,¹¹⁰ but can also function unsupervised, as in autoencoders, to learn data representations without labels. Similarly, RNNs are often used for supervised tasks like speech recognition and time-series prediction but can adapt to unsupervised tasks like sequence prediction,¹¹¹ allowing for flexible application across diverse machine learning challenges. DNNs, composed of multiple interconnected layers, effectively learn complex data relationships, making them suitable for pattern recognition tasks and multidimensional sensor data processing for applications requiring high accuracy in classification and prediction.^{112, 113}

Fig. 2 illustrates the integration of AI and nanogenerators to enhance daily life, industrial monitoring, and advanced interactive platforms.¹¹⁴⁻¹¹⁶ In wearable technology, nanogenerators enable biometric and health monitoring by supporting advanced machine learning algorithms, such as SVMs, neural networks, and decision trees, for health tracking and activity analysis.^{14, 37, 47, 117-121} Decision trees classify user activities by branching on feature values, while neural networks capture complex behavior patterns, and SVMs identify physiological signals (e.g., heart rate, skin temperature) for personalized monitoring by identifying the optimal hyperplane that separates different classes of data points.^{39, 122, 123} E-skins, which simulate touch, typically utilize CNNs to process spatial data, extracting features from tactile interactions to respond to stimuli accurately by applying convolutional layers that filter input data and pooling layers that reduce dimensionality.¹²⁴⁻¹³⁶ In environmental monitoring, nanogenerators paired with CNNs and SVMs enhance tasks like object recognition,^{137, 138} liquid leakage detection,^{139, 140} and gas sensing,^{47, 141, 142} with SVMs classifying environmental conditions and CNNs analyzing patterns for improved sensor detection.

RNNs are well-suited for sequential data tasks where the order of data points is crucial, such as speech classification and lip decoding, by managing temporal dependencies in speech signals.^{63, 69, 109, 114, 143, 144} However, standard RNNs struggle with retaining long-term information due to the vanishing gradient problem.¹⁴⁵ This limitation leads to challenges in learning long-term dependencies for applications requiring sustained contextual awareness.

LSTMs, a specialized RNN type, address this by using memory cells to track behavior changes and predict future actions over extended periods,¹¹¹ making them effective in user activity recognition and health monitoring applications.^{146, 147} LSTMs enable continuous monitoring of vital signs like blood pressure with improved

accuracy by maintaining important information across longer sequences, offering timely health updates essential for medical intervention.¹⁴⁸⁻¹⁵⁰ ANNs, consisting of interconnected layers of nodes, are also used for monitoring, including tasks like marine environmental surveillance and pressure mapping,¹⁰³ as they can learn to identify patterns and make predictions based on diverse inputs to model complex relationships within data and handling intricate datasets.^{17, 23, 151-154} HNNs, another form of RNNs for associative memory, excel at pattern recognition by managing complex patterns with hierarchical structures derived from data, such as typing dynamics and tactile information.¹⁵⁵ HNNs can retrieve stored patterns based on partial inputs, making them suitable for applications that require quick and reliable recognition of previously learned information, thereby improving user experience in systems that rely on human interaction.

DBNs, combining multiple layers of stochastic, latent variables to facilitate feature learning and classification,⁸ can capture hierarchical representations in high-dimensional data through unsupervised feature learning, useful in applications with unlabeled or poorly structured data. PCA aids in reducing the dimensionality of data from human interactions and typing dynamics, retaining key features while enhancing classification accuracy by transforming them into a smaller set of uncorrelated variables known as principal components.¹⁴³

The interplay between nanogenerators and various machine learning algorithms marks a step toward intelligent systems that augment human capabilities and experiences. This integration can achieve improved accuracy, efficiency, and user interaction, involving a range of algorithms (Table 1), such as SVM for object and character recognition,^{156, 157} KNN through instance-based learning for analyzing signal sequences and handwriting features,¹⁰⁸ ANN for time-series analysis in sensory networks,^{23, 151} CNN for image and pattern recognition,^{125, 158-160} and RNN for sequential tasks such as speech processing.¹⁵¹

One key approach to reusing AI models without the need for full retraining is transfer learning, which involves utilizing pretrained models that have already learned general features from large datasets and fine-tuning them for new applications.¹⁶¹ For example, a health monitoring model can be fine-tuned for fitness tracking by modifying layers to target metrics like steps or heart rate.¹⁶² Another effective strategy is modular AI design, where specific components of a model can be reused across different applications.¹⁶³ Foundational layers that have been trained on common features, such as motion patterns or general image features, can be repurposed for various tasks like differentiating between types of physical activity or detecting anomalies in sensor data. This modularity allows for significant savings in retraining efforts, enabling systems to adapt quickly to new challenges while maintaining efficiency. Moreover, distributed processing approaches where computational tasks are spread across multiple systems or devices, allow for handling more complex tasks while maintaining performance.¹⁶⁴ In larger systems, this can involve cloud computing resources that complement local processing, enabling advanced data analytics and machine learning operations that exceed the capabilities of individual devices.

4.1 On-device AI-integrated TENG for tactile sensing and recognition

Nanogenerators are pioneering a new era in artificial sensory systems and human-machine interfaces (HMIs) by creating self-powered, intelligent devices inspired by the biological sensory nervous system.¹⁶⁵

Various AI models, such as CNNs, SVMs, and RNNs, are tailored to handle the data types in tactile sensing and gait analysis (Table 2). For gait analysis, 1D CNNs excel at processing sequential, time-series data along a single temporal dimension.¹⁶⁶ These layers, adapted with broader strides, capture temporal dependencies within each gait cycle, supporting accurate classification of gait patterns for applications like sports training and rehabilitation. Pooling layers reduce data size while retaining key features, ensuring efficiency. 2D CNNs are well-suited for tactile sensing, using convolutional layers to capture spatial relationships such as texture and shape.¹⁶⁷ By pairing these layers with the max-pooling layer, which down-samples by retaining only the most prominent features, 2D CNNs reduce data dimensionality while preserving essential spatial features. Fine-tuning stride and kernel settings enhances localized sensitivity, enabling precise, high-resolution data processing for real-time, responsive interactions. In complex scenarios requiring analysis across spatial and temporal dimensions, like robotic tactile systems and environmental monitoring, 3D CNNs capture evolving three-dimensional patterns.¹⁶⁸ When used in tandem with CNNs, SVMs enhance the tactile peripheral nervous system (TPNS) sensor's ability to classify structured data, recognizing high-dimensional patterns like pressure or texture variations by identifying optimal hyperplanes, making them ideal for nuanced recognition tasks.¹⁶⁹ RNNs, particularly LSTMs, handle the sequential nature of tactile data by capturing short- and long-term dependencies, essential for interpreting touch sequences in real time, benefiting prosthetics and robotics.¹⁷⁰

The integration of these AI models—2D CNNs for spatial data, 1D CNNs for temporal data, and SVMs and LSTMs for classification and sequential analysis—demonstrates the flexibility and adaptability of AI-augmented, nanogenerator-powered systems.

4.1.1 SVMs, 2D CNNs, and RNNs for tactile peripheral nervous system

TPNS sensor, powered by TENG-based nanogenerators, exemplifies the synergy of nanotechnology and machine learning in mimicking human tactile responses. By converting mechanical touch into electrical signals, TENGs enable real-time, nuanced tactile perception, enhanced through advanced machine learning algorithms like SVMs, CNNs, and RNNs, which classify and interpret complex tactile data with high accuracy.

SVMs analyze the structured, high-dimensional data (datasets with numerous features) from TENG sensors, including touch intensity, duration, and texture, by identifying optimal hyperplanes that separate tactile classes, such as different pressures and textures, with high precision.^{139, 169, 171} By maximizing the distance between data points from different classes, SVMs achieve high classification accuracy, making them useful for recognizing structured patterns in tactile data. This capability enriches the TPNS by distinguishing tactile stimuli in

applications like prosthetics and robotics. Additionally, 2D CNNs work in tandem with SVMs to extract spatial hierarchies in tactile data.¹⁶⁷ Through convolutional layers, CNNs capture local features like edges and textures, creating a hierarchical understanding of tactile inputs. As the data moves through deeper layers of the CNN, increasingly complex spatial features are extracted, creating a hierarchical understanding of tactile input. Pooling layers further enhance this by downsampling while retaining essential details, enabling tasks such as identifying textures akin to braille¹⁷² (Fig. 3a). SVMs classify these patterns, ensuring high accuracy in differentiating tactile sensations.

For temporal tactile data, the TPNS employs RNNs, specifically LSTM networks, to handle the dynamic nature of tactile data that unfolds over time.¹⁷⁰ RNNs process sequential data by retaining information about previous inputs for interpreting patterns that change or evolve, while LSTM networks enhance this capability by incorporating memory cells that manage both short-term and long-term dependencies in data sequences, allowing the TPNS to analyze the occurrence of touch and its duration and intensity over time.¹⁷³ In prosthetics and robotics, LSTMs support real-time adaptive responses, imitating human touch perception effectively.

TENGs generate power autonomously by converting mechanical touch into electricity, eliminating the need for external batteries and enhancing the sensor's eco-friendliness. This self-sustained energy generation supports continuous, real-time tactile processing, allowing the TPNS to deliver rapid, precise responses for applications in prosthetics and intelligent robotics that rely on immediate, reliable feedback to function effectively.¹⁷⁴⁻¹⁸⁶ These advancements position the TPNS as a transformative technology in future sensory networks, where energy-efficient, intelligent sensors can provide human-like tactile sensitivity in environmentally sustainable ways.

4.1.2 2D CNNs for handwriting human-machine interfaces

The development of TENG-powered handwriting HMIs demonstrates the integration of AI and nanogenerators for interactive applications. TENG-based touchpads convert mechanical handwriting energy into unique electrical signals, capturing the nuances of each user's style¹⁸⁷ (Fig. 3b). Given the complex, multidimensional nature of these signals, CNNs play a key role in accurately processing and converting them.

In handwriting HMIs powered by TENGs, CNNs manage spatial data from the grid-like TENG sensor array, which records variations in pressure, texture, and shape.^{188, 189} This spatial data forms hierarchical levels of detail, with CNNs progressively abstracting and refining information from basic outlines to intricate handwriting characteristics through multiple convolutional and pooling layers.

Convolutional filters slide across the sensor grid, capturing fine details in pressure and contact that distinguish individual handwriting styles.¹⁶⁷ As data passes through layers, CNNs build hierarchical representations, from basic shapes to complex strokes, allowing for high-resolution interpretation of handwriting. Max-pooling layers

further streamline data by retaining prominent features like high-pressure zones and distinct edges, reducing noise and data complexity.¹⁹⁰

Tactile inputs in flexible, wearable devices often vary due to changes in pressure, contact angle, or surface area, particularly when devices undergo bending or twisting. To accommodate these variations, CNNs employ fine-tuned stride settings and adaptive kernel sizes. Finer stride settings (smaller movement steps across the data) enhance the CNN's sensitivity to minor changes, capturing subtle differences in texture or pressure.^{191, 192} Meanwhile, adaptive kernel sizes allow the model to focus on different scales of spatial features, adjusting its “field of view” to capture both fine details and broader strokes.¹⁹³ This adaptability is crucial for applications requiring real-time feedback, allowing CNNs to maintain accuracy even under physical distortions.

The synergy of TENGs and CNNs enables real-time data processing and instant feedback in handwriting HMIs. TENGs generate continuous electrical signals from handwriting, which CNNs rapidly interpret, supporting applications like virtual keyboards and digital notetaking where seamless interaction is expected. This integration sets a benchmark in self-powered HMIs, balancing energy efficiency with adaptability to physical changes.

4.1.3 1D and lightweight CNNs for smart socks and sports gait analysis

In sports and personal fitness, integrating TENGs with AI in smart wearables, like smart socks and shoes, is revolutionizing gait analysis. These devices embed TENG sensors that harvest kinetic energy from foot movements, converting it into electrical signals that reflect gait characteristics, walking phases, and pressure distributions^{46, 194, 195, 106} (Fig. 3c). The self-powered feature allows for long-term continuous, discreet monitoring, fitting seamlessly into daily wear. Gait details, like stride length, cadence, and weight distribution, are analyzed for insights into balance and stability.

Unlike tactile sensing, which relies on spatial data, gait analysis involves time-series data—a sequence of signals that represent movement patterns over time. 1D CNNs are well-suited as they can detect temporal dependencies across sequential movements, enabling the system to interpret complex gait cycles.^{166, 194} 1D convolutional layers slide filters across the time-series data, capturing recurrent patterns and subtle shifts in foot pressure over each step. This process enables the system to classify various gait types (e.g., normal walking, limping) by detecting recurring signal patterns that correspond to different types of movement. The use of broader strides in 1D CNNs allows the network to observe multiple time steps at once, capturing sequential relationships within the gait cycle that provide a complete, coherent view of movement patterns. This enhances classification accuracy by allowing the network to integrate and contextualize data over a sequence, rather than focusing solely on individual points in time.

Lightweight CNNs, which require minimal computational resources, further optimize on-device analysis, capturing essential features of foot pressure and movement for real-time feedback.¹⁹⁶ Unlike typical CNNs, which demand substantial processing power, lightweight CNNs use fewer parameters and streamlined layer structures, making them ideal for energy-efficient wearable devices. They process data from embedded sensors that monitor foot pressure and movement across gait stages. This capability supports instant adjustments in sports training and rehabilitation, where small gait corrections enhance performance and reduce injury risk.

Real-time feedback is vital for high-performance sports and rehabilitation, enabling athletes, coaches, and therapists to make precise adjustments based on accurate gait data. CNN-enhanced wearables offer valuable insights, including stability, balance, and load distribution, critical for athletic performance, injury prevention, and recovery tracking. In personalized medicine, detailed gait analysis assists in diagnosing mobility issues and customizing rehabilitation exercises to an individual's movement patterns.^{197, 198} This technology allows coaches to refine technique, monitor fatigue, and proactively address injury risks by identifying asymmetries in movement.¹⁹⁹ In rehabilitation, CNNs provide precise progress tracking, allowing therapists to adjust treatment plans based on quantifiable, real-time feedback, fostering more effective recovery.²⁰⁰ By enabling data-driven decisions, AI-powered smart wearables optimize performance and minimize injury risks.²⁰¹

4.2. Cloud-based AI-integrated TENG for security and document management

4.2.1 SVM and PCA for high-dimensional document classification

The integration of nanogenerators with SVM and PCA is advancing energy-efficient solutions in user authentication, security, and document management. When implemented in devices like keyboards and touchpads, TENGs can capture individual typing dynamics such as rhythm, pressure, and speed—producing unique, high-dimensional data patterns for each user^{47, 117, 202} (Fig. 3d). SVM is suited for handling this high-dimensional data due to its ability to create an optimal hyperplane that maximally separates data classes, which correspond to distinct typing behaviors associated with each user. This separation ensures robust, precise user authentication, as SVM effectively classifies nuanced variations in typing patterns, making it difficult for unauthorized users to replicate.

PCA, on the other hand, plays a complementary role by simplifying high-dimensional datasets for efficient data processing and storage.²⁰³ PCA works by identifying the main components (features) of the data, reducing complexity while preserving the most significant patterns, thereby optimizing the data for classification by SVM. This combination of PCA and SVM improves processing efficiency and enhances classification accuracy, as PCA distills the data to its most relevant features before SVM performs classification. In cloud-supported systems, this setup allows for large-scale data analysis, making it a viable solution for secure user authentication and document management across distributed networks.

In document management applications such as library archives and secure facilities, this approach is beneficial for monitoring document interactions. Systems can capture electrical signals generated by handling documents and analyze these signals with SVM and PCA to track user interactions in real-time and prevent theft^{117, 204, 205} (Fig. 3e). This innovation surpasses traditional radio frequency identification-based systems, providing a smarter, more sustainable solution that leverages cloud capabilities for managing extensive, high-dimensional datasets.

4.2.2 Decision trees for workflow automation in document management

Decision trees are hierarchical models that make classifications or decisions based on a series of branching paths determined by specific criteria, making them ideal for workflow automation in document management.²⁰⁶ By mapping out logical decisions in a tree-like structure, Decision trees can systematically evaluate different features of documents such as classification categories, access levels, and handling requirements without requiring manual input for every step. This systematic branching allows for rapid, consistent categorization of documents, ensuring efficient management and access control. In document storage and retrieval systems, a decision tree could automatically categorize documents by type, assign appropriate access permissions, or flag documents requiring special handling. This automation minimizes manual oversight, streamlining processes in secure environments where handling large volumes of documents is essential.

Handwriting recognition in document management captures an individual's unique writing style through sensors that detect variations in mechanical pressure exerted during writing²⁰⁷ (Fig. 3f). SVM classifies these distinct writing patterns for reliable identity verification, while PCA simplifies data complexity, making classification more efficient by focusing on key features of the handwriting. This application provides an additional layer of security in document management, as each user's handwriting is treated as a unique biometric signature that can be authenticated alongside other security protocols.

By combining SVM's precision in distinguishing high-dimensional data and PCA's efficiency in reducing data complexity, handwriting recognition systems offer secure, energy-efficient verification methods suitable for document management in high-security environments.^{178, 208} This integration not only enhances user authentication but also extends the capabilities of document management by adding personalized, biometric-based security options, contributing to a more intelligent, responsive, and energy-efficient system for managing sensitive information.

4.3 Cloud-based AI-integrated TENG for pattern recognition and memory

4.3.1 PCA, and SVM for typing analysis and user authentication

The combination of TENGs with PCA and SVM algorithms has significantly advanced typing behavior analysis, achieving greater accuracy and efficiency. TENGs capture mechanical nuances of typing, such as signal

magnitudes, latencies, and hold times, transforming these details into electrical signals that serve as robust datasets. PCA simplifies this high-dimensional data by reducing it to essential components, effectively isolating the core elements of typing patterns without unnecessary complexity²⁰² (Fig. 3g,h). By distilling the data into its most informative aspects, PCA sharpens the focus for further analysis, improving computational efficiency.

Utilizing the refined data provided by PCA, SVM employs its classification capabilities to differentiate between individuals based on their unique typing signatures. SVM identifies an optimal hyperplane that separates data points across high-dimensional spaces, capturing the subtle distinctions in typing behavior that are critical for accurate user identification and authentication. The synergy between PCA's dimensionality reduction and SVM's high-precision classification allows for a robust, energy-efficient typing analysis system, supporting enhanced security and personalization in applications like user authentication and productivity analysis.

4.3.2 HNNs, and DBNs for smart robotics and environmental interaction

HNNs play a pivotal role in developing artificial sensory memory for robotics, particularly in the recognition and recall of complex patterns.¹⁵⁵ HNNs are associative memory networks that excel at pattern recognition and recall based on partial inputs, making them highly effective for sensory memory applications in robotics. In systems with TENG matrix sensors, which capture intricate tactile data from interactions, HNNs process and store these sensory patterns. This capability enables robots to dynamically respond to changes in texture, pressure, and other tactile stimuli by recognizing familiar patterns and recalling previous interactions²⁰⁹ (Fig. 3i). With their layered architecture, HNNs support a robust framework for recognizing and storing high-dimensional sensory data, allowing robots to adapt to various environmental stimuli with precision and memory recall.²¹⁰

Complementing HNNs, DBNs, and layered neural networks that learn hierarchical data patterns without the need for labeled inputs, can be used for sensory memory systems where data often lacks explicit labels through unsupervised feature learning, which is beneficial for high-dimensional tactile data.⁸ In cloud-based tactile memory applications, DBNs extract meaningful features directly from complex, multi-faceted TENG sensor data, including information on texture, pressure, and motion. As DBNs autonomously identify underlying structures and patterns within this data, they allow sensory systems to improve responsiveness and adapt over time.

The use of cloud infrastructure with DBNs supports the substantial computational requirements for processing high-dimensional tactile data. This infrastructure enables DBNs to efficiently manage and organize complex tactile information, facilitating pattern recognition and feature learning that enhances robotic systems' real-time interactions and memory functions. HNNs and DBNs provide a comprehensive framework for artificial sensory

memory, allowing intelligent robotic systems to navigate, interpret, and recall tactile experiences with precision, thereby paving the way for responsive and autonomous interactions.

4.4. On-device/cloud-based AI-assisted advanced sensory detection

4.4.1 Cloud-integrated CNNs for object recognition in environmental monitoring

Cloud integration enhances the power of CNNs, enabling them to handle large-scale, high-dimensional datasets while benefiting from cloud-based computational resources. The cloud infrastructure continuously refines CNN models, improving accuracy and allowing them to scale effectively for diverse environmental applications. This setup supports real-time monitoring needs in data-intensive scenarios, as CNNs can quickly update and analyze large datasets from various sensors, providing precise and scalable insights essential for safety and environmental monitoring. The cloud-enabled architecture makes CNNs well-suited for large-scale environmental data analysis, where continuous updates and real-time object recognition play vital roles^{211, 212} (Fig. 4a,b).

For environmental monitoring, CNNs integrated with cloud computing bring advanced capabilities for object recognition and data classification. CNNs are adept at detecting spatial patterns through their hierarchical structure, which processes data in layers to capture features ranging from simple edges to intricate shapes. This makes CNNs highly effective in identifying objects, patterns, and environmental features, such as recognizing volatile organic compounds (VOCs) or detecting specific items or hazards within complex landscapes^{8, 142} (Fig. 4c).

4.4.2 RNNs for real-time sound analysis

AI-enhanced sensory detection systems that combine nanotechnology with RNNs are significantly advancing real-time sound analysis capabilities in robotics. Biomimetic tactile sensors, such as those powered by TENGs, autonomously respond to mechanical stimuli akin to human skin, allowing robots to detect and precisely process subtle changes in pressure and strain²¹³ (Fig. 4d). An important development in this field is a self-powered neural tactile sensor that integrates a graphene layer with a TENG sensor featuring microlines, yielding heightened sensitivity to pressure and vibration²¹⁴ (Fig. 4e).

RNNs offer distinct advantages for real-time sound analysis, making them highly effective in applications requiring continuous and rapid processing of audio data. Their unique architecture enables them to maintain context across time steps, making RNNs especially well-suited for handling sequential data like sound waves. This capacity to retain information allows RNNs to capture temporal patterns in sound, as they can integrate context from previous inputs—ideal for recognizing complex acoustic signatures that unfold over time. For

example, variations in pitch, frequency, and duration in sound waves are effectively analyzed as the RNN processes each element in the sequence, updating its understanding based on previous patterns.

In real-time applications, RNNs operate directly on-device to minimize latency, enabling instant processing of acoustic data and allowing robotic systems to respond to auditory cues with minimal delay. This immediate responsiveness is particularly valuable in robotics, where quick sound recognition and reaction are crucial for navigation, interaction, and environmental awareness. By processing sound data as it arrives, RNNs enable robotic systems to differentiate sounds in dynamic environments—whether identifying speech, mechanical noise, or environmental cues in real-time—enhancing their adaptability, autonomy, and responsiveness to the surrounding world²¹⁵ (Fig. 4f). Moreover, the introduction of biomimetic piezoelectric acoustic nanosensors marks a breakthrough in auditory fidelity. These sensors convert vibrations into electrical signals similar to the human hearing process, offering advanced sound detection capabilities²¹⁶ (Fig. 5a).

These advancements in CNN-driven object recognition for environmental monitoring and RNN-enhanced real-time sound analysis mark a transformative step toward autonomous, responsive sensory systems in robotics. By merging AI with nanotechnology, these approaches enable real-time learning and adaptive functionality across various fields, including medical diagnostics, environmental monitoring, and smart infrastructure. The combination of on-device and cloud-supported AI bolsters robot interactions with their surroundings, enhancing pattern recognition, decision-making, and sensory precision, furthering the autonomy and intelligence of advanced robotics systems.

4.5. On-device AI-assisted PENG wearables for health monitoring

4.5.1 ANN and RNN for wearable health monitoring

The fusion of nanogenerators with AI-driven algorithms, specifically ANNs, and RNNs, empowers wearable health monitors to continuously track health metrics in real time.^{42, 118, 209, 217-232} ANNs process complex, nonlinear health data patterns by extracting key features from multiple sensor inputs, which is vital for comprehensive health monitoring. RNNs, on the other hand, excel at interpreting time-dependent data, making them ideal for sequential monitoring tasks, such as analyzing heart rate variability, breathing patterns, or prolonged physical activity. By retaining information over time, RNNs allow wearables to recognize evolving patterns in health signals, which is essential for detecting subtle changes that may indicate health risks.

Wearable devices that incorporate ZnO nanorod-based PENGs add an extra dimension to this functionality.²³³⁻²³⁵ These materials are highly responsive to motion, generating electrical signals in response to bending, stretching, and other mechanical movements. This sensitivity enables precise measurement of physiological movements and provides valuable input for ANN and RNN models to analyze, enhancing the quality and relevance of real-time health monitoring. This breakthrough lays the groundwork for creating highly sensitive

e-skins²³⁶ (Fig. 5b,c). When coupled with AI, these devices can interpret complex motions, finding their place in advanced prosthetics and interactive technologies, thus improving the human-machine interface.

4.5.2 SVM, KNN, and decision trees for wearable tactile feedback

Advances in stretchable nanogenerators are revolutionizing wearable tactile feedback, making it possible for devices to deliver responsive sensations directly to users' fingertips¹¹² (Fig. 5d). These PENG-based devices, designed for industrial-scale production, have transformed touch-sensitive wearables, enabling them to detect and respond to tactile inputs in real time. By integrating these nanogenerators with AI, wearable devices provide users with a more immersive, intuitive interaction, as they can interpret and respond to complex tactile stimuli. The development of bio-PENGs, which utilize eco-friendly materials to generate power from body movements, furthers this approach, supporting sustainable, self-powered wearables capable of adapting to various environmental and physiological cues²³⁷ (Fig. 5e).

In achieving this high degree of tactile feedback, several algorithms play complementary roles, each addressing distinct aspects of tactile data processing. SVMs are pivotal for classifying tactile data by clearly separating various touch inputs, such as different pressures or textures, into specific categories, allowing wearables to differentiate touch types accurately.²³⁸ KNN, a straightforward yet effective algorithm, is useful for classifying tactile sensations by comparing them to known data points. KNN's proximity-based approach is valuable for recognizing textures, pressure levels, or gestures, making it a natural complement to SVM in applications where cumulative sensory data informs tactile feedback.²³⁹ Decision trees and random forests can enhance tactile classification by evaluating input data based on multiple criteria.²⁴⁰ Decision trees individually assess sensory data, while random forests employ an ensemble of trees for more robust classification.

While SVMs offer foundational classification precision, KNN's historical comparison helps refine touch recognition by drawing on accumulated sensory data. Decision trees and random forests, with their multiple-layered decision-making, add robustness to tactile feedback by providing nuanced classification for a broad range of touch inputs. By dynamically interpreting and adapting to tactile inputs, these algorithms empower nanogenerator-based wearables to deliver advanced, real-time feedback, paving the way for intelligent, self-sufficient, and seamlessly integrated technologies in everyday life.

4.6 On-device/cloud-based AI-integrated PENG biomedical robotics

4.6.1 LSTM for precision control in robotic hands

The integration of LSTM networks with 3D piezoelectric microsystems in robotic hands marks a transformative advancement in biomedical robotics, particularly for cloud-supported applications requiring precision and adaptability. LSTMs are uniquely suited to capture long-term dependencies in sequential data, a critical feature

for interpreting tactile inputs that continuously evolve. In robotic hand applications, these dependencies encompass complex tactile feedback patterns that arise as the hand interacts with diverse objects, surfaces, and textures. By retaining contextual information across time steps, LSTMs enable the robotic hand to make intelligent, real-time adjustments based on sequences of past interactions rather than isolated data points. This capability enhances the hand's sensitivity and adaptability, allowing for precise modulation of grip and pressure in response to varying tactile stimuli.

An example of this approach is demonstrated in robotic hands equipped with a monolayer MoS_{2-x} -based PENG designed to optimize electrical outputs in flexible configurations²⁴¹ (Fig. 5f) and a PVDF layer with chromium/gold electrodes mounted on a serpentine polyimide ribbon for sensitive tactile feedback²¹³ (Fig. 5g). By dynamically interpreting tactile data through LSTM algorithms, these systems achieve enhanced sensitivity during manipulation tasks, allowing for highly controlled and responsive actions.

Moreover, AI elevates the functionality of these systems beyond passive data collection, fostering active learning and real-time adaptation. This advanced AI-driven approach utilizes pattern recognition, predictive analytics, and dynamic decision-making processes to boost sensor sensitivity and adaptability under various environmental conditions.²⁴² For instance, AI's ability to dynamically adjust the electrical output of a sulfur vacancy-passivated MoS_2 PENG in response to changes in pressure and bending angles significantly increases energy efficiency, optimizing system performance and extending operational lifespan.²⁴³

In 3D piezoelectric microsystem integrated into a robotic hand, AI can significantly improve the hand's grip and manipulation abilities by continually learning from tactile feedback.^{244, 245} This adaptability allows the robotic hand to perform a wide range of tasks with enhanced precision and responsiveness to touch, enabling it to handle diverse and unpredictable objects effectively. This fusion of AI with nanogenerator-powered biomedical robotics opens a myriad of possibilities, from self-adjusting prosthetic systems that provide a more seamless user experience to autonomous energy management within these systems, ensuring optimal power distribution. Such advancements are crucial for enhancing the autonomy of robotic and biomedical applications, making them more efficient and user-friendly.

4.6.2 ANN for real-time decision-making in adaptive prosthetics

In adaptive prosthetics, the integration of ANNs on-device enables real-time responsiveness, which is essential for seamless and intuitive user experiences. Unlike LSTMs, which are more suitable for handling sequential dependencies over time, ANNs provide immediate decision-making by analyzing tactile feedback and positional data in real time. This capability allows the prosthetic to react instantly to changes in movement, enabling fluid, adaptive motion that closely aligns with the user's natural actions.

By processing tactile inputs on-device, ANNs eliminate the latency associated with cloud processing, ensuring that the prosthetic can adjust grip, orientation, and movement as the user performs various tasks. This real-time processing is particularly useful for adaptive prosthetic hands, where instantaneous feedback is needed to accommodate changes in grip strength and angle based on the detected force or shape of the object being handled. Additionally, by optimizing response based on real-time inputs, ANNs reduce wear and tear on the device by avoiding unnecessary movements, thereby improving the lifespan and efficiency of the prosthetic system. The PENG-based design, with materials such as sulfur vacancy-passivated MoS₂, enables these prosthetics to harvest energy autonomously, further enhancing their usability and sustainability.

These innovations in AI-integrated PENG biomedical robotics, through cloud-enabled LSTM applications for robotic hands and on-device ANN applications for adaptive prosthetics, mark a significant step towards creating self-sufficient, highly adaptive systems in healthcare. The combination of precise tactile feedback processing and intelligent adaptability enables these systems to provide a more personalized, responsive experience for users, with applications that span both medical and robotic fields.

5. Conclusions and Outlook

The fusion of artificial intelligence with nanogenerators is transforming the conversion of mechanical energy into electrical energy, leading to more efficient and sustainable energy solutions. This breakthrough is paving the way for the creation of self-powered devices, crucial for advancing autonomous robotics and intelligent systems independent of external power sources. Moreover, AI's integration is refining the accuracy and responsiveness of robotics sensors and actuators, significantly improving healthcare wearables for precise monitoring of vital signs and enabling real-time data analytics. These advancements promote predictive maintenance and adaptive learning, tailoring devices to user-specific requirements.

However, this integration presents several challenges, including complexities in analysis, design, fabrication, and the broad application of these technologies. There is an urgent need for a universal framework that can thoroughly understand the piezoelectric and triboelectric effects, optimize structures, innovate new materials, effectively scale current outputs, and expand the application domains. This advancement should extend beyond sensing functions to include computational capabilities as well.

Ongoing research offers promising directions for incorporating active materials that can respond dynamically to external stimuli, such as pressure, heat, or electrical fields into nanogenerator-powered soft robotics and intelligent machine systems. These materials are useful in robotic systems requiring adaptive responses, such as soft sensors, e-skins, actuators, and microfluidic devices, where flexibility and responsiveness are essential.

Combining TENGs and PENGs within a single system can offer dual capabilities in both sensing and actuation. This combination leverages TENGs' sensitivity to surface contact and movement and PENGs' ability to generate

stable output under deformation, creating a more comprehensive energy-harvesting and sensory network. This integration may be accomplished by layering materials or designing hybrid circuits where each generator type contributes to specific functions. These hybrid systems support the development of self-powered, untethered robotic devices capable of responding to environmental cues.

For soft robotics, low-power actuation mechanisms are crucial as they allow for motion without requiring high energy input. Further development of electroactive polymers, dielectric elastomers, and shape-memory alloys enables movements like bending, contracting or expanding with minimal electrical power for soft actuators in robots. When paired with TENG or PENG devices, these materials support sustained operation in autonomous systems that rely on limited power sources.

Microscale TENG- and PENG-based robots, due to their compact size, hold significant potential for biomedical applications within confined spaces, such as vascular systems. These miniature devices could navigate narrow blood vessels or other internal pathways to perform diagnostics, deliver targeted drugs, or even conduct minor repairs within the body. Biocompatible materials, such as hydrogels and flexible polymers, enable safe interactions with biological tissues, while advanced microfabrication techniques like photolithography, 3D printing, and laser micromachining allow for the precise construction of robots at the microscale, essential for delicate medical applications. In the development of flexible tactile sensors, innovations in materials science and structural design have led to substantial improvements in sensitivity. Flexible substrates, such as elastomers and conductive polymers, combined with structured micro/nano-patterns on the surface, enhance the device's ability to detect and differentiate between subtle pressure changes, temperature variations, and other material properties. These advances also support enhanced auditory and olfactory sensing, enabling more precise sound and gas detection, respectively, in soft robotics and wearable devices.

Moving forward, key areas for nanogenerator-based systems include addressing performance limitations, ensuring stability in challenging conditions, and advancing production techniques for scalability. Strategies to enhance output performance include using multilayered structures and optimizing the surface area to boost energy capture. Ensuring device stability in harsh environments may involve material coatings that protect against high temperature, humidity, or mechanical stress, as well as encapsulation techniques to shield sensitive components. Scaling production can benefit from automated fabrication techniques, such as roll-to-roll processing or 3D printing, to achieve consistent, high-quality manufacturing at a large scale.

Addressing these challenges will be essential for advancing the practical applications of nanogenerator systems. By enhancing durability, efficiency, and scalability, the potential of AI-enhanced nanogenerators can be unlocked across diverse fields, from medical devices and biosensors to self-powering buildings, ultimately marking a substantial step toward sustainable, autonomous technological solutions.

Data availability

No primary research results, software or code have been included and no new data were generated or analyzed as part of this review.

Conflicts of interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Author contribution

The manuscript was written through the contributions of all authors. All authors have approved the final version of the manuscript.

Acknowledgments

This is an invited submission for the *Nanogenerators* themed collection. The authors acknowledge the Henry Samueli School of Engineering & Applied Science and the Department of Bioengineering at the University of California, Los Angeles for their startup support. J.C. acknowledges the Vernroy Makoto Watanabe Excellence in Research Award at the UCLA Samueli School of Engineering, the Office of Naval Research Young Investigator Award (Award ID: N00014-24-1-2065), NIH Grant (Award ID: R01 CA287326), the American Heart Association Innovative Project Award (Award ID: 23IPA1054908), the American Heart Association Transformational Project Award (Award ID: 23TPA1141360), the American Heart Association's Second Century Early Faculty Independence Award (Award ID: 23SCEFIA1157587), the Brain & Behavior Research Foundation Young Investigator Grant (Grant Number:30944), and the NIH National Center for Advancing Translational Science UCLA CTSI (Grant Number: KL2TR001882).

References

- 1 W. Deng, Y. Zhou, A. Libanori, G. Chen, W. Yang and J. Chen, Piezoelectric nanogenerators for personalized healthcare, *Chem. Soc. Rev.*, 2022, **51**, 3380-3435.
- 2 Y. Su, W. Li, L. Yuan, C. Chen, H. Pan, G. Xie, G. Conta, S. Ferrier, X. Zhao, G. Chen, H. Tai, Y. Jiang, and J. Chen. Piezoelectric fiber composites with polydopamine interfacial layer for self-powered wearable biomonitoring, *Nano Energy*, 2021, **89**, 106321.
- 3 Y. Su, C. Chen, H. Pan, Y. Yang, G. Chen, X. Zhao, W. Li, Q. Gong, G. Xie, Y. Zhou, S. Zhang, H. Tai, Y. Jiang, and J. Chen. Muscle fibers inspired high-performance piezoelectric textiles for wearable physiological monitoring, *Adv. Funct. Mater.*, 2021, **31**, 2010962.
- 4 Y. Zou, V. Raveendran and J. Chen, Wearable triboelectric nanogenerators for biomechanical energy harvesting, *Nano Energy*, 2020, **77**, 105303.

- 5 J. Xu, Y. Zou, A. Nashalian and J. Chen, Leverage surface chemistry for high-performance triboelectric nanogenerators, *Front. Chem.*, 2020, **8**, 577327.
- 6 G. Conta, A. Libanori, T. Tat, G. Chen and J. Chen, Triboelectric nanogenerators for therapeutic electrical stimulation, *Adv. Mater.*, 2021, **33**, 2007502.
- 7 J. Chen, Y. Huang, N. Zhang, H. Zou, R. Liu, C. Tao, X. Fan, Z. L. Wang. Micro-cable structured textile for simultaneously harvesting solar and mechanical energy. *Nat. Energy*, 2016, **1**, 16138.
- 8 C. Huang, G. Chen, A. Nashalian and J. Chen, Advances in self-powered chemical sensing via a triboelectric nanogenerator, *Nanoscale*, 2021, **13**, 2065-2081.
- 9 L. Jin, X. Xiao, W. Deng, A. Nashalian, D. He, V. Raveendran, C. Yan, H. Su, X. Chu, T. Yang, W. Li, W. Yang, and J. Chen, Manipulating relative permittivity for high-performance wearable triboelectric nanogenerators, *Nano Lett.*, 2020, **20**, 6404-6411.
- 10 Y. Zou, J. Xu, Y. Fang, X. Zhao, Y. Zhou, J. Chen. A hand-driven portable triboelectric nanogenerator using whirligig spinning dynamics. *Nano Energy*, 2021, **83**, 105845.
- 11 J. Yin, S. Wang, A. Di Carlo, A. Chang, X. Wan, J. Xu, X. Xiao, J. Chen. Smart textiles for self-powered biomonitoring. *Med-X*, 2023, **1**, 3.
- 12 N. Sharma, X. Wan, Z. Duan, X. Xiao, J. Yin, Y. Du, J. Chen. Harvesting low-grade wind energy from highways using a triboelectric nanogenerator. *Nano Energy*, 2024, **132**, 110354.
- 13 Z. Zhou, L. Weng, T. Tat, A. Libanori, Z. Lin, L. Ge, J. Yang, J. Chen. Smart insole for robust wearable biomechanical energy harvesting in harsh environments. *ACS Nano*, **14**, 14126-14133.
- 14 G. Chen, Y. Li, M. Bick and J. Chen, Smart textiles for electricity generation, *Chem. Rev.*, 2020, **120**, 3668-3720.
- 15 Y. Zhou, W. Deng, J. Xu and J. Chen, Engineering materials at the nanoscale for triboelectric nanogenerators, *Cell Rep. Phys. Sci.* 2020, **1**, 100142.
- 16 Q. Chen, W. Akram, Y. Cao, C. Ge, T. Lin and J. Fang, Recent progress in the fabrication and processing of triboelectric yarns, *Carbon Neutral.*, 2023, **2**, 63-89.
- 17 Z. L. Wang, T. Jiang and L. Xu, Toward the blue energy dream by triboelectric nanogenerator networks, *Nano Energy*, 2017, **39**, 9-23.
- 18 W. Deng, Y. Zhou, X. Zhao, S. Zhang, Y. Zou, J. Xu, M.-H. Yeh, H. Guo, J. Chen. Ternary electrification layered architecture for high-performance triboelectric nanogenerators. *ACS Nano*, 2020, **14**, 9050-9058
- 19 B. Zhang, F. Chun, G. Chen, T. Yang, A. Libanori, K. Chen, G. Conta, D. Xiong, C. Yan, W. Yang, J. Chen. Water evaporation induced intermolecular force for nano-wrinkled polymeric membrane. *Cell Rep. Phys. Sci.*, 2021, **2**, 100441.
- 20 C. Yan, Y. Gao, S. Zhao, S. Zhang, Y. Zhou, W. Deng, Z. Li, G. Jiang, L. Jin, G. Tian, T. Yang, X. Chu, D. Xiong, Z. Wang, Y. Li, W. Yang, J. Chen. A linear-to-rotary hybrid nanogenerator for high-performance wearable biomechanical energy harvesting. *Nano Energy*, 2020, **67**, 104235
- 21 X. Zhao, H. Askari, J. Chen. Nanogenerators for smart cities in the era of 5G and Internet of Things. *Joule*, 2021, **5**, 1391-1431
- 22 Y. Zou, A. Libanori, J. Xu, A. Nashalian, J. Chen. Triboelectric nanogenerators enabled smart shoes for wearable electricity generation. *Research*, 2020, **2020**, 7158953.

- 23 X. Xiao, G. Chen, A. Libanori, J. Chen. Wearable triboelectric nanogenerators for therapeutics. *Trends Chem.*, 2021, **3**, 279-290.
- 24 S. Shen, X. Xiao, X. Xiao, J. Chen. Triboelectric nanogenerators for self-powered breath monitoring. *ACS Appl. Energy Mater.*, 2022, **5**, 3952–3965
- 25 Y. Zou, J. Xu, K. Chen and J. Chen, Advances in nanostructures for high-performance triboelectric nanogenerators, *Adv. Mater. Technol.*, 2021, **6**, 2000916.
- 26 S. Zhang, M. Bick, X. Xiao, G. Chen, A. Nashalian and J. Chen, Leveraging triboelectric nanogenerators for bioengineering, *Matter*, 2021, **4**, 845-887.
- 27 T. Tat, A. Libanori, C. Au, A. Yau and J. Chen, Advances in triboelectric nanogenerators for biomedical sensing, *Biosen. Bioelectron.*, 2021, **171**, 112714.
- 28 X. Li, T. Tat and J. Chen, Triboelectric nanogenerators for self-powered drug delivery, *Trend Chem.*, 2021, **3**, 765-778.
- 29 S. Shen, X. Xiao and J. Chen, Wearable triboelectric nanogenerators for heart rate monitoring, *Chem. Commun.*, 2021, **57**, 5871-5879.
- 30 G. Chen, C. Au and J. Chen, Textile triboelectric nanogenerators for wearable pulse wave monitoring, *Trends Biotechnol.*, 2021, **39**, 1078-1092.
- 31 J. Lama, A. Yau, G. Chen, A. Sivakumar, X. Zhao and J. Chen, Textile triboelectric nanogenerators for self-powered biomonitoring, *J. Mater. Chem. A*, 2021, **9**, 19149-19178.
- 32 Y. Su, G. Chen, C. Chen, Q. Gong, G. Xie, M. Yao, H. Tai, Y. Jiang and J. Chen, Self-powered respiration monitoring enabled by a triboelectric nanogenerator, *Adv. Mater.*, 2021, **33**, 2101262.
- 33 N. Zhang, C. Tao, X. Fan and J. Chen, Progress in triboelectric nanogenerators as self-powered smart sensors, *J. Mater. Res.*, 2017, **32**, 1628-1646.
- 34 S. Xu, F. Manshahi, X. Xiao, J. Yin and J. Chen, Triboelectric nanogenerators for self-powered neurostimulation, *Nano Res.*, 2024, **17**, 8926–8941.
- 35 X. Zhao, Y. Zhou, Y. Song, J. Xu, J. Li, T. Tat, G. Chen, S. Li and J. Chen, Permanent fluidic magnets for liquid bioelectronics, *Nat. Mater.*, 2024, **23**, 703-710.
- 36 X. Wan, T. Tat, Y. Zhou, X. Zhao and J. Chen, Building bioelectronic fibres with a light touch, *Nat. Electron.*, 2024, **7**, 521-522.
- 37 A. Libanori, G. Chen, X. Zhao, Y. Zhou and J. Chen, Smart textiles for personalized healthcare, *Nat. Electron.*, 2022, **5**, 142-156.
- 38 Y. Zhou, X. Zhao, J. Xu, Y. Fang, G. Chen, Y. Song, S. Li and J. Chen, Giant magnetoelastic effect in soft systems for bioelectronics, *Nat. Mater.*, 2021, **20**, 1670-1676.
- 39 X. Zhao, Y. Zhou, J. Xu, G. Chen, Y. Fang, T. Tat, X. Xiao, Y. Song, S. Li and J. Chen, Soft fibers with magnetoelasticity for wearable electronics, *Nat. Commun.*, 2021, **12**, 6755.
- 40 X. Xiao, X. Xiao, A. Libanori, Y. Fang, X. Li, J. Chen. Triboelectric nanogenerators for self-powered wound healing. *Adv. Healthc. Mater.*, 2021, **10**, 20, 2100975.

- 41 Y. Xiong, Z. Huo, J. Zhang, Y. Liu, D. Yue, N. Xu, R. Gu, L. Wei, L. Luo and M. Chen, Triboelectric in-sensor deep learning for self-powered gesture recognition toward multifunctional rescue tasks, *Nano Energy*, 2024, **124**, 109465.
- 42 X. Xiao, J. Yin, J. Xu, T. Tat and J. Chen, Advances in machine learning for wearable sensors, *ACS Nano*, 2024, **18**, 22734–22751.
- 43 X. Zhao, Y. Zhou, W. Kwak, A. Li, S. Wang, M. Dallenger, S. Chen, Y. Zhang, A. Lium, J. Chen. A reconfigurable and conformal liquid sensor for ambulatory cardiac monitoring. *Nat. Commun.*, 2024, **15**, 8492.
- 44 X. Zhao, Y. Zhou, A. Li, J. Xu, S. Karjagi, E. Hahm, L. Rulloda, J. Li, J. Hollister, P. Kavehpour, J. Chen. A self-filtering liquid acoustic sensor for voice recognition. *Nat. Electron.*, 2024, **7**, 924–932.
- 45 G. Chen, X. Zhao, S. Andalib, J. Xu, Y. Zhou, T. Tat, K. Lin, J. Chen. Discovering giant magnetoelasticity in soft matter for electronics textiles. *Matter*, 2021, **4**, 3725–3740.
- 46 S. Divya, S. Panda, S. Hajra, R. Jeyaraj, A. Paul, S. H. Park, H. J. Kim and T. H. Oh, Smart data processing for energy harvesting systems using artificial intelligence, *Nano Energy*, 2023, **106**, 108084.
- 47 Z. Tian, J. Li, L. Liu, H. Wu, X. Hu, M. Xie, Y. Zhu, X. Chen and W. Ou-Yang, Machine learning-assisted self-powered intelligent sensing systems based on triboelectricity, *Nano Energy*, 2023, **113**, 108559.
- 48 K. Meng, X. Xiao, W. Wei, G. Chen, A. Nashalian, S. Shen, X. Xiao, J. Chen. Wearable pressure sensors for pulse wave monitoring. *Adv. Mater.*, 2022, **34**, 2109357.
- 49 Y. C. Lai, H. W. Lu, H. M. Wu, D. Zhang, J. Yang, J. Ma, M. Shamsi, V. Vallem and M. D. Dickey, Elastic multifunctional liquid–metal fibers for harvesting mechanical and electromagnetic energy and as self-powered sensors, *Adv. Energy Mater.*, 2021, **11**, 2100411.
- 50 T. Tat, G. Chen, X. Zhao, Y. Zhou, J. Xu, J. Chen. Smart textiles for healthcare and sustainability. *ACS Nano*, 2022, **16**, 13301–13313.
- 51 X.-J. Dong, G. Meng and J.-C. Peng, Vibration control of piezoelectric smart structures based on system identification technique: Numerical simulation and experimental study, *J. Sound Vib.*, 2006, **297**, 680–693.
- 52 X.-S. Zhang, M.-D. Han, B. Meng and H.-X. Zhang, High performance triboelectric nanogenerators based on large-scale mass-fabrication technologies, *Nano Energy*, 2015, **11**, 304–322.
- 53 C. Yang, Y. Wang, S. Lan, L. Wang, W. Shen and G. Q. Huang, Cloud-edge-device collaboration mechanisms of deep learning models for smart robots in mass personalization, *Rob. Comput. Integ. Manuf.*, 2022, **77**, 102351.
- 54 J. Yin, S. Wang, T. Tat and J. Chen, Motion artefact management for soft bioelectronics, *Nat. Rev. Bioeng.*, 2024, **2**, 541–558.
- 55 N. Huyghues-Beaufond, S. Tindemans, P. Falugi, M. Sun and G. Strbac, Robust and automatic data cleansing method for short-term load forecasting of distribution feeders, *Appl. Energy*, 2020, **261**, 114405.
- 56 D. Karimi, H. Dou, S. K. Warfield and A. Gholipour, Deep learning with noisy labels: Exploring techniques and remedies in medical image analytics, *Med. Image Anal.*, 2020, **65**, 101759.

- 57 A. Mensi, D. M. Tax and M. Bicego, Detecting outliers from pairwise proximities: Proximity isolation forests, *Pattern Recog.*, 2023, **138**, 109334.
- 58 J. Yang, J. Chen, Y. Su, Q. Jing, Z. Li, F. Yi, X. Wen, Z. Wang, Z. L. Wang. Eardrum-inspired active sensors for self-powered cardiovascular system characterization and throat-attached anti-interference voice recognition. *Adv. Mater.*, 2015, **27**, 1316.
- 59 C. Avasalcui, C. Tsigkanos and S. Dustdar, Resource management for latency-sensitive IoT applications with satisfiability, *IEEE Trans. Serv. Comput.*, 2021, **15**, 2982-2993.
- 60 C. Cipriani, F. Zacccone, S. Micera and M. C. Carrozza, On the shared control of an EMG-controlled prosthetic hand: analysis of user–prosthesis interaction, *IEEE Trans. Robot.*, 2008, **24**, 170-184.
- 61 Z. Li, F. Liu, W. Yang, S. Peng and J. Zhou, A survey of convolutional neural network: Analysis, applications, and prospects, *IEEE Trans. Neural Netw. Learn. Syst.*, 2021, **33**, 6999-7019.
- 62 P. M. S. Sánchez, J. M. J. Valero, A. H. Celdrán, G. Bovet, M. G. Pérez and G. M. Pérez, A survey on device behavior fingerprinting: Data sources, techniques, application scenarios, and datasets, *IEEE Commun. Survey Tutor.*, 2021, **23**, 1048-1077.
- 63 D. Durstewitz, G. Koppe and M. I. Thurm, Reconstructing computational system dynamics from neural data with recurrent neural network, *Nat. Rev. Neuroscience*, 2023, **24**, 693-710.
- 64 A. Alnoman, G. H. Carvalho, A. Anpalagan and I. Woungang, Energy efficiency on fully cloudified mobile networks: Survey, challenges, and open issues, *IEEE Commun. Survey Tutor.*, 2017, **20**, 1271-1291.
- 65 F. J. Dian, R. Vahidnia and A. Rahmati, Wearables and the Internet of Things (IoT), applications, opportunities, and challenges: A Survey, *IEEE Access*, 2020, **8**, 69200-69211.
- 66 Y. He and L. Xiao, Structured pruning for deep convolutional neural network: A survey, *IEEE Trans. Pattern Anal. Machin. Intel.*, 2023, **46**, 2900-2919.
- 67 T. Liang, J. Glossner, L. Wang, S. Shi and X. Zhang, Pruning and quantization for deep neural network acceleration: A survey, *Neurocomputing*, 2021, **461**, 370-403.
- 68 U. Kulkarni, S. Meena, S. V. Gurlahosur and G. Bhogar, Quantization friendly mobilenet (qf-mobilenet) architecture for vision based applications on embedded platforms, *Neural Netw.*, 2021, **136**, 28-39.
- 69 S. Ishaque, N. Khan and S. Krishnan, Trends in heart-rate variability signal analysis, *Front. Digit. Health*, 2021, **3**, 639444.
- 70 N. Vinay, K. Vidyasagar, S. Rohith, P. Dayananda, S. Supreeth and S. Bharathi, An RNN-Bi LSTM based multi decision GAN approach for the recognition of cardiovascular disease (CVD) from heart beat sound: A feature optimization process, *IEEE Access*, 2024, **12**, 65482-65502.
- 71 P. Corke, T. Wark, R. Jurdak, W. Hu, P. Valencia and D. Moore, Environmental wireless sensor networks, *Proc. IEEE*, 2010, **98**, 1903-1917.
- 72 W. Mao, Z. Zhao, Z. Chang, G. Min and W. Gao, Energy-efficient industrial Internet of Things: Overview and open issues, *IEEE Trans. Indus. Informat.*, 2021, **17**, 7225-7237.
- 73 M. K. Kiptoo, M. E. Lotfy, O. B. Adewuyi, A. Conteh, A. M. Howlader and T. Senjyu, Integrated approach for optimal techno-economic planning for high renewable energy-based isolated microgrid considering cost of energy storage and demand response strategies, *Energy Conver. Manag.*, 2020, **215**, 112917.

- 74 K. S. Zaman, M. B. I. Reaz, S. H. M. Ali, A. A. A. Bakar and M. E. H. Chowdhury, Custom hardware architectures for deep learning on portable devices: a review, *IEEE Trans. Neural Netw. Learn. Syst.*, 2021, **33**, 6068-6088.
- 75 A. K. Sandhu, Big data with cloud computing: Discussions and challenges, *Big Data Min. Anal.*, 2021, **5**, 32-40.
- 76 B. Kar, W. Yahya, Y.-D. Lin and A. Ali, Offloading using traditional optimization and machine learning in federated cloud–edge–fog systems: A survey, *IEEE Commun. Survey Tutor.*, 2023, **25**, 1199-1226.
- 77 C. Wang, E. Shirzaei Sani and W. Gao, Wearable bioelectronics for chronic wound management, *Adv. Funct. Mater.*, 2022, **32**, 2111022.
- 78 T. Chen and R. Bahsoon, Self-adaptive trade-off decision making for autoscaling cloud-based services, *IEEE Trans. Serv. Comput.*, 2015, **10**, 618-632.
- 79 J. Chen and X. Ran, Deep learning with edge computing: A review, *Proc. IEEE*, 2019, **107**, 1655-1674.
- 80 I. F. Akyildiz, D. M. Gutierrez-Estevez, R. Balakrishnan and E. Chavarria-Reyes, LTE-advanced and the evolution to beyond 4G (B4G) systems, *Phys. Commun.*, 2014, **10**, 31-60.
- 81 P. Cong, J. Zhou, L. Li, K. Cao, T. Wei and K. Li, A survey of hierarchical energy optimization for mobile edge computing: A perspective from end devices to the cloud, *ACM Comput. Survey.*, 2020, **53**, 1-44.
- 82 J. Xu, J. Yin, Y. Fang, X. Xiao, Y. Zou, S. Wang and J. Chen, Deep learning assisted ternary electrification layered triboelectric membrane sensor for self-powered home security, *Nano Energy*, 2023, **113**, 108524.
- 83 Z. Zhou, S. Padgett, Z. Cai, G. Conta, Y. Wu, Q. He, S. Zhang, C. Sun, J. Liu and E. Fan, Single-layered ultra-soft washable smart textiles for all-around ballistocardiograph, respiration, and posture monitoring during sleep, *Biosen. Bioelectron.*, 2020, **155**, 112064.
- 84 Y. Su, T. Yang, X. Zhao, Z. Cai, G. Chen, M. Yao, K. Chen, M. Bick, J. Wang and S. Li, A wireless energy transmission enabled wearable active acetone biosensor for non-invasive prediabetes diagnosis, *Nano Energy*, 2020, **74**, 104941.
- 85 Y. Su, J. Wang, B. Wang, T. Yang, B. Yang, G. Xie, Y. Zhou, S. Zhang, H. Tai and Z. Cai, Alveolus-inspired active membrane sensors for self-powered wearable chemical sensing and breath analysis, *ACS Nano*, 2020, **14**, 6067-6075.
- 86 Q. Xu, Y. Fang, Q. Jing, N. Hu, K. Lin, Y. Pan, L. Xu, H. Gao, M. Yuan and L. Chu, A portable triboelectric spirometer for wireless pulmonary function monitoring, *Biosen. Bioelectron.*, 2021, **187**, 113329.
- 87 Z. Lin, G. Zhang, X. Xiao, C. Au, Y. Zhou, C. Sun, Z. Zhou, R. Yan, E. Fan and S. Si, A personalized acoustic interface for wearable human–machine interaction, *Adv. Funct. Mater.*, 2022, **32**, 2109430.
- 88 Y. Fang, Y. Zou, J. Xu, G. Chen, Y. Zhou, W. Deng, X. Zhao, M. Roustaei, T. K. Hsiai and J. Chen, Ambulatory cardiovascular monitoring via a machine-learning-assisted textile triboelectric sensor, *Adv. Mater.*, 2021, **33**, 2104178.
- 89 Y. Fang, J. Xu, X. Xiao, Y. Zou, X. Zhao, Y. Zhou and J. Chen, A deep-learning-assisted on-mask sensor network for adaptive respiratory monitoring, *Adv. Mater.*, 2022, **34**, 2200252.

- 90 J. Yin, V. Kashyap, S. Wang, X. Xiao, T. Tat and J. Chen, Self-powered eye-computer interaction via a triboelectric nanogenerator, *Device*, 2024, **2**, 100252.
- 91 X. Wang, X. Xiao, Z. Feng, Y. Wu, J. Yang and J. Chen, A soft bioelectronic patch for simultaneous respiratory and cardiovascular monitoring, *Adv. Healthc. Mater.*, 2024, **13**, 2303479.
- 92 X. Xiao, Y. Zhou, J. Yin, X. Zhao and J. Chen, In-ear electrophysicochemical sensing, *Nat. Biomed. Eng.*, 2023, **7**, 1207–1209.
- 93 H. Cui, S. Zhao and G. Hong, Wireless deep-brain neuromodulation using photovoltaics in the second near-infrared spectrum, *Device*, 2023, **1**, 100113.
- 94 Y. Y. Chang Gu, Jiale He, Donglin Pu, Linsen Chen, Yu-Mo Zhang, Sean Xiao-An Zhang, Transparent and energy-efficient electrochromic AR display with minimum crosstalk using the pixel confinement effect, *Device*, 2023, **1**, 100126.
- 95 L. Shan, H. Zeng, Y. Liu, X. Zhang, E. Li, R. Yu, Y. Hu, T. Guo and H. Chen, Artificial tactile sensing system with photoelectric output for high accuracy haptic texture recognition and parallel information processing, *Nano Lett.*, 2022, **22**, 7275–7283.
- 96 P. Zhang, W. Li, C. Liu, F. Qin, Y. Lu, M. Qin and Y. Hou, Molecular imaging of tumour-associated pathological biomarkers with smart nanoprobe: From “seeing” to “measuring”, *Exploration*, 2023, **3**, 20230070.
- 97 A. G. Yearley, R. V. Patel, S. E. Blitz, S. Park, A. M. Madinger, J. Li, B. R. Johnston, P. P. Peruzzi, S. Lee and S. S. Srinivasan, Implantable microdevices for treating brain tumors, *Device*, 2023, **1**, 100068.
- 98 M. Brennan, Wearable technology is a proving ground for device engineering and design, *Device*, 2023, **1**, 100096.
- 99 P. K. Mallapragada, R. Jin, A. K. Jain and Y. Liu, Semiboost: Boosting for semi-supervised learning, *IEEE Trans. Pattern Anal. Machin. Intel.*, 2008, **31**, 2000–2014.
- 100 S. B. Kotsiantis, I. D. Zaharakis and P. E. Pintelas, Machine learning: a review of classification and combining techniques, *Artif. Intel. Rev.*, 2006, **26**, 159–190.
- 101 F. Melgani and L. Bruzzone, Classification of hyperspectral remote sensing images with support vector machines, *IEEE Trans. Geosci. Rem. Sen.*, 2004, **42**, 1778–1790.
- 102 M. Pal and P. M. Mather, An assessment of the effectiveness of decision tree methods for land cover classification, *Rem. Sen. Environ.*, 2003, **86**, 554–565.
- 103 M. Khashei, A. Z. Hamadani and M. Bijari, A novel hybrid classification model of artificial neural network and multiple linear regression models, *Exper. Syst. Appl.*, 2012, **39**, 2606–2620.
- 104 S. Zhao, B. Zhang, J. Yang, J. Zhou and Y. Xu, Linear discriminant analysis, *Nat. Rev. Methods Primers*, 2024, **4**, 70.
- 105 L. Xiong and Y. Yao, Study on an adaptive thermal comfort model with K-nearest-neighbors (KNN) algorithm, *Build. Environ.*, 2021, **202**, 108026.
- 106 J. Piskozub and P. Strumillo, Reducing the number of sensors in the data glove for recognition of static hand gestures, *Appl. Sci.*, 2022, **12**, 7388.
- 107 H. Guo, J. Wan, H. Wang, H. Wu, C. Xu, L. Miao, M. Han and H. Zhang, Self-powered intelligent human-machine interaction for handwriting recognition, *Research*, 2021, **2021**, 4689869

- 108 Y. Liu, Y. Shen, W. Ding, X. Zhang, W. Tian, S. Yang, B. Hui and K. Zhang, All-natural phyllosilicate-polysaccharide triboelectric sensor for machine learning-assisted human motion prediction, *npj Flex. Electron.*, 2023, **7**, 21.
- 109 Z. Zhou, K. Chen, X. Li, S. Zhang, Y. Wu, Y. Zhou, K. Meng, C. Sun, Q. He and W. Fan, Sign-to-speech translation using machine-learning-assisted stretchable sensor arrays, *Nat. Electron.*, 2020, **3**, 571-578.
- 110 T. Kattenborn, J. Leitloff, F. Schiefer and S. Hinz, Review on convolutional neural network (CNN) in vegetation remote sensing, *ISPRS J. Photogram. Remot. Sens.*, 2021, **173**, 24-49.
- 111 A. Sherstinsky, Fundamentals of recurrent neural network (RNN) and long short-term memory (LSTM) network, *Physica D: Nonlinear Phenomena*, 2020, **404**, 132306.
- 112 W. Zhang, H. Yang, L. Li, S. Lin, P. Ji, C. Hu, D. Zhang and Y. Xi, Flexible piezoelectric nanogenerators based on a CdS nanowall for self-powered sensors, *Nanotechnology*, 2020, **31**, 385401.
- 113 G. Armeniakos, G. Zervakis, D. Soudris and J. Henkel, Hardware approximate techniques for deep neural network accelerators: A survey, *ACM Comput. Survey.*, 2022, **55**, 1-36.
- 114 Y. Lu, H. Tian, J. Cheng, F. Zhu, B. Liu, S. Wei, L. Ji and Z. L. Wang, Decoding lip language using triboelectric sensors with deep learning, *Nat. Commun.*, 2022, **13**, 1401.
- 115 R. Yuan, A. Kumar, S. Zhuang, N. Cucciniello, T. Lu, D. Xue, A. Penn, A. R. Mazza, Q. Jia and Y. Liu, Machine learning-enabled superior energy storage in ferroelectric films with a slush-like polar state, *Nano Lett.*, 2023, **23**, 4807-4814.
- 116 K. K. Chan, L.-W. Shang, Z. Qiao, Y. Liao, M. Kim and Y.-C. Chen, Monitoring Amyloidogenesis with a 3D Deep-Learning-Guided Biolaser Imaging Array, *Nano Lett.*, 2022, **22**, 8949-8956.
- 117 J. Zhang, Y. Yu, L. Zhang, J. Chen, X. Wang and X. Wang, Dig information of nanogenerators by machine learning, *Nano Energy*, 2023, 108656.
- 118 S. Xiang, G. Chen, Q. Wen, H. Li, X. Luo, J. Zhong, S. Shen, A. Di Carlo, X. Fan and J. Chen, Fully addressable textile sensor array for self-powered haptic interfacing, *Matter*, 2024, **7**, 82-94.
- 119 G. Chen, X. Xiao, X. Zhao, T. Tat, M. Bick and J. Chen, Electronic textiles for wearable point-of-care systems, *Chem. Rev.*, 2021, **122**, 3259-3291.
- 120 Y. Fang, G. Chen, M. Bick and J. Chen, Smart textiles for personalized thermoregulation, *Chem. Soc. Rev.*, 2021, **50**, 9357-9374.
- 121 X. Xiao, X. Xiao, Y. Zhou, X. Zhao, G. Chen, Z. Liu, Z. Wang, C. Lu, M. Hu and A. Nashalian, An ultrathin rechargeable solid-state zinc ion fiber battery for electronic textiles, *Sci. Adv.*, 2021, **7**, eabl3742.
- 122 P. Maharjan, K. Shrestha, T. Bhatta, H. Cho, C. Park, M. Salauddin, M. T. Rahman, S. S. Rana, S. Lee and J. Y. Park, Keystroke dynamics based hybrid nanogenerators for biometric authentication and identification using artificial intelligence, *Adv. Sci.*, 2021, **8**, 2100711.
- 123 X. Ji, T. Zhao, X. Zhao, X. Lu and T. Li, Triboelectric nanogenerator based smart electronics via machine learning, *Adv. Mater. Technol.*, 2020, **5**, 1900921.
- 124 F. Wang, A. Eljarrat, J. Müller, T. R. Henninen, R. Erni and C. T. Koch, Multi-resolution convolutional neural networks for inverse problems, *Sci. Rep.*, 2020, **10**, 5730.

- 125 Y. Yang, Q. Shi, Z. Zhang, X. Shan, B. Salam and C. Lee, Robust triboelectric information-mat enhanced by multi-modality deep learning for smart home, *InfoMat*, 2023, **5**, e12360.
- 126 S. Wu, H. Kan, J. Gao, W. Yue, C. Zhang, S. Gao and Y. Li, Convolutional neural network-motivated high-performance multi-functional electronic skin for intelligent human-computer interaction, *Nano Energy*, 2024, **122**, 109313.
- 127 K. Tao, J. Yu, J. Zhang, A. Bao, H. Hu, T. Ye, Q. Ding, Y. Wang, H. Lin and J. Wu, Deep-learning enabled active biomimetic multifunctional hydrogel electronic skin, *ACS Nano*, 2023, **17**, 16160-16173.
- 128 Y. Zhou, X. Zhao, J. Xu, G. Chen, T. Tat, J. Li and J. Chen, A multimodal magnetoelastic artificial skin for underwater haptic sensing, *Sci. Adv.*, 2024, **10**, eadj8567.
- 129 S. M. Xu, Farid; Chen, Guorui; Chen, Jun, Reversible metal–ligand coordination for photocontrolled metallopolymer adhesives, *Chem*, 2024, **10**, 1638-1640.
- 130 S. Xu, K. Scott and J. Chen, A bioinspired three-dimensionally architected electronic skin, *Device*, 2024, **2**, 100462.
- 131 P. Guo, J. Zhang, H. Pu, B. Yang, C. Huang, T. Sun, L. Li, X. Liu, Z. Guo and Y. Wu, Wafer-scale photolithographic fabrication of organic synaptic transistor arrays, *Device*, 2024, **2**, 100409.
- 132 D. Gao, J. P. Lee, J. Chen, L. S. Tay, Y. Xin, K. Parida, M. W. M. Tan, P. Huang, K. H. Kong and P. S. Lee, A wearable pneumatic-piezoelectric system for quantitative assessment of skeletomuscular biomechanics, *Device*, 2024, **2**, 100288.
- 133 M. Li, W. Li, Q. Guan, J. Lv, Z. Wang, L. Ding, C. Li, E. Saiz and X. Hou, Sweat-resistant bioelectronic skin sensor, *Device*, 2023, **1**, 100006.
- 134 Y. Chen, Z. Gao, F. Zhang, Z. Wen and X. Sun, Recent progress in self-powered multifunctional e-skin for advanced applications, *Exploration*, 2022, **2**, 20210112.
- 135 D. Wang, X.-B. Li and H.-B. Sun, Modulation doping: a strategy for 2D materials electronics, *Nano Letters*, 2021, **21**, 6298-6303.
- 136 S. Sundaram, P. Kellnhofer, Y. Li, J.-Y. Zhu, A. Torralba and W. Matusik, Learning the signatures of the human grasp using a scalable tactile glove, *Nature*, 2019, **569**, 698-702.
- 137 X. Zhong, P. Sun, R. Wei, H. Dong and S. Jiang, Object recognition by a heat-resistant core-sheath triboelectric nanogenerator sensor, *J. Mater. Chem. A*, 2022, **10**, 15080-15088.
- 138 T. Jin, Z. Sun, L. Li, Q. Zhang, M. Zhu, Z. Zhang, G. Yuan, T. Chen, Y. Tian and X. Hou, Triboelectric nanogenerator sensors for soft robotics aiming at digital twin applications, *Nat. Commun.*, 2020, **11**, 5381.
- 139 R. Li, D. Wei and Z. Wang, Synergizing Machine Learning Algorithm with Triboelectric Nanogenerators for Advanced Self-Powered Sensing Systems, *Nanomaterials*, 2024, **14**, 165.
- 140 T. Zhan, H. Zou, H. Zhang, P. He, Z. Liu, J. Chen, M. He, Y. Zhang and Z. L. Wang, Smart liquid-piston based triboelectric nanogenerator sensor for real-time monitoring of fluid status, *Nano Energy*, 2023, **111**, 108419.
- 141 D. Wang, D. Zhang, X. Chen, H. Zhang, M. Tang and J. Wang, Multifunctional respiration-driven triboelectric nanogenerator for self-powered detection of formaldehyde in exhaled gas and respiratory behavior, *Nano Energy*, 2022, **102**, 107711.

- 142 J. Tian, F. Wang, Y. Ding, R. Lei, Y. Shi, X. Tao, S. Li, Y. Yang and X. Chen, Self-powered room-temperature ethanol sensor based on brush-shaped triboelectric nanogenerator, *Research*, 2021, **2021**, 8564780.
- 143 Y. Liu, W. Yang, Y. Yan, X. Wu, X. Wang, Y. Zhou, Y. Hu, H. Chen and T. Guo, Self-powered high-sensitivity sensory memory actuated by triboelectric sensory receptor for real-time neuromorphic computing, *Nano Energy*, 2020, **75**, 104930.
- 144 S. P. Padhy and S. V. Kalinin, Domain hyper-languages bring robots together and enable the machine learning community, *Device*, 2023, **1**, 100115.
- 145 T. He, H. Mao and Z. Yi, Subtraction gates: Another way to learn long-term dependencies in recurrent neural network, *IEEE Trans. Neural Netw. Learn. Syst.*, 2020, **33**, 1740-1751.
- 146 J. Li, Z. Xie, Z. Wang, Z. Lin, C. Lu, Z. Zhao, Y. Jin, J. Yin, S. Mu and C. Zhang, A triboelectric gait sensor system for human activity recognition and user identification, *Nano Energy*, 2023, **112**, 108473.
- 147 H. Zhang, H. Tan, W. Wang, Z. Li, F. Chen, X. Jiang, X. Lu, Y. Hu, L. Li and J. Zhang, Real-time non-driving behavior recognition using deep learning-assisted triboelectric sensors in conditionally automated driving, *Adv. Funct. Mater.*, 2023, **33**, 2210580.
- 148 L. Zhao, S. Y. Wong, J. Y. Sim, J. Zhou, X. Li and C. Wang, Triboelectric nanogenerators and piezoelectric nanogenerators for preventing and treating heart diseases, *BMEMat*, 2023, **1**, e12020.
- 149 S. Xu, Farid. Manshahi and J. Chen, Multiphasic interfaces enabled aero-elastic capacitive pressure sensor, *Matter*, 2024, **7**, 2351-2354.
- 150 S. Xu, K. Scott, F. Manshahi and J. Chen, Heart-brain connection: How can heartbeats shape our minds?, *Matter*, 2024, **7**, 1684-1687.
- 151 Q. Zhang, T. Jin, J. Cai, L. Xu, T. He, T. Wang, Y. Tian, L. Li, Y. Peng and C. Lee, Wearable triboelectric sensors enabled gait analysis and waist motion capture for IoT-based smart healthcare applications, *Adv. Sci.*, 2022, **9**, 2103694.
- 152 P. Munirathinam, A. A. Mathew, V. Shanmugasundaram, V. Vivekananthan, Y. Purusothaman, S.-J. Kim and A. Chandrasekhar, A comprehensive review on triboelectric nanogenerators based on Real-Time applications in energy harvesting and Self-Powered sensing, *Mater. Sci. Eng. B*, 2023, **297**, 116762.
- 153 T. Wang, Z. Song, X. Zhao, Y. Wu, L. Wu, A. Haghparast and H. Wu, Spatial transcriptomic analysis of the mouse brain following chronic social defeat stress, *Exploration*, 2023, **3**, 20220133.
- 154 J.-S. Lim, H. J. Kim, I. Park, S. Woo, J.-H. Kim and J. W. Park, Force mapping reveals the spatial distribution of individual proteins in a neuron, *Nano Lett.*, 2022, **22**, 3865-3871.
- 155 J. Wang, X. Zhuge and F. Zhuge, Hybrid oxide brain-inspired neuromorphic devices for hardware implementation of artificial intelligence, *Sci. Technol. Adv. Mater.*, 2021, **22**, 326-344.
- 156 Q.-L. Goh, P.-S. Chee, E.-H. Lim and D. W.-K. Ng, An AI-assisted and self-powered smart robotic gripper based on eco-again nanocomposite for pick-and-place operation, *Nanomaterials*, 2022, **12**, 1317.
- 157 G. Ye, Y. Wan, J. Wu, W. Zhuang, Z. Zhou, T. Jin, J. Zi, D. Zhang, X. Geng and P. Yang, Multifunctional device integrating dual-temperature regulator for outdoor personal thermal comfort and triboelectric nanogenerator for self-powered human-machine interaction, *Nano Energy*, 2022, **97**, 107148.

- 158 X. Hou, L. Zhang, Y. Su, G. Gao, Y. Liu, Z. Na, Q. Xu, T. Ding, L. Xiao and L. Li, A space crawling robotic bio-paw (SCRBP) enabled by triboelectric sensors for surface identification, *Nano Energy*, 2023, **105**, 108013.
- 159 J. Huang, S. Wang, X. Zhao, W. Zhang, Z. Chen, R. Liu, P. Li, H. Li and C. Gui, Fabrication of a textile-based triboelectric nanogenerator toward high-efficiency energy harvesting and material recognition, *Mater. Horiz.*, 2023, **10**, 3840-3853.
- 160 J. Guo, Y. Liu, L. Lin, S. Li, J. Cai, J. Chen, W. Huang, Y. Lin and J. Xu, Chromatic plasmonic polarizer-based synapse for all-optical convolutional neural network, *Nano Lett.*, 2023, **23**, 9651–9656.
- 161 F. Zhuang, Z. Qi, K. Duan, D. Xi, Y. Zhu, H. Zhu, H. Xiong and Q. He, A comprehensive survey on transfer learning, *Proc. IEEE*, 2020, **109**, 43-76.
- 162 A. Raza, K. P. Tran, L. Koehl and S. Li, Designing ECG monitoring healthcare system with federated transfer learning and explainable AI, *Knowl. Based Syst.*, 2022, **236**, 107763.
- 163 H. Abbas, F. Garberson, S. Liu-Mayo, E. Glover and D. P. Wall, Multi-modular AI approach to streamline autism diagnosis in young children, *Sci. Rep.*, 2020, **10**, 5014.
- 164 J. Wang, C. Xu, J. Zhang and R. Zhong, Big data analytics for intelligent manufacture systems: A review, *J. Manuf. Syst.*, 2022, **62**, 738-752.
- 165 Y. Zhou, X. Xiao, G. Chen, X. Zhao and J. Chen, Self-powered sensing technologies for human Metaverse interfacing, *Joule*, 2022, **6**, 1381-1389.
- 166 A. O. Ige and M. Sibiya, State-of-the-art in 1D convolutional neural network: A survey, *IEEE Access*, 2024.
- 167 M. Meribout, N. A. Takele, O. Derege, N. Rifiki, M. El Khalil, V. Tiwari and J. Zhong, Tactile sensors: A review, *Measurement*, 2024, **238**, 115332.
- 168 H. Wu, X. Ma and Y. Li, Spatiotemporal multimodal learning with 3D CNNs for video action recognition, *IEEE Trans. Cir. Syst. Video Technol.*, 2021, **32**, 1250-1261.
- 169 Z. Hu, L. Lin, W. Lin, Y. Xu, X. Xia, Z. Peng, Z. Sun and Z. Wang, Machine learning for tactile perception: advancements, challenges, and opportunities, *Adv. Intel. Syst.*, 2023, **5**, 2200371.
- 170 M. Alameh, Y. Abbass, A. Ibrahim, G. Moser and M. Valle, Touch modality classification using recurrent neural network, *IEEE Sen. J.* 2021, **21**, 9983-9993.
- 171 J. Park, Y. Lee, S. Cho, A. Choe, J. Yeom, Y. G. Ro, J. Kim, D.-h. Kang, S. Lee and H. Ko, Soft sensors and actuators for wearable human-machine interfaces, *Chem. Rev.*, 2024, **124**, 1464–1534.
- 172 L. Chen, C. Wen, S.-L. Zhang, Z. L. Wang and Z.-B. Zhang, Artificial tactile peripheral nervous system supported by self-powered transducers, *Nano Energy*, 2021, **82**, 105680.
- 173 C. Wan, M. Pei, K. Shi, H. Cui, H. Long, L. Qiao, Q. Xing and Q. Wan, Toward a brain-neuromorphics interface, *Adv. Mater.*, 2024, **36**, 2311288.
- 174 R. K. Rajaboina, U. K. Khanapuram, V. Vivekananthan, G. Khandelwal, S. Potu, A. Babu, N. Madathil, M. Velpula and P. Kodali, Crystalline porous material-based nanogenerators: Recent progress, applications, challenges, and opportunities, *Small*, 2024, **20**, 2306209.
- 175 E. Elsanadidy, I. M. Mosa, D. Luo, X. Xiao, J. Chen, Z. L. Wang and J. F. Rusling, Advances in triboelectric nanogenerators for self-powered neuromodulation, *Adv. Funct. Mater.*, 2023, **33**, 2211177.

- 176 J. Chen, Z. L. Wang. Reviving vibration energy harvesting and self-powered sensing by a triboelectric nanogenerator. *Joule*, 2017, **1**, 480.
- 177 Z. L. Wang, J. Chen, L. Lin. Progress in triboelectric nanogenerators as a new energy technology and self-powered sensors. *Energy Environ. Sci.* 2015, **8**, 2250.
- 178 G. Zhu, J. Chen, T. Zhang, Q. Jing, Z. L. Wang. Radial-arrayed rotary electrification for high performance triboelectric generator. *Nat. Commun.*, 2014, **5**, 3426.
- 179 N. Zhang, F. Huang, S. Zhao, X. Lv, Y. Zhou, S. Xiang, S. Xu, Y. Li, G. Chen and C. Tao, Photo-rechargeable fabrics as sustainable and robust power sources for wearable bioelectronics, *Matter*, 2020, **2**, 1260-1269.
- 180 Y. Zhou, X. Zhao, Y. Song, J. Xu, J. Li, T. Tat, G. Chen, S. Li, J. Chen, Permanent Fluidic Magnets for Liquid Bioelectronics., *Nat. Mater.*, 2024, **23**, 703–710.
- 181 W. Yang, T. Chen, L. Xie, Y. Yu, M. Long and L. Xu, A systematic study of switching, optoelectronics, and gas-sensitive properties of PCF-graphene-based nanodevices: Insights from DFT study, *Carbon Neutral.*, 2024, **3**, cnl2.156.
- 182 S. Xu, G. Chen, K. Scott, F. Manshahi and J. Chen, Soft electrochemical actuators for intraoperative nerve activity monitoring *Matter*, 2024, **7**, 2795-2797.
- 183 M. P. Mahmud, T. Tat, X. Xiao, P. Adhikary and J. Chen, Advances in 4D-printed physiological monitoring sensors, *Exploration*, 2021, **1**, 20210033.
- 184 R. Ghanim, A. Kaushik, J. Park and A. Abramson, Communication protocols integrating wearables, ingestibles, and implantables for closed-loop therapies, *Device*, 2023, **1**, 100092.
- 185 Z. Dai, M. Lei, S. Ding, Q. Zhou, B. Ji, M. Wang and B. Zhou, Durable superhydrophobic surface in wearable sensors: From nature to application, *Exploration*, 2023, **4**, 20230046.
- 186 B. Luo, Q. Zhou, W. Chen, L. Sun, L. Yang, Y. Guo, H. Liu, Z. Wu, R. E. Neisiany and X. Qin, Nonadjacent wireless electrotherapy for tissue repair by a 3D-printed bioresorbable fully soft triboelectric nanogenerator, *Nano Lett.*, 2023, **23**, 2927-2937.
- 187 J. Yun, N. Jayababu and D. Kim, Self-powered transparent and flexible touchpad based on triboelectricity towards artificial intelligence, *Nano Energy*, 2020, **78**, 105325.
- 188 R. Mao, D. Zhang, Z. Wang, H. Zhang, D. Wang, M. Tang, L. Zhou, H. Cai and H. Xia, Deep-learning-assisted low-cost flexible cotton yarn-based triboelectric nanogenerator for ultra-sensitive human-computer merging interfaces, *Nano Energy*, 2023, **111**, 108418.
- 189 H. Fang, L. Wang, Z. Fu, L. Xu, W. Guo, J. Huang, Z. L. Wang and H. Wu, Anatomically designed triboelectric wristbands with adaptive accelerated learning for human-machine interfaces, *Adv. Sci.*, 2023, **10**, 2205960.
- 190 A. de Souza Brito, M. B. Vieira, M. L. S. C. De Andrade, R. Q. Feitosa and G. A. Giralddi, Combining max-pooling and wavelet pooling strategies for semantic image segmentation, *Exper. Syst. Appl.*, 2021, **183**, 115403.
- 191 B. Shi, A. Tay, W. L. Au, D. M. Tan, N. S. Chia and S.-C. Yen, Detection of freezing of gait using convolutional neural network and data from lower limb motion sensors, *IEEE Trans. Biomed. Eng.*, 2022, **69**, 2256-2267.

- 192 N. Sadeghzadehyazdi, T. Batabyal and S. T. Acton, Modeling spatiotemporal patterns of gait anomaly with a CNN-LSTM deep neural network, *Exper. Syst. Appl.*, 2021, **185**, 115582.
- 193 Z. Ye and J. Yu, AKSNet: A novel convolutional neural network with adaptive kernel width and sparse regularization for machinery fault diagnosis, *J. Manuf. Syst.*, 2021, **59**, 467-480.
- 194 N. T. Beigh, F. T. Beigh and D. Mallick, Machine learning assisted hybrid transduction nanocomposite based flexible pressure sensor matrix for human gait analysis, *Nano Energy*, 2023, **116**, 108824.
- 195 Z. Zhang, T. He, M. Zhu, Z. Sun, Q. Shi, J. Zhu, B. Dong, M. R. Yuce and C. Lee, Deep learning-enabled triboelectric smart socks for IoT-based gait analysis and VR applications, *npj Flex. Electron.*, 2020, **4**, 29.
- 196 H. Ullah, K. Muhammad, M. Irfan, S. Anwar, M. Sajjad, A. S. Imran and V. H. C. de Albuquerque, light-DehazeNet: a novel lightweight CNN architecture for single image dehazing, *IEEE Trans. Image Proc.*, 2021, **30**, 8968-8982.
- 197 I. Galić, M. Habijan, H. Leventić and K. Romić, Machine learning empowering personalized medicine: A comprehensive review of medical image analysis methods, *Electronics*, 2023, **12**, 4411.
- 198 L. Dipietro, U. Eden, S. Elkin-Frankston, M. M. El-Hagrassy, D. D. Camsari, C. Ramos-Estebanez, F. Fregni and T. Wagner, Integrating Big Data, Artificial intelligence, and motion analysis for emerging precision medicine applications in Parkinson's Disease, *J. Big Data*, 2024, **11**, 155.
- 199 Y. Kavva and S. S. Reka, Abnormal gait classification in children with cerebral palsy using convLSTM hybrid model and GAN, *IEEE Access*, 2024, **12**, 117721-117736
- 200 M. Panwar, D. Biswas, H. Bajaj, M. Jöbges, R. Turk, K. Maharatna and A. Acharyya, Rehab-net: Deep learning framework for arm movement classification using wearable sensors for stroke rehabilitation, *IEEE Trans. Biomed. Eng.*, 2019, **66**, 3026-3037.
- 201 L. Balcombe and D. De Leo, Psychological screening and tracking of athletes and digital mental health solutions in a hybrid model of care: mini review, *JMIR Format. Res.*, 2020, **4**, e22755.
- 202 C. Wu, W. Ding, R. Liu, J. Wang, A. C. Wang, J. Wang, S. Li, Y. Zi and Z. L. Wang, Keystroke dynamics enabled authentication and identification using triboelectric nanogenerator array, *Mater. Today*, 2018, **21**, 216-222.
- 203 P. Ray, S. S. Reddy and T. Banerjee, Various dimension reduction techniques for high dimensional data analysis: a review, *Artif. Intel. Rev.*, 2021, **54**, 3473-3515.
- 204 H. Askari, N. Xu, B. H. G. Barbosa, Y. Huang, L. Chen, A. Khajepour, H. Chen and Z. L. Wang, Intelligent systems using triboelectric, piezoelectric, and pyroelectric nanogenerators, *Mater. Today*, 2022, **52**, 188-206.
- 205 L. Zhang, F. Xue, W. Du, C. Han, C. Zhang and Z. Wang, Transparent paper-based triboelectric nanogenerator as a page mark and anti-theft sensor, *Nano Res.*, 2014, **7**, 1215-1223.
- 206 J. Basak and R. Krishnapuram, Interpretable hierarchical clustering by constructing an unsupervised decision tree, *IEEE Trans. Know. Data Eng.*, 2005, **17**, 121-132.
- 207 W. Zhang, L. Deng, L. Yang, P. Yang, D. Diao, P. Wang and Z. L. Wang, Multilanguage-handwriting self-powered recognition based on triboelectric nanogenerator enabled machine learning, *Nano Energy*, 2020, **77**, 105174.

- 208 G. T. Reddy, M. P. K. Reddy, K. Lakshmana, R. Kaluri, D. S. Rajput, G. Srivastava and T. Baker, Analysis of dimensionality reduction techniques on big data, *IEEE Access*, 2020, **8**, 54776-54788.
- 209 J. Y. Kwon, J. E. Kim, J. S. Kim, S. Y. Chun, K. Soh and J. H. Yoon, Artificial sensory system based on memristive devices, *Exploration*, 2023, 20220162.
- 210 L. Wang, W. Ye, Y. Zhu, F. Yang and Y. Zhou, Optimal parameters selection of back propagation algorithm in the feedforward neural network, *Eng. Anal. Boundar. Elem.s*, 2023, **151**, 575-596.
- 211 Z. Wang, J. An, J. Nie, J. Luo, J. Shao, T. Jiang, B. Chen, W. Tang and Z. L. Wang, A self-powered angle sensor at nanoradian-resolution for robotic arms and personalized medicare, *Adv. Mater.*, 2020, **32**, 2001466.
- 212 W. Qiao, L. Zhou, Z. Zhao, D. Liu, S. Li, J. An, X. Li, Y. Gao, P. Yang and J. Liu, A self-powered vector motion sensor for smart robotics and personalized medical rehabilitation, *Nano Energy*, 2022, **104**, 107936.
- 213 M. Han, H. Wang, Y. Yang, C. Liang, W. Bai, Z. Yan, H. Li, Y. Xue, X. Wang and B. Akar, Three-dimensional piezoelectric polymer microsystems for vibrational energy harvesting, robotic interfaces and biomedical implants, *Nat. Electron.*, 2019, **2**, 26-35.
- 214 S. Chun, W. Son, H. Kim, S. K. Lim, C. Pang and C. Choi, Self-powered pressure-and vibration-sensitive tactile sensors for learning technique-based neural finger skin, *Nano Lett.*, 2019, **19**, 3305-3312.
- 215 Y. Liu, E. Li, X. Wang, Q. Chen, Y. Zhou, Y. Hu, G. Chen, H. Chen and T. Guo, Self-powered artificial auditory pathway for intelligent neuromorphic computing and sound detection, *Nano Energy*, 2020, **78**, 105403.
- 216 H. S. Lee, J. Chung, G. T. Hwang, C. K. Jeong, Y. Jung, J. H. Kwak, H. Kang, M. Byun, W. D. Kim and S. Hur, Flexible inorganic piezoelectric acoustic nanosensors for biomimetic artificial hair cells, *Adv. Funct. Mater.*, 2014, **24**, 6914-6921.
- 217 S. Chen, F. Manshahi, X. Fan, Z. Duan, X. Zhao, Y. Zhou and J. Chen, Creating breathable wearable bioelectronics using three-dimensional liquid diodes, *Matter*, 2024, **7**, 2632-2635.
- 218 J. Xu, T. Tat, J. Yin, D. Ngo, X. Zhao, X. Wan, Z. Che, K. Chen, L. Harris and J. Chen, A textile magnetoelastic patch for self-powered personalized muscle physiotherapy, *Matter*, 2023, **6**, 2235-2247.
- 219 S. Xu, X. Xiao and J. Chen, Stretchable fiber strain sensors for wearable biomonitoring, *Nat. Sci. Rev.*, 2024, **11**, nwae173.
- 220 W. Kwak, J. Yin, S. Wang and J. Chen, Advances in triboelectric nanogenerators for self-powered wearable respiratory monitoring, *FlexMat*, 2024, **1**, 5-22.
- 221 V. Kashyap, J. Yin, X. Xiao and J. Chen, Bioinspired nanomaterials for wearable sensing and human-machine interfacing, *Nano Res.*, 2024, **17**, 445-461.
- 222 Z. Che, X. Wan, J. Xu, C. Duan, T. Zheng and J. Chen, Speaking without vocal folds using a machine-learning-assisted wearable sensing-actuation system, *Nat. Commun.*, 2024, **15**, 1873.
- 223 V. Kashyap, J. Yin, X. Xiao and J. Chen, Bioinspired nanomaterials for wearable sensing and human-machine interfacing, *Nano Res.*, 2023, **17**, 445-461.
- 224 T. Tat, X. Zhao and J. Chen, Leveraging fluidic programming for pneumatic haptic textiles, *Device*, 2023, **1**, 100094.

- 225 H. Qin, Y. Yan, Q. Feng, H. Liu, H.-P. Cong and S.-H. Yu, Rapid printing and patterning of tough, self-healable, and recyclable hydrogel thin-films toward flexible sensing devices, *Nano Lett.*, 2022, **22**, 8101-8108.
- 226 S. Xu, S. Ahmed, M. Momin, A. Hossain and T. Zhou, Unleashing the potential of 3D printing soft materials, *Device*, 2023, **1**, 100067.
- 227 K. Xu, Q. a. Li, Y. Lu, H. Luo, Y. Jian, D. Li, D. Kong, R. Wang, J. Tan and Z. Cai, Laser direct writing of flexible thermal flow sensors, *Nano Lett.*, 2023, **23**, 10317-10325.
- 228 Z. Dai, M. Lei, S. Ding, Q. Zhou, B. Ji, M. Wang and B. Zhou, Durable superhydrophobic surface in wearable sensors: From nature to application, *Exploration*, 2024, **4**, 20230046.
- 229 P. Cheng, S. Dai, Y. Liu, Y. Li, H. Hayashi, R. Papani, Q. Su, N. Li, Y. Dai and W. Liu, An intrinsically stretchable power-source system for bioelectronics, *Device*, 2024, **2**, 100216.
- 230 H. Zhou, K.-N. Kim, M.-J. Sung, S. J. Han and T.-W. Lee, Intrinsically stretchable low-dimensional conductors for wearable organic light-emitting diodes, *Device*, 2023, **1**, 100060.
- 231 T. Zhao, X. Xiao, Y. Wu, J. Ma, Y. Li, C. Lu, C. Shokoohi, Y. Xu, X. Zhang and Y. Zhang, Tracing the flu symptom progression via a smart face mask, *Nano Lett.*, 2023, **23**, 8960-8969.
- 232 G. Li, F. Sun, S. Zhao, R. Xu, H. Wang, L. Qu and M. Tian, Autonomous electroluminescent textile for visual interaction and environmental warning, *Nano Lett.*, 2023, **23**, 8436-8444.
- 233 B. Sui, T. Ding, X. Wan, Y. Chen, X. Zhang, Y. Cui, J. Pan, L. Li and X. Liu, Piezoelectric stimulation enhances bone regeneration in alveolar bone defects through metabolic reprogramming of macrophages, *Exploration* 2024, **4**, 20230149.
- 234 S. Xu, X. Wan, F. Manshahi, Z. Che and J. Chen, Advances in piezoelectric nanogenerators for self-powered cardiac care, *Nano Trends*, 2024, **1**, 100042.
- 235 C. Carlos, J. Li, Z. Zhang, K. J. Berg, Y. Wang and X. Wang, Strain-correlated piezoelectricity in quasi-two-dimensional zinc oxide nanosheets, *Nano Lett.*, 2023, **23**, 6148-6155.
- 236 X. Wang, W.-Z. Song, M.-H. You, J. Zhang, M. Yu, Z. Fan, S. Ramakrishna and Y.-Z. Long, Bionic single-electrode electronic skin unit based on piezoelectric nanogenerator, *ACS Nano*, 2018, **12**, 8588-8596.
- 237 A. S. Dahiya, F. Morini, S. Boubenia, K. Nadaud, D. Alquier and G. Poulin-Vittrant, Organic/inorganic hybrid stretchable piezoelectric nanogenerators for self-powered wearable electronics, *Adv. Mater. Technol.*, 2018, **3**, 1700249.
- 238 Z. Yi, T. Xu, W. Shang and X. Wu, Touch modality identification with tensorial tactile signals: A kernel-based approach, *IEEE Trans. Autom. Sci. Eng.*, 2021, **19**, 959-968.
- 239 J. Zheng, Y. Chen, Z. Wu, Y. Wang and L. Wang, Integration of flexible touch panels and machine learning: Applications and techniques, *Adv. Intel. Syst.*, 2024, **6**, 2300560.
- 240 A. J. Spiers, M. V. Liarokapis, B. Calli and A. M. Dollar, Single-grasp object classification and feature extraction with simple robot hands and tactile sensors, *IEEE Trans. Haptic.*, 2016, **9**, 207-220.
- 241 S. A. Han, T. H. Kim, S. K. Kim, K. H. Lee, H. J. Park, J. H. Lee and S. W. Kim, Point-defect-passivated MoS₂ nanosheet-based high performance piezoelectric nanogenerator, *Adv. Mater.*, 2018, **30**, 1800342.

- 242 P. Ren, Y. Xiao, X. Chang, P.-Y. Huang, Z. Li, B. B. Gupta, X. Chen and X. Wang, A survey of deep active learning, *ACM Comput. Survey.*, 2021, **54**, 1-40.
- 243 B. Lan, X. Xiao, A. Di Carlo, W. Deng, T. Yang, L. Jin, G. Tian, Y. Ao, W. Yang, J. Chen. Topological nanofibers enhanced piezoelectric membranes for soft bioelectronics. *Adv. Funct. Mater.*, 2022, **32**, 2207393
- 244 Y. Qiu, S. Sun, X. Wang, K. Shi, Z. Wang, X. Ma, W. Zhang, G. Bao, Y. Tian and Z. Zhang, Nondestructive identification of softness via bioinspired multisensory electronic skins integrated on a robotic hand, *npj Flex. Electron.*, 2022, **6**, 45.
- 245 S. Zhang, H. Zhao, X. Ma, J. Deng and Y. Liu, A 3-DOF piezoelectric micromanipulator based on symmetric and antisymmetric bending of a cross-shaped beam, *IEEE Trans. Indus. Electron.*, 2022, **70**, 8264-8275.

Figures and Captions

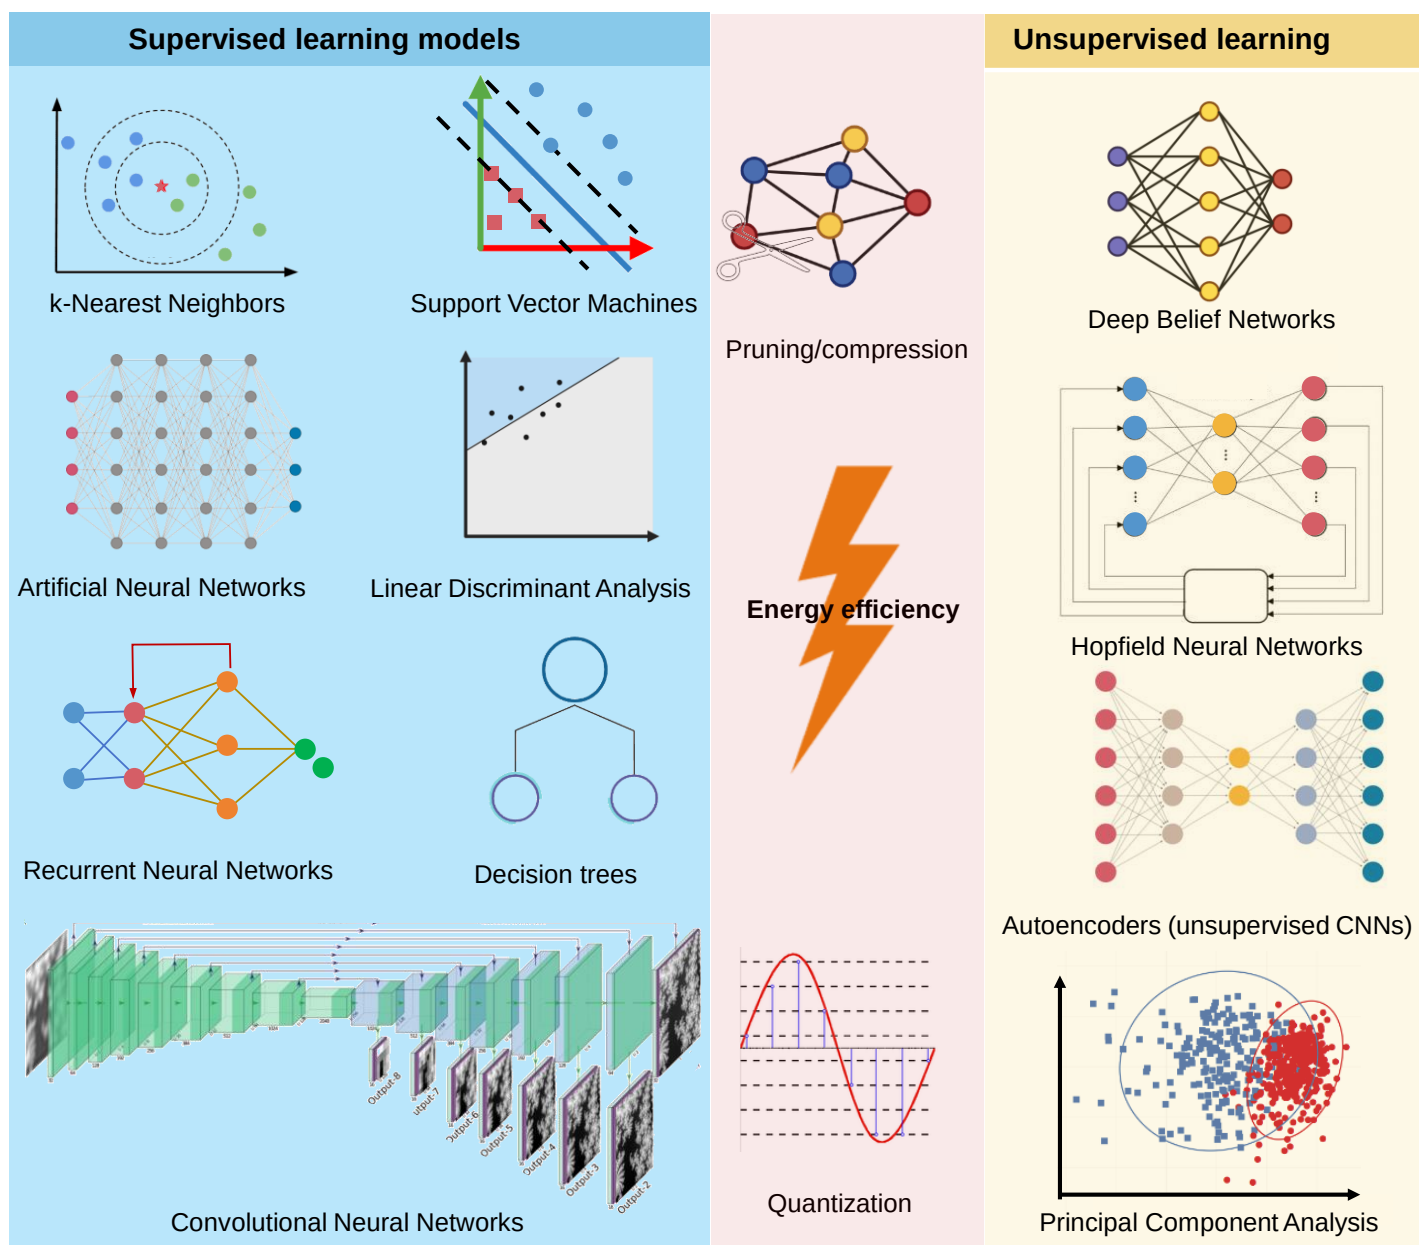


Fig. 1. Machine learning models for AI-augmented nanogenerators. In supervised learning, models like k-Nearest Neighbors (KNN), Support Vector Machines (SVM), Artificial Neural Networks (ANNs), Linear Discriminant Analysis (LDA), Recurrent Neural Networks (RNNs), Decision trees, and Convolutional Neural Networks (CNNs) are included. These models, trained on labeled data, are effective for tasks such as classification, pattern recognition, and real-time monitoring in energy-sensitive systems. In unsupervised learning, Deep Belief Networks (DBNs), Hopfield Neural Networks (HNNs), autoencoders (unsupervised CNNs), and Principal Component Analysis (PCA) operate without labeled data for clustering and dimensionality reduction. Energy efficiency strategies like pruning/compression and quantization can optimize these algorithms for low-power environments typical in wearables and IoT devices powered by nanogenerators. CNNs,¹²⁴ Copyright 2020, Springer Nature.

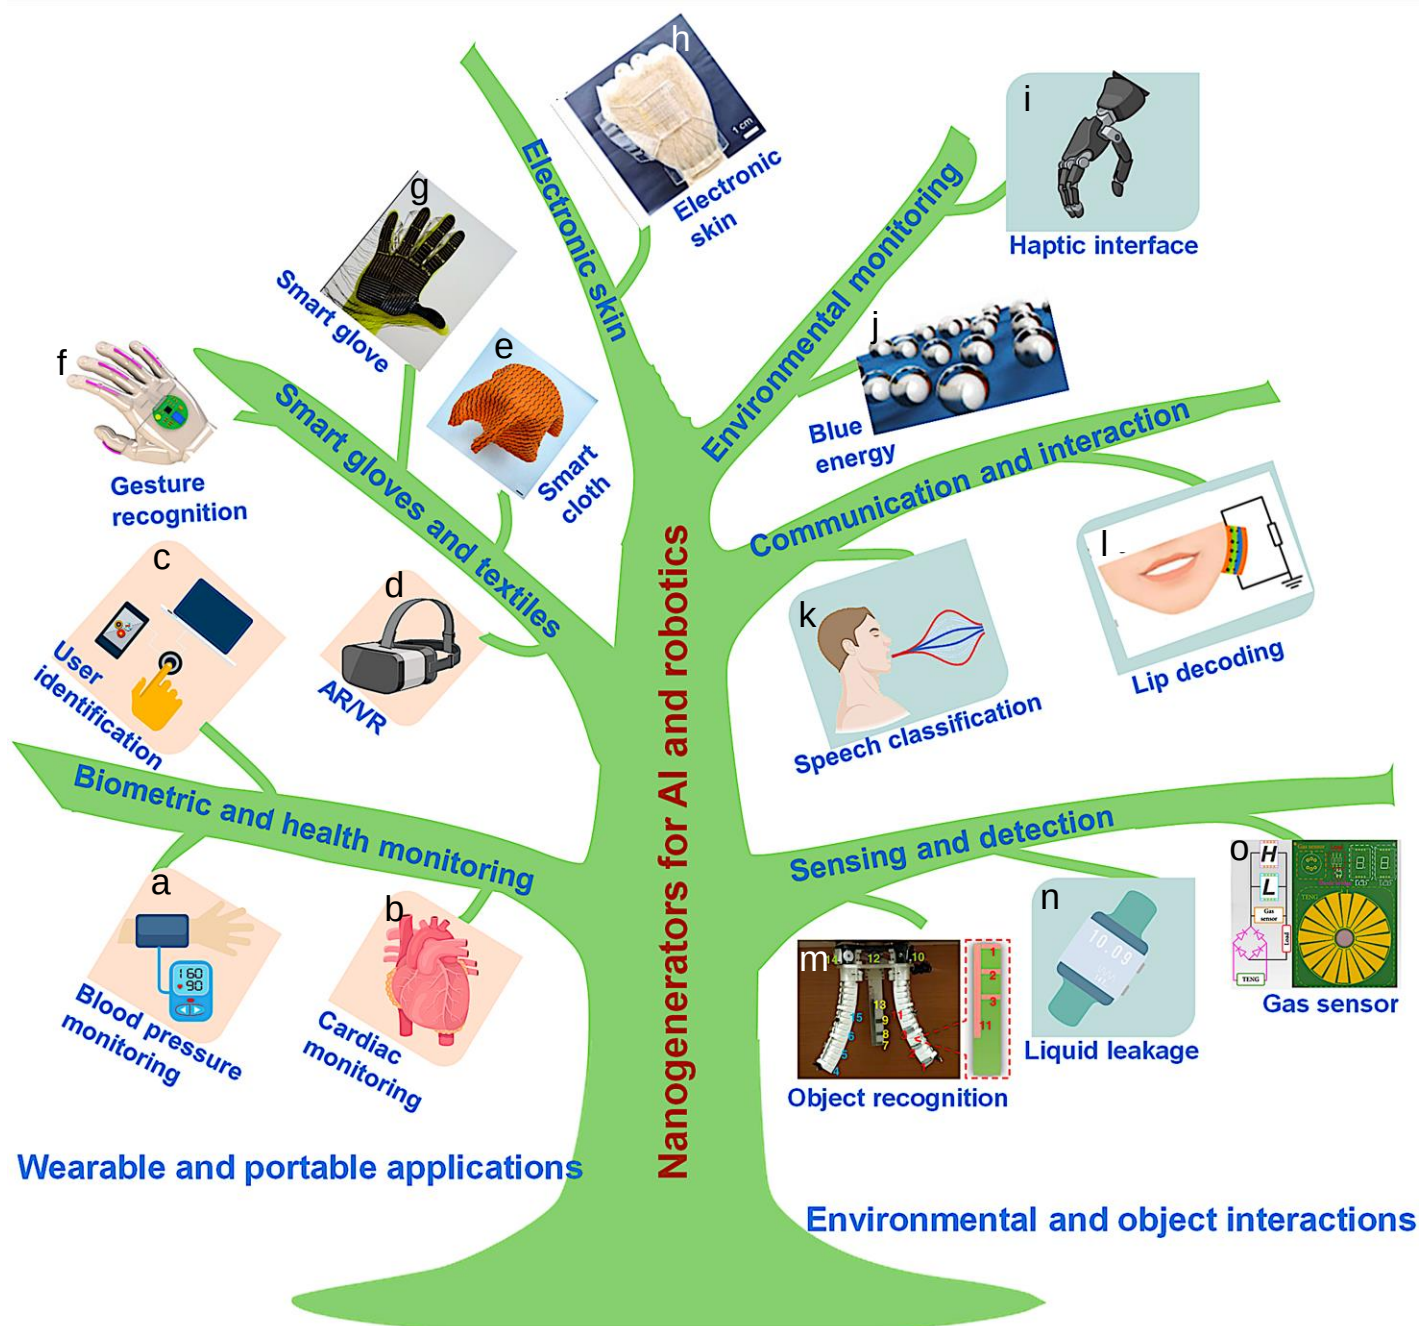


Fig. 2. Applications of AI-enhanced nanogenerators. AI-assisted nanogenerators provide responsive, efficient, and intelligent solutions in advancing human-machine interfaces. In wearable and portable applications, nanogenerators power biometric and health monitoring devices, such as (a) blood pressure monitors, (b) cardiac monitoring systems, and (c) user identification tools. For smart wearables, AI-augmented sensors enable (d) augmented reality/virtual reality (AR/VR) interfaces, (e) smart clothing,³⁷ Copyright 2022, Springer Nature; and (f) gesture-recognition glove,¹⁰⁹ Copyright 2020, Springer Nature; (g) tactile sensing glove,¹³⁶ Copyright 2019, Springer Nature; and (h) e-skin,⁴⁰ Copyright 2019, Elsevier. In environmental monitoring, (i) haptic interfaces and (j) blue energy harvesting,¹⁷ Copyright 2017, Elsevier, represent advancements in sustainable interactions. In communication and interaction, nanogenerators facilitate (k) speech classification and (l) lip decoding,¹¹⁴ Copyright 2022, Springer Nature. In advanced sensing and detection, AI-augmented nanogenerators improve capabilities for (m) object recognition,¹³⁸ Copyright 2020, Springer Nature; (n) liquid leakage detection, and (o) gas sensing, including the detection of volatile organic compounds (VOCs)¹⁴² Copyright 2021, AAAS.

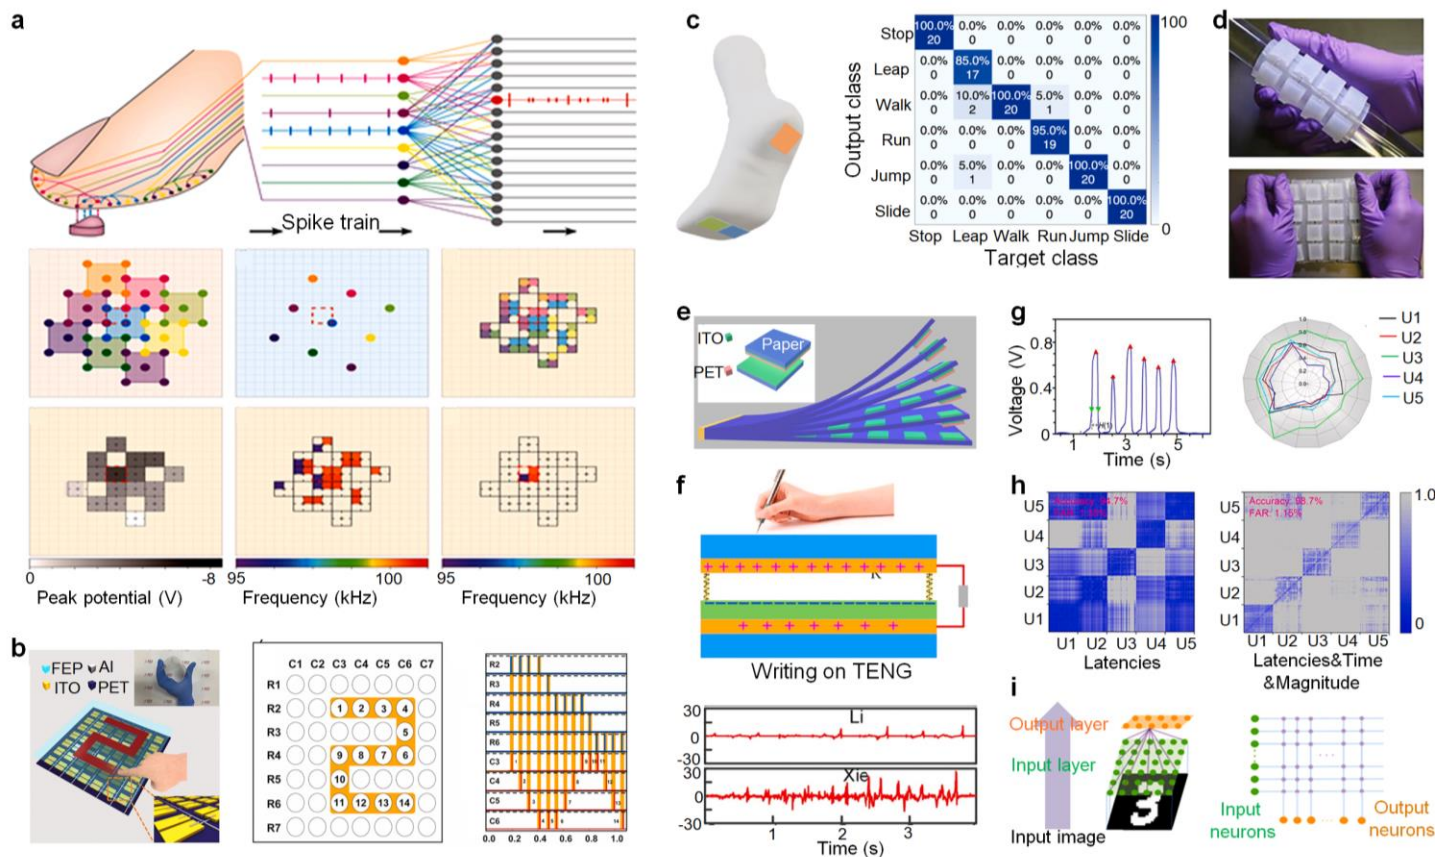


Fig. 3. AI-assisted TENGs for self-powered systems and interfaces. (a) A self-powered artificial tactile peripheral nervous system using TENG, simulating biological sensory circuits using CNN.¹⁷² Copyright 2021, Elsevier. (b) Self-powered handwriting HMI via TENG, with structure and recognition principles using CNN.¹⁸⁷ Copyright 2020, Elsevier. (c) Smart socks with TENG sensors for recognizing sports gait data using CNN.¹⁹⁵ Copyright 2020, Springer Nature. (d) Training and recognition process for a 16-key stretchable keyboard security system using SVM.²⁰² Copyright 2018, Elsevier. (e) Self-powered TENG sensor for document management: page-turn recording and book theft prevention.²⁰⁵ Copyright 2014, Springer. (f) Handwriting recognition with self-powered TENG for machine learning-based user classification using SVM.²⁰⁷ Copyright 2020, Elsevier. (g,h) Electrical signal-time curve and feature radar chart for user typing, alongside a cross-user difference score matrix with feature combinations using PCA and SVM.²⁰² Copyright 2018, Elsevier. (i) TENG matrix-based artificial sensory memory using HNN.¹⁴³ Copyright 2020, Elsevier.

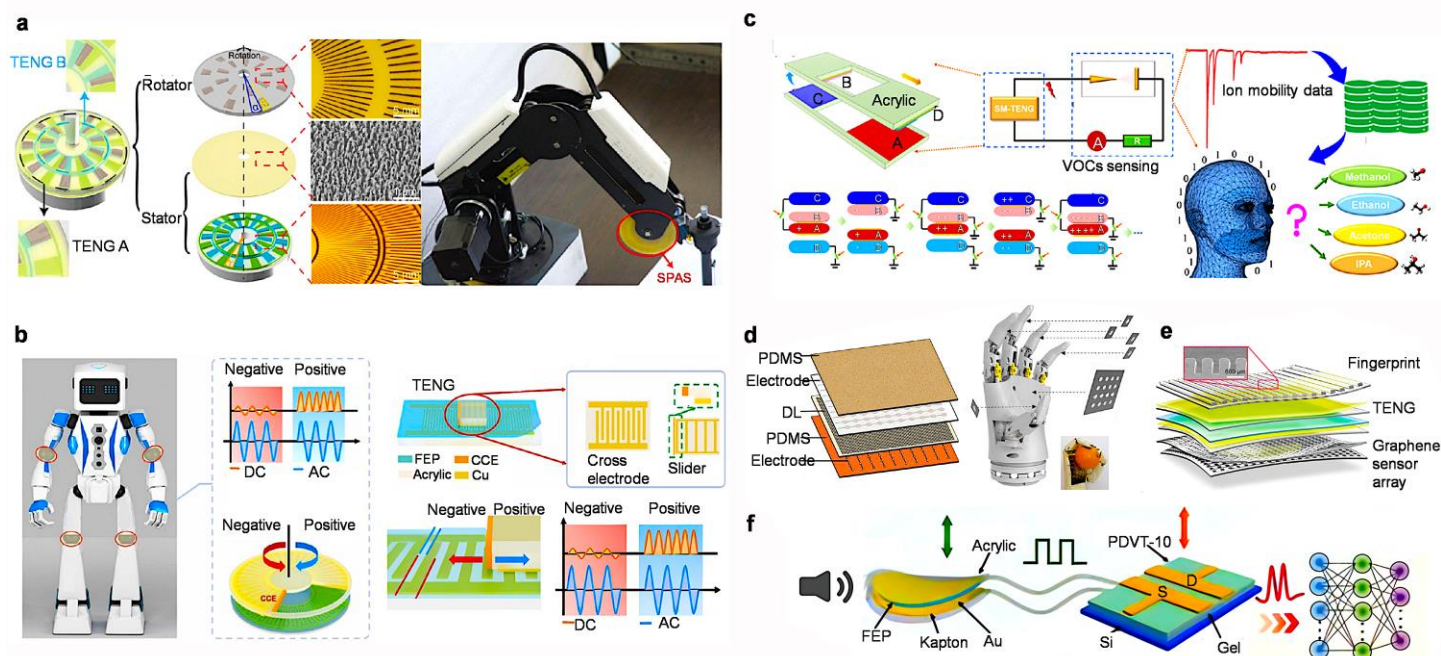


Fig. 4. AI-assisted TENGs for sensory detection. (a) Angle sensor.²¹¹ Copyright 2020, Wiley. (b) Dual-mode vector motion sensors for direction and angle.²¹² Copyright 2022, Elsevier. (c) Ionizer with machine learning enhancement.⁸ Copyright 2021, RSC. (d) Stretchable sensor for object scanning, pressure measurement, and hardness detection.²¹³ Copyright 2019, Springer Nature. (e) Neural tactile sensor for pressure detection and texture identification.²¹⁴ Copyright 2019, ACS. (f) Artificial auditory pathway.²¹⁵ Copyright 2020, Elsevier.

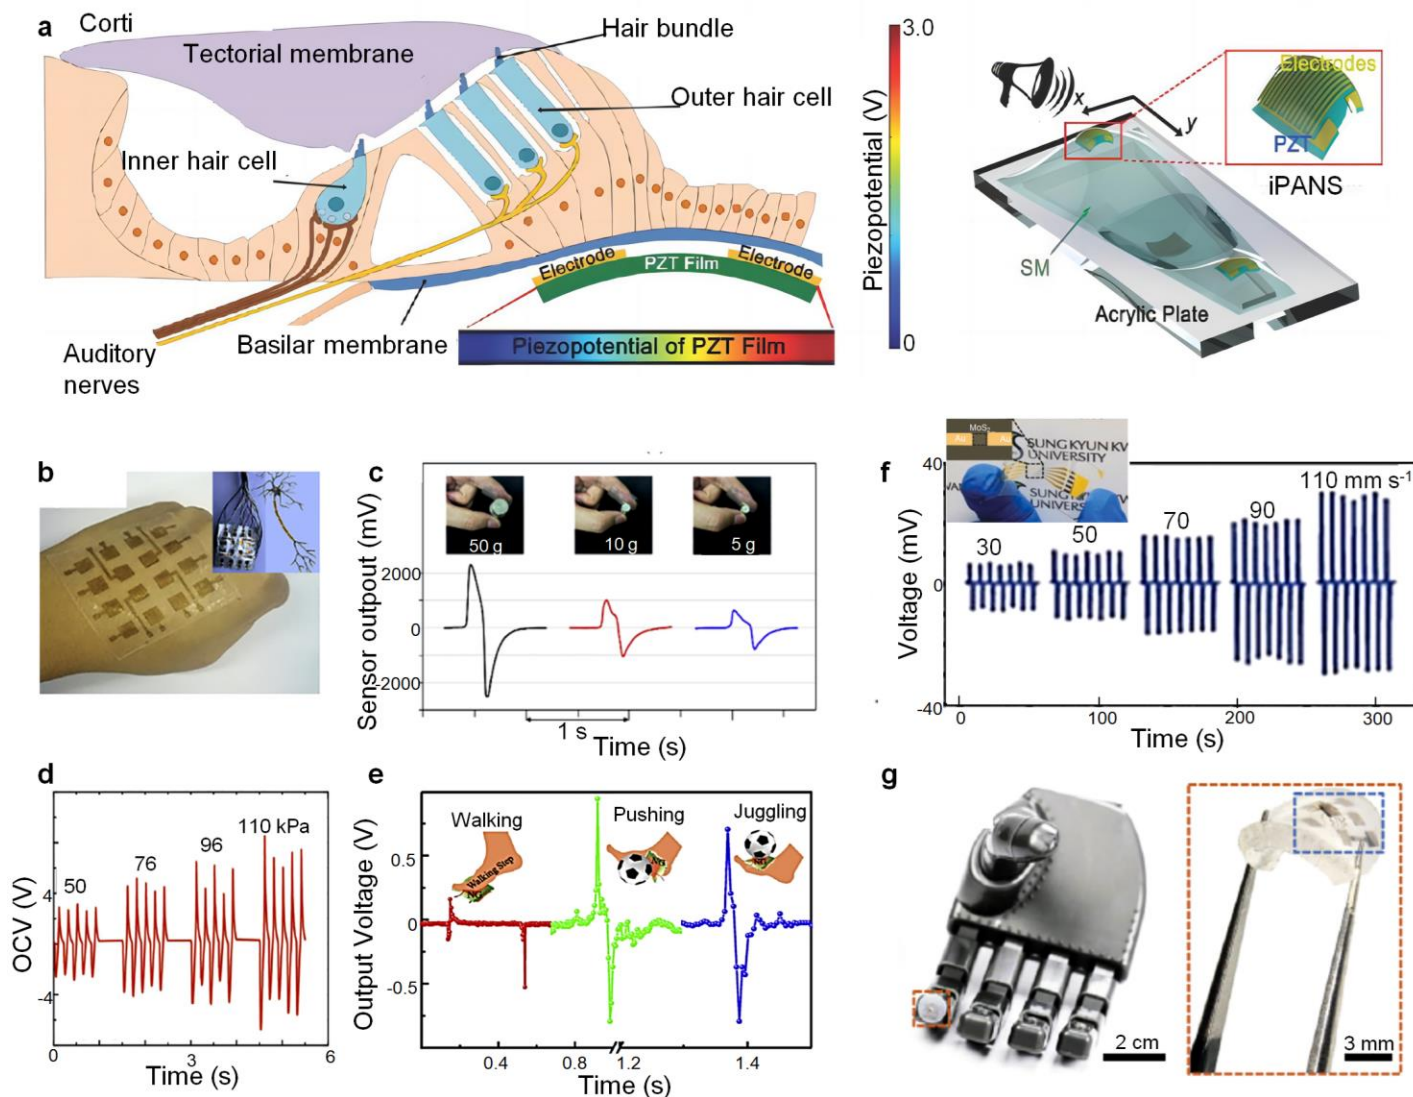


Fig. 5. AI-integrated PENGs for wearables and robotics. (a) Biomimetic inorganic piezoelectric acoustic nanosensor.²¹⁶ Copyright 2014, Wiley. (b,c) Multi-sensing e-skin for pressure and temperature detection.²³⁶ Copyright 2018, ACS. (d) Output voltage and pressure for affordable e-skin.¹¹² Copyright 2020, IOPscience. (e) Wearables inspired by the fish swim bladder.²³⁷ Copyright 2018, Wiley. (f) MoS_{2-x}-based PENG under different bending speeds.²⁴¹ Copyright 2018, Wiley. (g) Implanted microsystem in a robotic hand.²¹³ Copyright 2019, Springer Nature.

Table 1 Overview of algorithms with nanogenerator integration						
Algorithm	Roles	Deployment	Energy-efficiency	Reusability	Pros	Cons
PCA	Dimensionality reduction for enhanced classification efficiency	On-device	High (relatively low data dimensionality)	Limited	Efficient for dimensionality reduction, improves data processing speed	May lose critical information in reduced dimensions; sensitive to scaling variations
SVM	Classifies data using hyperplanes; effective in high-dimensional spaces	Cloud	Moderate (memory for large datasets)	Limited; often needs retraining for different data	Effective in high-dimensional spaces; robust to overfitting, enhances classification	High computational demand, may slow down real-time processing
RNNs	Temporal data analysis, ideal for sequential data like time-series signals	On-device	Low (sequential processing)	Adaptable, with limited retraining for different	Short sequential data and time-series analysis	Computationally expensive, vanishing gradients, challenging for long sequences
LSTM	Enhanced RNN capable of long-term dependencies; suitable for adaptive interfaces	Cloud	Low (memory cells)	Partially reusable through fine-tuning for sequential tasks	Effective for long-term dependencies, addresses vanishing gradient issues in RNNs	Resource-intensive, requires high computational power for training and inference
CNNs	Hierarchical feature extraction, especially effective in image and spatial feature recognition	On-device/cloud	Requires substantial power	Transfer learning allows reuse for similar tasks	Excellent at spatial data recognition, suitable for image and spatial feature extraction.	High computational cost; risk of overfitting in deep architectures without sufficient data

Table 1 Overview of algorithms with nanogenerator integration

Algorithm	Roles	Deployment	Energy-efficiency	Reusability	Pros	Cons
DNN	Models complex relationships; versatile in complex pattern detection.	Cloud	Low (memory requirements)	Reusable with fine-tuning; transfer learning possible.	Capable of modeling complex patterns, versatile for diverse applications	Requires substantial computational resources and large datasets; prone to overfitting in small data
DBN	Unsupervised feature learning for enhanced classification accuracy	Cloud	Moderate (high computational load)	Reusable with adjustments to layers; retains learned features	Effective for hierarchical feature extraction, enhances classification accuracy	Training is complex and time-consuming, demanding computational resources
KNN	Instance-based learning, good for small datasets; suitable for recognition tasks	On-device	Low energy efficiency with large datasets; energy-efficient in small, targeted datasets	Requires retraining for different classes; limited reus.	Simple and effective for small datasets, suitable for real-time applications	Inefficient with large datasets; performance degrades with irrelevant features
ANN	Models nonlinear relationships across diverse applications	On-device	Moderate; lightweight architectures viable	Moderate reusability with layer-specific fine-tuning.	Highly accurate for complex relationships; versatile across applications	Computationally demanding and requires large amounts of labeled data for training

Table 1 Overview of algorithms with nanogenerator integration

Algorithm	Roles	Deployment	Energy-efficiency	Reusability	Pros	Cons
HNN	Associative memory tasks, handling complex hierarchical data patterns	Cloud	Low (relatively high cost and energy consumption)	Good reusability; effective for memory-intensive tasks without full	Effective for associative memory, retrieves stored patterns from partial input	High computational complexity, often requires cloud-based processing for real-time use

Reusability: Pretrained models or parts of the models can be reused for energy-efficient adaptation to new tasks.

Table 2 Algorithmic requirements for various applications in AI-integrated nanogenerators

Application	Algorithms	Roles	Example applications	Data
Tactile sensing and recognition	2D CNNs (spatial)	Spatial feature extraction	e-skins (texture/pressure recognition)	Tactile logs, pressure mappings
	1D CNNs (temporal), KNN, RNN	Sequential and instance-based learning	Smart gloves (gesture recognition), AR/VR interfaces	Gesture sequences, spatial motion data
	1D CNNs (temporal), SVM, ANN, DBN	Classification, pattern recognition, sequential data	Wearable health monitors (heart rate, activity)	Biometric data, sensor readings
	SVMs (classification)	Classifying touch or pressure types	Haptic feedback systems	Tactile data logs
	LSTMs (sequential)	Sequential data processing	Adaptive human-machine interfaces	Sequential tactile data
Security and document management	SVM + PCA	High-dimensional data classification	Document authentication, user biometric verification	Biometric data, document signatures
	Decision trees	Decision-making in workflows	Document categorization, access control	Encrypted signatures, security
	LDA	Class separation	Document type classification	High-dimensional data
Pattern recognition and memory	HNNs (associative memory)	Pattern recognition with stored memory	Typing behavior analysis, user authentication	Sequential logs, sensory interaction
	DBNs (feature learning)	Unsupervised feature extraction	Sensory memory for robots, pattern detection	Sensory data, hierarchical patterns
	RNNs (sequential)	Sequential pattern analysis	Repetitive behavior recognition	Time-series data
	Autoencoders (unsupervised)	Feature extraction without labels	Data compression for sensor logs	Unlabeled data logs

Table 2 Algorithmic requirements for various applications in AI-integrated nanogenerators

Application	Algorithms	Roles	Example applications	Data
Advanced sensory detection	CNNs (feature extraction)	Feature extraction for detection tasks	Object and sound recognition	Environmental readings
	RNNs (real-time analysis)	Sequential data analysis	Continuous auditory analysis	Real-time sound patterns
	PCA, DBN, HNN outlier detection	Dimensionality reduction, feature learning, associative	VOC detection, unusual pattern identification, air quality monitoring	VOC sensor readings, environmental data ,

Data Availability Statement

Data available on request from the authors