EES Catalysis



PAPER

View Article Online



Cite this: EES Catal., 2023, 1,720

Received 23rd May 2023, Accepted 22nd June 2023

DOI: 10.1039/d3ey00113j

rsc.li/eescatalysis

CeO₂ supported high-valence Fe oxide for highly active and stable water oxidation?

Hongzhi Liu,‡^{ab} Jun Yu, (10 ‡*a Jinghuang Lin,‡^c Bin Feng,^c Mingzi Sun, (10 d Chen Qiu, Da Kun Qian, De Zhichun Si, Db Bolong Huang, D*d Jean-Jacques Delaunay, of Yuichi Ikuhara and Shihe Yang *

Despite the high intrinsic electrocatalytic activity for the oxygen evolution reaction (OER), stable high valence metal ions such as Fe⁴⁺ are very difficult to form in oxide catalysts. In this work, by elaborating a novel Fe^{HV}/CeO₂@NF (nickel foam) catalyst, we stabilized high-valence Fe ions on a CeO₂ support and achieved a record low overpotential of 219 mV to reach the current density of 50 mA cm⁻². Theoretical calculations revealed that the fluent d-f electron transfer between ultra-small FeO_x nanoparticles (US-FeO_x) and CeO₂ guarantees the robust high valence of surface Fe sites, which enables the optimum adsorption and efficient conversions in the OER process. Meanwhile, the electronic modulations induced by the US-FeO_x also improve the site-to-site electron transfer to lower the reaction energy barriers for excellent OER performance. Moreover, the Fe^{HV}/CeO₂@NF catalyst delivered excellent stability, sustaining a high current density (200 mA cm⁻²) for over 500 h, and the simple preparation method gave access to a large-area electrode (100 cm²), paving the way for large-scale hydrogen production by water splitting.

Broader context

Water electrolysis-based hydrogen production in a sustainable fashion is one of the most promising ways to meet the global energy demand of a green future. The development of highly active and stable water oxidation catalyst is the key for large-scale application of water electrolysis because of the kinetically sluggish four-electron transfer process of oxygen evolution reaction (OER). Despite the high intrinsic electrocatalytic activity for the OER, stable high valence metal ions such as Fe⁴⁺ are very difficult to form in oxide catalysts. Herein we successfully stabilized high-valence Fe ions on Ce^{4+/3+}O₂ support and achieved superior OER performance. The novel Fe^{HV}/CeO₂@NF (nickel foam) catalyst achieved a record low overpotential of 219 mV to reach the current density of 50 mA cm⁻² and delivered excellent stability of sustaining a high current density (200 mA cm⁻²) for over 500 h. Theoretical calculations revealed that the fluent d-f electron transfer between ultra-small FeOx nanoparticles (US-FeOx) and CeO2 guarantees the robust high valence of surface Fe sites, which enables the optimum adsorption and efficient conversions in the OER process. Moreover, the simple preparation method gave access to a large-area catalyst electrode (100 cm²), paving the way for large-scale hydrogen production by water splitting. This work sets the stage for designing and preparing large-area high valence transition metal-based catalysts with high OER activity and high stability for industrial production of clean hydrogen from water splitting.

Introduction

In order to take on the challenges of imminent energy, environmental and climatic crises caused by burning traditional fossil fuels, the development of renewable clean energy sources such as hydrogen, wind and solar energy has become a top priority agenda. Among possible solutions, water electrolysisbased hydrogen production in a sustainable fashion is the most promising one. 1-3 Extensive efforts have been made to tackle the kinetically sluggish four-electron transfer process of the OER, which causes huge energy loss and limits the large-scale application of water electrolysis for hydrogen production.⁴⁻⁷ Many non-noble metal-based electrocatalysts have been developed to reduce the overpotential for water oxidation.8-10

^a Guangdong Provincial Key Lab of Nano-Micro Material Research, School of Chemical Biology and Biotechnology, Shenzhen Graduate School, Peking University, Shenzhen, China. E-mail: yu.jun@pku.edu.cn, chsyang@pku.edu.cn

^b Shenzhen International Graduate School, Tsinghua University, Shenzhen, China

^c Institute of Engineering Innovation, The University of Tokyo, Tokyo, Japan

^d Department of Applied Biology and Chemical Technology, The Hong Kong Polytechnic University, Hung Hom, Kowloon, Hong Kong SAR, China. E-mail: bhuang@polyu.edu.hk

^e Department of Chemistry and Biochemistry, Northern Illinois University, DeKalb, Illinois 60115, USA

f School of Engineering, The University of Tokyo, 7-3-1 Hongo, Bunkyo-ku,

g Institute of Biomedical Engineering, Shenzhen Bay Laboratory, Shenzhen 518107,

[†] Electronic supplementary information (ESI) available. See DOI: https://doi.org/ 10.1039/d3ev00113i

[‡] These authors contributed equally.

Transition metal-based oxides or hydroxides have displayed good OER performance in alkaline environments yet free of the shortcomings of the scarcity and expensiveness of precious metal-based catalysts, 11-13 but their catalytic activity and stability under high current operating conditions need to be further improved.

It is widely known that the valence state of transition metals, e.g., Fe ions, is pivotal to the OER activity of transition-metalbased catalysts. The high-valence transition metals have been reported to be the actual OER active sites and shown high OER intrinsic activity. 14-18 The Fe³⁺ ions in the widely applied catalysts, such as NiFe-LDH, need be oxidized to Fe4+ first under applied potentials before they can contribute to the OER process. 19-21 It thus appears that direct synthesis of stable Fe⁴⁺ based catalysts should reduce the overpotential of the OER. However, given that the typical oxidation states of Fe are +2 and +3, it is very difficult to obtain such stable Fe⁴⁺-containing electrocatalysts. As far as we know, Fe⁴⁺ has only been reported in ABO₃ perovskite structure catalysts; however, that synthesis process was complicated and needed a very high annealing temperature (\geq 800 °C). 22,23

Because of the easy switch between Ce⁴⁺ and Ce³⁺, CeO₂ has been widely used as a metal catalyst support to modulate the electronic structure through the so-called strong metal-support interaction (SMSI). 24,25 This also applies to metal oxides/hydroxides on a CeO₂ support, but the electronic interactions are commonly weaker and could hardly change the valence states of surface metal ions. 26,27 It has been reported that the transferred charge between the surface metal and support is inversely related to the metal cluster size, 25,28 the electronic interaction between the CeO2 support and metal ions could thus be enhanced by reducing the particle size, making possible the formation of stable Fe⁴⁺ on the CeO₂ support.

Here, we report a stable FeO_x catalyst with a stable high valence of 4+, which shows greatly reduced overpotential for the OER. This was realized by a straightforward electroplatingetching method, whereby electroplated CeO2 coating on a nickel foam (NF) was etched with ferric nitrate solution (Schematic illustration in Fig. 1(a)), installing and stabilizing the high valence Fe⁴⁺ in FeO_x/CeO₂. The Fe⁴⁺-containing OER electrocatalyst (named FeHV/CeO2@NF) only requires 238 mV overpotential to deliver 100 mA cm⁻² current density in 1 M KOH (pH = 13.6). Also, the OER potential of Fe^{HV}/ CeO₂@NF can be stabilized at about 1.53 V vs. RHE (without iR compensation) to reach a high current density of 200 mA cm⁻² for over 500 h. Density functional theory (DFT) calculations uncovered that the effective interfacial d-f electron transfer from the US-FeO_x to CeO₂ maintains the stable high valence states of Fe sites, which accounts for the high electroactivity for the OER. The optimized electronic structures guarantee the fast conversions of the intermediates on the catalyst, leading to the largely lowered overpotential required for the OER. This advanced catalyst system combined with its simple fabrication method should help to set the stage for the industrialization of sustainable OER catalysts and watersplitting systems.

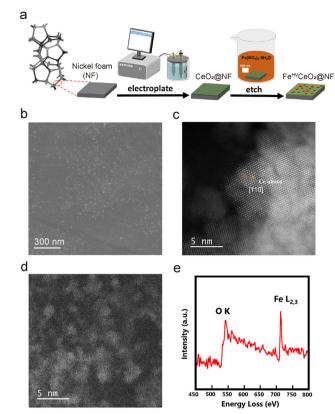


Fig. 1 Morphology and structure characterization of the Fe^{HV}/CeO₂@NF catalyst. (a) Schematic illustration of the synthesis process. (b) SEM image of Fe^{HV}/CeO₂@NF. (c) and (d) HAADF-STEM image of CeO₂ (c) and FeO_x particles (d) in Fe^{HV}/CeO₂@NF. (e) EELS (electron energy loss spectroscopy) spectrum of d.

Synthesis and characterization of high-valence Fe oxide

The scanning electron microscope (SEM) morphology of the CeO2@NF sample is shown in Fig. S1 (ESI†). A uniform electroplated layer, consisting of CeO2 nanoparticles, is formed on the surface of NF. After being etched in ferric nitrate solution, CeO₂@NF transforms to Fe^{HV}/CeO₂@NF and the morphology is shown in Fig. 1(b). The CeO₂ layer becomes flat, and there appears dense uniformly dispersed small white spots on the surface of CeO₂, which are probably iron oxide nanoparticles. The scanning transmission electron microscopy (STEM)energy dispersive X-ray spectrometry (EDS) mapping images (Fig. S2, ESI†) prove the uniform distribution of Ce and Fe in Fe^{HV}/CeO₂@NF. The high-angle annular dark field (HAADF)-STEM images of Fe^{HV}/CeO₂@NF are shown in Fig. 1(c) and (d). The Ce atomic columns belonging to CeO2 [110] are clearly observed (Fig. 1(c)). In general, the sizes of the FeO_x nanoparticles are smaller than 5 nm (Fig. 1(d)), which is confirmed by the atomic force microscope (AFM) images (Fig. S3, ESI†). The electron energy loss spectroscopy (EELS) spectrum taken from Fig. 1(d) is shown in Fig. 1(e), and it proves that the ultrasmall nanoparticles are indeed iron oxide. These iron oxide particles are detached from the CeO2 substrate, probably because

of the sonication process during TEM sample fabrication. The lattice fringes of both the CeO_2 support and the ultra-small FeO_x particles with a size of about 2–5 nm are also observed from the HRTEM image of $Fe^{HV}/CeO_2@NF$ (Fig. S4, ESI†). For the sake of comparison, $LFe/CeO_2@NF$ (larger FeO_x particles) and Fe@NF (without CeO_2 layer) reference samples were also fabricated. The $LFe/CeO_2@NF$ sample was synthesized by increasing the concentration of Fe^{3+} in the etching solution. The morphology of the $LFe/CeO_2@NF$ catalyst is shown in Fig. S5 (ESI†), which presents larger iron oxide particles (~ 100 nm) than that of the $Fe^{HV}/CeO_2@NF$ catalyst (Fig. 1(c)). As for the Fe@NF sample, what was partially etched away was the NF substrate in the acidic ferric nitrate solution accompanied by the formation of numerous holes, which is shown in Fig. S6 (ESI†).

The X-ray photoelectron spectroscopy (XPS), X-ray absorption fine structure (XAFS) and soft X-ray absorption spectroscopy (SXAS) were carried out to analyze the electronic interaction between CeO₂ and Fe in Fe^{HV}/CeO₂@NF, and the results are shown in Fig. 2. Fig. 2(a) presents the XPS spectra for the Fe 2p region of Fe@NF, LFe/CeO₂@NF and Fe^{HV}/CeO₂@NF. While the peaks of Fe@NF and LFe/CeO₂@NF

in the range of 710-712 eV correspond to Fe³⁺, the peak of FeHV/CeO2@NF in the range of 712-714 eV can be assigned to Fe³⁺ and Fe⁴⁺. ^{23,29} The Fe K-edge XANES spectra of the Fe^{HV}/CeO₂@NF catalyst and Fe₂O₃ and Fe foil reference samples are shown in Fig. 2(b). Clearly, the Fe absorption edge of FeHV/CeO2@NF shifts towards higher energy (inset of Fig. 2(b)) than that of Fe₂O₃, which confirms a higher Fe valence state in Fe^{HV}/CeO₂@NF than +3 in Fe₂O₃, ^{30,31} and also is in agreement with the XPS result. Further support is from the SXAS shown in Fig. 2(c). The Fe L-edge is divided into two peaks (at 714 eV and 726 eV) corresponding to the L3 and L₂ edges. Compared with standard Fe₂O₃, the Fe L-edge in Fe^{HV}/CeO₂@NF presents a blue shift, again evidencing a higher Fe valence state than +3 in Fe₂O₃. ^{32,33} Fig. 2(d) shows the Ce 3d XPS spectra, and the total areas of the Ce³⁺ and Ce⁴⁺ peaks are in proportion to their contents.34,35 The Ce3+ content in the Fe^{HV}/CeO₂@NF catalyst is calculated to be 35%, while the Ce³⁺ content in CeO₂@NF is 31%. The above results indicate an electronic transfer between Fe and Ce in FeHV/ CeO2@NF, that is, part of Fe3+ is oxidized to Fe4+ associated with the shift of Ce^{4+} to Ce^{3+} .

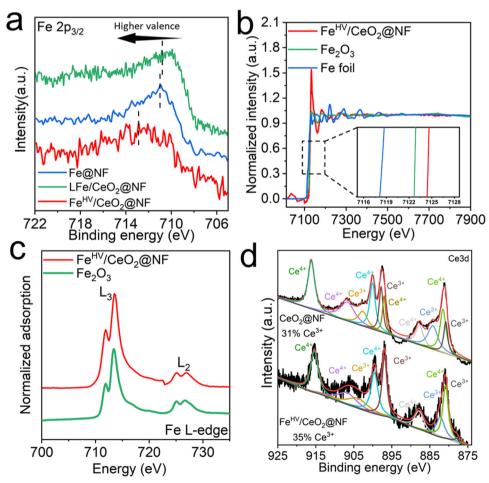


Fig. 2 Electronic structure characterization of the catalysts. (a) Fe 2p XPS spectra of the catalysts. (b) XANES of the samples at the Fe K-edge. The inset enlarges the absorption edges and displays the valence changes of Fe in the samples. (c) Soft X-ray absorption spectra (SXAS) of the catalyst and the Fe₂O₃ control sample at the Fe L-edge. (d) Ce 3d XPS spectra of the catalysts.

Electrochemical performance of

FeHV/CeO2@NF

The electrochemical performances of the electrodes were investigated using a three-electrode system in an alkaline environment (1 M KOH, pH = 13.6). As can be seen from Fig. S8 (ESI†), the Fe^{HV}/CeO₂@NF electrode displays much better OER performance than the Fe@NF. CeOa@NF LFe/CeOa@NF and RuO2@NF electrodes. The faradaic efficiency is calculated to be 98% at the current density of 30 mA cm⁻² (with the overpotential as low as 210 mV). To reach the high current densities of 100 mA cm⁻² and 200 mA cm⁻², the required overpotentials are only 238 mV and 261 mV, respectively. Comparatively speaking, under the overpotential of 238 mV (261 mV), the current density of the Fe^{HV}/CeO₂@NF electrode is 5.7(2.6), 8.1(4) and 42.5(43.4) times larger than those of the Fe@NF, LFe/CeO₂@NF and CeO₂@NF electrodes, respectively, as can be seen clearly in Fig. 3(a). The Nyquist plot in Fig. 3(b) shows that the semicircle radius of the Fe^{HV}/CeO₂@NF electrode is much smaller than that of Fe@NF and LFe/CeO2@NF, indicating the smallest charge transfer resistance of the Fe^{HV}/CeO₂@NF electrode. 36,37 The Tafel plots in Fig. 3(c) show that the Fe^{HV}/ CeO₂@NF electrode has the smallest Tafel slope of 40 mV dec⁻¹, which is beneficial to accelerate the reaction kinetics. 38,39 The OER activity comparison between the Fe^{HV}/CeO₂(a)NF electrode and recently reported OER electrode^{26,33,34,40-45} by comparing the overpotential to reach the geometric current density of 30, 50 and 100 mA cm $^{-2}$ (Fig. 3(d) and Table S1, ESI†) indicates the superior OER activity of the FeHV/CeO2@NF electrode. As shown in Fig. S9 (ESI[†]), the OER performance of the reference sample on a Cu foam substrate illustrates the positive role of Ni foam.

In order to explore whether the high catalytic activity of the Fe^{HV}/CeO₂@NF electrode comes from the high specific surface area or the high intrinsic activity of the active sites, we conducted cyclic voltammetry (CV) tests on the Fe^{HV}/CeO₂@NF, LFe/CeO2@NF and Fe@NF electrodes (Fig. S10, ESI†) in the non-Faraday potential range (0.32-0.40 V vs. Hg/HgO) and calculated the electrochemical double-layer capacitance (C_{dl}) of the three electrodes. The ECSA was calculated according to the formula ECSA = $C_{\rm DL}/C_{\rm S}$, where a specific capacitance of $C_{\rm S} = 0.040 \; \rm mF \; cm^{-2}$ was used in this work. The calculated ECSA values are shown in Fig. 3(e) and summarized in Table S2 (ESI†), as well as other relevant electrochemistry parameters. The ECSAs of the LFe/CeO2@NF and Fe@NF electrodes are about 5 times and 2.2 times as large as that of Fe^{HV}/CeO₂@NF, which demonstrates that the high OER activity of the FeHV/ CeO2@NF electrode derives from the high intrinsic activity of FeHV active sites considering that the lower ECSA means an electrode has less active sites. The specific activity (j_{ECSA}) is further obtained and shown in Fig. 3(f), where it is evident that the Fe^{HV}/CeO₂@NF electrode has much higher intrinsic OER activity than LFe/CeO2@NF and Fe@NF electrodes. Fig. S11 and

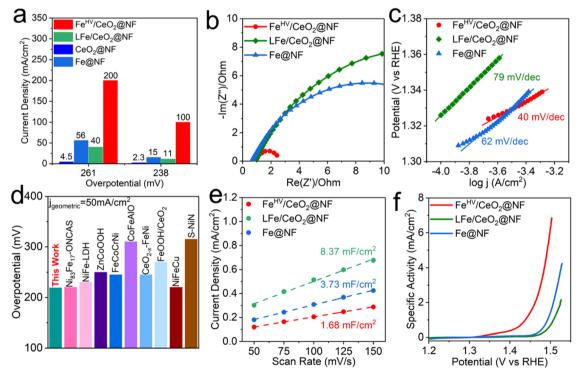


Fig. 3 OER performance characterization of the electrodes. (a) Comparison of the current densities achieved by different electrodes at special overpotentials. (b) EIS curves, measured at frequencies from 10^{-1} to 10^{5} Hz. (c) Tafel slope plots. (d) Activity comparison among OER electrocatalysts^{26,33,34,40-45} based on the overpotential needed to reach the geometric current density of 50 mA cm⁻² (for more details see Table S1, ESI†). (e) Electrochemical double-layer capacitance. The slope of current density at OCP vs. scan rate represents the double-layer capacitance. (f) Polarization curves with the current density normalized by ECSA.

Table S3 (ESI \dagger) show the comparison of the specific activity between the Fe^{HV}/CeO₂@NF electrode and a series of recently reported high OER performance electrodes by comparing the overpotential at an ECSA normalized current density of 1 mA cm⁻². The result shows that the Fe^{HV}/CeO₂@NF electrode has the best OER specific activity among these electrodes.

Formation of high-valence Fe oxide for the OER by DFT calculations

To further reveal the formation mechanism of high-valence Fe oxide (FeO_x) and its contributions to the OER performances in Fe/CeO₂, DFT calculations have been further introduced to investigate the electronic structures and energetic preferences. For the bonding and anti-bonding orbitals near the Fermi level ($E_{\rm F}$), the electron-rich feature of the surface US-FeO_x is noted (Fig. 4(a)). The electron-rich features indicate a higher electron density of Fe/CeO₂ near the $E_{\rm F}$. Since more electrons locate close to $E_{\rm F}$, the electron transfer barriers are much lower, suggesting that the electrons are easier to be transferred from

the Fe/CeO2 surface in accordance with the higher electroactivity of the Fe sites. Meanwhile, the strong orbital couplings at the interface between US-FeO_x and CeO₂ result in favorable electronic modulations. In comparison, CeO₂ only exhibits an electron-rich feature near the oxygen vacancies while the remaining sites of the surface with dominant contributions from anti-bonding orbitals cannot support the efficient adsorption and conversion of intermediates (Fig. 4(b)). The projected partial density of states (PDOS) have unraveled the electronic structure of Fe/CeO₂ (Fig. 4(c)). Fe-3d orbitals have shown the e_g - t_{2g} splitting near the E_F , where the overlapping with the Ce-4f orbitals supports the potential d-f electron transfer. The detailed electronic contributions of surface Ni sites have been revealed, viz., the Ni-3d orbitals mainly locate near the $E_{\rm F}$ with the dominant peak at $E_V - 0.85$ eV, thereby pulling up the overall electroactivity as well as the electron transfer rate with an improved *OH adsorption energetics and kinetics for optimum OER performance. In addition, the O-2p orbitals have exhibited evident orbital coupling with both Ce-4f and Fe-3d, indicating the small barriers for electron transfer within Fe/CeO₂. In comparison, the Ce-4f orbitals are much flattened

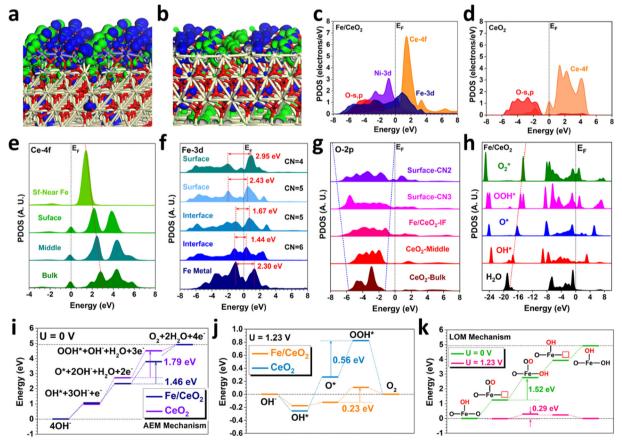


Fig. 4 DFT calculations. (a) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (b) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (c) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (d) The 3D contour plot of electronic distribution near the Fermi level of Fe/CeO₂. (d) The 3D contour plot of electronic distribution near the Fermi level of CeO₂. (d) The 3D contour plot of CeO₂. (e) The 3D contour plot of CeO₂. (f) The site-dependent PDOS of Fe/CeO₂. (f) The site-dependent PDOS o

and O-2p orbitals also become less broadened in CeO2 (Fig. 4(d)). The limited overlap between O-2p and Ce-4f orbitals induces an evident barrier of electron transfer, which results in

the significantly increased overpotentials of the OER. In order to interpret the detailed interactions between surface US-FeO_r and CeO₂, the site-dependent PDOSs have been supplied to illustrate the electronic structure evolution (Fig. 4(e)). We notice a gradual shifting for the empty Ce-4f orbital towards the $E_{\rm F}$ from the bulk to the surface sites near the Fe SNPs, potentially leading to efficient d-f electron transfer from Fe-3d orbitals to Ce-4f orbitals. Thus there appears to be a trend of maintaining the high oxidation states of Fe SNPs induced by the O sites, which is also confirmed by the experimental findings that the surface US-FeOx indeed exists in the high valence states. With the d-f electron transfer, the Fe-3d orbitals display essential contributions to the OER process. Specifically, the Fe sites at the interface show an alleviated eg-t2g splitting of 3d orbitals in Fe/CeO2, benefiting the fast electron transfer from Fe SNPs to CeO₂ (Fig. 4(f)). Compared to the interface, however, the surface Fe sites have shown an enlarged e_g-t_{2g} splitting. The overall downshifted 3d orbitals of the surface Fe sites significantly enhance the energy band overlap with surface O sites, thus lowering the electron transfer energy costs and further improving the electroactivity of the high valence Fe sites towards the water oxidation process. 46,47 Moreover, the O coordination numbers decrease with increasing e_g-t_{2g} splitting, especially for the surface Fe sites, supporting the higher electroactivity of Fe sites with high valence states. For the O sites, it is noted that the orbitals become much broadened from the bulk CeO2 to the surface, which considerably enhances their couplings with the Fe-3d orbitals

to promote electroactive Fe sites towards the OER (Fig. 4(g)). More importantly, the increased electron density near the Fermi level has improved the electron transfer at the interface. In addition, the PDOSs of the key intermediates have been revealed on the Fe/CeO₂ (Fig. 4(h)). Notably, the σ orbitals of O-2p in the key intermediates have shown a highly linear correlation for the OER process, which provides an efficient intermediate conversion process with efficient electron transfer. Such a correlation also supports that the surface US-FeO_x are the main active sites that contribute to the superior OER performances in Fe/CeO₂.

We next examine the reaction trends of the uphill OER process from the kinetic perspectives regarding both the adsorbate evolution mechanism (AEM) and lattice-oxygen-mediated mechanism (LOM). For the conventional AEM, the highest energy barrier occurs in the rate-determining step (RDS) from O* to OOH*. In comparison, Fe/CeO2 shows an energy barrier of 1.46 eV for the RDS, which is much lower than that with the CeO₂ at 1.79 eV and thus guarantees the much-improved OER performance. The overpotential has been estimated by reference to the standard equilibrium potential (U = 1.23 V)(Fig. 4(j)). Although Fe/CeO₂ shows an uphill trend from OH* to OOH*, the subtle energy barriers lead to a small overpotential of 0.23 V. In contrast, CeO2 shows overbinding of OH* in the initial reaction process, leading to high barriers for the following conversions to O* and OOH* with a large overpotential of 0.56 V. For the LOM mechanism (Fig. 4(k)), on the other hand, the highest energy barrier of 1.52 eV is located in the *OH adsorption step on the nearby oxygen vacancy sites of Fe. Compared to the RDS in AEM, the LOM presents a higher energy barrier. Using the standard equilibrium potential of 1.23 V as the reference, the overpotential of OER is determined

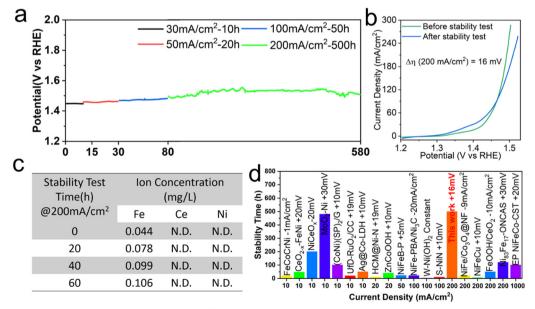


Fig. 5 Electrochemical stability characterization of the Fe^{HV}/CeO₂@NF electrode in 1 M KOH. (a) The chronopotentiometry measurements. (b) Polarization curves before and after the stability test with a scan rate of 10 mV s⁻¹. (c) The ion concentrations of Fe, Ce, and Ni (data acquired by inductive coupled plasma emission spectroscopy) in the electrolyte during the 60 h water electrolysis process. N.D. stands for a value below the measurement limit of 0.005 mg L^{-1} . (d) Summary of the stability comparison $^{26,33-35,41,42,44,45,48-57}$ of recently reported efficient oxygen evolution electrocatalysts (details in Table S4, ESI†). The electrolyte is 1 M KOH or NaOH

to be 0.29 V, which is higher than that of the AEM. Therefore, we can conclude that the AEM is preferred over the LOM for our OER catalyst, which agrees with the experimental characterizations (Fig. S12, ESI†).

OER stability of Fe^{HV}/CeO₂@NF

Besides catalytic activity, operational stability is another key parameter to evaluate the performance of a given electrocatalyst, especially for the industrial water splitting production of H₂. The chronopotentiometry measurement in 1 M KOH is carried out to evaluate the long-term stability of FeHV/ CeO₂@NF. In the continuous stability test of 30, 50, 100 and 200 mA cm⁻², the potential at every stage remains almost constant and at a high current density of 200 mA cm⁻², the potential can be stabilized at about 1.53 V vs. RHE (without iR compensation) for up to 500 h (Fig. 5(a)). By comparing the linear sweep voltammetry (LSV) curves of the electrode before and after the stability test, it can be seen that after the longterm (590 h) and high-current stability test, the overpotential increases by only 16 mV at the current density of 200 mA cm⁻² (Fig. 5(b)), indicating that FeHV/CeO2@NF is a super-stable electrode for water oxidation. To assess the valence stability of Fe in the FeHV/CeO2@NF electrocatalyst, XPS, SXAS and

Mössbauer spectroscopy were carried out on the samples after a 10 hours OER test at the current density of 30 mA cm⁻². As comparatively shown in Fig. S13-S15 (ESI†), the excellent stability of Fe⁴⁺ in the Fe^{HV}/CeO₂(a)NF electrode is clearly evidenced. The inductively coupled plasma optical emission spectrometer (ICP-OES) is further used to measure the concentration of metal ions in the electrolyte during the water electrolysis of the Fe^{HV}/CeO₂@NF electrode. As shown in Fig. 5(c), only Fe ions are detected and the content tends to be stable after the 60 h stability test. The excellent stability may derive from the fine and highly dispersed iron oxide nanoparticles, which can strongly combine with ceria and are difficult to fall off during the OER test. Therefore, the FeHV/CeO2@NF electrode behaves steadily for water oxidation. Fig. 5(d) and Table S4 (ESI†) summarize the stability comparison of recently reported efficient oxygen evolution electrodes, ${}^{26,33-35,41,42,44,45,48-\overline{57}}$ and the stability of the Fe^{HV}/ CeO₂@NF electrode is outstanding among them.

Large-area fabrication and OER performance under industrial conditions

Last but not least, an industrializable water splitting electrode should be equipped with the ability to scale up its production. Currently, common electrode preparation methods in laboratories

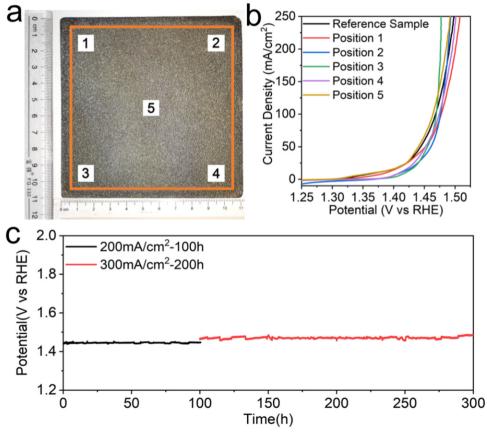


Fig. 6 Industrial application of the $Fe^{HV}/CeO_2@NF$ electrode. (a) Photograph of the large-area (100 cm²) $Fe^{HV}/CeO_2@NF$ electrode. (b) Polarization curves of the five different positions (1 cm²) in the large-area $Fe^{HV}/CeO_2@NF$ electrode (the reference sample is directly synthesized with 1 cm²). (c) The chronopotentiometry measurements in 6 M KOH and at 60 °C.

often involve complex processes and small electrode sizes, making it difficult to meet the industrial requirements for large-scale production. The electroplating-etching method presented here enables us to prepare a large-area electrode due to the simplicity of the preparation process and the scalability of the required experimental equipment, which is of great significance for the realization of industrialized hydrogen production by electrolysis of water. The large-size Fe^{HV}/CeO₂@NF electrode with 10 × 10 cm² effective area is synthesized through the electroplating-etching method, and a photograph is shown in Fig. 6(a). We selectively cut out five 1×1 cm² electrodes (labeled in Fig. 6(a)) from the 10×10 cm² electrode to perform the OER test, and compare their performances with the directly prepared 1×1 cm² electrode (reference sample in Fig. 6(b)). The results show that the performance of these six electrodes remained consistent within a certain fluctuation range (Fig. 6(b)). This proves that the large-area electrode has good uniformity, which in turn confirms the scalability of this preparation method. There is no doubt that this is one small but important

step towards the realization of industrialized hydrogen produc-

tion by electrolysis of water. Finally, the industrial-level (6 M

KOH, 60 °C) OER activity and stability tests of the Fe^{HV}/CeO₂@NF

electrode (1 cm²) were conducted. The polarization curve in Fig. S16

(ESI†) shows that the current density can reach 500 mA cm⁻² at the

overpotential of 270 mV (without iR compensation). As shown in

Fig. 6(c), the electrode of Fe^{HV}/CeO_2 (a)NF could deliver large current

densities of 200 mA cm⁻² and 300 mA cm⁻² at only 1.44 V and

1.47 V vs. RHE (without iR compensation) and remain stable up to

300 h in such a harsh environment, further indicating the potential

Conclusions

industrial application.

We have demonstrated an efficient and ultra-stable high valence Fe⁴⁺-containing OER electrode (named Fe^{HV}/CeO₂@NF) and its scalable preparation (100 cm² reported here) by a simple electroplating-etching method. The ultra-small size of the FeO_x nanoparticles on the CeO2 support enabled the formation of Fe⁴⁺, which has shown high intrinsic activity. Remarkably, the Fe^{HV}/CeO₂@NF electrode could deliver large current densities of 200 mA cm $^{-2}$ and 300 mA cm $^{-2}$ at only 1.44 V and 1.47 V vs. RHE (without iR compensation) and remain stable up to 300 h under harsh industrial conditions (6 M KOH, 60 °C). DFT calculations unraveled the electronic modulations induced by the d-f electron transfer at the interface of Fe/CeO2, which held the US-FeO_x in a stabilized high valence Fe⁴⁺ state conducive to the OER process. This work provides a guide to designing and preparing large-area high valence transition metal-based electrodes with high OER activity and high stability for industrial production of clean hydrogen from water splitting.

Author contributions

Shihe Yang and Jun Yu conceived and supervised the project. Hongzhi Liu conducted the experiments. Mingzi Sun performed the computational study under the supervision of Bolong Huang. Jinghuang Lin performed the STEM analysis with Bin Feng and Yuichi Ikuhara. Kun Qian performed the XAFS characterization. Hongzhi Liu, Jun Yu, Mingzi Sun, Bolong Huang and Shihe Yang wrote the paper. All authors discussed the results and commented on the manuscript.

Conflicts of interest

The authors declare no conflicts.

Acknowledgements

This work was financially supported by the National Natural Science Foundation of China (21972006, 22261160370, U2001217), Shenzhen Science and Technology Innovation Commission (KCXFZ20201221173604012), Shenzhen Peacock plan (KQTD2016053015544057), Guangdong Basic and Applied Basic Research Foundation (2021B1515120079), the National Natural Science Foundation of China/Research Grant Council of Hong Kong Joint Research Scheme (N_PolyU502/21), the funding for Projects of Strategic Importance of The Hong Kong Polytechnic University (Project Code: 1-ZE2V), Departmental General Research Fund (Project Code: ZVUL), Shenzhen Fundamental Research Scheme-General Program (JCYJ20220531 090807017) and Shenzhen Innovation Fund (JCYJ202208181 01018038). A part of this work was supported by "Advanced Research Infrastructure for Materials and Nanotechnology in Japan (ARIM)" of the Ministry of Education, Culture, Sports, Science and Technology (MEXT). J. L. was supported as a Japan Society for the Promotion of Science (JSPS) fellowship for part of this work. The authors would like to thank NSRL for the synchrotron beamtime. B. H. also thanks the support from Research Centre for Carbon-Strategic Catalysis of The Hong Kong Polytechnic University.

References

- 1 I. Roger, M. A. Shipman and M. D. Symes, *Nat. Rev. Chem.*, 2017, 1, 1–13.
- Z. Wang, T. Hisatomi, R. Li, K. Sayama, G. Liu, K. Domen,
 C. Li and L. Wang, *Joule*, 2021, 5, 344–359.
- 3 Z. Zhou, Y. Kong, H. Tan, Q. Huang, C. Wang, Z. Pei, H. Wang, Y. Liu, Y. Wang, S. Li, X. Liao, W. Yan and S. Zhao, Adv. Mater., 2022, 34, 2106541.
- 4 N. T. Suen, S. F. Hung, Q. Quan, N. Zhang, Y. J. Xu and H. M. Chen, *Chem. Soc. Rev.*, 2017, **46**, 337–365.
- 5 M. Tahir, L. Pan, F. Idress, X. Zhang, L. Wang, J. J. Zou and Z. L. Wang, *Nano Energy*, 2017, 37, 136–157.
- 6 J. Yu, X. Du, H. Liu, C. Qiu, R. Yu, S. Li, J. Ren and S. Yang, Energy Fuels, 2021, 35, 19000–19011.
- 7 Y. Liu, Y. Wang, S. Zhao and Z. Tang, Small Methods, 2022,6, 2200773.

- 8 Y. Yan, S. Liang, X. Wang, M. Zhang, S. M. Hao, X. Cui, Z. Li and Z. Lin, *Proc. Natl. Acad. Sci. U. S. A.*, 2021, **118**, e2110036118.
- 9 T. Wang, Y. He, Y. Liu, F. Guo, X. Li, H. Chen, H. Li and Z. Lin, *Nano Energy*, 2021, 79, 105487.
- 10 X. Cui, S. Lei, A. C. Wang, L. Gao, Q. Zhang, Y. Yang and Z. Lin, *Nano Energy*, 2020, 70, 104525.
- 11 H. Sun, Z. Yan, F. Liu, W. Xu, F. Cheng and J. Chen, *Adv. Mater.*, 2020, **32**, 1806326.
- 12 D. Y. Chung, P. P. Lopes, P. F. B. D. Martins, H. He, T. Kawaguchi, P. Zapol, H. You, D. Tripkovic, D. Strmcnik, Y. Zhu, S. Seifert, S. Lee, V. R. Stamenkovic and N. M. Markovic, *Nat. Energy*, 2020, 5, 222–230.
- 13 J. Kang, X. Qiu, Q. Hu, J. Zhong, X. Gao, R. Huang, C. Wan, L. M. Liu, X. Duan and L. Guo, *Nat. Catal.*, 2021, 4, 1050–1058.
- 14 J. Huang, H. Sheng, R. D. Ross, J. Han, X. Wang, B. Song and S. Jin, *Nat. Commun.*, 2021, 12, 3036.
- 15 J. Wang, S. J. Kim, J. Liu, Y. Gao, S. Choi, J. Han, H. Shin, S. Jo., J. Kim, F. Ciucci, H. Kim, Q. Li, W. Yang, X. Long, S. Yang, S. P. Cho, K. H. Chae, M. G. Kim, H. Kim and J. Lim, *Nat. Catal.*, 2021, 4, 212–222.
- 16 L. Gao, X. Cui, C. D. Sewell, J. Li and Z. Lin, Chem. Soc. Rev., 2021, 50, 8428.
- 17 S. Zhao, Y. Yang and Z. Tang, *Angew. Chem., Int. Ed.*, 2022, **61**, e202110186.
- 18 S. Zhao, C. Tan, C. T. He, P. An, F. Xie, S. Jiang, Y. Zhu, K. H. Wu, B. Zhang, H. Li, J. Zhang, Y. Chen, S. Liu, J. Dong and Z. Tang, *Nat. Energy*, 2020, 5, 881–890.
- 19 B. M. Hunter, N. B. Thompson, A. M. Müller, G. R. Rossman, M. G. Hill, J. R. Winkler and H. B. Gray, *Joule*, 2018, 2, 747–763.
- 20 A. Elabd and A. Coskun, Chem, 2018, 4, 661-670.
- 21 J. Y. C. Chen, L. Dang, H. Liang, W. Bi, J. B. Gerken, S. Jin, E. E. Alp and S. S. Stahl, *J. Am. Chem. Soc.*, 2015, 137, 15090–15093.
- 22 Z. Shen, Y. Zhuang, W. Li, X. Huang, F. E. Oropeza, E. J. M. Hensen, J. P. Hofmann, M. Cui, A. Tadich, D. Qi, J. Cheng, J. Li and K. H. L. Zhang, *J. Mater. Chem. A*, 2020, 8, 4407–4415.
- 23 S. She, J. Yu, W. Tang, Y. Zhu, Y. Chen, J. Sunarso, W. Zhou and Z. Shao, ACS Appl. Mater. Interfaces, 2018, 10, 11715–11721.
- 24 C. Sun, H. Li and L. Chen., *Energy Environ. Sci.*, 2012, 5, 8475–8505.
- 25 Q. Fu and T. Wagner, Surf. Sci. Rep., 2007, 62, 431-498.
- 26 J. X. Feng, S. H. Ye, H. Xu, Y. X. Tong and G. R. Li, Adv. Mater., 2016, 28, 4698–4703.
- 27 W. Yang, X. Wang, S. Song and H. Zhang, *Chem*, 2019, 5, 1743–1774.
- 28 Y. Li, Y. Zhang, K. Qian and W. Huang, ACS Catal., 2022, 12, 1268–1287.
- 29 Y. Zhu, W. Zhou, J. Yu, Y. Chen, M. Liu and Z. Shao, *Chem. Mater.*, 2016, **28**, 1691–1697.
- 30 S. Erat, A. Braun, A. Ovalle, C. Piamonteze, Z. Liu, T. Graule and L. J. Gauckler, *Appl. Phys. Lett.*, 2009, **95**, 174108.

- 31 T. Tsuyama, T. Matsuda, S. Chakraverty, J. Okamoto, E. Ikenaga, A. Tanaka, T. Mizokawa, H. Y. Hwang, Y. Tokura and H. Wadati, *Phys. Rev. B: Condens. Matter Mater. Phys.*, 2015, 91, 115101.
- 32 J. Jiang, F. Sun, S. Zhou, W. Hu, H. Zhang, J. Dong, Z. Jiang, J. Zhao, J. Li, W. Yan and M. Wang, *Nat. Commun.*, 2018, 9, 2885.
- 33 N. Zhang, X. Feng, D. Rao, X. Deng, L. Cai, B. Qiu, R. Long, Y. Xiong, Y. Lu and Y. Chai, *Nat. Commun.*, 2020, 11, 4066
- 34 J. Yu, J. Wang, X. Long, L. Chen, Q. Cao, J. Wang, C. Qiu, J. Lim and S. Yang, Adv. Energy Mater., 2021, 11, 2002731.
- 35 J. Yu, Q. Cao, Y. Li, X. Long, S. Yang, J. K. Clark, M. Nakabayashi, N. Shibata and J. J. Delaunay, ACS Catal., 2019, 9, 1605–1611.
- 36 J. Yu, Q. Cao, B. Feng, C. Li, J. Liu, J. K. Clark and J. J. Delaunay, *Nano Res.*, 2018, 11, 4323–4332.
- 37 J. Yu, Z. Wang, J. Wang, W. Zhong, M. Ju, R. Cai, L. Chen, X. Long and S. Yang, *ChemSusChem*, 2020, **13**, 5273–5279.
- 38 H. Liu, J. Yu, C. Qiu, R. Yu, S. Li, J. Cheng, J. Wang, Z. Si and S. Yang, *Funct. Mater. Lett.*, 2021, **14**, 2130009.
- 39 X. Cui, L. Gao, S. Lei, S. Liang, J. Zhang, C. D. Sewell, W. Xue, Q. Liu, Z. Lin and Y. Yang, *Adv. Funct. Mater.*, 2021, 31, 2009197.
- 40 P. Zhang, L. Li, D. Nordlund, H. Chen, L. Fan, B. Zhang, X. Sheng, Q. Daniel and L. Sun, *Nat. Commun.*, 2018, **9**, 381.
- 41 P. Liu, B. Chen, C. Liang, W. Yao, Y. Cui, S. Hu, P. Zou, H. Zhang, H. J. Fan and C. Yang, *Adv. Mater.*, 2021, 33, 2007377.
- 42 Z. Qiu, C. W. Tai, G. A. Niklasson and T. Edvinsson, *Energy Environ. Sci.*, 2019, **12**, 572.
- 43 Z. F. Huang, J. Song, Y. Du, S. Xi, S. Dou, J. M. V. Nsanzimana, C. Wang, Z. J. Xu and X. Wang, *Nat. Energy*, 2019, 4, 329–338.
- 44 T. Wu, S. Sun, J. Song, S. Xi, Y. Du, B. Chen, W. A. Sasangka, H. Liao, C. L. Gan, G. G. Scherer, L. Zeng, H. Wang, H. Li, A. Grimaud and Z. J. Xu, *Nat. Catal.*, 2019, 2, 763–772.
- 45 Y. Hou, M. Qiu, M. G. Kim, P. Liu, G. Nam, T. Zhang, X. Zhuang, B. Yang, J. Cho, M. Chen, C. Yuan, L. Lei and X. Feng, *Nat. Commun.*, 2019, 10, 1392.
- 46 J. Hwang, R. R. Rao, L. Giordano, Y. Katayama, Y. Yu and Y. Shao-Horn, *Science*, 2017, 358, 751–756.
- 47 S. Yagi, I. Yamada, H. Tsukasaki, A. Seno, M. Murakami, H. Fujii, H. Chen, N. Umezawa, H. Abe, N. Nishiyama and S. Mori, *Nat. Commun.*, 2015, 6, 8249.
- 48 J. Yan, L. Kong, Y. Ji, J. White, Y. Li, J. Zhang, P. An, S. Liu, S. T. Lee and T. Ma, *Nat. Commun.*, 2019, **10**, 2149.
- 49 X. Liu, J. Meng, K. Ni, R. Guo, F. Xia, J. Xie, X. Li, B. Wen, P. Wu, M. Li, J. Wu, X. Wu, L. Mai and D. Zhao, *Cell Rep. Phys. Sci.*, 2020, 1, 100241.
- 50 H. J. Song, H. Yoon, B. Ju, G. H. Lee and D. W. Kim, *Adv. Energy Mater.*, 2018, **8**, 1802319.
- 51 R. Ge, L. Li, J. Su, Y. Lin, Z. Tian and L. Chen, *Adv. Energy Mater.*, 2019, **9**, 1901313.

52 M. Zhang, Y. Zhang, L. Ye, B. Guo and Y. Gong, Appl. Catal., B, 2021, 298, 120601.

- 53 H. Zhang, Y. Liu, T. Chen, J. Zhang, J. Zhang and X. W. D. Lou, Adv. Mater., 2019, 31, 1904548.
- 54 Y. Kang, Y. Guo, J. Zhao, B. Jiang, J. Guo, Y. Tang, H. Li, V. Malgras, M. A. Amin, H. Nara, Y. Sugahara, Y. Yamauchi and T. Asahi, Small, 2022, 18, 2203411.
- 55 X. Lin, S. Cao, H. Chen, X. Chen, Z. Wang, S. Zhou, H. Xu, S. Liu, S. Wei and X. Lu, Chem. Eng. J., 2022, 433, 133524.
- 56 J. Lv, L. Wang, R. Li, K. Zhang, D. Zhao, Y. Li, X. Li, X. Huang and G. Wang, ACS Catal., 2021, 11, 14338-14351.
- 57 J. Mo, Y. Ko, Y. S. Yun, J. Huh and J. Cho, Energy Environ. Sci., 2022, 15, 3815-3829.