## Chemical Science



### **EDGE ARTICLE**

View Article Online
View Journal | View Issue



Cite this: Chem. Sci., 2017, 8, 2115

# Molecular engineering and sequential cosensitization for preventing the "trade-off" effect with photovoltaic enhancement†

Weiwei Zhang,<sup>a</sup> Yongzhen Wu,<sup>a</sup> Xin Li,<sup>b</sup> Erpeng Li,<sup>a</sup> Xiongrong Song,<sup>a</sup> Huiyun Jiang,<sup>a</sup> Chao Shen,<sup>a</sup> Hao Zhang,<sup>a</sup> He Tian<sup>a</sup> and Wei-Hong Zhu\*<sup>a</sup>

In dye-sensitized solar cells (DSSCs), it is essential to use rational molecular design to obtain promising photosensitizers with well-matched energy levels and narrow optical band gaps. However, the "tradeoff" effect between the photocurrent and photovoltage is still a challenge. Here we report four benzoxidazole based D-A- $\pi$ -A metal-free organic dyes (WS-66, WS-67, WS-68 and WS-69) with different combinations of  $\pi$ -spacer units and anchoring-acceptor groups. Either extending the  $\pi$ -spacer or enhancing the electron acceptor can efficiently modulate the molecular energy levels, leading to a red-shift in the absorption spectra. The optimal dye, WS-69, containing a cyclopentadithiophene (CPDT) spacer and cyanoacetic acid acceptor, shows the narrowest energy band gap, which displays a very high photocurrent density of 19.39 mA cm<sup>-2</sup>, but suffers from a relatively low photovoltage of 696 mV, along with the so-called deleterious "trade-off" effect. A cosensitization strategy is further adopted for enhancing the device performance. Optimization of the dye loading sequence is found to be capable of simultaneously improving the photocurrent and photovoltage, and distinctly preventing the "trade-off" effect. The superior cosensitized cell exhibits an excellent power-conversion efficiency (PCE) of 10.09% under one-sun irradiation, and 11.12% under 0.3 sun irradiation, which constitutes a great achievement in that the efficiency of a pure metal-free organic dye with iodine electrolyte can exceed 11% even under relatively weak light irradiation. In contrast with the previous cosensitization strategy which mostly focused on compensation of light-harvesting, we propose a novel cosensitization architecture, in which the large molecular-sized, high photocurrent dye WS-69 takes charge of broadening the light-harvesting region to generate a high short-circuit current ( $J_{SC}$ ) while the small molecular-sized, high photovoltage dye WS-5 is responsible for retarding charge recombination to generate a high open-circuit voltage ( $V_{OC}$ ). In addition, adsorption amount and photo-stability studies suggest that the cyano group in the anchoring acceptor is important for the stability since it is beneficial towards decreasing the LUMO levels and enhancing the binding of dyes onto TiO2 nanocrystals.

Received 2nd September 2016 Accepted 17th November 2016

DOI: 10.1039/c6sc03938c

www.rsc.org/chemicalscience

### Introduction

Dye-sensitized solar cells (DSSCs) have attracted a large amount of attention due to their high potential for converting sunlight to electricity, easy fabrication and good stability. As one of the pivotal components in DSSCs, photosensitizers have been widely exploited and achieved considerably high power-conversion efficiencies (PCEs). To date, metal-based

sensitizers, such as ruthenium polypyridine or zinc porphyrin, have achieved relatively high PCEs of 11–13%.<sup>3</sup> However, due to the environmental impact and cost issues associated with these sensitizers, increased attention has been paid to pure metal-free organic sensitizers, which possess merits of being made from abundantly available raw materials, being environmentally benign, and having tunable molecular structures and optical properties.<sup>4</sup> Nevertheless, metal-free organic dyes have scarcely achieved comparably high efficiency as metal-based sensitizers in DSSCs, especially in the case of the iodine electrolyte.<sup>5</sup>

As the key factor that determines the PCE, the photocurrent density depends largely on the light-harvesting abilities of photosensitizers as well as their highest occupied molecular orbital (HOMO) and lowest unoccupied molecular orbital (LUMO) energy levels. Generally, broad absorption spectra can be obtained through decreasing the band gap between the HOMO and LUMO orbitals of the photosensitizers. Meanwhile,

<sup>&</sup>quot;Shanghai Key Laboratory of Functional Materials Chemistry, Key Laboratory for Advanced Materials and Institute of Fine Chemicals, Collaborative Innovation Center for Coal Based Energy (i-CCE), School of Chemistry and Molecular Engineering, East China University of Science and Technology, Shanghai 200237, P. R. China. E-mail: whzhu@ecust.edu.cn

<sup>&</sup>lt;sup>b</sup>Division of Theoretical Chemistry and Biology, School of Biotechnology, KTH Royal Institute of Technology, SE-10691 Stockholm, Sweden

 $<sup>\</sup>dagger$  Electronic supplementary information (ESI) available: Synthesis and characterization, and additional photovoltaic data. See DOI: 10.1039/c6sc03938c

**Chemical Science Edge Article** 

a potential offset is required to act as the driving force for electron injection from the excited dyes to the TiO2 conduction band (0.5 V vs. NHE) and dye regeneration by accepting electrons from an iodine electrolyte (0.4 V vs. NHE). The mismatched LUMO and HOMO can always lead to inferior photocurrent performance due to the problematic electron injection or dye regeneration process.8 Therefore, it is particularly essential to use rational molecular design to obtain superior photosensitizers with well-matched energy levels and narrow optical band gaps.

Simultaneously, when extending the absorption spectrum of a sensitizer to obtain a higher photocurrent, a significant photovoltage loss is usually observed due to the prolific "trade-off" effect between the photocurrent and photovoltage. For example, Hua et al.9 designed three quinoxaline-based organic dyes, AQ201, AQ202, and AQ203, by introducing different  $\pi$ -bridges to extend the conjugations. The gradually improved photocurrent from AQ201 to AQ203 is accompanied with a reduced photovoltage by 40-70 mV, eventually leading to a decreased PCE for AQ203. Similarly, for porphyrin sensitizers, Diau et al.<sup>10</sup> extended the  $\pi$ -conjugation of LD-14 by coupling two zinc porphyrin cores via an acetylene bridge, bringing forth an improved photocurrent, but also a decrease in both the photovoltage and PCE. Even for the leading porphyrin dye SM315,11 which contains an electron-withdrawing unit of benzothiadiazole to broaden the light-harvesting ability, displays an enhanced photocurrent but reduced photovoltage, albeit achieving a high efficiency of 13%. Further, for squaraine dye, Han et al.12 developed a series of near-infrared (NIR) squaraine sensitizers by incorporating different electron-deficient units. HSQ4 with the broadest absorption and highest photocurrent density shows the weakest photovoltage due to faster charge recombination. Obviously, due to the "trade-off" effect, most low energy gap sensitizers often enhance the photocurrent at the cost of the photovoltage.<sup>13</sup> Although the increase in the photocurrent sometimes overweighs the decrease in photovoltage, leading to a slightly improved PCE, there is no doubt that the "trade-off" effect can still be considered as the great and eternal barrier for further improving the PCE of DSSCs as well as for the future development of solar cells.

In this work, we first optimize the energy levels of benzoxidazole (BOD) based D-A- $\pi$ -A organic sensitizers by combining different  $\pi$ -spacer units and anchoring-acceptor groups. To illustrate their influence on molecular energy levels and absorption spectra, we design a simple dye WS-66 (Fig. 1) as a reference. Replacing the carboxylic acid group in WS-66 with a stronger anchoring group of cyanoacetic acid leads to the dye WS-67, which shows extended absorption spectra as a result of the downwards-shifted LUMO level. On the other hand, introducing an electron-rich unit of 4H-cyclopenta[2,1b:3,4-b']-dithiophene (CPDT) into the  $\pi$ -spacer can lead to an upwards shift of the HOMO levels and further red-shift the absorption spectra, such as in dyes WS-68 and WS-69. Preliminary device studies indicate that WS-69 is the optimal of the four dyes, which shows a PCE of 9.03% with a high short-circuit current  $(J_{SC})$  of 19.39 mA cm<sup>-2</sup> due to its broad spectral response. However, suffering from the "trade-off"




Fig. 1 Molecular structures of dyes WS-66, WS-67, WS-68 and WS-69 with different combinations of  $\pi$ -spacer units and anchoring-acceptor groups.

effect, devices based on WS-69 show a decreased open-circuit voltage  $(V_{OC})$  compared with the reference dye WS-66. To further enhance the device performance, we employ a co-sensitization strategy and carefully optimize the dye loading sequence. As demonstrated, a suitable dye loading sequence can simultaneously improve the  $J_{SC}$  and  $V_{OC}$ , significantly overcoming the known "trade-off" effect between the two parameters. As a result, we achieved an excellent PCE of 10.09% under full AM 1.5G irradiation, and 11.12% under 0.3 sunlight. To the best of our knowledge, this is the first time that the efficiency of a pure metal-free organic dye with an iodine electrolyte exceeds 11% even under relatively weak light irradiation. Moreover, the adsorption amount and photostability studies suggest that the cyano group in the anchoring acceptor is important for the stability since it is beneficial to decreasing the LUMO levels and enhancing the binding of dyes onto the TiO2 nanocrystals.

### Results and discussion

### Molecular engineering with different combinations of $\pi$ spacer units and anchoring-acceptor groups

D-A- $\pi$ -A-based organic dyes have been widely developed due to their ability to facilitate electron migration in excited dye as well as their higher stability with respect to traditional D- $\pi$ -A sensitizers.14 In this regard, compared to the commonly used benzothiadiazole (BTD) auxiliary acceptor,15 the stronger benzoxidiazole (BOD) unit remains relatively unexplored. Hence, in this context, the BOD additional acceptor is chosen to bridge with the powerful donor of an indoline unit, in combination with a different anchoring group and  $\pi$ -bridge. As is well known, carboxylic acids are widely used in ruthenium polypyridine or zinc porphyrin dyes, 16 while cyanoacetic acid is commonly used in metal-free organic dyes.17 To investigate dye characteristics brought about by different anchoring units, four sensitizers were designed with these two different anchoring groups. Moreover, based on WS-66 and WS-67 with a benzene spacer, an efficient building block octyl-decorated CPDT unit was further introduced into WS-68 and WS-69 to enhance their electron-donating ability. The synthetic routes of the four sensitizers are outlined in Scheme 1 in the ESI†. The target sensitizers WS-66 and WS-67 started from 4-bromo-7-(4-(p-tolyl)-

the ESI.†

**Edge Article** 

1,2,3,3a,4,8b-hexahydrocyclopenta[b]indol-7-yl)benzo[c][1,2,5]oxadiazole (1), which is a quite stable red powder and does not undergo colour change for at least one year, mainly owing to the strong electron-withdrawing BOD unit.18 It is first converted to compounds 3 and 5 by Suzuki coupling with butyl 4-(4,4,5,5tetramethyl-1,3,2-dioxaborolan-2-yl)benzoate (2) and (4-formylphenyl)boronic acid (4), respectively. Afterwards, compound 3 was converted to sensitizer WS-66 by ester hydrolysis in KOH with a high yield of 75.9%, while compound 5 was converted to sensitizer WS-67 by Knoevenagel condensation with cyanoacetic acid with a yield of 68.8%. Compound 8 (purple powder) was obtained from compound 1 and CPDT (6) via a Suzuki reaction and then bromination. The bromination reaction was conducted without purification for a high conversion yield. Then 8 was converted to 9 and 10 by Suzuki coupling with 2 and 4, which is similar to the synthesis of 3 and 5. Likewise, the precursors, 9 and 10, were converted to WS-68 and WS-69 by ester hydrolysis and Knoevenagel condensation, respectively. All intermediates and the target sensitizer dyes were characterized by <sup>1</sup>H and <sup>13</sup>C NMR, and high-resolution mass spectroscopy (HR-MS). Their corresponding spectra are presented in

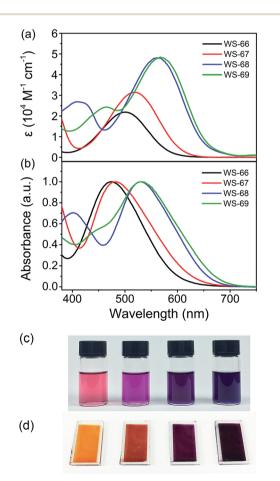


Fig. 2 Absorption spectra of dyes WS-66, WS-67, WS-68 and WS-69 in  $CH_2Cl_2$  (a) and on 3  $\mu$ m  $TiO_2$  films (b). Photographs of dyes WS-66, WS-67, WS-68 and WS-69 (from left to right) in solution (c) and on  $TiO_2$  films (d).

### Enhanced light-harvesting from a narrowed energy band gap

Fig. 2 shows the UV-Vis absorption spectra of dyes WS-66, WS-67, WS-68 and WS-69 measured in CH<sub>2</sub>Cl<sub>2</sub> solution  $(3 \times 10^{-5} \text{ M}, \text{ Fig. 2a})$  and on TiO<sub>2</sub> films (3 µm, Fig. 2b). Their corresponding characteristic data are summarized in Table 1. WS-66 shows a distinct absorption band from 380 to 650 nm, with an intramolecular charge transfer (ICT) peak located at 501 nm. When the carboxylic acid group in WS-66 is replaced by the much stronger electron acceptor of cyanoacetic acid, as in WS-67, it displays a bathochromic shift of 18 nm in the ICT peak, with a maximum absorption band at 519 nm. Dye WS-68, with an inserted electron-rich group of CPDT in the  $\pi$ -spacer, exhibits a more obvious red-shift by 59 nm in the ICT peak (up to 560 nm), along with an enhanced molar extinction coefficient  $(\varepsilon, 4.81 \times 10^4 \text{ M}^{-1} \text{ cm}^{-1})$ . The insertion of the CPDT unit is expected to relieve the steric hindrance between BOD and the benzene unit and to enhance the conjugation, thus facilitating the ICT process. Further replacing the carboxylic acid group in WS-68 with cyanoacetic acid to give dye WS-69 leads to a slight bathochromic shift of 8 nm in the ICT peak to 568 nm. Overall, it can be found that the ICT band is gradually red-shifted with an improved absorption coefficient from WS-66 to WS-69, which can be reflected in a photograph of the dye solution, changing from pink to purple then to dark violet (Fig. 2c). These results indicate that the introduction of a CPDT unit into the D-A- $\pi$ -A framework combined with a cyanoacetic acid acceptor is beneficial to broadening the absorption and enhancing the light-harvesting capability.

Upon adsorption onto  $TiO_2$  films, all four dyes show hypsochromic shifts in their ICT bands, which can be ascribed to deprotonation of the carboxylic acid or cyanoacetic acid. Meanwhile, there is a variation tendency similar to that occurring in solution with a gradual bathochromic shift in the ICT peak can be observed from **WS-66** (473 nm) to **WS-69** (532 nm). As is shown in Fig. 2d, the colour of the dye-loaded  $TiO_2$  films changes from orange to red then to purple gradually. The light-harvesting efficiency (LHE, Fig. S1†) calculated from Fig. 2b well matches the behaviour of the absorption spectra, reaching close to 100% near the ICT band even for the 8  $\mu$ m  $TiO_2$  film. Practical light-harvesting in solar cells should be more efficient due to the thicker mesoscopic  $TiO_2$  film (16  $\mu$ m) used in devices.

#### Modulation of energy levels from the LUMO to HOMO

Generally, the energy gap between the LUMO and HOMO is calculated from the absorption edge of dye-loaded TiO<sub>2</sub> film.<sup>19</sup> The broader the absorption the sensitizer exhibited, the narrower the energy gap it actually possesses. Meanwhile, the LUMO and HOMO levels of the sensitizers that critically determine photo-generated electron-injection and dye-regeneration play a pivotal role in the ultimate power output of the devices. Accordingly, there is a persistent pursuit to design photosensitizers with a well-matched energy level and narrower band gap *via* molecular engineering. Here, to thermodynamically evaluate dye regeneration and charge injection, the electrochemical properties of four dyes, WS-66, WS-67, WS-68 and WS-69, were measured by cyclic voltammetry in CH<sub>2</sub>Cl<sub>2</sub> with tetra-n-

**Chemical Science** 

Table 1 Optical and electrochemical data for dyes WS-66, WS-67, WS-68 and WS-69

Dye	$\lambda_{\max}^{a}[nm]$	$\varepsilon^a \left[ \mathrm{M}^{-1} \ \mathrm{cm}^{-1} \right]$	$\lambda_{\max}$ on $\mathrm{TiO_2}^b$ [nm]	$HOMO^{c}[V]$ (vs. NHE)	$E_{0-0}^{d}$ [eV]	$LUMO^{e}[V]$ (vs. NHE)
WS-66	501	21 898	473	0.99	2.07	-1.08
WS-67	519	31 495	483	0.99	1.98	-0.99
WS-68	560	48 122	530	0.87	1.89	-1.02
WS-69	568	48 465	532	0.87	1.85	-0.98

<sup>&</sup>lt;sup>a</sup> Absorption peaks ( $\lambda_{max}$ ) and molar extinction coefficients ( $\varepsilon$ ) were obtained in CH<sub>2</sub>Cl<sub>2</sub>. <sup>b</sup> Absorption parameters were obtained on 3  $\mu$ m TiO<sub>2</sub> films. <sup>c</sup> The HOMO was obtained in CH<sub>2</sub>Cl<sub>2</sub> (working electrode: glassy carbon; reference electrode: saturated calomel electrode (SCE); counter electrode: Pt); the measured redox potentials were calibrated with ferrocene as an external reference and converted to NHE by addition of  $\pm 0.69$  V.  $d_{E_{0-0}}$  values were estimated from the wavelength at 10% maximum absorption intensity for the dye-adsorbed 3 μm TiO<sub>2</sub> film. <sup>e</sup> The LUMO was calculated according to LUMO = HOMO -  $E_{0-0}$ .

butylammonium hexafluorophosphate (0.1 M, Fig. 3a). The SCE reference electrode was calibrated using a ferrocene redox couple as an external standard and the  $E_{1/2}$  of the ferrocene redox couple was found to be 0.42 V versus the SCE reference electrode. The potentials versus the NHE were calibrated by the addition of 0.69 V to the potentials versus ferrocene. The energy level data (LUMO, HOMO and energy band gap) are listed in Table 1 and Fig. 3b. The LUMO and HOMO values for reference dye WS-66 are -1.08 and 0.99 V, respectively, along with a wide energy gap of 2.07 eV. It is generally considered that the energy values for the TiO2 conduction band and iodine electrolyte in DSSCs are -0.5 V and 0.4 V, respectively. And the minimum

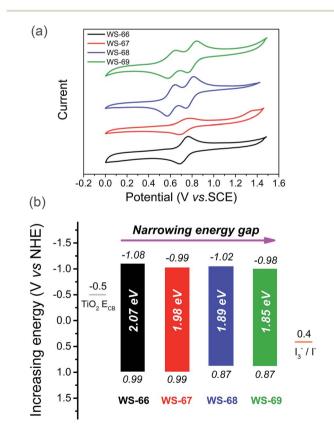


Fig. 3 Cyclic voltammograms of dyes WS-66, WS-67, WS-68 and WS-69 measured in CH2Cl2 (a), LUMO (above the coloured bar) and HOMO (under the coloured bar) values, and energy band gaps of dyes WS-66, WS-67, WS-68 and WS-69 (b).

driving force requirement for excited electron injection into TiO<sub>2</sub> and dye regeneration by the electrolyte is about 0.3 V.<sup>8a,20</sup> Therefore, WS-66 theoretically possesses sufficient LUMO and HOMO values for electron-injection and dye-regeneration with a driving force of more than 0.5 V. Based on WS-66, replacing carboxylic acid with a stronger electron-withdrawing acceptor of cyanoacetic acid induces a downwards shift of the LUMO level by 0.09 V, while no variation in the HOMO level was observed, resulting in a reduced band gap (1.98 eV) for WS-67. Considering the relatively positive HOMO levels for WS-66 and WS-67 which have the potential to be further modulated, the electronrich CPDT unit was purposefully introduced into the  $\pi$ -bridge to upwards shift the HOMO level. As we expected, the HOMO levels for WS-68 and WS-69 are successfully uplifted by 0.12 V with respect to WS-66 and WS-67. In particular, the optimal dye, WS-69, displays the narrowest band gap (1.85 eV) of the four sensitizers, along with theoretically enough driving force for electron-injection (0.48 V) and dye-regeneration (0.47 V). Comparing these four dyes, the customized LUMO levels downwards shift from -1.08 V (WS-66) to -0.98 V (WS-69), and the customized HOMO levels upwards shift from 0.99 V (WS-66) to 0.87 (WS-69), together with the energy gap reducing from 2.07 eV (WS-66) to 1.98 eV (WS-67) to 1.89 eV (WS-68) to 1.85 eV (WS-69). Here, for the metal-free organic dye, we have successfully demonstrated the rational modulation of energy level for a narrower band gap dye through molecular engineering.

#### **DFT** calculations

Density functional theory (DFT) calculations were employed using the hybrid B3LYP functional and the 6-31G(d) basis set (ESI†) to simulate the energy levels and electron distribution in the frontier orbitals.21 As presented in Fig. 4, the change in the calculated energy band gaps (Table S1†) is in agreement with the experimental data reducing from WS-66 (2.63 eV) to WS-69 (2.12 eV). For dyes WS-66 and WS-67, the HOMO orbitals are mainly distributed on the indoline donor and BOD auxiliary acceptor, while the LUMO orbitals are largely delocalized on BOD, the benzene unit and the anchoring group. In comparison, the insertion of the CPDT moiety in WS-68 and WS-69 results in an extended delocalization of the HOMO and LUMO onto CPDT, thus enhancing the ICT character band, together with increasing the oscillator strength (Table S2†). All four sensitizers with either cyanoacetic acid or carboxylic acid

**Edge Article** 




Fig. 4 Calculated frontier molecular orbitals (HOMO and LUMO) and energy gaps for dyes WS-66, WS-67, WS-68 and WS-69.

acceptors display delocalized LUMO orbitals over the anchoring groups. Apparently, the well-overlapping HOMO and LUMO orbitals can facilitate electron migration from the donor to the anchoring group and injection into the TiO<sub>2</sub> conduction band.<sup>18</sup> Besides, the twisted dihedral angle between the BOD and benzene ring can be significantly relieved by the introduction of a co-planar CPDT unit (Table S3†). Especially for dye WS-69, the dihedral angles were minimized to 1.7° for BOD–CPDT and 10.6° for CPDT–benzene ring, which contributes to the convenient electron flow through the entire molecular skeleton.

### Enhanced $J_{SC}$ from WS-66 to WS-69 accompanied by a decrease of $V_{OC}$

Fig. 5 shows the photocurrent density-voltage (J-V) characteristic curves (a) of DSSCs fabricated with the prepared dyes using an iodine electrolyte containing 0.6 M of DPMII, 0.05 M of I<sub>2</sub>, 0.1 M of LiI, and 0.5 M of TBP in acetonitrile under AM 1.5 full sunlight (100 mW cm<sup>-2</sup>). The relevant parameters of the DSSCs are listed in Table 2. Detailed information regarding the DSSCs' fabrication is included in the experimental section (ESI†). For the dye bath, 0.3 mM of dye was dissolved in chloroform/ ethanol (4:1) without any co-adsorbent. Interestingly, the PCE values of these devices are increased in the order of WS-66 (7.01%) < WS-67 (8.25%) < WS-68 (8.42%) < WS-69 (9.03%),which can be attributed to the enhancement in  $J_{SC}$  from 12.97 to 15.91 to 17.73 to 19.39 mA cm<sup>-2</sup>. Compared to the devices sensitized by WS-66 and WS-68 with the carboxylic acid anchoring group, WS-67 and WS-69 bearing a stronger cyanoacetic acid group show the increased  $J_{SC}$  by 2.94 and 1.66 mA cm<sup>-2</sup> due to a slightly improved photo-response. Meanwhile, an obvious decrease of 46 and 9 mV in the  $V_{\rm OC}$  can also be seen, and mainly stems from the cyano group increasing the undesired backwards electron transfer. By incorporating CPDT into the skeleton of WS-66 and WS-67, significant improvements in the  $J_{SC}$  of 4.76 and 3.48 mA cm<sup>-2</sup> are obtained for the WS-68 and WS-69 sensitized cells owing to the greatly broadened lightharvesting and IPCE (Fig. 5b), albeit with a  $V_{\rm OC}$  loss about 10 mV. Consequently, through rational molecular engineering, the optimal sensitizer, WS-69, realized the highest PCE of 9.03%, with the average parameters of  $J_{SC} = 19.39 \text{ mA cm}^{-2}$ ,  $V_{OC}$ 

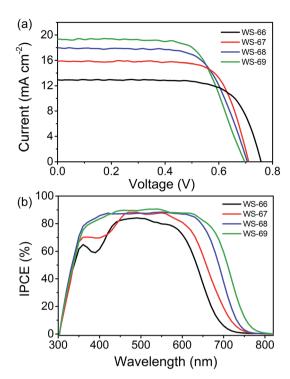


Fig. 5 Current–voltage (J-V) curve (a) and IPCE spectra (b) of cell devices sensitized with dyes WS-66, WS-67, WS-68 and WS-69 under full AM 1.5 solar intensity.

= 696 mV and FF = 0.67, outperforming the reference dye, WS-66(7.01%), as a result of broadening absorption and improving the near-infrared light-harvesting.

The incident photon-to-current conversion efficiencies (IPCE) spectra, a function confirming the variation in  $J_{\rm SC}$  for DSSCs, are shown in Fig. 5b. It can be found that the IPCE action spectra become broader from WS-66 to WS-69, which is in line with the light-harvesting of the dye-loaded TiO<sub>2</sub> films (Fig. S1†). In comparison with the carboxylic acid groups (WS-66 and WS-68), dyes bearing cyanoacetic acid (WS-67 and WS-69) show relatively broader IPCE spectra with higher plateaus. These behaviours are consistent with previously reported results from another group.<sup>22</sup> Notably here, the optimal dye, WS-69, exhibits a high IPCE value exceeding 80% from 375 to 660 nm and an onset at 800 nm, along with no distinct valley over the whole visible wavelength. The enhancement in the IPCE spectra also demonstrates the significance of narrowing the band gap with suitable energy levels for DSSCs.

Table 2 Detailed photovoltaic parameters of cell devices sensitized with dyes WS-66, WS-67, WS-68 and WS-69 under full AM 1.5 solar intensity $^a$ 

Dyes	$J_{ m SC}~({ m mA~cm}^{-2})$	$V_{\mathrm{OC}}\left(\mathrm{mV}\right)$	FF	η (%)
WS-66	$12.97\pm0.02$	$757 \pm 4$	$\textbf{0.71} \pm \textbf{0.02}$	$\textbf{7.01} \pm \textbf{0.05}$
WS-67	$15.91 \pm 0.04$	$711 \pm 3$	$0.73 \pm 0.02$	$8.25 \pm 0.07$
WS-68	$17.73\pm0.03$	$705\pm2$	$\textbf{0.67} \pm \textbf{0.01}$	$8.42\pm0.04$
WS-69	$19.39\pm0.05$	$696\pm2$	$\textbf{0.67} \pm \textbf{0.01}$	$9.03\pm0.05$

<sup>&</sup>lt;sup>a</sup> Average values are based on three replicate measurements.

**Chemical Science Edge Article** 

Meanwhile, we noticed that, despite the enhancement in  $J_{SC}$ , the  $V_{\rm OC}$  value for these dyes undesirably decreased from 757 mV for WS-66 to 696 mV for WS-69. This probably results from the increased molecular size of WS-69 combining the cyano unit in the anchoring group, resulting in a slightly tilted binding geometry and aggravated dye aggregation, then leading to faster charge recombination between the dye radical cation and electron in TiO2.10-12 It is deemed to be the "trade-off" effect between  $J_{\rm SC}$  and  $V_{\rm OC}$ , which is hard to avoid in the molecular design of sensitizers.  $^{9-13}$  In this context, since the high  $J_{\rm SC}$  with broad IPCE action spectra were obtained from molecular engineering, we try to further overcome the  $V_{\rm OC}$  loss through a cosensitization strategy using a known high  $V_{\rm OC}$  organic dye WS-5 (Fig. S3 and Table S4†) for pursuing better photovoltaic performance. For comparison, two cosensitization couples of WS-68/WS-5 and WS-69/WS-5 were prepared and tested under the same conditions.

### Sequential cosensitization to prevent the "trade-off" effect between $J_{SC}$ and $V_{OC}$

The cosensitized DSSCs of WS-68/WS-69 with WS-5 were made with the previous iodine electrolyte, and measured at an irradiation of simulated AM 1.5 sunlight. The J-V curves, IPCE spectra and corresponding photovoltaic parameters are presented in Fig. 6 and Table 3. We focused on probing the effect of the cosensitization sequence on their photovoltaic performances. The cosensitized TiO2 electrode was first dipped in a solution of WS-68/WS-69 for 12 h, then dipped in a solution of WS-5 for 2 h, indicated as WS-68 (12 h) + WS-5 (2 h) and WS-69

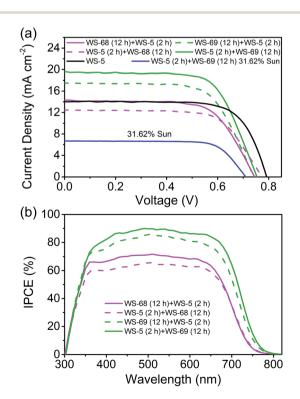


Fig. 6 Current-voltage (J-V) curve (a) and IPCE spectra (b) of DSSCs made by cosensitization of WS-68/69 with WS-5.

(12 h) + WS-5 (2 h), respectively. Unexpectedly, both of the cosensitization couples show a decreased PCE due to the decreased  $J_{SC}$  (14.08 and 17.36 mA cm<sup>-2</sup>) compared to their single dye (17.73 and 19.39 mA cm<sup>-2</sup>), which can be reflected in their relatively low IPCE values (Fig. 6b). However, it is promising that cosensitization leads to an obvious increase in  $V_{\rm OC}$  up to 740 mV. Next, the reversed co-adsorption sequence was explored, in which the TiO<sub>2</sub> electrode was first dipped in a WS-5 solution for 2 h, then dipped in a WS-68/WS-69 solution for 12 h, indicated as WS-5 (2 h) + WS-68 (12 h) and WS-5 (2 h) + WS-69 (12 h), respectively. Interestingly, totally disparate cell behaviours were obtained for these two cosensitization couples. For the WS-5 (2 h) + WS-68 (12 h) cosensitization, the cell performances are extremely poor with a PCE of 6.56% due to the sharp reduction in photocurrent to 12.51 mA cm<sup>-2</sup>. However, the  $V_{\rm OC}$ here for cosensitization is boosted to 774 mV, which is even close to the  $V_{\rm OC}$  of single WS-5 (792 mV). We speculate that a large adsorption replacement of WS-68 by WS-5 exists which dominated the cell's behaviour (discussed in the adsorption amount experiment section). Apparently, the cosensitization sequence can exert a tremendous influence on the cell's performance, especially for the  $V_{\rm OC}$  value. In contrast, in the case of WS-5 (2 h) + WS-69 (12 h), surprisingly, the cosensitized cells exhibit a significantly enhanced PCE reaching 10.09%, along with the photovoltaic parameters  $J_{\rm SC}=19.56~{
m mA~cm}^{-2}$ ,  $V_{\rm OC} = 753$  mV and FF = 0.68. It is remarkable that synergistic improvements both in the photocurrent and photovoltage can be obtained via cosensitization with respect to the single WS-69. Note that the  $V_{\rm OC}$  value increases by 57 mV from 696 to 753 mV for the cosensitized cells. Also, to meet the requirement of indoor DSSCs' applications, the best device (WS-5 (2 h) + WS-69 (12 h)) was tested at a weaker light irradiation. Strikingly, the optimal cells achieve a notable PCE of 11.12% under 31.62% sunlight illumination owing to the high FF. To the best of our knowledge, this is the first time that the efficiency of a pure metal-free organic dye with an iodine electrolyte exceeds 11% even under relatively weak light irradiation. Indeed, the leading cosensitized cells (WS-5 (2 h) + WS-69 (12 h)) display an impressive IPCE action spectrum which is even stronger than the single WS-69 based device, along with a high value beyond 80% from 385 to 675 nm and an onset at 800 nm. The enhanced IPCE behaviour is probably attributed to the improved electron injection efficiency due to the adsorption of WS-5. The calculated photocurrent from the IPCE spectrum is in good agreement with the measured  $J_{SC}$ . Indeed, we have successfully overcome the "trade-off" effect by carefully exploring sequential cosensitization. In contrast with the previous cosensitization strategy mostly focused on the compensation of light-harvesting, we here propose a novel cosensitization architecture, in which the large molecular-sized high  $J_{SC}$  dye, WS-69, takes charge of broadening the light-harvesting region to generate a high photocurrent while the small molecular-sized high  $V_{\rm OC}$ dye, WS-5, is responsible for retarding charge recombination to generate a high photovoltage (discussed in the electrochemical impedance spectroscopy (EIS) analysis section). The cosensitization of WS-69 with WS-5 with different molecular sizes can form a compact and synergetic sensitized layer on the TiO2

Table 3 Detailed photovoltaic parameters of cell devices fabricated with cosensitization of WS-68/WS-69 with WS-5 under different light intensities<sup>d</sup>

Dyes	$J_{\rm SC}$ (Cal) <sup>c</sup> (mA cm <sup>-2</sup> )	$J_{ m SC}~({ m mA~cm}^{-2})$	$V_{\rm OC}$ (mV)	FF	η (%)
<b>WS-68</b> (12 h) + <b>WS-5</b> (2 h) <sup><math>a</math></sup>	13.98	$14.08\pm0.06$	$746\pm3$	$0.67\pm0.01$	$7.67\pm0.06$
<b>WS-69</b> (12 h) + <b>WS-5</b> (2 h) <sup><math>a</math></sup>	17.19	$17.36\pm0.03$	$744\pm2$	$0.67\pm0.02$	$8.66\pm0.02$
<b>WS-5</b> (2 h) + <b>WS-68</b> (12 h) $^a$	12.93	$12.51\pm0.05$	$774 \pm 2$	$0.68\pm0.02$	$\textbf{6.56} \pm \textbf{0.05}$
<b>WS-5</b> $(2 \text{ h})$ + <b>WS-69</b> $(12 \text{ h})^a$	18.66	$19.56\pm0.03$	$753\pm3$	$0.68\pm0.01$	$10.09\pm0.02$
<b>WS-5</b> (2 h) + <b>WS-69</b> (12 h) <sup>b</sup>	_	$6.67\pm0.04$	$710\pm2$	$0.74\pm0.01$	$\textbf{11.12} \pm \textbf{0.03}$
WS-5 <sup>a</sup>	_	$14.05\pm0.03$	$792\pm2$	$\textbf{0.72}\pm\textbf{0.01}$	$8.01\pm0.03$

 $<sup>^</sup>a$  100% solar intensity irradiation.  $^b$  31.62% solar intensity irradiation.  $^c$  Calculated  $J_{\rm SC}$  value from the IPCE spectrum.  $^d$  Average values are based on three replicate measurements.

surface to effectively block backwards electron transfer between the injected electrons and the redox species. Moreover, the choice of co-adsorption dye and the co-adsorption sequence are demonstrated to be very critical for the cell behaviours, especially for the cosensitization of dye with different anchoring group which deserves to be more carefully studied to achieve higher efficiency.

### Cosensitization brings forth long-lived electron lifetime

To get insight into the different  $V_{\rm OC}$  values resulting from modulation of the energy level and cosensitization, electrochemical impedance spectroscopy (EIS) analysis was applied to the DSSCs based on single WS-66, WS-67, WS-68, WS-69 and the optimal cosensitized couple (WS-5 (2 h) + WS-69 (12 h)). Generally, the  $V_{\rm OC}$  is determined by the quasi-Fermi level of TiO<sub>2</sub> and the redox couple in the electrolyte.<sup>23</sup> Since the electrolyte components used in this work are identical, the variation in  $V_{\rm OC}$  can be attributed to the change of the quasi-Fermi level of TiO<sub>2</sub>, which is mainly influenced by the conduction band position and free charge density in TiO2. As shown in Fig. 7a, nearly no obvious change in the capacitance can be found for the four individual dyes, while co-adsorption of WS-69 with WS-5 brings about a slightly upwards shifted conduction band edge reflected in its higher capacitance. Then, the electron lifetime as a function of free charge density was further measured and plotted in Fig. 7b. At a given bias voltage, the lifetime for DSSCs sensitized by individual dyes decreases in the order **WS-66** > **WS-67** > **WS-68** > **WS-69**, which is in line with the  $V_{\rm OC}$  change, suggestive of the aggravated charge recombination process between electrons injected into TiO2 with an iodine electrolyte or oxidized dyes. Notably, upon co-adsorption of WS-69 with WS-5, the cosensitized device exhibits a significantly prolonged electron lifetime even close to that of WS-66, indicative of its slowed charge recombination rate. Here we consider that the large-sized molecule (WS-69) cosensitized with a smallsized molecule (WS-5) can form a compact and synergetic sensitized layer on the TiO<sub>2</sub> surface, not only suppressing dye aggregation and weakening intermolecular interactions but also largely removing the charge recombination channels between the injected electrons and the iodine electrolyte. Accordingly, it can be concluded that the dramatic increase of 57 mV in the  $V_{\rm OC}$  value for the cosensitized cells is a cumulative effect caused by the upward shifted conduction band and enhanced deterring of the charge recombination process with prolonged electron lifetime. EIS analysis further demonstrates that the cosensitization strategy is a feasible method for improving the  $V_{\rm OC}$  for the development of DSSCs.

### The cyano group benefits the binding of dyes onto ${\rm TiO_2}$ nanocrystals

Since the only difference between **WS-68** and **WS-69** is the anchoring group, we try to investigate their adsorption ability as well as dye composition change in the cosensitization process. The adsorption amounts (Table S5†) of the individual dye and cosensitization were measured from UV-Vis spectra of a desorption dye solution (0.1 M NaOH in THF/H<sub>2</sub>O (1/1)) and are presented in Fig. 8. Compared to dye **WS-68** which bears a carboxylic acid anchoring group (1.60  $\times$  10<sup>-7</sup> mol cm<sup>-2</sup>), **WS-69** bearing a cyanoacetic acid group shows a larger dyeloading amount of 2.18  $\times$  10<sup>-7</sup> mol cm<sup>-2</sup> in a 12 h dipping time.




Fig. 7 TiO<sub>2</sub> capacitance (a) and electron lifetime (b) as a function of potential based on WS-66, WS-67, WS-68, WS-69 and cosensitization of WS-5 with WS-69.

Chemical Science Edge Article




Fig. 8 Pie charts showing the adsorption proportions of dyes WS-5, WS-68 and WS-69 in the cosensitization strategy on 16  $\mu$ m TiO<sub>2</sub> films.


Meanwhile, WS-5 can also achieve a considerable dye-loading amount of  $1.20 \times 10^{-7}$  mol cm<sup>-2</sup> in just 2 h probably due to its small molecule size. Upon co-adsorption, when the electrode was first dipped into the WS-5 solution for 2 h, then dipped into WS-68/WS-69 for 12 h, all of the three dyes show decreased adsorption amounts compared to their individual adsorption, indicative of the serious competitive adsorption among the co-adsorbed dyes. Meanwhile, although WS-68 has undergone a longer adsorption time of 12 h than of WS-5 (2 h), the proportion of WS-68 in all dye-loading (WS-5 + WS-68) is just 44.86%, even less than that of WS-5 (55.14%). Thereby, we can understand from this that the high  $V_{\rm OC}$  close to that of WS-5 in this cosensitized couple mainly results from the advantageous adsorption amount of WS-5. However, in case of the co-adsorption of WS-5 and WS-69, the dye-loading amount of WS-69 (88.23%) is much higher than WS-5 (11.77%) and nearly double that of WS-68 (44.86%) under the same adsorption conditions. Hence, WS-5 working as a benchmark can identify the discrepant binding strength of the two anchoring units with TiO<sub>2</sub>. We can conclude that the cyanoacetic acid anchoring group possesses a stronger adsorption ability than the carboxylic acid group. Then the reversed adsorption sequence was also carried out, and similar results can be obtained in that the ratio of WS-68 is still less than WS-5 and WS-69, further supporting the relative weaker binding strength of carboxylic acid with TiO2. Besides, the WS-5 and WS-69 co-adsorption couple exhibits a greater total adsorption amount (2.25  $\times$  10<sup>-7</sup> and  $2.64 \times 10^{-7}$  mol cm<sup>-2</sup>) than the **WS-5** and **WS-68** co-adsorption couple  $(1.48 \times 10^{-7} \text{ and } 1.70 \times 10^{-7} \text{ mol cm}^{-2})$ , which is thought to be a key factor of their different cells' behaviours.

### High-stability afforded by rational molecular engineering

Stability is considered to be a crucial requirement for further solar cell applications. Thereby, we first tested the photostability of four sensitizers with different molecular structures. According to the method reported by Katoh and coworkers,<sup>24</sup> the most unstable state of sensitizers is their oxidized state. Sensitizers are required to be stable in their cation state for at least 10 s to be able to realize a 10 year operation cycle. To

shorten the experiment period, the absorbance of a dye-loaded  ${\rm TiO_2}$  film without a redox electrolyte was measured under simulated AM 1.5G (15 and 30 min), in which the dye regeneration process occurs in the millisecond time range, taking  $10^4$  to  $10^3$  times longer than that in a complete DSSC device (100 ns to 1  $\mu$ s).

As depicted in Fig. 9a, WS-66 shows obvious attenuation in absorbance after light irradiation, suggesting its relatively weak stability. Incorporation of a CPDT unit can remarkably improve the dye stability with reduced attenuation after illumination as reflected in WS-68, which can be ascribed to the more effective separation of the HOMO orbital on the CPDT unit as illustrated in the DFT calculation. On the other hand, it can be found that WS-67 and WS-69 with cyanoacetic acid acceptors display enhanced stability compared with WS-66 and WS-68 with carboxylic acid acceptors,25 which can be attributed to two factors: (i) a more stabilized LUMO orbital resulting from the electron-withdrawing cyano group, and (ii) stronger binding strength of cyanoacetic acid with TiO2 nanocrystals as demonstrated in the adsorption amount experiment. Apparently, WS-69 exhibits the strongest photo-stability with no obvious shift and decay after 30 min irradiation, which is considered to be better than that of MK-2.24 Afterwards, the long-term






Fig. 9 Dyes WS-66, WS-67, WS-68 and WS-69 adsorbed on  $\rm TiO_2$  films before and after light irradiation for 15 and 30 min (a), evolution of photovoltaic performance parameters for DSSCs based on cosensitization of WS-69 with WS-5 under visible-light soaking (b).

**Edge Article Chemical Science** 

durability of cell devices based on the leading dye WS-69 and cosensitization (WS-5 (2 h) + WS-69 (12 h)) was also tested with a liquid iodine electrolyte (Fig. S4† and 9b). As a result, the PCE of the cosensitized cell remained at 96% of its initial value after 500 h aging. These results unambiguously corroborate the superior stability of dye WS-69, which is afforded by rational molecular engineering.

### Conclusions

We have focused on the detrimental "trade-off" effect between photocurrent and photovoltage, and developed four novel benzoxidiazole based D-A- $\pi$ -A metal-free organic dyes with different combinations of  $\pi$ -spacer units and anchoringacceptor groups (WS-66, WS-67, WS-68 and WS-69). By stepwise tuning of the LUMO and HOMO levels, the optimal sensitizer WS-69 exhibits the narrowest energy band gap and broadest absorption spectrum, along with the highest photocurrent of up to 19.39 mA cm<sup>-2</sup> but suffers from an inferior photovoltage of 696 mV. Sequential cosensitization with a small molecularsized high  $V_{\rm OC}$  dye WS-5 was demonstrated to effectively remedy the  $V_{\rm OC}$  loss for dye WS-69 and distinctly prevent the "trade-off" effect between  $J_{SC}$  and  $V_{OC}$ . The leading cosensitized cells exhibit an excellent efficiency of 10.09% under one sun irradiation, and 11.12% under 0.3 sun irradiation. To the best of our knowledge, this is the first time that the efficiency of a pure metal-free organic dye with an iodine electrolyte exceeds 11% even under relatively weak light irradiation. We further propose a novel cosensitization architecture, in which the large molecular-sized, high  $J_{SC}$  dye WS-69 takes charge of broadening the light-harvesting region to generate a high photocurrent while the small molecular-sized, high  $V_{\rm OC}$  dye WS-5 is responsible for retarding charge recombination to generate a high photovoltage. Moreover, the adsorption amount and photo-stability studies suggest that the cyano group in the anchoring acceptor is important for the stability since it is beneficial towards decreasing the LUMO levels and enhancing the binding of dyes onto the TiO2 nanocrystals.

### Acknowledgements

This work was supported by the NSFC for Creative Research Groups (21421004) and Distinguished Young Scholars (21325625), NSFC/China, Oriental Scholarship, Fundamental Research Funds for the Central Universities (WJ1416005), Scientific Committee of Shanghai (15XD1501400), and Programme of Introducing Talents of Discipline to Universities (B16017).

### Notes and references

1 (a) B. O'Regan and M. Grätzel, Nature, 1991, 353, 737-740; (b) Y. Ren, Y. Li, S. Chen, J. Liu, J. Zhang and P. Wang, Energy Environ. Sci., 2016, 9, 1390-1399; (c) S. Kim, J. K. Lee, S. O. Kang, J. Ko, J. H. Yum, S. Fantacci, F. De Angelis, D. Di Censo, M. K. Nazeeruddin and M. Grätzel, J. Am. Chem. Soc., 2006, 128, 16701-16707; (d) Z. S. Wang, Y. Cui,

- K. Hara, Y. Dan-oh, C. Kasada and A. Shinpo, Adv. Mater., 2007, 19, 1138-1141; (e) C. Chou, F. Hu, H. Yeh, H. Wu, Y. Chi, J. N. Clifford, E. Palomares, S. Liu, P. Chou and G. Lee, Angew. Chem., Int. Ed., 2014, 53, 178-183; (f) S. Wang, K. Wu, E. Ghadiri, M. G. Lobello, S. Ho, Y. Chi, J. Moser, F. De Angelis, M. Grätzel and M. K. Nazeeruddin, Chem. Sci., 2013, 4, 2423-2433; (g) B. Xu, H. Tian, L. Lin, D. Qian, H. Chen, J. Zhang, N. Vlachopoulos, G. Boschloo, Y. Luo, F. Zhang, A. Hagfeldt and L. Sun, Adv. Energy Mater., 2015, 5, 1401185.
- 2 (a) Z. Yao, H. Wu, Y. Ren, Y. Guo and P. Wang, Energy Environ. Sci., 2015, 8, 1438-1442; (b) Y. Hu, A. Ivaturi, M. Planells, C. L. Boldrini, A. O. Biroli and N. Robertson, J. Mater. Chem. A, 2016, 4, 2509-2516; (c) T. Higashino, Y. Fujimori, K. Sugiura, Y. Tsuji, S. Ito and H. Imahori, Angew. Chem., Int. Ed., 2015, 127, 9180-9184; (d) Y. K. Eom, I. T. Choi, S. H. Kang, J. Lee, J. Kim, M. J. Ju and H. K. Kim, Adv. Energy Mater., 2015, 5, 1500300; (e) C. Wang, J. Hu, C. Wu, H. Kuo, Y. Chang, Z. Lan, H. Wu, E. W. Diau and C. Lin, Energy Environ. Sci., 2014, 7, 1392-1396; (f) K. Kakiage, Y. Aoyama, T. Yano, K. Oya, J. Fujisawa and M. Hanaya, Chem. Commun., 2015, 51, 15894-15897; (g) M. Xu, M. Zhang, M. Pastore, R. Li, F. De Angelis and P. Wang, Chem. Sci., 2012, 3, 976-983; (h) M. Liang and J. Chen, Chem. Soc. Rev., 2013, 42, 3453-3488. 3 (a) L. Han, A. Islam, H. Chen, C. Malapaka, B. Chiranjeevi, S. Zhang, X. Yang and M. Yanagida, Energy Environ. Sci., 2012, 5, 6057–6060; (b) Y. Xie, Y. Tang, W. Wu, Y. Wang, J. Liu, X. Li, H. Tian and W. H. Zhu, J. Am. Chem. Soc., 2015, 137, 14055-14058; (c) A. Yella, H. W. Lee, H. N. Tsao, C. Yi, A. K. Chandiran, M. K. Nazeeruddin, E. W. G. Diau, C. Y. Yeh, S. M. Zakeeruddin and M. Grätzel, Science, 2011,

334, 629-634.

4 (a) X. Kang, J. Zhang, D. O'Neil, A. J. Rojas, W. Chen, P. Szymanski, S. R. Marder and M. A. El-Sayed, Chem. Mater., 2014, 26, 4486-4493; (b) H. Wang, L. Xiao, L. Yan, S. Chen, X. Zhu, X. Peng, X. Wang, W. Wong and W. Wong, Chem. Sci., 2016, 7, 4301-4307; (c) Z. Yao, M. Zhang, H. Wu, L. Yang, R. Li and P. Wang, J. Am. Chem. Soc., 2015, 137, 3799-3802; (d) T. Lan, X. Lu, L. Zhang, Y. Chen, G. Zhou and Z. Wang, J. Mater. Chem. A, 2015, 3, 9869-9881; (e) Z. Chai, M. Wu, M. Fang, S. Wan, T. Xu, R. Tang, Y. Xie, A. Mei, H. Han, Q. Li and Z. Li, Adv. Energy Mater., 2015, 5, 1500846; (f) J. Shi, Z. Chai, R. Tang, J. Hua, Q. Li and Z. Li, Sci. China: Chem., 2015, 58, 1144-1151; (g) X. Gu, H. Yan, T. Kurosawa, B. C. Schroeder, K. L. Gu, Y. Zhou, J. W. F. To, S. D. Oosterhout, V. Savikhin, F. Molina-Lopez, C. J. Tassone, S. C. B. Mannsfeld, C. Wang, M. F. Toney and Z. Bao, Adv. Energy Mater., 2016, 6, 1601225; (h) D. J. Lipomi and Z. Bao, Energy Environ. Sci., 2011, 4, 3314-3328; (i) W. Ying, J. Yang, M. Wielopolski, T. Moehl, J. Moser, P. Comte, J. Hua, S. M. Zakeeruddin, H. Tian and M. Grätzel, Chem. Sci., 2014, 5, 206-214; (j) B. Chen, D. Chen, C. Chen, C. Hsu, H. Hsu, K. Wu, S. Liu, P. Chou and Y. Chi, J. Mater. Chem., 2011, 21, 1937-1945.

(a) D. Joly, L. Pelleja, S. Narbey, F. Oswald, T. Meyer, Y. Kervella, P. Maldivi, J. N. Clifford, E. Palomares and R. Demadrille, *Energy Environ. Sci.*, 2015, 8, 2010–2018; (b) N. Zhou, K. Prabakaran, B. Lee, S. H. Chang, B. Harutyunyan, P. Guo, M. R. Butler, A. Timalsina, M. J. Bedzyk, M. A. Ratner, S. Vegiraju, S. Yau, C. Wu, R. P. H. Chang, A. Facchetti, M. Chen and T. J. Marks, *J. Am. Chem. Soc.*, 2015, 137, 4414–4423; (c) Q. Chai, W. Li, J. Liu, Z. Geng, H. Tian and W. H. Zhu, *Sci. Rep.*, 2015, 5, 11330.

**Chemical Science** 

- 6 (a) Z. Ning, Y. Fu and H. Tian, Energy Environ. Sci., 2010, 3, 1170–1181; (b) J. Wu, G. Li, L. Zhang, G. Zhou and Z. Wang, J. Mater. Chem. A, 2016, 4, 3342–3355; (c) Y. Zhang, X. Bao, M. Xiao, H. Tan, Q. Tao, Y. Wang, Y. Liu, R. Yang and W. Zhu, J. Mater. Chem. A, 2015, 3, 886–893; (d) W. Tan, R. Wang, M. Li, G. Liu, P. Chen, X. Li, S. Lu, H. L. Zhu, Q. Peng, X. Zhu, W. Chen, W. C. H. Choy, F. Li, J. Peng and Y. Cao, Adv. Funct. Mater., 2014, 24, 6540–6547.
- 7 (a) Z. Wang, H. Wang, M. Liang, Y. Tan, F. Cheng, Z. Sun and S. Xue, ACS Appl. Mater. Interfaces, 2014, 6, 5768–5778; (b)
  J. Ni, Y. Yen and J. T. Lin, J. Mater. Chem. A, 2016, 4, 6553–6560.
- 8 (a) Y. Xie, W. Wu, H. Zhu, J. Liu, W. Zhang, H. Tian and W. H. Zhu, Chem. Sci., 2016, 7, 544-549; (b) P. Gao, H. N. Tsao, C. Yi, M. Grätzel and M. K. Nazeeruddin, Adv. Energy Mater., 2014, 4, 1301485; (c) Z. Sun, M. Liang and J. Chen, Acc. Chem. Res., 2015, 48, 1541-1550.
- 9 X. Li, Y. Hu, I. Sanchez-Molina, Y. Zhou, F. Yu, S. A. Haque, W. Wu, J. Hua, H. Tian and N. Robertson, *J. Mater. Chem. A*, 2015, 3, 21733–21743.
- 10 J. Shiu, Y. Chang, C. Chan, H. Wu, H. Hsu, C. Wang, C. Lin and E. W. Diau, *J. Mater. Chem. A*, 2015, 3, 1417–1420.
- S. Mathew, A. Yella, P. Gao, R. Humphry-Baker,
   B. F. E. Curchod, N. Ashari-Astani, I. Tavernelli,
   U. Rothlisberger, M. K. Nazeeruddin and M. Grätzel, *Nat. Chem.*, 2014, 6, 242–247.
- 12 C. Qin, Y. Numata, S. Zhang, X. Yang, A. Islam, K. Zhang, H. Chen and L. Han, *Adv. Funct. Mater.*, 2014, **24**, 3059–3066.
- (a) C. Yan, W. Ma, Y. Ren, M. Zhang and P. Wang, ACS Appl. Mater. Interfaces, 2015, 7, 801–809; (b) J. Luo, M. Xu, R. Li, K. Huang, C. Jiang, Q. Qi, W. Zeng, J. Zhang, C. Chi, P. Wang and J. Wu, J. Am. Chem. Soc., 2013, 136, 265–272; (c) X. Qian, Y. Zhu, W. Chang, J. Song, B. Pan, L. Lu, H. Gao and J. Zheng, ACS Appl. Mater. Interfaces, 2015, 7, 9015–9022; (d) Z. Huang, X. Zang, T. Hua, L. Wang, H. Meier and D. Cao, ACS Appl. Mater. Interfaces, 2015, 7, 20418–20429; (e) W. Zhang, W. Li, Y. Wu, J. Liu, X. Song, H. Tian and W. H. Zhu, ACS Sustainable Chem. Eng., 2016, 4, 3567–3574.
- 14 (a) W. H. Zhu, Y. Wu, S. Wang, W. Li, X. Li, J. Chen, Z. Wang and H. Tian, *Adv. Funct. Mater.*, 2011, 21, 756–763; (b) Y. Wu and W. H. Zhu, *Chem. Soc. Rev.*, 2013, 42, 2039–2058; (c) S. Chaurasia, W. Hung, H. Chou and J. T. Lin, *Org. Lett.*, 2014, 16, 3052–3055; (d) X. Kang, J. Zhang, A. J. Rojas,

- D. O'Neil, P. Szymanski, S. R. Marder and M. A. El-Sayed, J. Mater. Chem. A, 2014, 2, 11229–11234; (e) N. P. Liyanage, A. Yella, M. Nazeeruddin, M. Grätzel and J. H. Delcamp, ACS Appl. Mater. Interfaces, 2016, 8, 5376–5384; (f) P. Lin, T. Lu, D. Cai, K. Lee and C. Liu, ChemSusChem, 2015, 8, 3222–3227.
- 15 (a) M. Katono, M. Wielopolski, M. Marszalek, T. Bessho, J. Moser, R. Humphry-Baker, S. M. Zakeeruddin and M. Grätzel, J. Phys. Chem. C, 2014, 118, 16486–16493; (b) X. Wang, J. Yang, H. Yu, F. Li, L. Fan, W. Sun, Y. Liu, Z. Y. Koh, J. Pan, W. Yim, L. Yan and Q. Wang, Chem. Commun., 2014, 50, 3965–3968; (c) C. Du, L. Jiang, L. Sun, N. Huang and W. Deng, RSC Adv., 2015, 5, 37574–37580; (d) W. Zhang, Y. Wu, H. Zhu, Q. Chai, J. Liu, H. Li, X. Song and W. H. Zhu, ACS Appl. Mater. Interfaces, 2015, 7, 26802–26810; (e) D. Joly, L. Pellejà, S. Narbey, F. Oswald, J. Chiron, J. N. Clifford, E. Palomares and R. Demadrille, Sci. Rep., 2014, 4, 4033.
- 16 (a) F. Sauvage, S. Chhor, A. Marchioro, J. Moser and M. Grätzel, J. Am. Chem. Soc., 2011, 133, 13103–13109; (b)
  H. Wu, Z. Ou, T. Pan, C. Lan, W. Huang, H. Lee, N. M. Reddy, C. Chen, W. Chao, C. Yeh and E. W. Diau, Energy Environ. Sci., 2012, 5, 9843–9848.
- 17 S. M. Feldt, E. A. Gibson, E. Gabrielsson, L. Sun, G. Boschloo and A. Hagfeldt, *J. Am. Chem. Soc.*, 2010, **132**, 16714–16724.
- 18 Y. Wu, W. H. Zhu, S. M. Zakeeruddin and M. Grätzel, *ACS Appl. Mater. Interfaces*, 2015, 7, 9307–9318.
- 19 A. Hagfeldt, G. Boschloo, L. Sun, L. Kloo and H. Pettersson, Chem. Rev., 2010, 110, 6595–6663.
- 20 T. Daeneke, A. J. Mozer, Y. Uemura, S. Makuta, M. Fekete, Y. Tachibana, N. Koumura, U. Bach and L. Spiccia, *J. Am. Chem. Soc.*, 2012, 134, 16925–16928.
- 21 (a) W. J. Hehre, R. Ditchfield and J. A. Pople, J. Chem. Phys., 1972, 56, 2257–2261; (b) A. D. Becke, J. Chem. Phys., 1993, 98, 5648–5652.
- 22 P. Ganesan, A. Yella, T. W. Holcombe, P. Gao, R. Rajalingam, S. A. Al-Muhtaseb, M. Grätzel and M. K. Nazeeruddin, ACS Sustainable Chem. Eng., 2015, 3, 2389–2396.
- 23 A. Yella, R. Humphry-Baker, B. F. E. Curchod, N. Ashari Astani, J. Teuscher, L. E. Polander, S. Mathew, J. Moser, I. Tavernelli, U. Rothlisberger, M. Grätzel, M. K. Nazeeruddin and J. Frey, *Chem. Mater.*, 2013, 25, 2733–2739.
- 24 R. Katoh, A. Furube, S. Mori, M. Miyashita, K. Sunahara, N. Koumura and K. Hara, *Energy Environ. Sci.*, 2009, 2, 542–546.
- 25 (a) H. Tian, X. Yang, R. Chen, R. Zhang, A. Hagfeldt and L. Sun, J. Phys. Chem. C, 2008, 112, 11023-11033; (b) J. Wiberg, T. Marinado, D. P. Hagberg, L. Sun, A. Hagfeldt and B. Albinsson, J. Phys. Chem. C, 2009, 113, 3881-3886; (c) C. Chen, X. Yang, M. Cheng, F. Zhang and L. Sun, ChemSusChem, 2013, 6, 1270-1275; (d) B. Zietz, E. Gabrielsson, V. Johansson, A. M. El-Zohry, L. Sun and L. Kloo, Phys. Chem. Chem. Phys., 2014, 16, 2251-2255.