



Cite this: *Nanoscale Horiz.*, 2021, 6, 936

## Horizons Community Board collection: optical and photonic materials

Xiaolu Zhuo, <sup>a</sup> Li Na Quan <sup>b</sup> and Qingchen Dong <sup>c</sup>

DOI: 10.1039/d1nh90046c

[rsc.li/nanoscale-horizons](https://rsc.li/nanoscale-horizons)

*Materials Horizons* and *Nanoscale Horizons* set up their Community Boards several years ago, aiming to support early career researchers so that they could share their experiences and ideas on scientific publishing. As future leaders

in their respective fields, the Community Boards also provide a channel for members to build relationships across their research community and develop their own editorial skills.

This collection continues a series of post-publication online article collections, led by our Community Board members across both *Materials Horizons* and *Nanoscale Horizons*.

Working together and sharing their unique areas of expertise, our Community Board members have recommended several key topics where significant, rapid progress has been made in the last

2 years. They have selected top articles published in the Horizons journals to showcase the most important advances in each topic area.

## Optical and photonic materials


Xiaolu Zhuo, Li Na Quan and Qingchen Dong present this Horizons Community Board collection on materials and devices for optics and photonics.

Nowadays, optical and photonic materials are closely related to technological progress and are responsible for the

<sup>a</sup> CIC biomaGUNE, Basque Research and Technology Alliance (BRTA), 20014 Donostia-San Sebastián, Spain. E-mail: [xzhuo@cicbiomagune.es](mailto:xzhuo@cicbiomagune.es)

<sup>b</sup> Department of Chemistry, Virginia Tech, Blacksburg, VA, USA. E-mail: [linaquan@vt.edu](mailto:linaquan@vt.edu)

<sup>c</sup> MOE Key Laboratory of Advanced Display and System Applications, School of Mechanical & Electronic Engineering and Automation, Shanghai University, Shanghai, 200072, China. E-mail: [qcdong@shu.edu.cn](mailto:qcdong@shu.edu.cn)

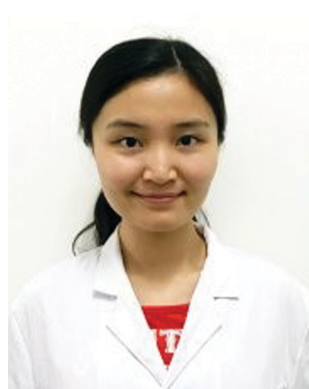

**Xiaolu Zhuo**

research interests focus on plasmonics, nanophotonics, and biotechnology.

*Nanoscale Horizons Community Board member Xiaolu Zhuo obtained her PhD in Physics in 2017 under the supervision of Prof. Jianfang Wang at the Chinese University of Hong Kong and then conducted her first postdoctoral research in the same group for one year. She is currently a Juan de la Cierva postdoctoral fellow in the BioNanoPlasmonics group, led by Prof. Luis M. Liz-Marzán, at CIC biomaGUNE in Spain. Her*



**Li Na Quan**

career as an Assistant Professor at the Chemistry Department, Virginia Tech in early 2021. Her research focuses on the optical and electronic properties of emerging semiconductors, such as perovskites, for use in next-generation optoelectronic applications.

*Materials Horizons Community Board member Li Na Quan earned her PhD in Chemistry from Ewha Womans University in Seoul, South Korea, where she worked with Prof. Dong Ha Kim. During her PhD, she worked with Prof. Edward Sargent at the University of Toronto (2014–2016). After receiving her doctorate in 2016, she continued work as a postdoctoral researcher at the University of Toronto and then at the University of California, Berkeley with Prof. Peidong Yang. She started her independent*

growth of entire industries. Accordingly, various materials based on different properties have been widely used in optoelectronic devices or used as low-loss dielectrics for a range of vital optical and photonic components across the infrared wavelength range. In this collection, we have compiled a list of communications and reviews about the applications of optical and photonic materials in various fields, including luminescence, detection, photovoltaics, photodynamic therapy, optical sensing, bioimaging *etc.* We hope that this collection will bring new inspiration and thoughts to researchers in the field of optoelectronic technology.

## Materials

Optical and photonic materials include a wide range of materials that generate, harvest, control, and respond to light and photons, covering materials of different scales from molecules to nano-/micro- particles and structures. The design and preparation methods of new materials, as well as understanding their intrinsic properties, are the foundation of the development of functional optical and photonic devices.

Regarding the design of new optical materials, much attention has been paid to luminescent quantum dots (QDs), organic small molecules, and perovskites, due to their crucial roles in bioimaging, sensing, theranostics, and light-emitting devices. This focus includes novel synthesis and fabrication methods,

the improvement of luminescence properties, and the discovery of new luminescence mechanisms. Shen *et al.* reported the synthesis of lead-free  $\text{FA}_3\text{Bi}_2\text{Br}_9$  perovskite QDs with a bright blue emission at 437 nm with a high photoluminescence quantum yield of 52% (DOI: 10.1039/C9NH00685K). Li *et al.* designed and synthesized a new type of small molecule that coupled rigidity and flexibility to simultaneously achieve good photoacoustic, near-infrared fluorescence, photodynamic, and photothermal properties, enabling multifunctional imaging and therapy (DOI: 10.1039/D0NH00672F). Dunlap-Shohl *et al.* demonstrated the resonant infrared matrix-assisted pulsed laser evaporation technique for the thin film deposition of a lead-halide-based perovskite, enabling facile optical measurements and device fabrication based on perovskite thin films (DOI: 10.1039/C9MH00366E). A fast and intense X-ray scintillation response was observed from the halide perovskite  $\text{MAPbBr}_3$  at low temperatures, reaching exceptionally high light yields of  $>100\,000$  ph MeV $^{-1}$  and sub-nanosecond decay times (Mykhaylyk *et al.*, DOI: 10.1039/C9MH00281B). Strongly anisotropic 2D excitonic resonances were reported by Maserati *et al.* in a bulk metallorganic chalcogenide  $[\text{AgSePh}]_\infty$  lamellar framework (DOI: 10.1039/C9MH01917K). A detailed study of the charge and energy transfer processes was conducted by Lédée *et al.* based on their newly developed synthesis of two-dimensional halide perovskites containing 100% of a photoactive tetrazine

derivative as the organic spacer in the layered perovskites (DOI: 10.1039/D0MH01904F). Chen *et al.* reported a new fluorophore with aggregation-induced emission characteristics and explored a new photoactivatable mechanism of photo-induced crystallization with emission enhancement (DOI: 10.1039/D0MH01200A). Okada *et al.* demonstrated the self-assembly of photochromic molecules into optical microresonator arrays that display switchable whispering gallery mode resonant photoluminescence for rewritable optical memory (DOI: 10.1039/D0MH00566E). Moreover, a few review articles summarized the recent development in polydopamine fluorescent nanomaterials (Yang *et al.*, DOI: 10.1039/C9MH01197H), lanthanide-doped nanoparticles (Marin *et al.*, DOI: 10.1039/D0NH00627K), and copper indium sulfide QDs (Morselli *et al.*, DOI: 10.1039/D1NH00260K).

In addition, progress has been made on exploring new optical phenomena from other nanoparticles/nanostructures and realizing various lab-demo applications. Yin *et al.* developed the synthesis of mid-infrared-responsive plasmonic nanonails for molecular detection based on surface-enhanced infrared absorption spectroscopy (DOI: 10.1039/D0NH00244E). Liu *et al.* demonstrated a dual-responsive photonic liquid using  $\text{Fe}_3\text{O}_4$ @polyvinylpyrrolidone@poly(*N*-isopropyl acrylamide) nanoparticles, which allows for the independent modulation of the color brightness and hue (DOI: 10.1039/D1MH00556A). Chu *et al.* combined the nanoscale self-assembly of cellulose nanocrystals with microscale diffraction grating to achieve freestanding photonic paper with programmable structural color and polarization rotation (DOI: 10.1039/C9MH01485C).

## Devices

The inherent advantages of optical and photonic materials endow optoelectronic devices, including photodiodes (PDs) field-effect transistors (FETs) and light-emitting diodes (LEDs), with multiple advantages, such as a strong light response, high carrier mobility, and excellent luminescence characteristics,



**Qingchen Dong**

*Nanoscale Horizons Community Board member Qingchen Dong obtained her PhD under the tutelage of Prof. Wai-Yeung Wong in 2012 at Hong Kong Baptist University. She also worked at Caltech with Prof. H. B. Gray from 2010 to 2011. She joined Taiyuan University of Technology from 2012 to 2021 and she now works at Shanghai University as a full-time Professor. Her research involves the design and synthesis of functional organic and metallo-organic compounds for applications in data storage, artificial synapses and neuromorphic computing, optoelectronics, etc.*

making them match or even exceed the corresponding performance of amorphous silicon devices. In this context, many researchers have made tremendous efforts to advance the development of optoelectronic devices. Ultraviolet (UV) PDs are highly desired due to their great significance in many applications. Huang *et al.* (DOI: 10.1039/D0MH00250J) reported ternary copper halide ( $\text{CsCu}_2\text{I}_3$ ) nanowires for the first time, which were used as the light absorber to achieve polarization sensitive and flexible UV photodetector with a photocurrent anisotropy ratio of 3.16. Ma *et al.* (DOI: 10.1039/D1MH00776A) successfully designed and fabricated visible-blind UV narrowband photomultiplication-type organic photodetectors (OPDs) using TAPC:C<sub>60</sub> with a weight ratio of 50:1 as the active layer, exhibiting a narrowband response with a full-width at half-maximum of approximately 36 nm, an ultrahigh external quantum efficiency (EQE) of  $1.08 \times 10^6\%$  and a remarkable specific detectivity of  $1.28 \times 10^{14}$  Jones at 335 nm wavelength under  $-14$  V bias. In addition, they integrated a flexible UV photomultiplication-type OPD with a flexible OLED to fabricate a wearable UV monitor, which can visually detect the intensity of weak UV light. Light emitting field-effect transistors (LEFETs) are an emerging class of multifunctional optoelectronic device. A color-saturated, high-efficiency red QD hybrid light-emitting field-effect transistor (QD-HLET) with an EQE of 22.8% and a field-effect mobility of  $3.1 \text{ cm}^2 \text{ V}^{-1} \text{ s}^{-1}$  was demonstrated by the group of Cao (DOI: 10.1039/D0MH00951B). LED technologies, such as organic LEDs (OLEDs), metal halide perovskite LEDs and QD LEDs (QLEDs) have achieved remarkable progress. Thompson's group (DOI: 10.1039/C9MH00195F) described a series of phenanthro[9,10-*d*]triazole and phenanthro[9,10-*d*]imidazole based materials which serve as alternatives to carbazoles for achieving high triplet energies as hosts for blue phosphors in OLEDs. Similarly to phosphorescent organometallic emitters, purely organic thermally activated delayed fluorescence (TADF) emitters can recruit both singlet and triplet excitations for

light emission and hence achieve 100% internal quantum efficiencies (IQE). Recently, a Focus article on the exciton harvesting mechanism of TADF materials from the same group (DOI: 10.1039/D0MH00276C) systematically introduced the routes for efficient radiative decay from S1 and T1 states and described the TADF process in depth. Costa *et al.* (DOI: 10.1039/D0MH00503G) presented a new family of bio-hybrid light-emitting diodes (Bio-HLEDs) with silk fibroin as a packaging matrix and fluorescent proteins as emitters. List-Kratochvil *et al.* (DOI: 10.1039/D0MH00512F) reported a perovskite LED based on inkjet-printed MAPbBr<sub>3</sub> active layer for the first time. QLED technology has emerged for next-generation smart displays due to the demand for higher color saturation and higher electrical stability. The progress of QLED technology for next-generation displays is summarized by Kim *et al.* (DOI: 10.1039/D0NH00556H). Greenham *et al.* (DOI: 10.1039/C8MH01122B) reported an efficient donor-acceptor QD system by embedding a relatively small fraction of well-passivated acceptor QDs. Yang *et al.* (DOI: 10.1039/D0NH00606H) explored the solution-processed fabrication of tricolored white lighting QLEDs based on the novel combination of three environmentally benign primary color emitters of blue and green ZnSeTe and red Zn-Cu-In-S QDs.

## Advanced methods and characterization

To understand the fundamental physical science in optical and photonic materials, using advanced methods and characterizations are a prerequisite to further developing the materials for practical applications. Materials with periodic patterns of nano- to micro-scale pores have been used for photonic applications for decades, however, the characterization of the pore size distribution, pore curvature and specific surface area has been limited by using electron microscopy and nitrogen absorption (BET) methods.

Welborn *et al.* employed small-angle X-ray scattering (SAXS) as a reciprocal space characterization tool that can provide statistically representative microstructure information in a wide range of materials (DOI: 10.1039/C9NH00347A). In organic light-emitting materials, the triplet state is one of the major exciton loss channels involved in the degradation of light-emitting devices. To study the non-emissive triplet state, Grüne *et al.* developed transient optically detected magnetic resonance to detect the paramagnetic spin states of the luminescence organic materials. Such triplet excitons in organic luminescence materials can also be converted to singlets on TADF materials and then transferred to the fluorescent material by long-range Förster energy transfer (DOI: 10.1039/D1MH00999K). Haase *et al.* employed various optical spectroscopy tools to investigate Dexter energy transfer from the TADF triplet state to the non-emissive triplet of the fluorescence light emitters, which is the key loss mechanism in light-emitting devices (DOI: 10.1039/D0MH01666G). In excitonic organic semiconductors, it is important to understand the nature of electron and hole separations under photoexcitation. To have a deeper understanding of photoinduced charge separation in donor/acceptor heterojunctions, Kang *et al.*, utilized pump-probe ultrafast transient absorption spectroscopy and time-resolved microwave conductivity techniques. They found that the rigid bonds and low reorganization energy, as well as the highly delocalized charge carriers in single-walled carbon nanotubes, limit the formation of the charge transfer state in heterojunctions (DOI: 10.1039/D0MH01810D). In the area of developing efficient light-emitting materials, the use of theoretical tools, such as machine learning/artificial intelligence, can further support to predict the structure and property relationships *etc.* Parker *et al.* directly compared the supervised and unsupervised approaches and used artificial neural networks to determine the emitting wavelengths in fluorescent silicon QDs (DOI: 10.1039/D0NH00637H).