

Cite this: *Energy Environ. Sci.*,
2026, **19**, 460Received 5th September 2025,
Accepted 17th December 2025

DOI: 10.1039/d5ee05267j

rsc.li/ees

The levelized cost of exergy: a technoeconomic framework for energy system comparison

Jordan D. Kocher,^{ib}*^{ab} Aravindh Rajan,^c Jason Woods,^{ib}^a Walter P. Parker Jr,^{ab}
Samuel Woolsey^b and Akanksha K. Menon*^{ab}

While the levelized costs of electricity and heat have been quantified before, these two metrics cannot be directly compared, due to the different exergy content of heat and work. To address this, we develop a levelized cost of exergy (LCOEx) framework that enables direct comparisons between energy sources and processes. We find that moderate- and high-grade heat have an LCOEx that is comparable to electricity (5–10 ¢ per kWh_{ex}), while low-grade heat sources have much higher LCOEx values (>50 ¢ per kWh_{ex}). The LCOEx of a system's output is affected by (i) the LCOEx of the system input, (ii) the CAPEX of the system, and (iii) the exergetic efficiency of the system. We use our framework to identify which processes are already achieved with relatively high cost effectiveness (production of fuels, hydrogen, and ammonia) and which have room for improvement (dehumidification, food production).

Broader context

Growing populations demand efficient and cost-effective sources of food, water, and energy. To quantify the cost to produce commodities, researchers have developed “levelized cost” metrics, including the levelized cost of electricity (LCOE), levelized cost of heat (LCOH), levelized cost of water (LCOW), and levelized cost of ammonia (LCOA). However, these quantities cannot be directly compared, given the different units of measure. Even LCOE and LCOH, which are both quantified in cost per unit energy, should not be compared, since one unit of electrical work is not thermodynamically equivalent to one unit of heat transfer. In this work, we develop a broadly applicable “levelized cost of exergy” (LCOEx) metric. Our framework allows a direct comparison between the cost of exergy (or “useful energy”) within different energy sources, chemicals, and foods. Applying the framework to an energy system reveals how the system's output is influenced by (i) the LCOEx of the system input, (ii) the exergetic efficiency of the system, and (iii) the system CAPEX. The framework then indicates which thermodynamic processes have room for cost reduction, as well as those which are already cost-optimized. Of those with room for improvement, cost reduction can be achieved by switching to a process that produces the same output with a cheaper exergy source, improving process efficiency, and/or reducing CAPEX.

Introduction

As populations grow and urbanization intensifies, it becomes increasingly important to efficiently and cost-effectively utilize global energy resources. Low-grade heat, which for the purposes of this work is defined as heat delivered at temperatures ≤ 150 °C, is used in a variety of applications.^{1–6} For example, steam is used for sterilization,^{7–9} food and beverage processes,^{10,11} and thermal desalination.^{12–17} Hot water is used to heat buildings^{18,19} and regenerate liquid desiccants in dehumidifiers,^{20,21} and solar absorbers are used to regenerate sorbents in atmospheric water harvesting^{22–24} (AWH) and CO₂ direct air capture²⁵ (DAC) systems.

Low-grade heat is often far cheaper (per unit energy) than electricity; for example, Gilbert *et al.* found that industrial steam (at 150 °C) generated with natural gas (NG) has a levelized cost of 1.25 ¢ per kWh_{th},²⁶ while electricity produced by natural gas combined cycles (NGCC) often has a levelized cost around 6 ¢ per kWh.^{27,28} Solar- and waste-heat also seem attractive, given that they have no fuel cost. However, Geffroy *et al.* showed that the necessary capital investment and low conversion efficiency of low-grade waste heat yield unfavorable economics when using this heat to produce electricity.¹ Moderate-grade heat (above 150 °C) has more potential to generate electricity, in which case Rankine²⁹ and organic Rankine cycles³⁰ have proven cost-effective in valorizing waste heat. Beyond power generation, a broader technoeconomic analysis is needed to evaluate the viability of different energy sources (from electricity to low-grade and high-grade heat, hydrocarbon fuels, and more), which is the focus of the present work.

On a per unit energy basis, heat and electricity cannot be directly compared. This is because heat has less potential to do

^a National Laboratory of the Rockies, Golden, CO, USA.
E-mail: jordan.kocher@nrel.gov

^b George W. Woodruff School of Mechanical Engineering, Georgia Institute of Technology, Atlanta, GA, USA. E-mail: akanksha.menon@me.gatech.edu

^c Orca Sciences, Kirkland, WA, USA



work – not all of the energy transferred *via* heat is useful, and some of it must be rejected to the environment in accordance with the second law of thermodynamics. This has led to the development of the concept of “exergy”, which is the theoretical maximum amount of energy that can be converted to work when a system interacts with a specified reference environment.^{31–34} The flow of heat carries exergy, but the amount of exergy within the heat is less than the amount of energy being transferred. The higher the temperature at which heat is being transferred, the more exergy there is. In contrast, electrical energy is fully available as work; *i.e.*, all of the energy is exergetic. Because low-grade heat sources have temperatures in the range of 80–150 °C, they carry far less exergy than electricity, so a comparison between the levelized costs per unit energy (heat or electricity) is not an appropriate one. Another comparison between heat- and work-driven systems that is often made in the literature is on the basis of “specific energy consumption” (SEC), which is defined as the energy consumption of a system, per unit output.^{12,35,36} However, for heat-driven systems, the SEC is far greater than for work-driven systems (for the exergetic-based reasons explained above). To remedy this, the SEC of the heat-driven system is often reported as an “equivalent” electric SEC, by multiplying it with an assumed heat conversion efficiency (usually around 30%¹²). This method is rather imprecise and does not consider the cost of the different energy sources. Thus, comparing the SEC (or other efficiency metrics like coefficient of performance) of work- and heat-driven systems is also not appropriate.

Framework

Comparing the thermodynamic and economic performance of systems on the basis of exergy allows for a direct comparison across systems with different energy sources. To quantify the costs associated with a particular exergy source, we introduce the levelized cost of exergy (LCOEx). The LCOEx quantifies the lifetime costs to produce exergy in a particular form (*e.g.*, chemical exergy within a fuel, exergy transferred *via* heat, *etc.*), divided by the lifetime exergy production. The general expression for LCOEx is given in eqn (1), where CAPEX is the initial capital cost of the system, OPEX_{*n*} is the variable operating cost associated with the system in year *n*, *r* is the discount rate, *N* is the lifetime of the system (in years), and Ex is the annual amount of exergy that the system produces. CRF is the capital recovery factor, which is defined in eqn (2).

$$\text{LCOEx} = \text{CRF} \times \frac{\text{CAPEX} + \sum_{n=1}^N \frac{\text{OPEX}_n}{(1+r)^n}}{\text{Ex}} \quad (1)$$

$$\text{CRF} = \frac{r(1+r)^N}{(1+r)^N - 1} \quad (2)$$

Generally, every system converts exergy input to exergy output, with an exergetic efficiency of η_{ex} . Because the exergy input has some cost, the OPEX can be broken down into the cost of

the exergy input (*e.g.*, electricity cost), $\text{LCOEx}_{\text{in}}/\eta_{\text{ex}}$, plus all other OPEX (*e.g.*, maintenance costs), OPEX_m . Then, the output LCOEx of a system can be written as shown in eqn (3).

$$\text{LCOEx}_{\text{out}} = \frac{\text{LCOEx}_{\text{in}}}{\eta_{\text{ex}}} + \text{CRF} \times \frac{\text{CAPEX} + \sum_{n=1}^N \frac{\text{OPEX}_{m,n}}{(1+r)^n}}{\text{Ex}} \quad (3)$$

The amount of exergy per unit energy is sometimes referred to as the “exergy factor”, f_e .³⁷ For work, the exergy factor is unity. For heat flow, the exergy factor is simply the Carnot efficiency, given in eqn (4), where T_0 is the ambient temperature and T_d is the temperature of the heat being delivered. Notably, the temperature of heat supplied to a system will decrease from the source ($T = T_s$) to the temperature at which it is delivered to the system ($T = T_d$), resulting in a lower exergy factor at the point of delivery than at the source. For fuels, the exergy factor is simply the ratio of chemical exergy to heat of combustion.³⁷

$$f_e = 1 - \frac{T_0}{T_d} \quad (4)$$

For any energy source, the LCOEx is equal to the levelized cost of energy divided by the exergy factor of the source. For electricity or mechanical work input, the LCOEx is simply equal to the LCOE, since the exergy factor of work is unity. For heat, the LCOEx is equal to the levelized cost of heat (LCOH) divided by the exergy factor of the heat, which is the Carnot efficiency.

In addition to the LCOEx, this framework compares heat- and work-driven systems on the basis of “specific exergy consumption”, Σ . The specific exergy consumption of a work-driven system is equal to the SEC, again because the exergy factor of work is unity. Meanwhile, the specific exergy consumption of a heat-driven system is the SEC multiplied by the exergy factor, which is given in eqn (5).

$$\Sigma = \text{SEC} \times \left(1 - \frac{T_0}{T_d}\right) \quad (5)$$

Then, the quantity $\text{LCOEx}_{\text{in}} \times \Sigma$ is the cost of the energy needed to produce a unit output from the system. For example, for a desalination plant, $\text{LCOEx}_{\text{in}} \times \Sigma$ is the cost of the energy needed to produce one cubic meter of fresh water. As expected, $\text{LCOEx}_{\text{in}} \times \Sigma$ is equal to $\text{LCOE}_{\text{in}} \times \text{SEC}$ for a work-driven system, but it is also equal to $\text{LCOH}_{\text{in}} \times \text{SEC}$ for a heat-driven system (since the f_e terms cancel out). Furthermore, the quantity $\text{LCOEx}_{\text{in}} \times \Sigma$ can be rewritten as $\text{LCOEx}_{\text{in}} \times \Sigma_{\text{rev}}/\eta_{\text{ex}}$, where Σ_{rev} is the reversible specific exergy consumption of a process, and η_{ex} is the exergetic efficiency of the actual system that achieves said process.

Fundamentally, recasting the output cost in terms of LCOEx and exergetic efficiency does not change the end result of a cost analysis. Instead, it allows for more direct comparisons between two systems producing the same output using different energy inputs (*e.g.*, work-driven, heat-driven with a high temperature source, heat-driven with a low temperature source, *etc.*). By writing the quantity in this way, the contribution to output cost can be broken down into three separate contributions: (i) the



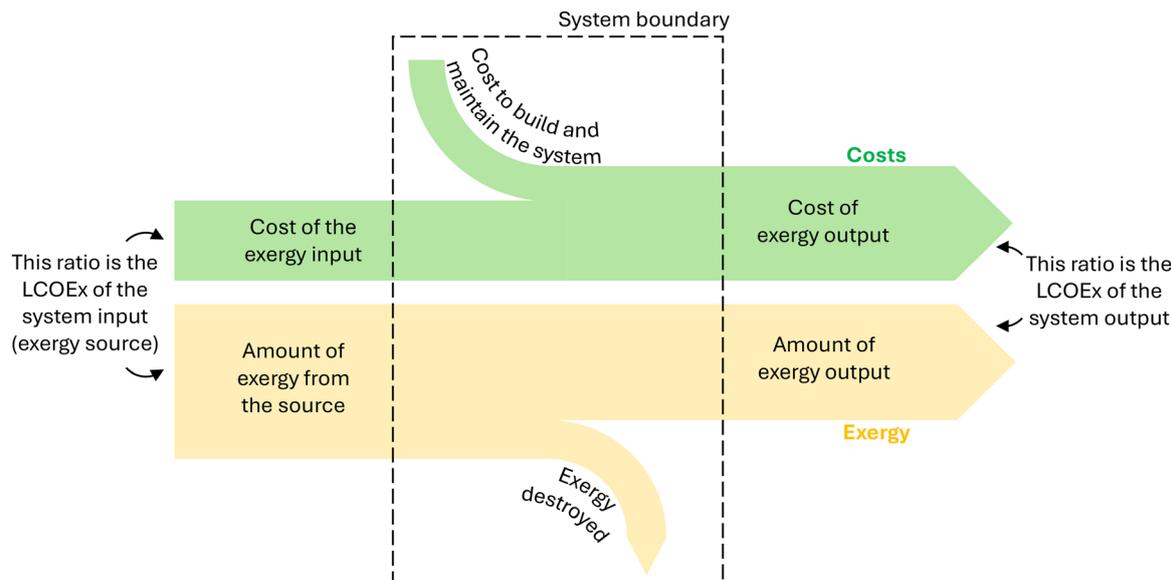


Fig. 1 Generalized LCOEx Sankey diagram.

cost per unit exergy of the system input (LCOEx_{in}), (ii) how exergy intensive the process is (Σ_{rev}), which is independent of the system performance and only depends on the thermodynamics of the process, and (iii) how close the system gets to the reversible limit (η_{ex}). This formulation is particularly useful as a litmus test for emerging concepts/processes: even in the reversible limit ($\eta_{\text{ex}} = 1$), would the process use a high LCOEx input? Or does it have a high specific exergy consumption? If the answer to either of these questions is yes, then the unit output cost will be high.

To visualize how the LCOEx increases when going from energy input to output of a system (or series of systems), we introduce an LCOEx Sankey diagram; a generalized version is shown in Fig. 1. The overall illustration consists of two separate Sankey diagrams: the top one is for cost (in green), while the bottom one is for exergy (in yellow). The ratio of cost to exergy represents the LCOEx. When that ratio is calculated before the system boundary (left side of the figure), it represents the LCOEx of the system's energy source. For example, in the case of a reverse osmosis (RO) plant, this would be the LCOEx of the electricity input. For a NGCC power plant, it is the LCOEx of the NG fuel. When the cost to exergy ratio is calculated after the system boundary (right side of the figure), it represents the LCOEx of the system output. For the RO plant example, this would be the cost per unit exergy of the fresh water produced by the plant. For the NGCC power plant, it is the electricity produced. Notably, the LCOEx always increases from system input to system output, because exergy is destroyed in any real process. Furthermore, there are costs associated with building and maintaining the system (CAPEX), which must be added to the cost of the exergy source. For the LCOEx of the system output to be as low as possible, the Sankey diagram in Fig. 1 reveals that the system should have the following three attributes: (i) it should utilize an exergy source with a low LCOEx,

(ii) the cost to build and maintain the system itself should be low, and (iii) the system should have a high exergetic efficiency. For a system with multiple subsystems, or for multiple different systems being used in series (e.g., a NGCC power plant generates electricity which is then used by an RO plant), the cost and exergy flow can be visualized through each of the systems sequentially, and the LCOEx at different points in the process can be calculated by taking the cost to exergy ratio before and after each system. The detailed methodology for constructing these diagrams with the appropriate units is described in Note S1.

Because Fig. 1 reveals that the LCOEx of a system's output largely depends on the LCOEx of the exergy source, we first present results for the LCOEx of various exergy sources, including electricity, high-grade and low-grade heat, fuels, and food. We then discuss which of these sources are used by different technologies, as well as the associated exergetic efficiencies. We then identify which processes and energy systems stand to benefit the most from switching to lower LCOEx sources and from exergetic efficiency improvements. Finally, we demonstrate that electrically-driven systems can reduce costs in certain cases (due to the relatively low LCOEx of electricity), while other systems will not benefit from using electricity as the energy source, due to high capital costs and/or low exergetic efficiencies.

Results

The LCOEx of heat

We apply our LCOEx framework first to heat as a source of exergy. We use the LCOH values that Gilbert *et al.*²⁶ calculated for four different applications (industrial steam at 150 °C, a hot water heater at 80 °C, ethane cracking at 850 °C, and a glass



The prices of fuels in Table 1 and foods in Table 2 will fluctuate over time and vary with location. Thus, while we use these data to analyze general trends and provide benchmarks for the LCOEx of different commodities, these findings are not universal to every location or application.

Leveraging thermodynamics for economic benefits

Thermodynamically “unfavorable” processes (or in other words, processes that require significant energy input to produce a high-exergy output) are limited by the LCOEx of the exergy input, as well as the specific exergy of the output. Fig. 2 suggests that low-grade heat cannot serve as a significantly cheaper exergy source than electricity or the fuels in Table 1. As such, low-grade solar- and waste-heat will not significantly improve the economics of thermodynamically unfavorable processes.

However, Fig. 3 illustrates that there are other methods of leveraging thermodynamics to improve a process’ economics. Using a chemical exergy input reduces the required energy input. For example, RO desalination uses seawater as its feed, while point-source carbon capture uses flue gas. Both of these feed streams have far higher concentrations (of water and CO₂, respectively), and thus more exergy, than ambient air. Because much of their exergy input comes in the form of chemical exergy, RO and point-source carbon capture require far less energy input than AWH and DAC, respectively. Through the lens of the LCOEx framework, this means the total input LCOEx is less heavily weighted towards the LCOEx of the energy input.

If the feed streams have a lower LCOEx than the energy source, then they effectively lower the overall LCOEx of the system input. In the case of RO and point source carbon capture, the system is receiving energy (heat or work) and chemical exergy, but it is only paying for the energy, as shown in Fig. 3. Because of the lower input LCOEx, desalination can produce water at lower costs than AWH, while point-source carbon capture can store carbon at lower costs than DAC.

Likewise, DAC *via* rock weathering (a recently proposed method of carbon sequestration^{102,103}) uses rocks with chemical exergy as one of its inputs (along with ambient air). Furthermore, rock weathering produces an output with less exergy than conventional DAC. This is because rock weathering stores carbon as carbonates and/or bicarbonates, which have far less exergy than the compressed, concentrated stream of CO₂ that a conventional DAC system outputs. Though still hypothetical, this “enhanced” rock weathering could leverage thermodynamics to reduce the LCOEx of sequestered carbon.

As another example, sulfur depolarized electrolysis^{104–106} is an alternative method of producing hydrogen that leverages both of these advantages: it uses a higher exergy input/feed-stock (compared to near-dead state liquid water in conventional electrolysis) and produces a lower exergy output/product (co-production of hydrogen with sulfur dioxide or sulfuric acid; see Note S5 for output exergy calculations).⁴⁷ Because sulfur depolarized electrolysis co-produces hydrogen (a precursor to ammonia) and sulfuric acid, which are both relevant for fertilizer production, it also has the advantage of distributing

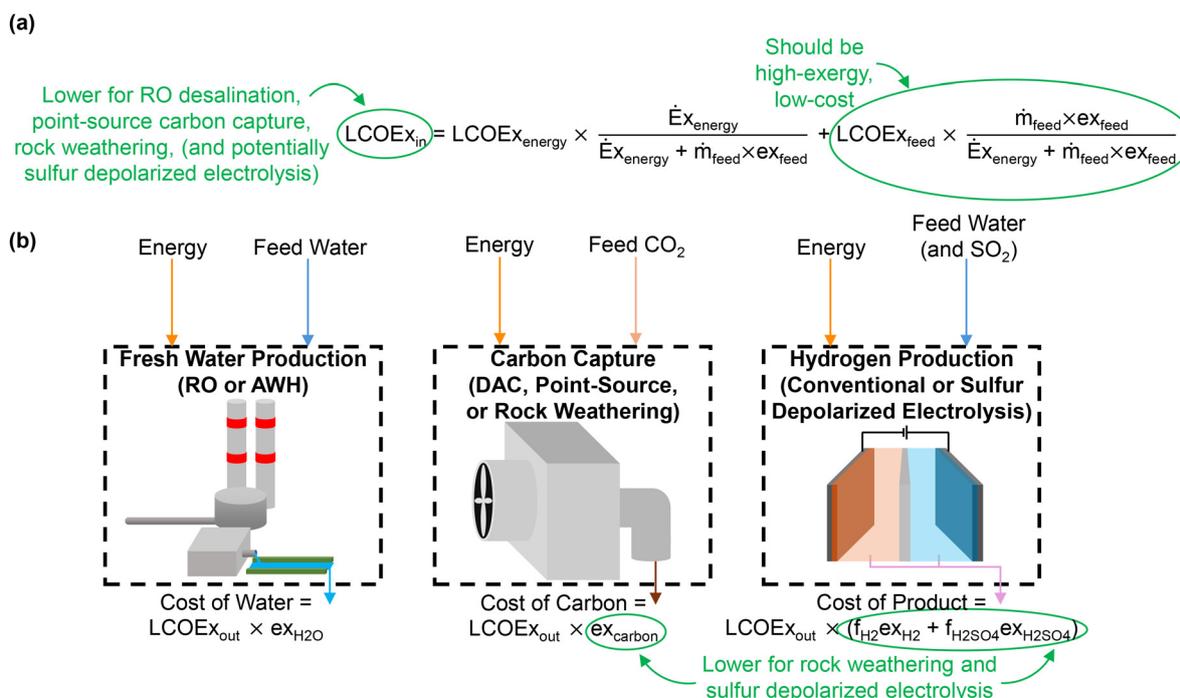


Fig. 3 Leveraging thermodynamics leads to exergetic and economic benefits. The cost of the output/product of a thermodynamic process is determined by the LCOEx of the input and the specific exergy of the output. Lower output costs can be achieved by using a cheap, high-exergy feed to lower the input LCOEx, as illustrated by the equation in (a), or by switching to a process that produces a low-exergy product, as illustrated by the example systems in (b).



the CAPEX over two valuable products (instead of just hydrogen in conventional electrolysis).

Opportunities exist for electrically-driven systems to reduce cost

Following our analysis of exergy sources above, we now demonstrate the utility of the LCOEx framework in comparing systems that achieve the same process with different exergy sources. Due to its ubiquity as an energy source, the cost of electricity is a logical benchmark for LCOEx. Furthermore, electricity has a very competitive LCOEx compared to other energy sources (*e.g.*, heat, hydrocarbon fuels, *etc.*, shown in Fig. 2 and Table 1). One factor that has led to this is the high exergetic efficiency of NGCC power plants, which first convert the chemical exergy of NG to high-grade heat and then convert the heat to work, all with relatively low exergy destruction. Other electricity generation technologies must then compete with the LCOEx of NGCC electricity.

In Fig. 4, the LCOEx framework is applied to a historical example – desalination – to illustrate how the cost of a commodity can be reduced. Per eqn (3), the LCOEx of the system output depends on two quantities: $LCOEx_{in}/\eta_{ex}$, which represents the cost to convert the exergy input to output (if the system CAPEX were zero), and the actual (non-zero) system CAPEX. In Fig. 4(a), we plot historical desalination cost and efficiency data (see Methods). The LCOEx of fresh water produced with desalination is plotted against $LCOEx_{NG}/\eta_{ex}$, where $LCOEx_{NG}$ is the LCOEx of NG (1.37 ¢ per kWh_{ex}), and η_{ex} is the exergetic efficiency if NG were used as the primary energy

source (*i.e.*, going from NG and saline water to clean water). A clear trend emerges: the older, heat-driven technology (multi-stage flash, MSF) was inefficient at converting the chemical exergy in NG to fresh water, because of losses incurred when NG is converted to low-grade heat and because of losses in the heat-driven desalination system itself. This led to a high $LCOEx_{NG}/\eta_{ex}$ value in 1970 (Fig. 4(b)), which in turn caused the desalinated water to be expensive.

The first major improvement came when an electrically-driven technology was implemented (mechanical vapor compression, MVC), because the conversion of NG to electricity has a higher exergetic efficiency than NG to low-grade heat. Thus, using electricity as the exergy source improved the overall NG-to-water exergetic efficiency, which reduced $LCOEx_{NG}/\eta_{ex}$. Upon switching from distillation to MVC, $LCOEx_{H_2O}$ was reduced by less than $LCOEx_{NG}/\eta_{ex}$, indicating that the power plant + MVC combination had a higher CAPEX than the natural gas distillation system.

The next improvement came by increasing the exergetic efficiency of the desalination process itself, first by switching from MVC to RO, and then by improving the efficiency of RO (Fig. 4(c)). This highlights why (i) electricity is a favorable exergy source compared to low-grade heat, and (ii) processes that are exergetically efficient through the entire production chain (from primary energy source to final product) are usually preferable. This paradigm, revealed by the evolution of desalination, can serve as a roadmap to improve other processes. The exception, however, is when CAPEX is too high, which would result in a higher $LCOEx_{out}$, even with a lower $LCOEx_{in}/\eta_{ex}$.

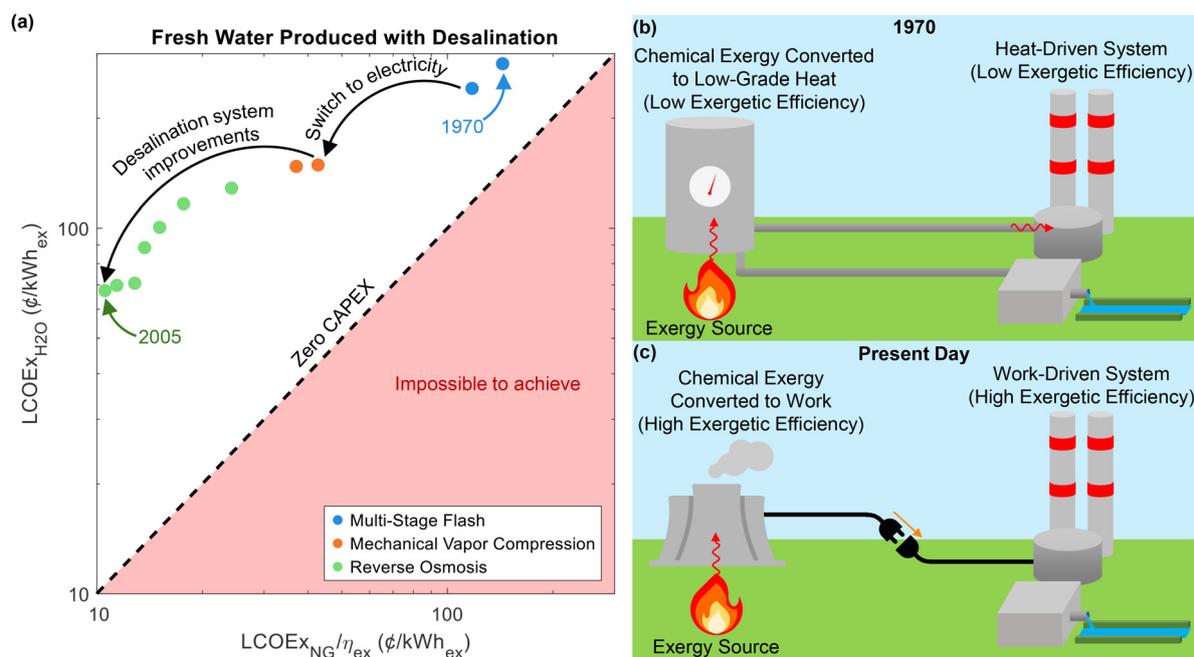


Fig. 4 Comparison of work- and heat-driven desalination. (a) Plot of output (fresh water) LCOEx against the LCOEx of natural gas divided by exergetic efficiency. Desalination cost and efficiency data from Beltrán and Koo-Oshima.¹⁰⁷ (b) Heat-driven system, where a boiler destroys a large portion of the exergy from the fuel source when producing low-grade steam, and the heat-driven desalination plant destroys additional exergy, producing little water per unit fuel input. (c) Work-driven system, where the exergy from the fuel source is converted to electrical work with little exergy destruction, and the desalination plant has a high exergetic efficiency, so it produces a large amount of water per unit fuel input.



While desalination serves as an exemplary process for comparing work- and heat-driven technologies in the industrial sector, air conditioning can be used as a representative process in buildings. This is illustrated in the Sankey diagrams in Fig. 5. In Fig. 5(a), NG is used in a highly efficient power plant (61% exergetic efficiency for NGCC^{33,37}) and electricity is transmitted with little loss (95% exergetic efficiency for transmission¹⁰⁸) to a vapor compression refrigerator, which has an exergetic efficiency of 11% (Methods). Meanwhile, in Fig. 5(b), NG is used to directly heat an absorption refrigerator, where much of the NG chemical exergy is destroyed when converted to low-grade heat (assumed to be 90 °C¹⁰⁹), and then most of the remaining exergy is destroyed because of the relatively low exergetic efficiency of the absorption refrigerator (assumed to be 11%, which is the same as the vapor compression refrigerator).

Similar to the conclusion for desalination, we find that work-driven refrigeration tends to have a lower LCOEx at the system output compared to absorption refrigeration, owing to fewer exergetic losses. If absorption refrigerators

were designed to utilize very high-grade heat (as is used in power plants), then the overall exergetic efficiencies of vapor compression and absorption refrigeration would be comparable. However, engineering residential and commercial technologies to utilize this high-grade heat is unrealistic and would increase the CAPEX of absorption refrigeration. Instead, some absorption refrigerators utilize waste heat in large combined heat and power (CHP) plants;¹¹⁰ despite the low exergy factor of low-grade waste heat, the economics are favorable when the CAPEX of the heat exchanger to transfer this heat to the refrigerator is not too high. In the illustrative example in Fig. 5, it is assumed that both the vapor compression and absorption refrigeration systems have a CAPEX of \$1000 per ton (which is likely a generous assumption for absorption refrigeration), a lifetime of 10 years, and a utilization factor of 20% (*i.e.*, they run for 20% of the year). A discount rate of 7% was used to obtain the values in the illustration. The exergetic efficiency of 11% approximately corresponds to a COP of 4 for vapor compression and 0.7 for

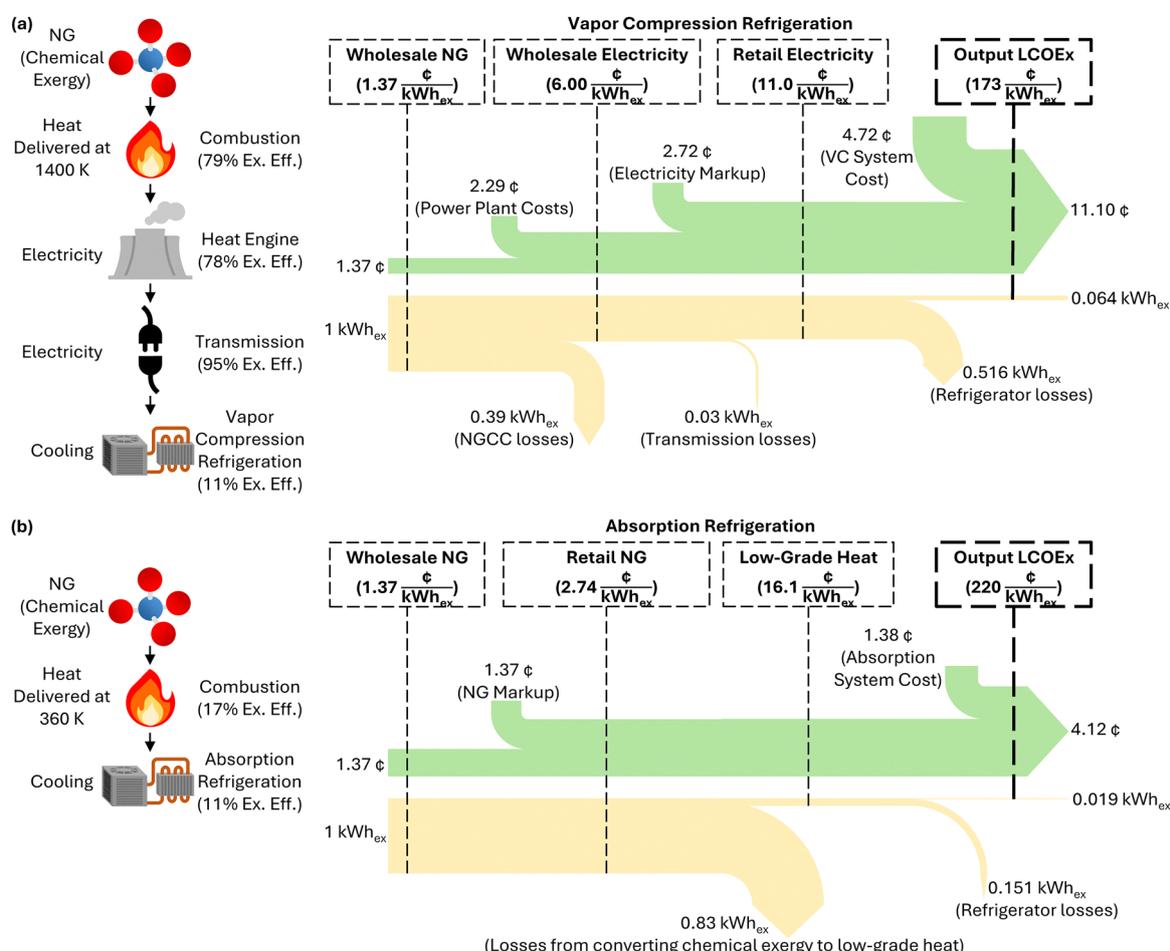


Fig. 5 LCOEx Sankey diagrams for (a) vapor compression and (b) absorption refrigeration. Both systems use natural gas (NG) as the primary energy source, but the process of converting the chemical exergy within NG to high-grade heat, which is used to produce electricity and drive vapor compression refrigeration is significantly more exergetically efficient than using NG to produce low-grade heat and drive absorption refrigeration. This leads to cost benefits for vapor compression refrigeration.



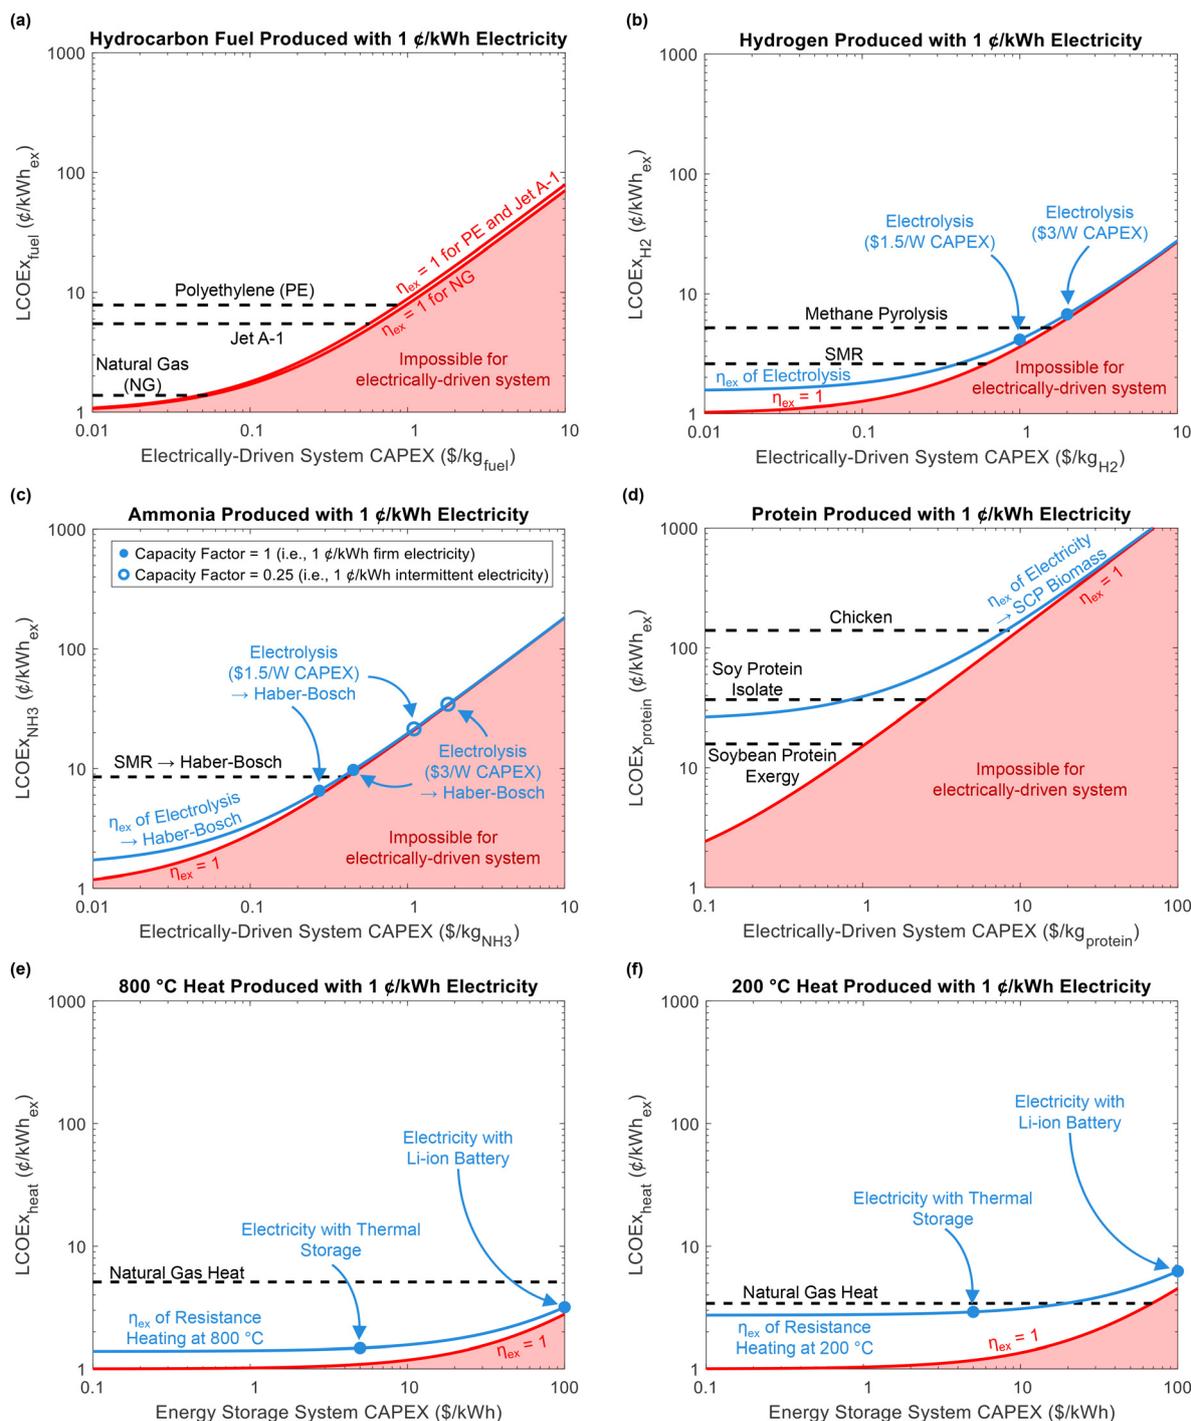


Fig. 6 LCOEx regime maps for various commodities. Electricity can be used to produce (a) synthetic hydrocarbons, (b) hydrogen, (c) ammonia, (d) protein, (e) high-grade heat, and (f) medium-grade heat. Each plot shows the LCOEx of different commodities produced *via* conventional means (e.g., thermochemistry) with horizontal dashed lines. Then, the LCOEx of the same commodity, produced *via* an electrically-driven system (either hypothetical or already realized) is plotted against the CAPEX of the electrically-driven system. The red curve corresponds to a reversible electrically-driven process, so no electrically-driven system can exist within the shaded red region.

and the plant operates around the clock (*i.e.*, a capacity factor of unity), then electrically-produced hydrogen will fail to compete with both SMR and methane pyrolysis, even when electricity is cheap. If the electrolyzer CAPEX is only \$1.5 per W to the levelized cost of hydrogen, the electrically-produced hydrogen

would be cheaper than methane pyrolysis but still more expensive than SMR.

Green ammonia (Fig. 6(c)), produced *via* electrolyzed hydrogen fed to a Haber-Bosch plant, has also been discussed as a potential fuel source and fertilizer. To evaluate the former



use-case, the LCOEx of green ammonia should be compared to the LCOEx of other fuel sources. To evaluate the latter use-case, the LCOEx of green ammonia should be compared to that of grey ammonia. The CAPEX of a green ammonia plant can be approximated as that of a conventional (gray) ammonia plant, minus the CAPEX of the SMR portion of the plant, plus the CAPEX of an electrolyzer to replace the SMR. Thus, the “green premium” incurred on the ammonia CAPEX is less significant than in a green hydrogen plant, since it only affects a portion of the overall plant (and 1 kg of green hydrogen produces 5.63 kg of green ammonia). Regardless of whether the electrolyzer CAPEX is \$1.5 per W or \$3 per W, green ammonia would be cost competitive with grey ammonia if 1 ¢ per kWh_e electricity were continuously available. This indicates a potential pathway for green ammonia to serve as a fertilizer. However, firm electricity at this cost will be difficult to produce. If the cheap electricity is only available intermittently, the capacity factor of the plant decreases, which increases the levelized CAPEX. As such, we have plotted points for a capacity factor of 0.25 (6 h of operation per day), which are significantly more expensive than conventionally-produced (gray) ammonia. Thus, green ammonia needs both very cheap and firm electricity to avoid a green premium. Furthermore, given the LCOEx of green ammonia – between 6 and 10 ¢ per kWh_{ex} – its use as a fuel source in the industrial and transportation sectors is not practical. It would be very cost ineffective to use 1 ¢ per kWh_{ex} electricity to produce green ammonia, an exergy/fuel source that is 6–10× more expensive than the electricity used to make it, and then use that ammonia to power some other system. Exergy is lost and cost is incurred by converting the cheap electricity into ammonia and then using that ammonia to power another process. Even green hydrogen, with an LCOEx of 4 ¢ per kWh_{ex} (when the CAPEX is \$1 per kg and electricity is 1 ¢ per kWh_e) would be an expensive exergy source relative to the electricity used to make it. Thus, our framework reveals the exergetic and economic inefficiencies associated with using electrically-produced fuels to power different sectors of the economy, though electrically-produced chemicals do have potential for other uses (*e.g.*, as fertilizer).

While Fig. 6(a) reveals the significant challenges of using electricity to produce a cheap, high specific exergy fuel, Fig. 6(d) reveals a potential opportunity for electricity to produce the opposite – a more expensive, lower exergy material, such as protein. Poultry has a relatively high LCOEx, but electrochemically produced protein would likely not compete with meats, due to the fact that they are consumed in part for their taste. Instead, electrically-driven protein production would compete with protein isolates. Per Table 2, the specific cost of soybeans is 38.79 ¢ per kg, and there are 348 g of protein per kg of soybean, equating to a cost of \$1.11 per kg of protein. Based on the exergy of protein, this corresponds to an LCOEx of ~16 ¢ per kWh_{ex} for the protein within soybeans. However, Table 2 reveals that soy protein isolate has an LCOEx of ~40 ¢ per kWh_{ex}; this increase in cost is due to the exergetic losses and costs incurred when going from soybean to soy protein isolate. This high LCOEx of protein isolate gives

electrochemistry a chance to compete, and Fig. 6(d) sets the CAPEX values that must be met for it to do so. The exergetic efficiency of electricity to single-cell protein (SCP) biomass is approximated as 4% based on Wang *et al.*⁹⁵ When the system CAPEX is high (>\$10 per kg protein), the exergetic efficiency has little bearing on output cost. Conversely, if the system CAPEX is low (<\$1 per kg protein), the exergetic efficiency has a significant effect on output cost, while a reduction in CAPEX would yield negligible benefits.

When utilizing intermittent electricity from renewable energy sources, “firmed” (or consistently available) requires some form of energy storage. Furthermore, the question remains as to whether this electrically-driven heat should be produced *via* dissipative heating (*e.g.*, resistive heating) or *via* heat pumps. In Fig. 6(e) and (f), we investigate the LCOEx of firmed heat that is produced by an intermittent electricity source (with an LCOE of 1 ¢ per kWh_e). In this case, we assume the electric resistance heater CAPEX is negligible, so we plot the LCOEx as a function of the CAPEX of the energy storage system. Fig. 6(e) reveals that, from an exergetic standpoint, high-grade heat will be the easiest to switch the exergy source to electricity (though practical challenges, such as durability at high temperatures, must be considered). This is because electric resistance heaters, which have a lower CAPEX than heat pumps, destroy little exergy when dissipating their electricity as heat at high temperatures. The combination of low CAPEX and high exergetic efficiency, and low input LCOEx of electric resistance heaters will allow the LCOEx of high temperature electric resistance heaters to approach that of the electricity input. Electricity at 1 ¢ per kWh_e would thus lead to incredibly cheap high-grade industrial heat, but even electricity at 6 ¢ per kWh_e would be close to the cost of high-grade industrial heat from NG (~5 ¢ per kWh_e). While electrochemical storage has a high CAPEX, thermal storage could enable low-cost electrically-driven heat if current cost targets are achieved¹²² as the technology readiness improves. Fig. 6(f) reveals that moderate-grade heat (150–400 °C) will be harder to source *via* electricity, for several reasons. First, NG has both lower LCOH and lower LCOEx values at these temperatures than high-grade heat (due to lower CAPEX and higher thermal efficiency²⁶). Second, dissipative electric heaters will destroy far more exergy at these temperatures. For example, a dissipative heater (whether electric resistance or microwave) with a thermal efficiency of unity (the best-case scenario) would only have an exergetic efficiency of 20% at 100 °C and 55% at 400 °C. Fig. 6(f) shows that at 200 °C, electric resistance could compete with NG heat, but only if the cost of intermittent electricity input falls to 1 ¢ per kWh_e. This indicates that the production of moderate-grade heat *via* electricity is feasible but difficult. At these temperatures, the less CAPEX-heavy electric resistance option has significantly more exergetic losses than when producing high-grade heat. Meanwhile, the more exergetically efficient heat pump option leads to a higher CAPEX, and the exergetic benefits are not as significant as when producing low-grade heat. So while electric resistance heating can be attractive for high-grade heat and heat pumps



can be attractive for low-grade heat,³⁸ it is unclear if either option can compete with NG for moderate-grade heat production.

Conclusions

The LCOEx framework enables a direct comparison between different energy sources, systems, and processes on a common basis (\$ per kWh_{ex}). Among different energy sources, electricity delivers exergy at a relatively low cost, while low-grade heat does not carry much exergy per unit energy and thus has a relatively high LCOEx. In the theoretical ideal case, the LCOEx of a system's output would be equal to the LCOEx of the energy source/input, because there would be zero exergy destruction (reversible) and zero system CAPEX. However, any real system will have some capital cost and will destroy some of the input exergy, so the LCOEx of the output will always be greater. This highlights the importance of designing systems that:

- (i) Utilize low LCOEx energy sources.
- (ii) Achieve high exergetic efficiency.
- (iii) Have low CAPEX.

We use this work to demonstrate the new LCOEx framework, illustrate its utility through examples, and evaluate the price per unit exergy of different commodities (chemical fuels, electricity, water, heat, cooling, and food). Our analysis is not comprehensive given the wide breadth of processes to which it can be applied, and future studies can utilize the framework to analyze different commodities in greater depth.

Applying the LCOEx framework to different processes reveals which have significant room for improvement and which are already optimized, with LCOE values used as a benchmark for LCOEx. The opportunity to reduce cost should, however, be taken in context of the history of a given technology. For example, both air conditioning (~173 ¢ per kWh_{ex} output per Fig. 5) and desalination (~70 ¢ per kWh_{ex} output per Fig. 4) produce outputs with LCOEx values more than 10× that of electricity. This indicates room for improvement, but it is important to recognize that both processes are already electrically-driven, and they have experienced more than a century of engineering.^{123,124} As such, we believe it is unlikely that drastically higher exergetic efficiencies can be achieved without a significant increase in CAPEX.

Using the LCOEx metric not as a replacement for other levelized cost metrics, but rather as a complement to them, allows for a useful perspective. For example, the levelized cost of heat, water, hydrogen, ammonia, and energy storage are all useful metrics in assessing the economic viability of different energy systems, when compared to systems that produce the same output. These metrics, however, provide no insight into how fundamental thermodynamics influence the cost of an output, based on the cost of the inputs and the efficiency of the process. By combining conventional levelized cost metrics (*i.e.*, the green portion of the Sankey diagram in Fig. 1) with exergy analysis (*i.e.*, the yellow portion of the Sankey diagram in Fig. 1), a new perspective on the cost-effectiveness and efficiency of a thermodynamic process is gained.

The LCOEx framework is also useful in identifying fundamental cost bounds for different processes. For example, AWH is limited by the LCOEx of the exergy input and the specific exergy of the harvested water. AWH uses exergy sources with an LCOEx ~ 6 ¢ per kWh_{ex} (*e.g.*, electricity or heat) and the specific exergy consumption is high (~80 kWh_{ex} m⁻³ for reversible operation in arid regions per Note S5). Thus, even when the CAPEX is negligible, the cost to produce water will be ~\$4.80 per m³, a value too high to compete with RO desalination (~\$1 per m³).³⁵ In other cases, the reversible limit is potentially acceptable; for example, the reversible exergy consumption of DAC¹²⁵ is ~200 kWh_{ex} per ton of CO₂, such that the reversible exergy input accounts for merely \$12 per ton CO₂ when the input LCOEx is 6 ¢ per kWh_{ex}. However, for processes like DAC, exergetic efficiencies and CAPEX hinder economic viability. These thermo-economically constrained processes need to leverage thermodynamic advantages to either lower the input LCOEx (*e.g.*, point source carbon capture and hydrogen production *via* sulfur depolarized electrolysis^{105,106,126,127}) or lower the specific exergy of the product (*e.g.*, DAC *via* enhanced rock weathering). Otherwise, they will struggle to progress beyond lab-scale demonstrations and may never see meaningful market penetration.

Finally, we developed LCOEx regime maps for electrically-driven systems. By comparing the LCOEx of conventionally-produced commodities to electrically-driven alternatives, we identified (i) commodities that electricity would struggle to produce with cost parity (*e.g.*, fuels), (ii) the CAPEX and exergetic efficiencies needed for emerging electrically-driven process (*e.g.*, electrochemical protein synthesis), and (iii) for which processes electricity already makes sense as the exergy source (*e.g.*, high-grade heat). We found that electrically-produced ammonia (specifically for fertilizers) and moderate-grade heat could reach cost parity if inexpensive electricity (1 ¢ per kWh_e) becomes available, but if this electricity is intermittent the reduced capacity factor will make these electrically-driven commodities expensive. Alternatively, we believe that moderate-grade heat could be electrically-produced with more expensive electricity if better heat pumps are developed (*i.e.*, lower CAPEX and higher exergetic efficiencies), but the margin for exergetic efficiency improvement that a heat pump presents over electric resistance heating is smaller at moderate-grade temperatures than with low-grade heat. Ultimately, while our analysis reveals the cost-effectiveness of electricity as an exergy source, further research is required to understand if the CAPEX and efficiency targets that we present for electrically-driven systems can be achieved. If these targets prove feasible, then the technology readiness of these emerging, electrically-driven processes must be addressed.

Methods

Calculating LCOEx and specific exergy content values in Table 2

The mass of protein, fat, and carbohydrates per kg of corn were calculated for a moisture content of 15.5%, which is the



standard moisture content for a bushel of corn.¹²⁸ The mass of protein, fat, and carbohydrates per kg of soybeans were calculated for a moisture content of 13%, which is the standard moisture content for a bushel of soybeans.¹²⁹ For the protein, fat, and carbohydrates within wheat, USDA nutrition data for durum wheat was used, even though common wheat makes up the vast majority of global wheat production¹³⁰ (because common wheat nutritional information was not given on the USDA website). For eggs, prices are reported in \$ per dozen, and it was assumed that 1 dozen eggs weigh 1.5 lbs.

For beef, the hot carcass weight was assumed to be 63% of the live weight, whereas the boneless trimmed beef weight is 40% of the live weight.^{131,132} The carcass contains fat which is discarded as a byproduct, and that fat contains some exergy, though that exergy is not considered in this work. Instead, we take the nutritional exergy of the boneless trimmed beef for our LCOEx value of beef in Table 2. Lean beef consists of 22.3% protein by weight and 1.8% fat by weight.¹³³ Thus, 8.9% of the live animal weight is edible protein and 0.72% is edible fat.

For chicken, the edible share of live weight is 60%,¹³² and of this meat, 22.8% and 0.9% by weight are protein and fat, respectively.¹³³ Thus, of the live animal weight, 13.7% is edible protein and 0.54% is edible fat.

For protein isolate, the bulk production cost per kg of soy protein isolate was used,⁹³ along with soy protein isolate nutritional data.¹³⁴

Historical desalination data

The desalination plot in Fig. 4 was created using historical data for seawater desalination in Spain, spanning from 1970 to 2005.^{12,107} The primary energy source (*e.g.*, natural gas, coal, solar, wind) was not given for any of these systems, so it is impossible to know the true input LCOEx. Instead, we used the LCOEx of NG as a proxy, and we approximated the hypothetical NG-to-water exergetic efficiency to make a direct comparison between the heat- and work-driven technologies. For the heat-driven system (MSF), it was assumed that the reported SEC in the dataset was an “equivalent” electrical SEC, which is simply the thermal SEC multiplied by a factor of 0.3 (the standard power plant efficiency used to convert thermal SEC values to electrical SEC in desalination literature¹²). Thus, we took the reported SEC values from the dataset and divided by a factor of 0.3 to return the original thermal SEC (*e.g.*, a reported SEC of 22 kWh_e m⁻³ for MSF becomes 73.3 kWh_{th} m⁻³). It was assumed that this SEC corresponds to the steam used to deliver heat to the MSF system; a boiler efficiency of 0.8 was assumed, such that the steam SEC was divided by 0.8 to return the amount of NG heat used to produce the steam that was used (*e.g.*, the calculated steam SEC of 73.3 kWh_{th} m⁻³ for MSF becomes 91.7 kWh_{th} m⁻³). Then, to find the original exergy within the NG, the exergy factor of 1.03 (which corresponds to NG³⁷) was used (*e.g.*, the calculated NG thermal SEC of 91.7 kWh_{th} m⁻³ for MSF becomes $\Sigma = 94.4$ kWh_{ex} m⁻³). Then, to find the exergetic efficiency, the minimum separation exergy for seawater desalination (~ 0.9 kWh_{ex} m⁻³) was divided by the

exergy input to find the exergetic efficiency (*e.g.*, $\Sigma = 94.4$ kWh_{ex} m⁻³ becomes $\eta_{\text{ex}} = 9.5\%$).

For the electrically-driven systems (MVC and RO), the hypothetical NG-to-water exergetic efficiency was found by first assuming that the electricity could be generated with a NGCC power plant possessing a thermal efficiency of 55% (slightly lower than the state of the art³³). For example, a reported SEC of 3 kWh_e m⁻³ for RO becomes 5.5 kWh_{th} m⁻³ of heat from NG used to generate the electricity needed to drive RO. Then, the exergy factor of NG³⁷ (1.03) was used to find the original exergy within the NG used to generate the electricity (*e.g.*, the calculated NG thermal SEC of 5.5 kWh_{th} m⁻³ for RO becomes $\Sigma = 5.6$ kWh_{ex} m⁻³). Finally, the minimum separation exergy for seawater desalination (~ 0.9 kWh_{ex} m⁻³) was again divided by the exergy input to find the exergetic efficiency (*e.g.*, $\Sigma = 5.6$ kWh_{ex} m⁻³ becomes $\eta_{\text{ex}} = 16.0\%$).

Air conditioning exergetic efficiency

To estimate the exergetic efficiency of air conditioning, we assumed that the vapor compression system has a COP of 4 (based on current SEER2 standards¹³⁵) at the EER2 standard testing conditions of 80 °F indoor dry-bulb temperature and 95 °F outdoor dry-bulb temperature.¹³⁶ At these standard testing conditions, the reversible COP would be 36. If the actual COP is 4 and the reversible COP is 36, then the exergetic efficiency is $\sim 11\%$.

CAPEX and exergetic efficiency values in electrically-driven regime maps

For hydrogen electrolysis, we found that an LCOEx of 14.3 ¢ per kWh_{ex} (\$5.50 per kg) results when the electrolyzer CAPEX contributes roughly \$2 per kg of the levelized cost of hydrogen (assuming 65% exergetic efficiency during electrolysis and an input electricity cost of 6 ¢ per kWh_e). This levelized CAPEX contribution of \$2 per kg_{H₂} corresponds to an electrolyzer cost of \$3 per W (when a discount rate of 7% and electrolyzer lifetime of 14 years are assumed). While this agrees with some existing literature,^{137,138} an electrolyzer CAPEX contribution of \$1 per kg (\$1.5 per W) is also commonly reported.¹³⁹ As such, we provided results for both values, for both hydrogen and ammonia. For both ammonia and hydrogen synthesis, we assumed the exergetic efficiency of electrically-driven synthesis is 65% (given that the hydrogen to ammonia exergetic efficiency is nearly unity¹⁴⁰). For green ammonia plant CAPEX, we assume the NH₃ and N₂ subsystems CAPEX contribute a levelized cost of \$0.10 per kg NH₃, while the electrolyzer levelized CAPEX in units of \$ per kg H₂ can be converted into units of \$ per kg NH₃ by accounting for the fact that 1 kg of H₂ produces 5.6 kg of NH₃.

For industrial heat, we used a thermal storage CAPEX of \$5 per kWh_{th}, based on values reported by Rondo for their thermal storage system.¹²² For electrochemical batteries, we used a CAPEX value of \$100 per kWh_e, which is typical for current Li-ion batteries.¹⁴¹



Author contributions

Conceptualization, J. D. K.; methodology, J. D. K.; investigation, J. D. K., A. R., W. P. P., and S. W.; writing – original draft, J. D. K.; writing – review & editing, J. D. K., A. R., J. W., W. P. P., S. W., and A. K. M.; funding acquisition, J. D. K., J. W., S. W., and A. K. M.; supervision, J. D. K. and A. K. M.

Conflicts of interest

There are no conflicts to declare.

Data availability

All data generated or analyzed during this study are included in the manuscript and its supplementary information (SI). Supplementary information is available. See DOI: <https://doi.org/10.1039/d5ee05267j>.

Acknowledgements

This work was authored in part by the National Laboratory for the Rockies for the U.S. Department of Energy (DOE), operated under Contract No. DE-AC36-08GO28308. This work was supported by the Director's Fellowship Program in the Laboratory Directed Research and Development (LDRD) Program at the National Laboratory of the Rockies. The views expressed in the article do not necessarily represent the views of the DOE or the U.S. Government. The U.S. Government retains and the publisher, by accepting the article for publication, acknowledges that the U.S. Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do so, for U.S. Government purposes. The authors would like to thank Mr Ahmed N. Mahfouz and Mr Preston Bohm for reviewing the manuscript and providing thoughtful insight.

References

- C. Geffroy, D. Lilley, P. S. Parez and R. Prasher, *Joule*, 2021, **5**, 3080–3096.
- Z. Y. Xu, R. Z. Wang and C. Yang, *Energy*, 2019, **176**, 1037–1043.
- D. M. Warsinger, K. H. Mistry, K. G. Nayar, H. W. Chung and J. H. Lienhard, *Entropy*, 2015, **17**, 7530–7566.
- W. P. Parker, J. D. Kocher and A. K. Menon, *Desalination*, 2024, **580**, 117560.
- S. Garimella, K. Lockyear, D. Pharis, O. E. Chawa, M. T. Hughes and G. Kini, *Joule*, 2022, **6**, 956–971.
- A. Odukumaiya, J. Woods, N. James, S. Kaur, K. R. Gluesenkamp, N. Kumar, S. Mumme, R. Jackson and R. Prasher, *Energy Environ. Sci.*, 2021, **14**, 5315–5329.
- T. B. Magath, *Ann. Med. Hist.*, 1937, **9**, 338–344.
- J. van Doornmalen and K. Kopinga, *Am. J. Infect. Control*, 2008, **36**, 86–92.
- Z.-M. Zhao, L. Wang and H.-Z. Chen, *Bioresour. Technol.*, 2015, **192**, 547–555.
- N. K. Sinha, *Handbook of Food Products Manufacturing*, John Wiley & Sons, 2007.
- J. H. Billington, *J. Inst. Brew.*, 1945, **51**, 31–33.
- H. Nassrullah, S. F. Anis, R. Hashaikeh and N. Hilal, *Desalination*, 2020, **491**, 114569.
- K. H. Mistry, R. K. McGovern, G. P. Thiel, E. K. Summers, S. M. Zubair and J. H. Lienhard, *Entropy*, 2011, **13**, 1829–1864.
- I. Baniasad Askari and M. Ameri, *Appl. Therm. Eng.*, 2021, **185**, 116323.
- M. Elimelech and W. A. Phillip, *Science*, 2011, **333**, 712–717.
- J. Eke, A. Yusuf, A. Giwa and A. Sodiq, *Desalination*, 2020, **495**, 114633.
- J. H. Lienhard, K. H. Mistry, M. H. Sharqawy and G. P. Thiel, in *Desalination Sustainability: A Technical, Socioeconomic, and Environmental Approach*, ed. H. A. Arafat, Elsevier Publishing Co., 2017, ch. 4.
- M. Jangsten, J. Kensby, J.-O. Dalenbäck and A. Trüschel, *Energy*, 2017, **137**, 292–301.
- T. T. Tasker, *US Pat.*, US19591A, 1858.
- E. Kozubal, J. Woods, J. Burch, A. Boranian and T. Merrigan, NLR Report No. 1004010, 2011, DOI: [10.2172/1004010](https://doi.org/10.2172/1004010).
- J. Woods, E. Kozubal, P. Luttik, D. Fox and J. Warner, *Modeling and Experiments on a Dedicated Outdoor Air System Using Liquid Desiccant Heat and Mass Exchangers*, Purdue University, West Lafayette, IN, 2022.
- X. Li, B. El Fil, B. Li, G. Graeber, A. C. Li, Y. Zhong, M. Alshrah, C. T. Wilson and E. Lin, *ACS Energy Lett.*, 2024, **9**, 3391–3399.
- A. LaPotin, Y. Zhong, L. Zhang, L. Zhao, A. Leroy, H. Kim, S. R. Rao and E. N. Wang, *Joule*, 2021, **5**, 166–182.
- J. Lord, A. Thomas, N. Treat, M. Forkin, R. Bain, P. Dulac, C. H. Behroozi, T. Mamutov, J. Fongheiser, N. Kobilansky, S. Washburn, C. Truesdell, C. Lee and P. H. Schmaelzle, *Nature*, 2021, **598**, 611–617.
- S. Li, R. Chen, J. Wang, S. Deng, H. Zhou, M. Fang, H. Zhang and X. Yuan, *npj Mater. Sustainability*, 2024, **2**, 11.
- T. Gilbert, A. K. Menon, C. Dames and R. Prasher, *Joule*, 2023, **7**, 128–149.
- LCOE U.S. H2 2023 by technology, <https://www.statista.com/statistics/1427203/united-states-levelized-cost-of-electricity-by-technology/>, (accessed December 20, 2024).
- 2023 Levelized Cost Of Energy+, <https://www.lazard.com/research-insights/2023-levelized-cost-of-energyplus/>, (accessed December 20, 2024).
- D.-H. Oh, C.-H. Lee and J.-C. Lee, *ACS Omega*, 2021, **6**, 21043–21058.
- G. Valencia Ochoa, J. Cárdenas Gutierrez and J. Duarte Forero, *Resources*, 2020, **9**, 2.
- A. Bejan, *Int. J. Energy Res.*, 2002, **26**, 0–43.
- I. Dincer and M. A. Rosen, *Exergy: Energy, Environment and Sustainable Development*, Newnes, 2012.



- 33 J. D. Kocher and S. K. Yee, *ASME J. Heat Mass Transfer*, 2025, **147**(2), 022901.
- 34 Z. Rant, *Forsch. Geb. Ingenieurwes.*, 1956, **22**, 36–37.
- 35 J. D. Kocher and A. K. Menon, *Energy Environ. Sci.*, 2023, **16**, 4983–4993.
- 36 A. K. Menon, M. Jia, S. Kaur, C. Dames and R. S. Prasher, *iScience*, 2023, **26**, 105966.
- 37 M. Gong and G. Wall, *Energies*, 2016, **9**, 707.
- 38 E. J. H. Wilson, P. Munankarmi, B. D. Less, J. L. Reyna and S. Rothgeb, *Joule*, 2024, **8**, 1000–1035.
- 39 K. Kaygusuz, *Energy Sources*, 1999, **21**, 595–610.
- 40 N. A. S. Elminshawy, F. R. Siddiqui and G. I. Sultan, *Energy Convers. Manage.*, 2015, **103**, 28–35.
- 41 J. Z. Klingensmith, *Introduction to Microeconomics*, Affordable Course Transformation: The Pennsylvania State University, University Park, 2019.
- 42 Z. Utlu and A. Hepbasli, *Renewable Sustainable Energy Rev.*, 2007, **11**, 603–634.
- 43 Energy, <https://www.bloomberg.com/energy>, (accessed December 21, 2024).
- 44 Z. Wu, S. Zhou and L. An, *J. Sustainable Dev.*, 2011, **4**, p. 260.
- 45 The Future of Hydrogen – Analysis, <https://www.iea.org/reports/the-future-of-hydrogen>, (accessed December 21, 2024).
- 46 Executive summary – Global Hydrogen Review 2021 – Analysis, <https://www.iea.org/reports/global-hydrogen-review-2021/executive-summary>, (accessed January 8, 2025).
- 47 J. Szargut, *Egzergia: poradnik obliczenia i stosowania*, Wydawnictwo Politechniki Śląskiej, 2007.
- 48 Mike, Ammonia price index, <https://businessanalytiq.com/procurementanalytics/index/ammonia-price-index/>, (accessed January 13, 2025).
- 49 Blue, green ammonia prices diverge as electrolysis power prices rise, natural gas falls, <https://www.spglobal.com/commodity-insights/en/news-research/latest-news/energy-transition/031924-blue-green-ammonia-prices-diverge-as-electrolysis-power-prices-rise-natural-gas-falls>, (accessed January 21, 2025).
- 50 Z. Utlu and A. Hepbasli, *Renewable Sustainable Energy Rev.*, 2007, **11**, 1–29.
- 51 Today in Energy Daily Prices – U.S. Energy Information Administration (EIA), <https://www.eia.gov/todayinenergy/prices.php>, (accessed December 21, 2024).
- 52 C. A. Guerrero-Martin, J. S. Fernández-Ramírez, J. E. Arturo-Calvache, H. A. Milquez-Sanabria, F. A. da Silva Fernandes, V. J. Costa Gomes, W. Lima e Silva, E. Dutra Valente Duarte, L. E. Guerrero-Martin and E. F. Lucas, *Energies*, 2023, **16**, 3502.
- 53 Ethanol – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/ethanol>, (accessed December 21, 2024).
- 54 H. Caliskan, S. Ekici and Y. Sohret, *Propul. Power Res.*, 2022, **11**, 391–400.
- 55 Are aviation biofuels ready for take off?, <https://www.iea.org/commentaries/are-aviation-biofuels-ready-for-take-off>, (accessed June 24, 2025).
- 56 USJP54, JET A1 price in United States 88.3 bbl/\$ [24.06.2025], <https://jet-a1-fuel.com/price/united-states>, (accessed June 24, 2025).
- 57 Coal – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/coal>, (accessed December 21, 2024).
- 58 Monthly Densified Biomass Fuel Report, <https://www.eia.gov/biofuels/biomass/>, (accessed December 21, 2024).
- 59 Average monthly cost of water United States 2019, <https://www.statista.com/statistics/720418/average-monthly-cost-of-water-in-the-us/>, (accessed December 21, 2024).
- 60 Water Pricing, <https://www.circleofblue.org/waterpricing/>, (accessed October 9, 2025).
- 61 X. Chen, D. Goodnight, Z. Gao, A. H. Cavusoglu, N. Sabharwal, M. DeLay, A. Driks and O. Sahin, *Nat. Commun.*, 2015, **6**, 7346.
- 62 A.-H. Cavusoglu, X. Chen, P. Gentine and O. Sahin, *Nat. Commun.*, 2017, **8**, 617.
- 63 N. G. Barton, *ANZIAM J.*, 2008, **49**, 503–524.
- 64 E. Kozubal, J. Woods and R. Judkoff, *US Pat.*, US9140471B2, 2015.
- 65 M. Mumtaz, B. C. Pamintuan, A. J. Fix, J. E. Braun and D. M. Warsinger, *Energy Convers. Manage.*, 2023, **294**, 117547.
- 66 K. F. Najjar, J. J. Shaw, E. E. Adams, G. H. Jirka and D. R. F. Harleman, *Environmental and economic comparison of cooling-system designs for steam-electric power plants*, Massachusetts Inst. of Tech., Cambridge (USA), 1978.
- 67 A. Shehabi, S. Smith, D. Sartor, R. Brown, M. Herrlin, J. Koomey, E. Masanet, N. Horner, I. Azevedo and W. Lintner, *United States Data Center Energy Usage Report*, Lawrence Berkeley National Laboratory (LBNL), Berkeley, CA (United States), 2016.
- 68 Repository of free climate data for building performance simulation, <https://climate.onebuilding.org/>, (accessed January 6, 2023).
- 69 B. Walton, The Price of Water, <https://www.circleofblue.org/2010/world/the-price-of-water-a-comparison-of-water-rates-usage-in-30-u-s-cities/>, (accessed June 11, 2025).
- 70 M. Özilgen, *Renewable Sustainable Energy Rev.*, 2018, **96**, 275–295.
- 71 J. M. Awika, *Advances in Cereal Science: Implications to Food Processing and Health Promotion*, American Chemical Society, 2011, vol. 1089, pp. 1–13.
- 72 S. Réhault-Godbert, N. Guyot and Y. Nys, *Nutrients*, 2019, **11**, 684.
- 73 Rice, brown, long grain, unenriched, raw – USDA FoodData Central Food Details, <https://fdc.nal.usda.gov/food-details/2512380/nutrients>, (accessed January 14, 2025).
- 74 Rice – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/rice>, (accessed January 13, 2025).
- 75 Wheat, durum – USDA FoodData Central Food Details, <https://fdc.nal.usda.gov/food-details/169721/nutrients>, (accessed January 14, 2025).
- 76 Wheat – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/wheat>, (accessed January 14, 2025).



- 77 Oats, whole grain, steel cut – USDA FoodData Central Food Details, <https://fdc.nal.usda.gov/food-details/2346397/nutrients>, (accessed January 14, 2025).
- 78 Oat – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/oat>, (accessed January 14, 2025).
- 79 Corn, sweet, white, canned, whole kernel, regular pack, solids and liquids – USDA FoodData Central Food Details, <https://fdc.nal.usda.gov/food-details/168541/nutrients>, (accessed January 14, 2025).
- 80 Corn – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/corn>, (accessed January 13, 2025).
- 81 Soybeans, green, raw – USDA FoodData Central Food Details, <https://fdc.nal.usda.gov/food-details/169282/nutrients>, (accessed January 14, 2025).
- 82 Soybeans – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/soybeans>, (accessed January 14, 2025).
- 83 Sugars, granulated – USDA FoodData Central Food Details, <https://fdc.nal.usda.gov/food-details/746784/nutrients>, (accessed January 14, 2025).
- 84 Sugar – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/sugar>, (accessed January 14, 2025).
- 85 Milk, whole, 3.25% milkfat, with added vitamin D – USDA FoodData Central Food Details, <https://fdc.nal.usda.gov/food-details/746782/nutrients>, (accessed January 14, 2025).
- 86 Milk – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/milk>, (accessed January 14, 2025).
- 87 Butter, stick, unsalted – USDA FoodData Central Food Details, <https://fdc.nal.usda.gov/food-details/789828/nutrients>, (accessed January 14, 2025).
- 88 Butter – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/butter>, (accessed January 14, 2025).
- 89 Egg, whole, raw, fresh – USDA FoodData Central Food Details, <https://fdc.nal.usda.gov/food-details/171287/nutrients>, (accessed January 13, 2025).
- 90 Eggs US – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/eggs-us>, (accessed July 7, 2025).
- 91 Poultry – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/poultry>, (accessed January 13, 2025).
- 92 Beef – Price – Chart – Historical Data – News, <https://tradingeconomics.com/commodity/beef>, (accessed January 13, 2025).
- 93 GC Protein Pricing Review Year End 2023, March 2024, <https://greencirclecap.com/gcproteinpricing/>, (accessed May 30, 2025).
- 94 Savor, <https://www.savor.it/home>, (accessed May 29, 2025).
- 95 Z. Wang, C. Zhang and F. Jiao, *ACS Agric. Sci. Technol.*, 2025, 5, 681–686.
- 96 E. C. Hann, S. Overa, M. Harland-Dunaway, A. F. Narvaez, D. N. Le, M. L. Orozco-Cárdenas, F. Jiao and R. E. Jinkerson, *Nat. Food*, 2022, 3, 461–471.
- 97 S. J. Davis, K. Alexander, J. Moreno-Cruz, C. Hong, M. Shaner, K. Caldeira and I. McKay, *Nat. Sustainability*, 2024, 7, 90–95.
- 98 N. Ripoll, C. Silvestre, E. Paredes and M. Toledo, *Int. J. Hydrogen Energy*, 2017, 42, 5513–5522.
- 99 E. Koeleman, Algae cultivation profitable by 2025, <https://www.allaboutfeed.net/animal-feed/raw-materials/algae-cultivation-profitable-by-2025/>, (accessed May 29, 2025).
- 100 W. de Queiróz Lamas, *Fuel*, 2025, 395, 134853.
- 101 P. Procházka, J. Abrham, J. Cerveny, J. Soukupová, C. N. Ouma, K. J. Mullen, P. Sanova and L. Smutka, *Front. Sustainable Food Syst.*, 2023, 7, DOI: [10.3389/fsufs.2023.1256473](https://doi.org/10.3389/fsufs.2023.1256473).
- 102 A. Vernon, *A Review of Massively Scalable Enhanced Rock Weathering*, <https://austinvernon.substack.com/p/a-review-of-massively-scalable-enhanced>, (accessed June 11, 2025).
- 103 A review of massively scalable enhanced rock weathering | Orca Notes, <https://www.orcasciences.com/articles/a-review-of-massively-scalable-enhanced-rock-weathering>, (accessed June 11, 2025).
- 104 Z. Ying, A. Yang, M. Zhao, J. Yang, X. Zheng, B. Dou and G. Cui, *J. Cleaner Prod.*, 2024, 435, 140590.
- 105 S. Omelchenko, M. Shaner and I. McKay, *US Pat.*, US20240271302A1, 2024.
- 106 Peregrine, <https://peregrinehydrogen.com/#solution>, (accessed June 12, 2025).
- 107 J. M. Beltrán and S. Koo-Oshima, *FAO Land and water discussion paper*, 2006, vol. 5, p. 48.
- 108 How much electricity is lost in electricity transmission and distribution in the United States?, <https://www.eia.gov/tools/faqs/faq.php?id=105&t=3>, (accessed February 18, 2025).
- 109 S. S. Alrwashdeh and H. Ammari, *Case Stud. Therm. Eng.*, 2019, 16, 100559.
- 110 Combined Heat and Power Technology Fact Sheet: Absorption Chillers for CHP Systems | Better Buildings Initiative, <https://betterbuildingssolutioncenter.energy.gov/resources/combined-heat-and-power-technology-fact-sheet-absorption-chillers-chp-systems>, (accessed July 12, 2025).
- 111 P. E. Phelan, B. E. Phelan and A. Sharma, *Front. Energy Effic.*, 2024, 2, DOI: [10.3389/fenef.2024.1471628](https://doi.org/10.3389/fenef.2024.1471628).
- 112 J. D. Kocher, *Int. J. Refrig.*, 2025, 169, 418–428.
- 113 R. Gabbrielli, P. Castrataro and F. Del Medico, *Energy Procedia*, 2016, 91, 759–766.
- 114 J. Woods, N. James, E. Kozubal, E. Bonnema, K. Brief, L. Voeller and J. Rivest, *Joule*, 2022, 6, 726–741.
- 115 J. D. Kocher, S. K. Yee and R. Y. Wang, *Energy Convers. Manage.*, 2022, 253, 115158.
- 116 G. Angrisani, A. Capozzoli, F. Minichiello, C. Roselli and M. Sasso, *Appl. Energy*, 2011, 88, 1354–1365.
- 117 Munters HCD desiccant dehumidifier | Munters, <https://www.munters.com/en-us/products-cms/dehumidifiers/hcd-series/>, (accessed July 15, 2025).
- 118 F. Ge and C. Wang, *Energy Convers. Manage.*, 2020, 224, 113343.



