

Cite this: *Sustainable Energy Fuels*,  
2023, 7, 3014

# Life-cycle global warming impact of hydrogen transport through pipelines from Africa to Germany

Olga Kanz, \*<sup>a</sup> Franka Brüggemann,<sup>a</sup> Kaining Ding,<sup>a</sup> Karsten Bittkau, <sup>a</sup> Uwe Rau<sup>a</sup>  
and Angèle Reinders<sup>b</sup>

Various hydrogen pipeline structures for the export of hydrogen from Africa to Germany are analyzed by life cycle analysis (LCA) in order to determine the global warming potential (GWP) of the production and transportation of 1 kg of hydrogen. This analysis was motivated by the fact that a hydrogen pipeline infrastructure can be built cost-effectively by partially using existing natural gas pipelines. However, little is known about its possible environmental impact. In this paper, the LCA method is used to compare different import options, including possible changes to future supply chains. Three supply locations – Morocco, Senegal, and Nigeria – are compared with each other and evaluated using Germany's domestic hydrogen supply as a reference. Hydrogen transport *via* a pipeline from Morocco shows emissions of 0.07–0.11 kg CO<sub>2</sub>-eq per kg H<sub>2</sub>, and hydrogen transport from Nigeria causes emissions of 0.27–0.38 kg CO<sub>2</sub>-eq per kg H<sub>2</sub>. These figures are highly dependent on the flow rate of hydrogen, the GWP of PV electricity used to power the hydrogen compressors along the way, and compression efficiency. However, the GWP due to pipeline transport is negligible compared to the emissions caused by PV electrolysis. The total emissions of the African supply chain amount to 1.9–2.5 kg CO<sub>2</sub>-eq per kg H<sub>2</sub>. From a sensitivity analysis, it can be concluded that, by using identical PV panels, the GWP of German domestic hydrogen production (3.0–3.1 kg CO<sub>2</sub>-eq per kg H<sub>2</sub>) still has a higher GWP than hydrogen produced in Africa and imported through pipeline supply chains.

Received 3rd March 2023  
Accepted 26th May 2023

DOI: 10.1039/d3se00281k

rsc.li/sustainable-energy

## 1. Introduction

The importance of hydrogen in the European transition to a net-zero emissions economy in the future is widely acknowledged. Currently (2022), hydrogen is mainly produced from fossil fuels consisting of 76% natural gas and 22% coal gasification, while only 2% of hydrogen is produced *via* electrolysis.<sup>1</sup> Fossil fuel pathways have a high global warming potential (GWP) of at least 10 kg CO<sub>2</sub>-eq per 1 kg H<sub>2</sub>.<sup>2</sup> According to prior studies, hydrogen production *via* electrolysis will guarantee emissions reductions of up to 80% compared to hydrogen production dependent on fossil fuels.<sup>3</sup>

Accelerating the integration of renewable energy resources, especially photovoltaics (PV), in the production of hydrogen is therefore of great importance when it comes to mitigating the effects of global warming.<sup>4</sup> This will be even more significant in the future, given the anticipated development of the hydrogen market in the context of Germany's national climate plan. In addition to existing hydrogen consumption in oil refining and ammonia production, the demand for hydrogen as a transportation fuel for road transport, maritime applications,

aviation, electricity generation, storage, and heating will significantly increase in the upcoming decades.<sup>5</sup> Germany's predicted hydrogen demand in 2045 is 226 to 600 TW h.<sup>6</sup> Of this long-term German demand, 50–90% will have to be imported from regions with favorable production conditions and enough space for hydrogen production for self-consumption and export.<sup>7</sup> In new initiatives, Germany is collaborating with African countries to explore Africa's hydrogen production potential.

Information about the environmental impact of this route is limited because even “green” hydrogen production *via* electrolysis is associated with different GWP levels depending on the origin of the electricity used to power the operation of electrolyzers. However, hydrogen production in Africa could yet be financially viable. It has been shown, for instance, that PV electricity for the electrolyzer can be generated below 2 cents per kWh in many African locations, making it possible to save 30% on hydrogen production costs compared to Germany's self-supply.<sup>8</sup>

Transporting vast amounts of hydrogen produced overseas is challenging. Previous studies show that pipelines are the most cost-efficient solution to transport large hydrogen volumes.<sup>9</sup> A key benefit is the opportunity to convert existing European natural gas pipelines to transport pure hydrogen, an economical and time-saving alternative to building entirely new

<sup>a</sup>IEK-5 Photovoltaics, Forschungszentrum Jülich GmbH, Jülich, Germany. E-mail: o.kanz@fz-juelich.de<sup>b</sup>Eindhoven University of Technology (TU/e), Eindhoven, Netherlands

infrastructure.<sup>10</sup> The European Hydrogen Backbone (EHB), a group of 31 energy infrastructure operators, works on repurposing the pipeline infrastructure in Europe and enabling the renewable hydrogen market. EHB has already identified large-scale pipeline corridors to import significant quantities of green hydrogen from Africa to Germany (see Fig. 1).<sup>3</sup>

Despite these ambitious initiatives, only a few studies have been conducted which quantitatively capture the GWP of large-scale hydrogen infrastructure. Extensive analysis of environmental burdens of hydrogen production (excl. transport) was completed by Terlouw *et al.*<sup>11</sup> Also Tayarani & Ramji<sup>12</sup> have already analyzed the GWP of the pipeline transportation of hydrogen in gaseous form, although only for the case of the USA. These results show that one ecologically beneficial pathway is PV-powered electrolysis transported through pipelines. Kolb *et al.*,<sup>13</sup> studied liquid hydrogen imports to Germany. Ozawa *et al.*,<sup>14</sup> Al-Breiki & Bicer<sup>15</sup> analyzed the GWP of hydrogen for overseas shipping, albeit only in liquid form. An overview of general hydrogen LCA studies can be found in Osman *et al.*<sup>16</sup> and Kanz *et al.*<sup>17</sup> As for international gaseous hydrogen transport *via* pipeline from Africa to Europe, the environmental impact on global warming is still unknown.

In response to an accelerating development of the hydrogen market in combination with a gap in the literature, this work evaluates the GWP of hydrogen production and import through the pipeline from Africa to Germany. The hydrogen supply chain has been evaluated in terms of GWP using LCA. This paper is structured into four sections. After the Introduction, Section 2 explains the LCA method as well as the framework of the systems to be investigated. Section 3 focuses on the life cycle inventory (LCI) and operation parameters. The results of the

study and scenario analysis are presented in Section 4. The paper is rounded off with discussions and a conclusion in Sections 5 and 6.

## 2. Research method, system framework, and data input

### 2.1 Life cycle assessment method

LCA is a valuable instrument for analyzing the environmental performance of any product or system. LCA is described as a compilation and evaluation of the inputs (materials and energy), outputs (emissions), and potential environmental impacts of a product system during its life cycle. LCA studies consist of four phases, which are covered by ISO standards (see Fig. 2).<sup>18,19</sup>

The first phase of the LCA is used to outline the goal and scope of the study. In the second step, data are collected in the LCI. The LCI analysis measures elementary flows related to individual processes, such as mass (materials and resources) and energy flows, land use, emissions to air, and water, *etc.* The third step of the LCA is the life cycle impact assessment (LCIA). In the LCIA, all the inputs and outputs are placed in the environmental framework. The last step is the interpretation, where the information resulting from the LCIA is systematically evaluated. For the calculations, a well-known LCA tool named GaBi was used.<sup>20</sup>

One of the 17 impact categories of an LCA – the global warming potential (GWP in grams of CO<sub>2</sub> equivalent emissions) – is a significant factor in today's energy policy and, therefore, essential for any comparative energy technology assessment. The LCIA is completed for this category and the results are used as an indicator of the contribution to climate change following the International Reference Life Cycle Data System (ILCD) Handbook.<sup>21</sup> Based on the latest IPCC, GWP100 is used for this study. Limiting global warming to 2 °C by 2100 requires a GWP100 (100 years of evaluation time). The GWP100 measures the impact of radiative forcing (caused by greenhouse gases in the atmosphere) over 100 years and provides a standard unit of measure. The GWP is normalized to CO<sub>2</sub> equivalent emissions, including the contribution of all significant carbon dioxide, methane, nitrous oxide, and chlorofluorocarbon emissions.<sup>18,19</sup> Further descriptions of the LCA method are provided by Kanz *et al.*<sup>17</sup>



Fig. 1 Hydrogen supply chain. Red-colored route is possible corridor for German imports based on existing natural gas infrastructure (European Hydrogen Backbone).<sup>28</sup> The routes in Africa are estimated on the basis of our own calculations and the planned Trans-Saharan Gas Pipeline project.

### Life Cycle Assessment Framework



Fig. 2 Schematic illustration of the life cycle assessment framework.



## 2.2 System framework

While defining the scope for developing inventory, it must be determined which emission sources should be included within the selected organizational boundary for the inventory. The system boundary for hydrogen imports in this paper includes production, compression, and long-distance hydrogen transport, following the cradle-to-gate principle (see Fig. 3). Dedicated green hydrogen refers to hydrogen production *via* electrolysis using electricity generated from PV in the numerous importing regions selected on the basis of the geopolitical and climatic criteria of H<sub>2</sub>Atlas-Africa project.<sup>8</sup> The production regions were evaluated based on location information related to PV electricity costs, local energy demands, and land and water eligibility. Three production “hot spots” in Morocco, Senegal, and Nigeria were selected, and production is based partly on the simulation and LCA model used in our previous work.<sup>17</sup> Processes within the system boundary are the foreground and background processes of hydrogen supply chains, including the essential upstream processes such as raw material extraction, for example the electrolyzer and pipeline, and PV panels for electricity generation. Fig. 3 shows the system boundaries of this LCA, and Section 3.1 gives a detailed overview of the electrolyzer and PV parameters.

The functional unit (FU) definition is a significant element for modeling a product system in an LCA. An FU refers to the product, service, or system whose impacts are calculated using an LCA. The final conditions of the FU are defined as the “1 kg of hydrogen” (purity > 99% vol. pressure 100 MPa ( $p_2$ ), temperature 25 °C) supplied to the distribution pipeline in Germany, as proposed by the FC-HyGuide guidance document.<sup>22</sup> A detailed description of the FU decision process can be found in our previous work.<sup>17</sup> To allow for comparisons with competing energy carriers on an energetic basis, we indicate emissions related to 1 kW h of hydrogen in our results using a lower heating value of 33.32 kW h per kg H<sub>2</sub>. The results are also converted to kW h (LHV) to give the reader a more straightforward evaluation.

## 2.3 Data input

Most data were collected from the ecoinvent database (version 3.6), secondary literature, other LCA studies, and manufacturer datasheets. Electricity was either assumed to be supplied by country-specific electricity grid mixes based on ecoinvent

databases or exclusively from PV from a particular country based on data taken from public weather databases and the PVGIS online tool.<sup>23</sup> The main PV characteristics are in agreement with IEA-PVPS Task 12 reports.<sup>24</sup> As a reference framework, a guidance document published by the European Union and Fraunhofer ISE was applied.<sup>22</sup>

## 3. Life cycle inventory

This section provides an overview of the following components: electrolyzers (Section 3.1), pipeline infrastructure (Section 3.2), and compressor stations (Section 3.3). Furthermore, pipe capacity and leakage assumptions are clarified in Section 3.4.

### 3.1 Electrolyzer inventory and operation

The electrolysis systems used for this study are proton exchange membrane (PEM) electrolyzers. PEM electrolyzers can produce hydrogen at low temperatures without any external heating. PEM electrolyzers have a higher efficiency at a lower current density compared to alkaline electrolyzers. They, therefore, operate efficiently with intermittent PV electricity. The electricity needed to produce 1 kg of hydrogen at the theoretical efficiency limit is 39.4 kW h. For present-day production, electricity consumption is realistically about 55–57.5 kW h per kg H<sub>2</sub>.<sup>22</sup> The LCIA of a 1 MW PEM stack and balance of plant was exhibited based on the data from Bareiß *et al.*<sup>25</sup> The data for the Nafion membrane are unavailable, which is why the perfluoro sulfonyl fluoride data were used instead. Since oxygen produced during electrolysis is not technically used, no multifunctionality occurred. The production of deionized water for the electrolyzers follows the ecoinvent processes.<sup>20</sup>

To produce hydrogen, an oversized grid-connected Si-wafer 3 MWp PV plant and a 1 MW PEM electrolyzer were investigated. The electrolyzer operates 3500 full-load hours and a constant hydrogen production profile assumed in the study. The lifetime of the PV electrolyzer configuration is 25 years. Replacement of electrodes in the electrolyzer is mandatory once in a lifetime.<sup>17</sup> The manufacture and operation of the whole system are considered in the model based on GaBi database.<sup>24</sup> The model considers the background country-specific annual irradiance values of PVGIS.<sup>20</sup> PVGIS-SARAH2 was applied as database, system loss is assumed to be 14% and total loss 23.91%, with a slope angle of 35° and azimuth angle of 0°. A degradation rate



Fig. 3 System boundaries of hydrogen transport. Left – subsystem 1: production of hydrogen; right – subsystem 2: transport of hydrogen.



of 0.7% per year and a life expectancy of 25 years were selected in line with the IEA-PVPS Task 12 reports.<sup>24</sup> Furthermore, since the operation in Africa led to a decline in the amount of power produced due to dust, a loss of 4.4% was added.<sup>27</sup>

The following countries were evaluated as operating regions for electrolysis: Germany (DE), Morocco (M), Senegal (S), and Nigeria (N). The electricity demand for hydrogen production was assumed to be covered by the same PV set in order to have an adequate and comparable outcome. Cologne (Germany) was chosen as a location for a domestic production case as a reference. A representative average domestic site was taken for hydrogen production in the center of Germany.

### 3.2 Hydrogen transport *via* pipeline

The pipeline routes from Africa to Germany were selected according to the large-scale pipeline corridors of the European Hydrogen Backbone (EHB) (see Fig. 1).<sup>28</sup> For this study, 60% of the European infrastructure is assumed to be built on repurposed pipelines. The pipes in Africa and offshore pipes are expected to be newly built. The routes between Morocco and Nigeria have been selected in accordance with the Trans-Saharan Gas Pipeline (TSGP) project.<sup>29</sup> Due to a lack of data, the remaining infrastructure in Africa had to be estimated based on distances calculated using Google Maps.<sup>30</sup> The pipes have outer diameters of 500 mm, 900 mm, and 1200 mm. The percentage distribution of pipeline diameters was assumed based on the European design of EHB. Fig. 1 and Table 7 give an overview of the distances and pipeline types used in the study. Pipeline materials were based on the information of manufacturers, such as Mannesmann Line Pipe. The pipe material used in this study is L360/X52. The primary materials are chromium, carbon, copper, manganese, molybdenum, nickel, phosphorus, and sulfur. In order to repurpose the natural gas pipes to transport gaseous hydrogen, extra protection for the pipeline material in the form of corrosion and mechanical protection coating is to be added. A three-layer system consisting of an epoxy primer, an adhesive, and a polyethylene layer coats the exterior of the pipeline. A thickness of 300 mm is assumed for each epoxy layer and the adhesive, and a thickness of 5 mm for the PE topcoat.<sup>31</sup> The LCI of Nord Stream II was used to model the Strait of Gibraltar crossing. Additionally, a protective layer coating and a concrete jacket to weigh down the pipeline were considered in the model.<sup>32</sup> Tables 4 and 5 show the offshore and onshore pipeline life cycle inventory. Current natural gas infrastructure has a lifetime prediction of 50 years.<sup>33</sup> The same lifetime can be expected for newly built hydrogen pipelines. The repurposed pipelines are assumed to have a service life of 30 years, during which they can be used for hydrogen transport. Similarly, emissions from the repurposed natural gas pipelines are now assumed to only amount to 30% of total emissions, since the pipelines have already been used for natural gas transportation (Öko-Institut e.V., 2021).

### 3.3 Compressor stations

The operation pressure in the pipe is assumed to be between 70 and 100 bar. PV-powered compressor stations are installed every

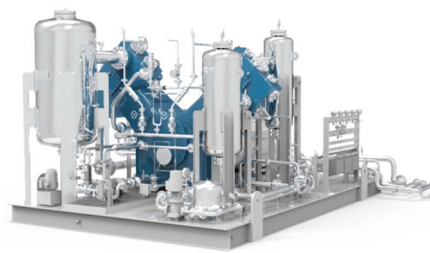


Fig. 4 NEA hydrogen piston compressor, NEUMAN & ESSER GROUP. Copyright© NEUMAN & ESSER Verwaltungs- und Beteiligungsgesellschaft.

Table 1 Input parameters of the compression station model

| Parameter                       | Value    |                            |
|---------------------------------|----------|----------------------------|
| Service life (new construction) | 50       | years                      |
| Net power demand every 100 km   | 0.1 (35) | kW h per kg H <sub>2</sub> |
| Compressor power                | 12 (10)  | MW                         |
| Overall efficiency              | 50       | %                          |
| Inlet pressure                  | 70       | bar                        |
| Outlet pressure                 | 100      | bar                        |

100 km to maintain the operating pressure.<sup>10</sup> For assumed hydrogen flow rates and pressure levels, piston compressors such as the LCA NEA API 618 are the most economical solution. Fig. 4 demonstrates a hydrogen piston compressor of the Neuman & Esser Group.<sup>34</sup>

Table 1 shows the most critical parameters of the compression station for the LCA. Detailed inventories of the compressor stations can be found in Table 6. The emissions of PV electricity used to power the compression are calculated nationwide based on the current production routes and a market mix of installed PV technologies.<sup>20</sup>

### 3.4 Hydrogen capacity and leakage

Based on the mechanical work of the compressor stations, the maximum speed of hydrogen was calculated for different pipe diameters. The Darcy–Weisbach equation was applied for the turbulent flow to calculate the maximum speed.<sup>36</sup> Based on this equation, operation at maximum speed for 208 days a year leads to an annual flow of 69 TW h a<sup>-1</sup> for a 900 mm pipe. However, looking at existing natural gas pipelines like Nord Stream 1, it should be possible to operate the pipeline 350 days a year.<sup>37</sup> This would almost double capacity. For the 900 mm pipe, a mass flow of 115 TW h a<sup>-1</sup> at the maximum speed is possible. Since it is difficult to predict the operation mode, both flow rates are evaluated in the results section and referred to as “flow rate min” and “flow rate max”.

The possibility of hydrogen leakage cannot be ruled out, even in newly constructed pipes. A Frazer-Nash study reports that the long-distance transport of hydrogen may cause 0.5% losses per 1000 km.<sup>39</sup> This study assumes 1.49–3.74% leakage for analyzed import distances based on these numbers. The FU was recalculated based on these losses. Additionally, since hydrogen is an indirect greenhouse gas, its GWP of 5.8 over a 100 year time



Table 2 Parameters of the baseline scenario

| Parameter   | Value  | Unit                       |
|---|--------|----------------------------|
| Expected lifetime (new)                           | 50     | years                      |
| Expected lifetime (reused)                        | 30     | years                      |
| Maintenance                                       | 2      | % y <sup>-1a</sup>         |
| Compression (every 100 km)                        | 0.1    | kW h per kg H <sub>2</sub> |
| Losses per 1000 km                                | 0.5    | % <sup>b</sup>             |
| Pressure  | 70–100 | bar <sup>c</sup>           |
| Min. annual capacity (208 d of operation, 900 mm) | 69     | TW h a <sup>-1d</sup>      |
| Max. annual capacity (350 d of operation, 900 mm) | 115    | TW h a <sup>-1d</sup>      |

<sup>a</sup> Ref. 5. <sup>b</sup> Ref. 38. <sup>c</sup> Ref. 35. <sup>d</sup> 900 mm diameter, own calculation.

frame is included in the analysis. However, since the leakage is relatively small, it does not significantly contribute to the FU GWP. The main assumptions for the baseline scenario of hydrogen transport *via* pipeline are listed in Table 2.

## 4. Results

Emissions from sources in the hydrogen supply chain can be classified into the following two main categories:

- Emissions from the production of hydrogen: emissions occur indirectly through manufacturing and operation of electrolyzers (PV electricity for electrolyzer operation, electrolyzer production, conditioning of hydrogen...).
- Emissions from transport of hydrogen: transportation-related emissions – emissions associated with the operation of various transport sources, including tanks and transfers into transmission or distribution pipelines (compression of hydrogen during transport, pipe manufacturing...).

### 4.1 GWP of FU in the baseline scenario for the production of hydrogen

Two different operation scenarios were modeled for each country: a “high energy demand scenario” with 57.5 kW h and a “low energy demand scenario” with 55 kW h. Increasing the efficiency of the electrolyzer results in a lower GWP according to a linear correlation.

However, the emissions associated with the input of electricity dominate the GWP. The primary source of emissions here is the electricity supply along the entire value chain of PV production. A variation of the GWP of PV electricity used to power the electrolyzer between 15 and 45 g CO<sub>2</sub>-eq per kW h is shown in Fig. 5.

### 4.2 GWP of FU of pipeline transport

Thanks to higher irradiation, PV-powered electrolysis in Africa will have a lower impact on global warming than in Germany. The question is, however, whether the GWP of hydrogen produced with PV electricity in Germany would still be lower when considering the GWP due to transportation, *i.e.* imports from Africa. To answer this question, a scenario of German domestic production was analyzed and compared to the supply chain from Africa to Germany. The GWP results associated with the production, operation, and deposition of the pipeline are presented in this section.

Table 3 gives an overview of the GWP of hydrogen transport for the baseline scenario of compressor consumption for different supply routes. Similar to the production of hydrogen, the primary source of emissions for hydrogen transport is the electricity supply. The most substantial consumption can be attributed to the operation of the pipeline compressor stations (see Fig. 6 and 7).

### 4.3 Compression efficiency and PV emissions

Due to the increased research interest in hydrogen infrastructure, it can be assumed that efficiencies will be optimized in the near future. However, it is difficult to predict precise figures. The sensitivity analysis in this section is conducted to gain a better understanding of the influence of the different

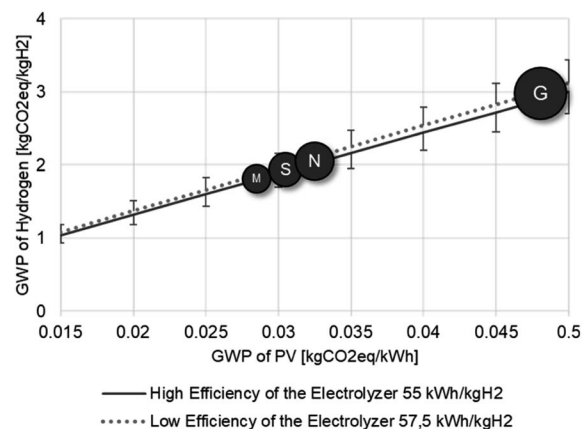


Fig. 5 GWP of hydrogen production based on different PV electrolysis efficiencies and PV electricity emissions. Germany (G), Nigeria (N), Senegal (S), and Morocco (M).

Table 3 The life cycle GWP results of hydrogen imports (excl. production)

| Production region | High flow rate <sup>b</sup> | Low flow rate <sup>a</sup> | Unit   |
|-------------------|-----------------------------|----------------------------|--|
| Morocco           | 0.07                        | 0.11                       | kg CO <sub>2</sub> -eq per kg H <sub>2</sub> |
| Senegal           | 0.18                        | 0.26                       | kg CO <sub>2</sub> -eq per kg H <sub>2</sub> |
| Nigeria           | 0.27                        | 0.38                       | kg CO <sub>2</sub> -eq per kg H <sub>2</sub> |

<sup>a</sup> GWP of the baseline scenario for the flow rates, 69 TW h a<sup>-1</sup>. <sup>b</sup> GWP of the baseline scenario, 115 TW h a<sup>-1</sup>.



Table 4 Life cycle inventory of the onshore pipeline

| Material onshore pipeline                             | Volume  | Value          |
|---|---------|----------------|
| Water   | 187     | m <sup>3</sup> |
| Diesel, burned in construction machinery and vehicles | 3.31    | TJ             |
| Steel X52, seamless pipeline                          | 630     | t              |
| Epoxy powder, at the plant                            | 1.36    | kg             |
| Polyethylene, LDPE, granules, at the plant            | 4.64    | t              |
| Transport, helicopter                                 | 26      | h              |
| Transport, truck 32 t                                 | 219 000 | t km           |
| Transport, freight, rail                              | 77 500  | t km           |

Table 5 Life cycle inventory of the offshore pipeline

| Material offshore pipeline                            | Volume  | Value          |
|---|---------|----------------|
| Water   | 805     | m <sup>3</sup> |
| Diesel, burned in construction machinery and vehicles | 2.53    | TJ             |
| Steel X52, seamless, pipeline                         | 1015.61 | t              |
| Concrete  | 361     | m <sup>3</sup> |
| Aluminum  | 3.32    | t              |
| Zinc for coating                                      | 175     | kg             |
| Transport, truck 32 t                                 | 76 100  | t km           |
| Transport, freight, rail                              | 122 000 | t km           |
| Transport, transoceanic cargo ship                    | 182 000 | t km           |

Table 6 Life cycle inventory of the compression stations

| Material                                   | Value    | Unit |
|--|----------|------|
| Steel profiles                             | 12 100   | t    |
| Concrete                                   | 172 000  | t    |
| Reinforcing steel                          | 8500     | t    |
| Transport, trucks 32 t                     | 54 750   | tkm  |
| Diesel, trucks, and construction machinery | 827 500* | MJ   |

Table 7 Import distances from Africa to Germany

| Pipeline type                     | Distance [km] |
|-----------------------------------|---------------|
| Onshore pipeline Europe–Germany   | 2400          |
| Offshore pipeline Europe–Africa   | 40            |
| Onshore pipeline Africa (Morocco) | 560           |
| Onshore pipeline Africa (Senegal) | 3060          |
| Onshore pipeline Africa (Nigeria) | 4260          |

compression efficiencies on the GWP of PV-based hydrogen supply. The energy demand for previously described pipeline routes is varied until the worst-case scenario (compressor demand of 1.5 kW h per kg H<sub>2</sub> per compressor station) is achieved. Additionally relevant is the origin of the PV panels used to run the compressors. Therefore, minimum and maximum values for the GWP of PV electricity, as described in the previous section, are applied. Fig. 8 shows the GWP of hydrogen imports based on different PV emissions and the energy demand of the compression stations. For the best-case scenario, renewable electricity is assumed for PV production (“low emission PV” – 0.015 kg CO<sub>2</sub>-eq per kW h). In the worst case, Chinese PV

production is based on coal electricity (“high emission PV” – 0.045 kg CO<sub>2</sub>-eq per kW h).<sup>40</sup>

The results of low-efficiency compressors in combination with the high GWP of PV electricity can only achieve up to 5.5 kg CO<sub>2</sub>-eq per kg H<sub>2</sub> for transport from Nigeria to Germany, 3.9 kg CO<sub>2</sub>-eq per kg H<sub>2</sub> for Senegal, and 2.0 kg CO<sub>2</sub>-eq per kg H<sub>2</sub> for the shortest distance from Morocco.

#### 4.4 GWP of hydrogen supply chains for Germany

For the holistic results on the hydrogen supply chains, the production and distribution of hydrogen are included in the model in this section (see Fig. 8). The mass flows described earlier were evaluated for two scenarios: lower efficiency electrolyzers with a demand of 57.5 kW h for producing 1 kg of

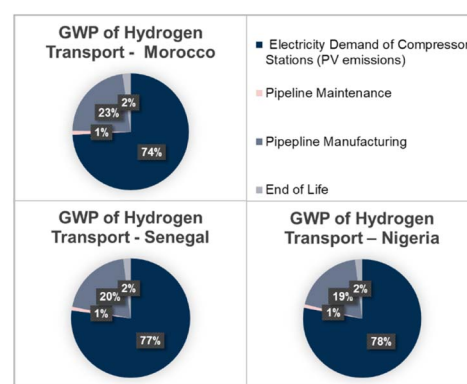


Fig. 6 The life cycle GWP contribution of hydrogen transport from Morocco, Senegal, and Nigeria to Germany. The GWP of hydrogen transport is demonstrated excl. the GWP of hydrogen production.





Fig. 7 GWP of hydrogen transport (excl. production) from Morocco, Senegal, and Nigeria depending on the efficiency of the compression and origin of PV electricity. For the best-case scenario, renewable electricity is assumed for PV production ("low emission PV" – 0.015 kg CO<sub>2</sub>-eq per kWh). The worst case involves Chinese PV production based on coal electricity ("high emission PV" – 0.045 kg CO<sub>2</sub>-eq per kWh).

hydrogen and higher efficiency electrolyzers that only need 55 kW h per kg H<sub>2</sub>. For the German supply chain, a distribution distance of 300 km was assumed. The pipeline infrastructure

was modeled according to the assumptions described previously in this paper.

Additionally, a scenario of a grid-connected PEM electrolyzer in Germany was evaluated. The GWP of the German grid in this study was assumed to be 0.251 kg CO<sub>2</sub>-eq per kWh, which is the GWP of the grid in 2030 after the phasing out of coal. The GWP of hydrogen production *via* electrolysis using the average grid electricity for 2030 in Germany is 14.5 kg CO<sub>2</sub>-eq per kWh. The current share of renewable electricity in the German electricity grid is lower. The GWP of the German grid in 2021 is 0.428 kg CO<sub>2</sub>-eq per kWh. Based on the current grid, the hydrogen supply would lead to significantly higher emissions of 24.2 kg CO<sub>2</sub>-eq per kg H<sub>2</sub>. Fig. 8 shows the results of this comparison. The results show that the import of renewable hydrogen can outperform domestic production in the baseline scenario, where the efficiency of the compressors is estimated at an average of 0.1 kWh per kg H<sub>2</sub>. The GWP of the domestic production sites is dominated by the power supply, with more than 90% of emissions resulting from electricity emissions.

#### 4.5 Limitation of the study

There are several limitations to application of the study in the context of current energy systems:

- An LCA study requires a significant amount of data of future energy systems. However, the availability and reliability of such data is limited, particularly for emerging technologies and processes. The increased share of renewable electricity in the grid will influence the GWP for all future supply chains covered in the study. For instance, the GWP of electricity required for PV cell production will probably drop in the future, leading to reduced GWP per kWh of PV energy production.

- GWP results are subject to uncertainties and variability due to the data used and assumptions applied for the future energy system that doesn't exist yet in reality in 2023. These uncertainties can arise from various sources, such as assumptions about the technological performance and operation profiles of components in the system considered (*e.g.*, compression stations). In this study, for instance, we assume ideal performance of the compression stations under non-stationary operation (as if operated under base load conditions) with oversized grid-connected PV systems. This simplified approach was applied due to a lack of information available about operation profiles for hydrogen compressors in scientific literature. Probably further future research on practical experiences with demonstrations of (parts of) the hydrogen infrastructure will close this gap.

- Defining the boundaries of this study was challenging, as different stages of the life cycle of parts the investigated system may occur in different geographical locations and involve different actors. In general, it is known that the choice of system boundaries can significantly affect the results of an LCA study and limit its scope. We decided not to include island systems with batteries in the study, since their sizing depends on several unknown factors as desired level of reliability of system operation, project budgets, system autonomy and load profiles of the electrolyzers.<sup>11,26</sup>





Fig. 8 Scenario analysis for different insolation levels and electrolyzer consumption. GWP of PV-powered hydrogen production by country with high-efficiency scenario (power consumption: 55 kW h per kg H<sub>2</sub>) and low-efficiency (electricity demand of 57.5 kW h per kg H<sub>2</sub>). Blue – GWP caused by PV electricity, grey – GWP of plant manufacturing, beige – GWP of compression and conditioning, and mint – the pipeline transport.

• Different energy systems' LCA results may be hardly comparable, due to differences between the chosen system boundaries, functional units, and environmental impact categories. The outputs of an LCA have thus to be evaluated only in the framework given through the specific LCA study. The performance of PV systems, for instance, can vary based on several factors, such as location, irradiance conditions, module technology, and installation quality. The location of a PV production site can impact the amount of solar radiation it receives, which affects its energy output. Production sites located in areas with high levels of solar irradiance, such as southern Germany, may perform better than those in areas with lower levels of irradiance as central Germany. It is essential to carefully consider these factors when discussing the results of the study.

• This LCA focused only the GWP, and may not capture other aspects of sustainability, such as social and economic impacts. The GWP results represent just a few of the many outputs of the LCA, which are, however, based very centrally on the expected usage of hydrogen in the energy and transport sectors. Additional impact categories that may be addressed in future research considering hydrogen application fields include acidification potential, eutrophication potential, and photochemical ozone creation potential.<sup>22</sup> The results of this and future studies might be relevant to policymakers, investors, researchers, and stakeholders in the EU and Africa. More data from actual hydrogen pipeline structures are needed for future research to extend the system boundaries and validate the LCA models.

## 5. Discussion

The results for domestic and import supply chains of solar PV-based hydrogen range from 2 to 3 kg CO<sub>2</sub>-eq per kg H<sub>2</sub> in the baseline scenario. The GWP results in our study are within the range of existing life cycle studies. The GWP of hydrogen from PV electrolysis is usually reported to be around 2–7 kg CO<sub>2</sub>-eq per kg H<sub>2</sub>.<sup>17,41,42</sup> The sensitivity analyses demonstrated that the GWP could significantly increase with the emissions of PV, which explains the gap between the GWPs.

However, even from the high energy demand scenario in this study, the GWP of hydrogen still has a lower GWP than any fossil-dominated alternative production methods. According to the certification of hydrogen by CertifHy, production by steam methane reforming (SMR) of natural gas causes 10.9 kg CO<sub>2</sub>-eq per kg H<sub>2</sub> without distribution. A review by Bhandari *et al.*<sup>43</sup> indicated a range of 8.9–12.9 kg CO<sub>2</sub>-eq per kg H<sub>2</sub>. Even higher values for the SMR production of hydrogen (up to 17.5 kg CO<sub>2</sub>-eq per kg H<sub>2</sub>) can be found in the literature.<sup>44</sup> The combination of SMR with CCS technologies for producing “blue” hydrogen results in a lower total GWP of 6.87 kg CO<sub>2</sub>-eq per kg H<sub>2</sub>.<sup>45</sup> The emissions resulting from the entire transport supply chain are not additionally analyzed and are therefore unknown. Domestically produced hydrogen from PV in Germany also shows a higher GWP than liquid hydrogen imports.<sup>13</sup>

The GWP of hydrogen per kg of this study can be recalculated to kW h using a lower heat value of 33.3 kW h per kg H<sub>2</sub> in order to compare it to other fossil fuels such as natural gas. The GWP of 0.04–0.050 kg CO<sub>2</sub>-eq per kW h for the Moroccan export to Germany and 0.06–0.07 kg CO<sub>2</sub>-eq per kW h for German domestic production is concluded for the baseline scenario of this research after recalculation of the FU. Based on the literature, the GWP of natural gas transported by pipeline to Germany ranges between 0.5 kg CO<sub>2</sub>-eq per kW h and 0.95 kg CO<sub>2</sub>-eq per kW h, depending on the export region and transport quality (*e.g.*, leakage). For instance, a higher GWP is considered for Russian natural gas *via* the TurkStream pipeline to Southeast Europe, caused by a higher leakage rate and a longer pipeline transport distance.<sup>46</sup> The GWP of natural gas is thus higher than the GWP of imported hydrogen in the baseline scenario of this study.

Since the Russian invasion of Ukraine in February 2022, sales of liquefied natural gas (LNG) to Europe have been increasing rapidly.<sup>47</sup> However, the value chain of LNG is even more complex than gaseous natural gas, which causes an even higher GWP.<sup>48</sup>

The security of hydrogen pipelines is a critical issue that needs to be addressed to ensure the safe transportation of hydrogen. One of the major challenges is the potential for hydrogen embrittlement, which can lead to the degradation of





pipeline materials and ultimately result in pipeline failure. The selection of appropriate pipeline materials, proper maintenance and inspection, and the installation of effective leak detection systems are all critical components of ensuring the security of hydrogen pipelines. In our study an ideal operation without security or safety issues is assumed, but in real life a comprehensive security plan that addresses the potential risks of terrorism must be developed and implemented to safeguard the integrity of the pipeline network and protect public safety.<sup>49</sup>

The export of hydrogen would most likely have a positive impact on the local energy supply, the labor market, local education, and health in Africa. However, alongside these benefits, the import also harbors risks, which must also be highlighted. For instance, the provision of sufficient pure water is a challenge in Africa. The H<sub>2</sub>Atlas-Africa shows that sufficient water to produce green hydrogen would be available in many regions of Africa.<sup>8</sup> The availability of fresh water for electrolysis is an essential factor that must be considered when choosing a production site. The results of the atlas indicate that the cost of desalination would not significantly increase the price of hydrogen. Another option would be to produce hydrogen directly from seawater. However, this technology is still being developed.<sup>50</sup> A stable political and economic framework is as significant as the choice of location. It is crucial to fostering the benefits of international cooperation and ensuring the initiation of renewable production. International standards are needed to speed up a fair energy transition in Africa and Europe in order to guarantee economic development, new business and job opportunities, and better living conditions.

## 6. Conclusions

This study provides a comprehensive evaluation of the life cycle performance of hydrogen imports from Africa in comparison to domestic PV – powered hydrogen production. By analyzing various supply chain parameters in different scenarios, we identified hot spots and potential sources for future reduction of emissions.

Our results reveal that hydrogen produced by electrolysis and imported *via* pipelines from Africa has a total GWP ranging from 1.9 to 2.5 kg CO<sub>2</sub>-eq per kg H<sub>2</sub>. On the other hand, PV-powered German domestic hydrogen production results in a GWP of 3.0 to 3.1 kg CO<sub>2</sub>-eq per kg H<sub>2</sub> in the baseline scenario, while the use of electricity from the German electricity mix after 2030 instead of PV leads to a GWP increase of up to 14.5 kg CO<sub>2</sub>-eq per kg H<sub>2</sub>. These emissions are highly dependent on the flow rate of hydrogen, the GWP of PV electricity used to power the compressors along the way, transport distance and compression efficiency. Our findings suggest that the impact of transport *via* pipeline on the GWP is negligible when compared to the production of hydrogen by PV electrolysis. Moreover, the results indicate that in the GWP associated with PV electricity is contributing up to 78% of the GWP of hydrogen transport and up to 91% of the total GWP of the hydrogen supply chain depending on the scenario analyzed.

In conclusion, our life cycle assessment highlights the importance of considering the entire supply chain when

assessing the environmental performance of hydrogen. As hydrogen becomes increasingly important in the fight against global warming, investigating potential supply chains is essential. Future studies should examine the potential of alternative transportation methods, such as liquid hydrogen (LH<sub>2</sub>) and liquid organic hydrogen carriers (LOHCs).

## Author contributions

Conceptualization – AR, UR, KD, KB, FB; methodology – OK, AR; software and validation – OK; formal analysis – KB; writing (original draft preparation) – OK; writing (review and editing) – AR, KB, KD, and UR; supervision – AR. All authors have read and agreed to the published version of the manuscript.

## Conflicts of interest

The authors declare no conflict of interest.

## Acknowledgements

This research was funded by the German Federal Ministry of Education and Research within the framework of the YESPV-NIGBEN project, grant number: 03SF0576A.

## References

- 1 International Energy Agency, *Sustainable Recovery. World Energy Outlook Special Report*, 6 2020, <https://www.iea.org/reports/sustainable-recovery>.
- 2 P. L. Spath and M. K. Mann, *Life Cycle Assessment of Hydrogen Production via Natural Gas Steam Reforming*, National Renewable Energy Laboratory (NREL), 2000.
- 3 A. Van Wijk and F. Wouters, Hydrogen – the bridge between Africa and Europe, *Shaping an Inclusive Energy Transition*, 2021.
- 4 S. Sadeghi, S. Ghandehariun and M. A. Rosen, Comparative economic and life cycle assessment of solar-based hydrogen production for oil and gas industries, *Energy*, 2020, 118347.
- 5 German National Hydrogen Council, *Wasserstofftransport*, July 16, 2021, [Cited: September 3, 2021.], [https://www.wasserstoffrat.de/fileadmin/wasserstoffrat/media/Dokumente/NWR\\_Wasserstofftransport\\_WEB-Bf.pdf](https://www.wasserstoffrat.de/fileadmin/wasserstoffrat/media/Dokumente/NWR_Wasserstofftransport_WEB-Bf.pdf).
- 6 Deutsche Energie-Agentur GmbH, *Dena-Leitstudie Aufbruch Klimaneutralität*, Deutsche Energie-Agentur GmbH (dena), Berlin, 2021.
- 7 A. van Wijk and F. Wouters, 50–50; 2050 Final Energy Demand Split in 50% Electricity and 50% Hydrogen, *Shaping an Inclusive Energy Transition*, ed. M. P. C. Weijnen, Z. Lukszo and S. Farahani, Springer, 2021, pp. 109–110.
- 8 Forschungszentrum Jülich GmbH, 2022, <https://www.h2atlas.de/>.
- 9 J. Chatzimarkakis and A. van Wijk, *Green Hydrogen for a European Green Deal A 2x40 GW Initiative*, Hydrogen Europe, Brussels, 2020.



- 10 Siemens Energy, *Hydrogen infrastructure – the pillar of energy transition*, 2021, [Cited: September 3, 2021], <https://assets.siemens-energy.com/siemens/assets/api/uuid:3d4339dc-434e-4692-81a0-a55adbcaa92e/200915-whitepaper-h2-infrastructure-en.pdf>.
- 11 T. Terlouw, *et al.*, Large-scale hydrogen production via water electrolysis: a techno-economic and environmental assessment, *Energy Environ. Sci.*, 2023, **15**(9), 3583–3602.
- 12 H. Tayarani and A. Ramji, Life Cycle Assessment of Hydrogen Transportation Pathways via Pipelines and Truck Trailers: Implications as a Low Carbon Fuel, *Sustainability*, 2022, **14**(19), 12510.
- 13 S. Kolb, *et al.*, Renewable hydrogen imports for the German energy transition – a comparative life cycle assessment, *J. Clean. Prod.*, 2022, **373**, 133289.
- 14 A. Ozawa, *et al.*, Assessing Uncertainties of Well-To-Tank Greenhouse Gas Emissions from Hydrogen Supply Chains, *Sustainability*, 2017, **9**(7), 1101.
- 15 M. Al-Breiki and Y. Bicer, Comparative life cycle assessment of sustainable energy carriers including production, storage, overseas transport and utilization, *J. Clean. Prod.*, 2021, **279**, 123481.
- 16 A. Osman, *et al.*, Hydrogen production, storage, utilisation and environmental impacts: a review, *Environ. Chem. Lett.*, 2022, **20**(1), 153–188.
- 17 O. Kanz, *et al.*, Review and Harmonization of the Life-Cycle Global Warming Impact of PV-Powered Hydrogen Production by Electrolysis, *Frontiers in Electronics*, 2021, **9**, 11.
- 18 DIN ISO 14040, *DIN ISO 14040 Environmental Management-Life Cycle Assessment-Requirements and Guidelines*, 2006.
- 19 DIN ISO 14044, *Environmental Management-Life Cycle Assessment-Principles and Framework*, 2006.
- 20 Sphera Solutions GmbH, 2022, <https://gabi.sphera.com/deutsch/index/>.
- 21 European Commission, Joint Research Centre and Institute for Environment and Sustainability. *ILCD Handbook: General Guide for Life Cycle Assessment – Provisions and Action Steps. s.l.*, Publications Office of the European Union, 2010, EUR 24378 EN.
- 22 A. Lozanovski, *et al.*, *Guidance Document for Performing LCA on Hydrogen Production*, Fraunhofer-Institut für Bauphysik, Stuttgart, 2013.
- 23 European Commission, *PVGIS Online Tool*, [https://re.jrc.ec.europa.eu/pvg\\_tools/en/](https://re.jrc.ec.europa.eu/pvg_tools/en/), 01 23 2023.
- 24 R. Frischknecht, *et al.*, *Life Cycle Inventories and Life Cycle Assessments of Photovoltaic Systemes. PVPS Task 12, Report. s.l.*, The International Energy Agency (IEA), 2020.
- 25 K. Bareiß, *et al.*, Life Cycle Assessment of Hydrogen From Proton Exchange Membrane Water Electrolysis in Future Energy Systems, *Appl. Energy*, 2019, **237**, 862–872.
- 26 A. Alobaid and R. A. Adomaitisa, Optimal design of a coupled photovoltaic-electrolysis-battery system for hydrogen generation, *Sustain. Energy Fuels*, 2023, **7**(6), 1395–1414.
- 27 J. Zorrilla-Casanova, *et al.*, Analysis of Dust Losses in Photovoltaic Modules, *s.l.*, *Covariates of Fuel Saving Technologies in Urban Ethiopia*, World Renewable Energy Congress, Linköping, Sweden, 2011.
- 28 R. v. Rossum, *et al.*, *European Hydrogen Backbone*, Guidehouse, Utrecht, The Netherlands, 2022.
- 29 G. E. Jerome, *et al.*, Design Approach for Trans-Sahara Gas Pipeline Transmission, *Int. J. Eng. Res. Sci. Technol.*, 2016, 143–152.
- 30 Google, *Google Maps*, 2022.
- 31 E. Legghe, *et al.*, Computational analysis of a three-layer pipeline coating: internal stresses generated during the manufacturing process, *Comput. Mater. Sci.*, 2010, **48**(2), 460–465.
- 32 ESU-services Ltd, *Life Cycle Inventory of Natural Gas Supply*, 2012, [https://esu-services.ch/fileadmin/download/publicLCI/Schori\\_2012\\_NaturalGas.pdf](https://esu-services.ch/fileadmin/download/publicLCI/Schori_2012_NaturalGas.pdf).
- 33 European Gas Pipeline Incident Data Group EGIG, *Gas Pipeline Incidents – 11th Report of the EGIG (period 1970-2019)*, December 17, 2020, [Cited: January 5, 2022], <https://www.egig.eu/reports>.
- 34 NEUMAN & ESSER Verwaltungs- und Beteiligungsgesellschaft mbH and NEUMAN & ESSER, 2022, <https://www.neuman-esser.de/en/compressors/hydrogen-compressors/>.
- 35 M. Niermann, Liquid Organic Hydrogen Carriers and alternatives for international transport of renewable hydrogen, *Renewable Sustainable Energy Rev.*, 2021, **135**, 110171.
- 36 TRW Systems Group, *Aerospace Fluid Component Designers' Handbook*, 1970, [Cited: May 24, 2022], <https://apps.dtic.mil/sti/pdfs/AD0874542.pdf>.
- 37 Nord Stream 2 AG, *Nord Stream 2*, September, 2018, [Cited: December 21, 2021], <https://www.nord-stream2.com/media/documents/pdf/en/2018/10/leaflet-construction-pipeline-en-201809.pdf>.
- 38 R. B. Gupta, A. Basile and T. N. Veziroglu, *Compendium of Hydrogen Energy – Volume 2: Hydrogen Storage, Distribution and Infrastructure*, 2016, [Cited: November 14, 2021], <https://searchworks.stanford.edu/view/11548889>.
- 39 Frazer-Nash Consultancy, *Fugitive Hydrogen Emissions in a Future Hydrogen Economy. s.l.: Crown*, 2022.
- 40 German Environment Agency, *Komponentenzerlegung energiebedingter Treibhausgasemissionen mit Fokus auf dem Ausbau erneuerbarer Energien*, 06 2019, [https://www.umweltbundesamt.de/sites/default/files/medien/1410/publikationen/2019-03-18\\_cc\\_06-2019\\_synthesebericht-kompetenzerlegung-ee.pdf](https://www.umweltbundesamt.de/sites/default/files/medien/1410/publikationen/2019-03-18_cc_06-2019_synthesebericht-kompetenzerlegung-ee.pdf).
- 41 M. Hermesmann and T. E. Müller, Green, turquoise, blue, or grey? Environmentally friendly hydrogen production in transforming energy systems, *Prog. Energy Combust. Sci.*, 2022, **90**, 100996.
- 42 S. Sadeghi, S. Ghandehariun and M. A. Rosen, Comparative economic and life cycle assessment of solar-based hydrogen production for oil and gas industries, *Energy*, 2020, **208**, 118347.
- 43 R. Bhandari, C. A. Trudewind and P. Zapp, Life cycle assessment of hydrogen production via electrolysis – a review, *J. Clean. Prod.*, 2014, **85**, 151–163.



- 44 L. Bodineau, *Analyse de cycle de vie relative à l'hydrogène. s.l.*, Sphera, Gingko, 2020.
- 45 C. Bauer, *et al.*, On the climate impacts of blue hydrogen production, *Sustain. Energy Fuels*, 2022, **6**(1), 66–75.
- 46 E. Schropp, G. Naumann and M. Gaderer, Prospective life cycle assessment: a case study of hydrogen production with water electrolysis, *Procedia CIRP*, 2022, **105**, 92–97.
- 47 European Commission, *European Commission Website*, 2022, [https://energy.ec.europa.eu/topics/oil-gas-and-coal/liquefied-natural-gas\\_en](https://energy.ec.europa.eu/topics/oil-gas-and-coal/liquefied-natural-gas_en).
- 48 L. Abrahams, *et al.*, Life Cycle Greenhouse Gas Emissions From U.S. Liquefied Natural Gas Exports: Implications for End Uses, *Environ. Sci. Technol.*, 2015, **49**(5), 3237–3245.
- 49 J. Lilliestam, Vulnerability to terrorist attacks in European electricity decarbonisation scenarios: comparing renewable electricity imports to gas imports, *Energy Policy*, 2014, **66**, 234–248.
- 50 Y. Kuanga, *et al.*, Solar-driven, highly sustained splitting of seawater into hydrogen and oxygen fuels, *Proc. Natl. Acad. Sci. U. S. A.*, 2019, **116**(14), 6624–6629.

