

Cite this: *Chem. Sci.*, 2024, 15, 953

All publication charges for this article have been paid for by the Royal Society of Chemistry

A 0D hybrid lead-free halide with near-unity photoluminescence quantum yield toward multifunctional optoelectronic applications†

Dong-Yang Li,^{‡ac} Huai-Yuan Kang,^{‡a} Yu-Hang Liu,^c Jie Zhang,^c Cheng-Yang Yue,^a Dongpeng Yan^{id}*^b and Xiao-Wu Lei^{id}*^a

Zero-dimensional (0D) hybrid metal halides have emerged as highly efficient luminescent materials, but integrated multifunction in a structural platform remains a significant challenge. Herein, a new hybrid 0D indium halide of (Im-BDMPA)InCl₆·H₂O was designed as a highly efficient luminescent emitter and X-ray scintillator toward multiple optoelectronic applications. Specifically, it displays strong broadband yellow light emission with near-unity photoluminescence quantum yield (PLQY) through Sb³⁺ doping, acting as a down-conversion phosphor to fabricate high-performance white light emitting diodes (WLEDs). Benefiting from the high PLQY and negligible self-absorption characteristics, this halide exhibits extraordinary X-ray scintillation performance with a high light yield of 55 320 photons per MeV, which represents a new scintillator in 0D hybrid indium halides. Further combined merits of a low detection limit (0.0853 μGy_{air} s⁻¹), ultra-high spatial resolution of 17.25 lp per mm and negligible afterglow time (0.48 ms) demonstrate its excellent application prospects in X-ray imaging. In addition, this 0D halide also exhibits reversible luminescence off–on switching toward tribromomethane (TBM) but fails in any other organic solvents with an ultra-low detection limit of 0.1 ppm, acting as a perfect real-time fluorescent probe to detect TBM with ultrahigh sensitivity, selectivity and repeatability. Therefore, this work highlights the multiple optoelectronic applications of 0D hybrid lead-free halides in white LEDs, X-ray scintillation, fluorescence sensors, etc.

Received 4th October 2023
Accepted 4th December 2023

DOI: 10.1039/d3sc05245a

rsc.li/chemical-science

Introduction

In the past several decades, halide perovskite nanocrystals (PNCs) of CsPbX₃ (X = Cl, Br, I) have emerged as new-generation optoelectronic functional materials due to excellent optical and electronic properties including direct bandgaps, high absorption coefficients, low defect densities, long carrier diffusion lengths, etc.^{1–4} PNCs display excellent photoluminescence (PL) performance with diversified advantages of an adjustable emission wavelength covering the whole visible spectrum, narrow bandwidth, high photoluminescence quantum yield (PLQY), etc.^{5–8} Therefore, three-dimensional (3D) PNCs have been explored as down-conversion phosphors to fabricate solid-

state LED and backlit liquid-crystal display (LCD) devices with high external quantum efficiency and a wide color gamut, respectively.^{9–11} Since 2018, 3D PNCs have been explored as new a kind of scintillator due to their strong X-ray absorption and conversion ability, which aroused new research interest to explore their application in radiation detection and X-ray imaging.^{12,13} In addition, the unique crystal structure and dynamic ionic bond nature also endow 3D PNCs with a PL switching phenomenon as fluorescence sensors toward external stimuli.^{14–16} As a consequence, 3D PNCs possess widely advanced application prospects in LEDs, photovoltaic cells, photodetectors, lasers, scintillators, fluorescent probes, etc.^{17–19} Despite multiple optoelectronic performances, some inescapable shortcomings (such as spectral instability, toxic Pb²⁺ ions, low scintillation light yield, irreversible PL switching, etc.) remain, seriously restricting the application prospects of 3D PNCs, which inspire further in-depth research to explore new environmentally friendly perovskite derivatives to overcome these drawbacks.

Recently, organic–inorganic hybrid zero-dimensional (0D) metal halide perovskites have attracted tremendous attention as some of the promising candidates of 3D PNCs with comparable optoelectronic properties and superior stabilities.^{20–23} Indeed, versatile organic species and substantial metal ions

^aSchool of Chemistry, Chemical Engineer and Materials, Jining University, Qufu, Shandong, 273155, P. R. China. E-mail: xwlei_jnu@163.com

^bBeijing Key Laboratory of Energy Conversion and Storage Materials, College of Chemistry, Key Laboratory of Radiopharmaceuticals, Ministry of Education, Beijing Normal University, Beijing 100875, P. R. China. E-mail: yandp@bnu.edu.cn

^cSchool of Chemistry and Chemical Engineering, Qufu Normal University, Qufu, Shandong, 273165, P. R. China

† Electronic supplementary information (ESI) available. CCDC 2233592. For ESI and crystallographic data in CIF or other electronic format see DOI: <https://doi.org/10.1039/d3sc05245a>

‡ Dong-Yang Li and Huan-Yuan Kang contributed equally to this work.

In view of these shortcomings, we focus on this domain to explore highly efficient emissive 0D hybrid indium halides

© 2024 The Author(s). Published by the Royal Society of Chemistry

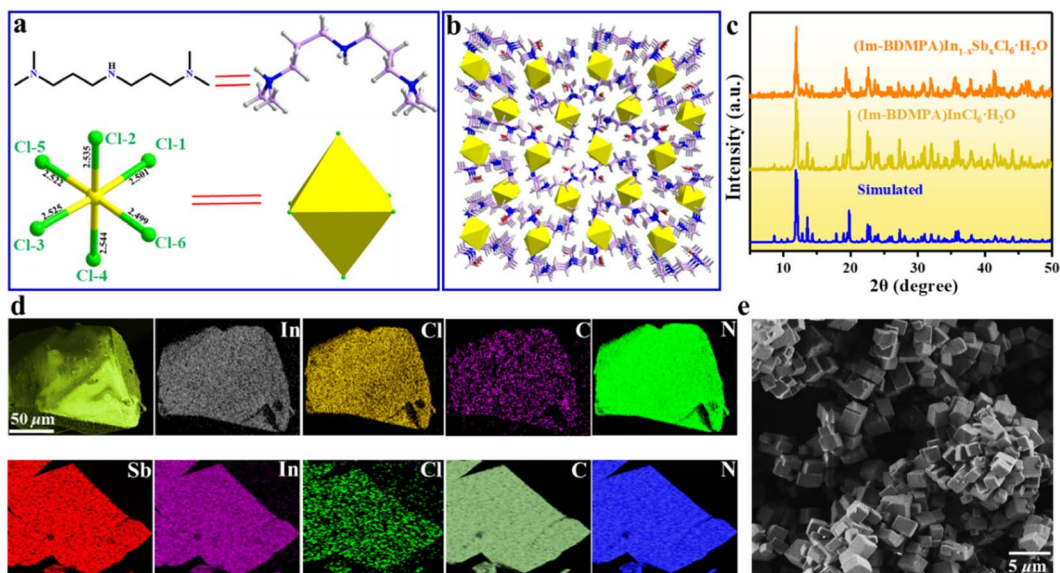


Fig. 1 Structural characterization of $(\text{Im-BDMPA})\text{In}_{1-x}\text{Sb}_x\text{Cl}_6 \cdot \text{H}_2\text{O}$: (a) $(\text{Im-BDMPA})^{3+}$ cation and $[\text{In/SbCl}_6]^{3-}$ octahedron; (b) packing structure of the 0D structure viewed along the a -axis; (c) simulated and experimental PXRD patterns; (d) elemental mapping of SEM images; (e) SEM image of a microparticle.

indicate the high crystalline degree of microcrystals (Fig. S3†). $(\text{Im-BDMPA})\text{In}_{0.78}\text{Sb}_{0.22}\text{Cl}_6 \cdot \text{H}_2\text{O}$ microcrystals can also be prepared by a solid-phase mechanochemical grinding method from precursor materials within a fast time of 30 s and with 100% yield verified by the same PXRD pattern, providing a facile

preparation method for various optoelectronic device engineering (Fig. S4 and S5†).

As shown in Fig. 2a and S6,† bulk single crystals of pristine and doped $(\text{Im-BDMPA})\text{InCl}_6 \cdot \text{H}_2\text{O}$ display the same bright yellow light emission under UV light radiation. The PL properties of $(\text{Im-BDMPA})\text{InCl}_6 \cdot \text{H}_2\text{O}$ are summarized in Fig. S6,† and

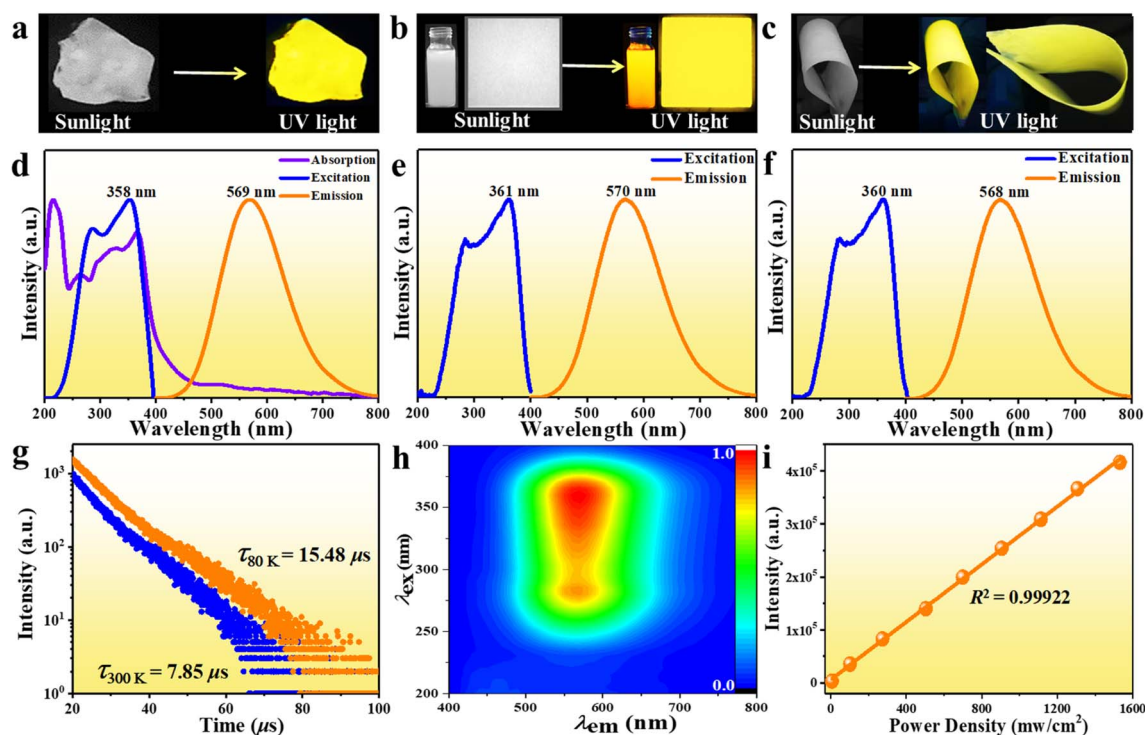


Fig. 2 PL characterization of $(\text{Im-BDMPA})\text{In}_{0.78}\text{Sb}_{0.22}\text{Cl}_6 \cdot \text{H}_2\text{O}$: (a–c) photo images of bulk crystals, microparticles, the deposited thin film and the flexible composite film under sunlight and 365 nm UV light; (d–f) absorption, excitation and emission spectra of bulk crystals, microparticles and flexible composite; (g) PL decay curves at 300 K and 80 K; (h) 3D consecutive PL map; (i) power density dependent PL emission intensity.



shift, wide FWHM and long lifetime should originate from the radiative recombination of STEs due to the strong electron-phonon (EP) coupling effect in the deformable 0D soft crystal lattice.^{28,29}

To probe into the underlying PL mechanism and confirm the STE nature, temperature dependent PL emission spectra were recorded from 300 to 80 K (Fig. S14a[†]). As shown in Fig. 3a, a new weak emission band emerges in the temperature decreasing process, which can be ascribed to be singlet STE. The maximum emission wavelength exhibits a slightly red shift from 558 nm to 570 nm along with the temperature increasing, which is mainly determined by EP interaction based on the theoretical fitting of temperature dependent emission energy evolution (Fig. S14b[†]). In the temperature decreasing process, the emission intensity increases monotonously from 300 to 80 K owing to decreased thermal quenching and nonradiative recombination rates. Thermal activation energy (E_a) can be extracted by fitting the temperature dependent integrated emission intensity to the Arrhenius equation, which represents the energy barrier of excitons between radiative and non-radiative centers. The calculated E_a of 43 meV is larger than the thermal dissociation energy (~ 26 meV) of free excitons at 300 K, indicating the formation of stable bound excitons for (Im-BDMPA)In_{0.78}Sb_{0.22}Cl₆·H₂O (Fig. 3b). Simultaneously, the emission spectra gradually broaden along with the increasing temperature due to enhanced EP coupling. To accurately evaluate the strength of the EP effect, the temperature dependent FWHM is fitted by using the following equation (1):

$$\Gamma(T) = \Gamma_0 + \Gamma_{\text{phonon}} \left(e^{\frac{E_{\text{LO}}}{k_B T}} - 1 \right)^{-1} + \Gamma_{\text{inhomo}} e^{-\frac{E_b}{k_B T}} \quad (1)$$

where Γ_0 is the FWHM of 0 K, and E_{LO} and E_b represent the energy of the longitudinal-optical phonon and average binding energy of the trap states, respectively. Γ_{phonon} and Γ_{inhomo} represent the relative contributions of EP coupling and inhomogeneous broadening induced by trapped states, respectively.⁴⁶ As shown in Fig. 3c, the best fitting of the FWHM demonstrates the major contribution of EP coupling ($\Gamma_{\text{phonon}} = 31$ meV) compared to the inhomogeneous broadening effect. The calculated phonon energy (E_{LO}) of 17 meV corresponds to In/Sb-Cl stretching frequency (158 cm^{-1}) in the Raman spectrum, confirming EP coupling in the deformable crystal lattice (Fig. S15[†]). In addition, the deformability of the soft crystal lattice can be evaluated by using the Huang-Rhys factor (S) according to the following equation (2):

$$\text{FWHM} = 2.36\sqrt{S\hbar\omega_{\text{photon}}}\sqrt{\coth\frac{\hbar\omega_{\text{photon}}}{2k_{\text{B}}T}} \quad (2)$$

where $\hbar\omega_{\text{photon}}$ is the phonon vibration energy. By fitting the temperature dependence of the FWHM, the obtained S factor of 37 is much higher than those of traditional semiconducting materials, such as CdSe (1.0), ZnSe (0.3), CsPbX₃ (3.2), *etc.*, demonstrating the soft crystal nature and easy formation of STE (Fig. 3d).^{47–49} Therefore, the broad light emission of (Im-BDMPA)In_{0.78}Sb_{0.22}Cl₆·H₂O can be ascribed to the radiative



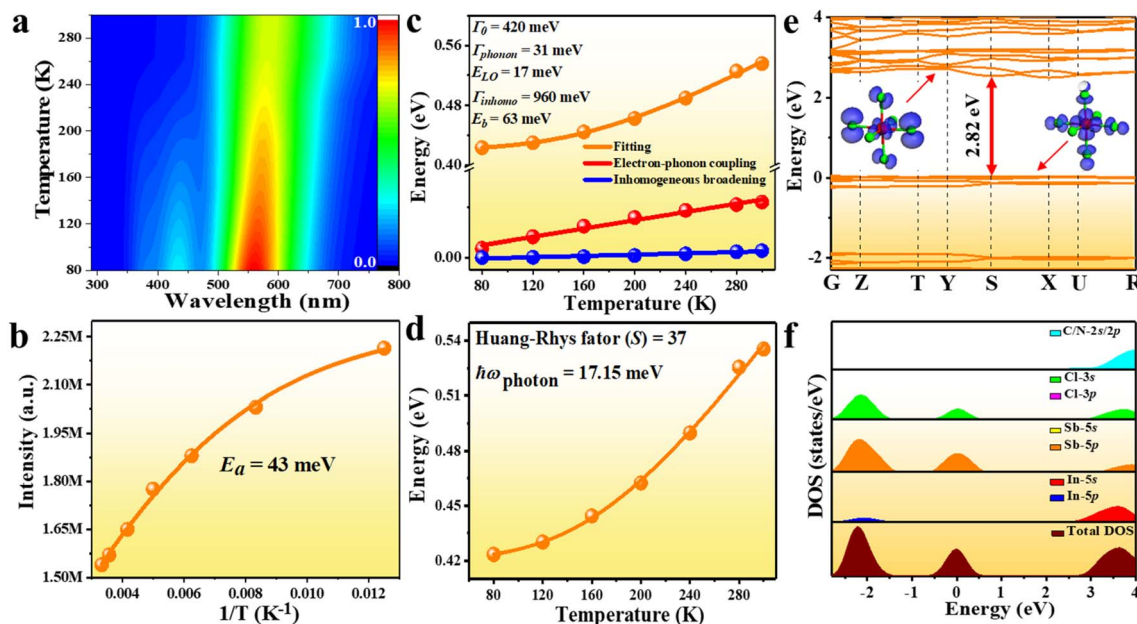


Fig. 3 PL mechanism study of $(\text{Im-BDMPA})\text{In}_{0.78}\text{Sb}_{0.22}\text{Cl}_6 \cdot \text{H}_2\text{O}$: (a) 3D color mapping of PL emission at varied temperature; (b) experimental and fitted emission intensity vs. reciprocal temperature; (c) temperature-dependent FWHM with the contribution of electron–phonon coupling and inhomogeneous broadening; (d) fitted FWHM according to eqn (2); (e) electronic band structure (inset: electron density maps of the HOMO and LUMO); (f) total and partial densities of states.

recombination of STE due to EP coupling in the soft crystal lattice. The detailed PL mechanism was further unveiled by using density functional theory (DFT) calculations. As shown in Fig. S16† and 3e, the incorporation of Sb^{3+} into pure 0D indium perovskite induces an isolated and extremely narrow impurity band in valence bands, which reduces the band gap from 4.2 eV to 2.82 eV. Owing to the absence of electronic interactions between adjacent anionic octahedra, both the conduction and valence bands are fairly flat illustrating highly localized electron states with large effective mass, promoting the formation of electron and hole polarons.⁵⁰ However, the conduction bands remain unchanged meaning that the incorporation of Sb^{3+} mainly leads to up-shift of the VBM. Detailed density of states and electron maps show that both the CBM and VBM are contributed by anionic species without direct contribution from the organic component (Fig. 3e and f). Therefore, the corporation of Sb^{3+} does not influence the radiative recombination process but introduces new impurity bands, increases the electron state density of VBM, facilitates more carriers into the conduction band, and finally improves the emission efficiency.⁵¹

Apart from the highly efficient broadband light emission, $(\text{Im-BDMPA})\text{In}_{1-x}\text{Sb}_x\text{Cl}_6 \cdot \text{H}_2\text{O}$ also exhibits sufficient structural and spectral stability. Based on thermogravimetric analysis, the bulk crystals of $(\text{Im-BDMPA})\text{In}_{1-x}\text{Sb}_x\text{Cl}_6 \cdot \text{H}_2\text{O}$ can be stable up to about 280 °C (Fig. S17†). Under continuous heating at different temperatures from 80 °C to 280 °C, the PL emission spectral profiles remain unchanged with slightly decreased intensities and PXRD patterns are also fixed indicating sufficient thermal stability (Fig. S18†). After long-term exposure to humid air for one month or strong UV light for 48 h, $(\text{Im-BDMPA})\text{In}_{0.78}\text{Sb}_{0.22}\text{Cl}_6 \cdot \text{H}_2\text{O}$ retains the high crystalline degree

and nearly identical emission intensity (Fig. S19†). Highly efficient and stable broadband (FWHM = 135 nm) yellow light emission motivates us to fabricate a white LED by using $(\text{Im-BDMPA})\text{In}_{0.78}\text{Sb}_{0.22}\text{Cl}_6 \cdot \text{H}_2\text{O}$ as a down-conversion phosphor. To validate this application, we firstly blend $(\text{Im-BDMPA})\text{In}_{0.78}\text{Sb}_{0.22}\text{Cl}_6 \cdot \text{H}_2\text{O}$ as a yellow phosphor and commercial $\text{BaMgAl}_{10}\text{O}_{17}:\text{Eu}^{2+}$ as a blue phosphor with varied ratios. As shown in Fig. 4a and b, the mechanically mixed phosphors display white light emission under irradiation of 365 nm UV light and broadband PL spectra are composed of dual blue-yellow emitting peaks. By finely controlling the blending ratio of the two phosphors, a range of “cold” to “warm” white light can be obtained with tunable correlated color temperature (CCT) from 9520 K to 3320 K (Fig. 4c and Table S2†). Subsequently, a white LED was fabricated as an example by coating the mixed phosphor on an UV chip. Under the drive of 20 mA current, the LED gives bright white light with a CCT of 4590 K and CIE chromaticity coordinates of (0.35, 0.33) (Fig. 4d and e). The obtained color rendering (CRI) index of 95.4 is far higher than that of commercially available white LEDs based on $\text{YAG}:\text{Ce}^{3+}$ (CRI < 80).³¹ To test the reabsorption effect between the two phosphor counterparts, varied electroluminescence (EL) spectra under different operating currents were recorded (Fig. 4f). With the current increasing from 20 mA to 120 mA, both the EL emission intensities of dual emission peaks increase linearly with enhanced drive current without energy transfer between the two phosphors, showcasing potential application in high-power white LEDs. The CIE coordinates, CCT and CRI also keep almost unchanged indicating the negligible self-absorption and efficiency loss of the fabricated



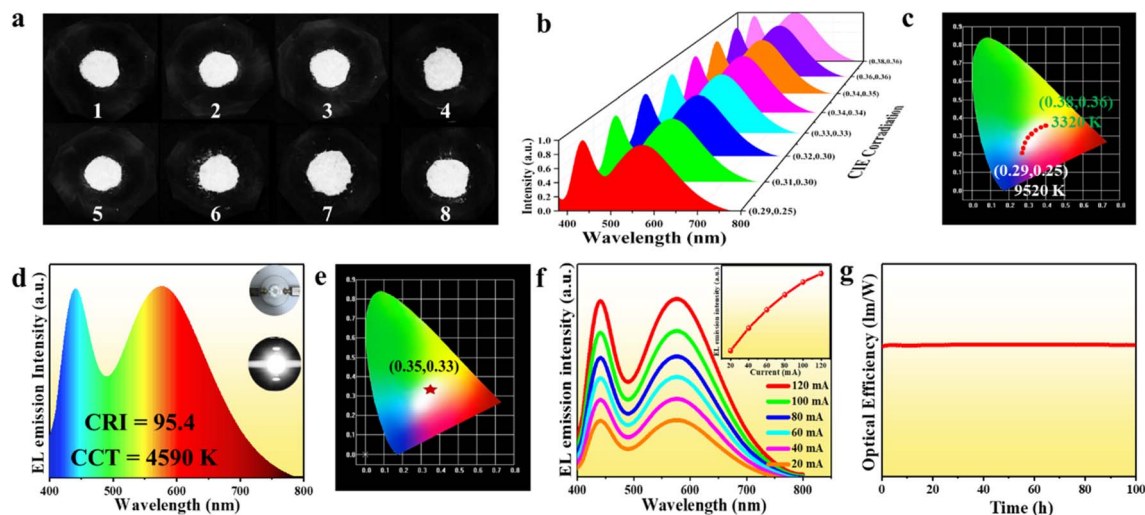


Fig. 4 Characterization of a white LED: (a) photo images of mixed phosphors with varying ratios under 365 nm excitation; (b) PL emission spectra and (c) CIE coordinates of mixed phosphors with varying ratios; (d) EL spectrum of the fabricated white LED (inset: photographs of the fabricated WLED with power off and on); (e) CIE coordinates of the white LED; (f) drive current dependent EL emission spectra; (g) current operating time dependent luminous efficiency.

white LED (Table S3†). Finally, to evaluate the operating stability of the as-prepared LED, we monitor the EL emission spectra along with operating time under a drive current of 20 mA as shown in Fig. S20.† It can be clearly seen that the EL emission spectra remain unchanged and the luminous efficacy shows no obvious degradation over 100 hours of operation indicating excellent photostability (Fig. 4g).

The high PLQY, broad emission band and large Stokes shift demonstrate the potential of $(\text{Im-BDMPA})\text{In}_{0.78}\text{Sb}_{0.22}\text{Cl}_6 \cdot \text{H}_2\text{O}$ as a promising candidate of X-ray scintillators. We firstly plot the absorption spectra of $(\text{Im-BDMPA})\text{In}_{1-x}\text{Sb}_x\text{Cl}_6 \cdot \text{H}_2\text{O}$ and commercial Ce:LuAG toward X-ray in a broad range of photon energy based on the photon cross-section database (Fig. S21†). Based on the calculation of the X-ray absorption coefficients (α)

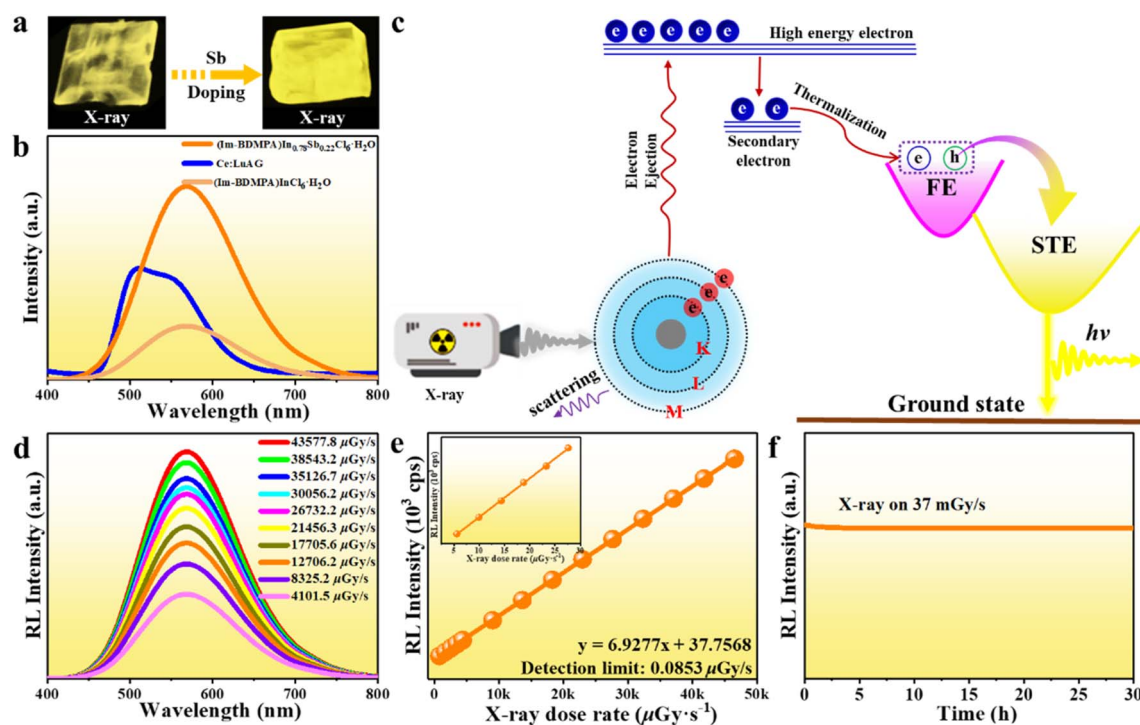


Fig. 5 X-ray scintillation performance of $(\text{Im-BDMPA})\text{In}_{1-x}\text{Sb}_x\text{Cl}_6 \cdot \text{H}_2\text{O}$: (a) photo images of bulk crystals under X-ray irradiation; (b) RL spectra under 30 kV X-ray excitation; (c) proposed radioluminescence mechanism; (d) X-ray dose rate dependent RL emission spectra; (e) linear dependence of RL emission intensity vs. X-ray dose rate; (f) monitored RL emission intensity under continuous X-ray irradiation.

versus a broad range of photon energies, the X-ray attenuation efficiencies of $(\text{Im-BDMPA})\text{In}_{1-x}\text{Sb}_x\text{Cl}_6 \cdot \text{H}_2\text{O}$ are comparable with that of Ce:LuAG in the region of medical digital radiography (18–30 keV). Under the irradiation of 30 kV X-rays, bulk crystals of $(\text{Im-BDMPA})\text{In}_{1-x}\text{Sb}_x\text{Cl}_6 \cdot \text{H}_2\text{O}$ display bright yellow light as shown in Fig. 5a, and the detailed scintillation properties are further determined by using Ce:LuAG as a standard reference. Both $(\text{Im-BDMPA})\text{In}_{1-x}\text{Sb}_x\text{Cl}_6 \cdot \text{H}_2\text{O}$ samples display broad radioluminescence (RL) emission bands centered at 570 nm, which are similar to those under UV excitation indicating the same radiative recombination pathway (Fig. 5b). Based on a previous study, the photoelectric effect occurs between the interaction of X-ray phonon and electrons in the inner shell of atoms, generating higher-energy electrons and holes (Fig. 5c). The created hot carriers further lose energy through thermal relaxation into valence and conduction band edges as secondary electrons and holes. Subsequently, the generated electron-hole polarons undergo thermalization to form free excitons (FEs), which transfer to STEs through intersystem crossing to generate broadband emission.¹²

Although the RL emission intensity of $(\text{Im-BDMPA})\text{InCl}_6 \cdot \text{H}_2\text{O}$ is lower than that of Ce:LuAG , the Sb^{3+} -doped strategy greatly enhances the X-ray response up to about 2.2 times that of Ce:LuAG . By integrating the peak area of RL emission spectra, the light yields of $(\text{Im-BDMPA})\text{InCl}_6 \cdot \text{H}_2\text{O}$ and $(\text{Im-BDMPA})\text{In}_{0.78}\text{Sb}_{0.22}\text{Cl}_6 \cdot \text{H}_2\text{O}$ are derived to be about 23 047 and 55 320 photons per MeV on the basis of Ce:LuAG (25 000 photons per MeV). Herein, it is noteworthy that $(\text{Im-BDMPA})\text{In}_{1-x}\text{Sb}_x\text{Cl}_6 \cdot \text{H}_2\text{O}$ represents a rare X-ray scintillator in 0D indium halides, which opens a new window to explore promising candidates for

scintillators (Table S4†). Significantly, the light yield of $(\text{Im-BDMPA})\text{In}_{0.78}\text{Sb}_{0.22}\text{Cl}_6 \cdot \text{H}_2\text{O}$ exceeds that of most of the state-of-the-art commercial scintillators including CsI:Tl (54 000 photons per MeV), CsI:Na (41 000 photons per MeV), CdWO_4 (20 000 photons per MeV), LYSO (33 200 photons per MeV), *etc.*^{35,50–52} Additionally, the scintillation light yield is also superior to those of most halide scintillators, such as 3D CsPbBr_3 (~21 000 photons per MeV), $(\text{PPN})_2\text{SbCl}_5$ (49 000 photons per MeV), Cs_3MnI_5 (33 600 photons per MeV), $(\text{DIET})_3\text{Cu}_3\text{Br}_3$ (20 000 photons per MeV), *etc.*^{34,53–55} Such outstanding scintillation performance is related to the high X-ray attenuation efficiency, near unity PLQY and large Stokes shift. To investigate the detection sensitivity of this 0D halide toward X-rays, RL emission spectra were collected at various X-ray dose rates. As shown in Fig. 5d, $(\text{Im-BDMPA})\text{In}_{0.78}\text{Sb}_{0.22}\text{Cl}_6 \cdot \text{H}_2\text{O}$ displays the same RL emission spectral profiles with monotonously enhanced emission response to the increase of the dose rate from 4101.5 $\mu\text{Gy s}^{-1}$ to 43 577.8 $\mu\text{Gy s}^{-1}$. The best linear fitting between RL emission intensity and dose rate gives an ultralow detection limit of 0.0853 $\mu\text{Gy s}^{-1}$ when the signal-to-noise ratio (SNR) is 3, which is much lower than the required value for regular medical diagnostics (5.5 $\mu\text{Gy s}^{-1}$) (Fig. 5e). In addition, the radiant stability against X-ray illumination is also a crucial indicator for evaluating the performance of X-ray scintillators. Under continuous X-ray irradiation at a fixed dose rate of 37 mGy s^{-1} over 30 hours, the RL emission intensity of $(\text{Im-BDMPA})\text{In}_{0.78}\text{Sb}_{0.22}\text{Cl}_6 \cdot \text{H}_2\text{O}$ features negligible fluctuation and attenuation demonstrating robust stability for X-rays (Fig. 5f).

Combined superiorities of a high light yield, ultralow detection limit and sufficient X-ray endurance provide the


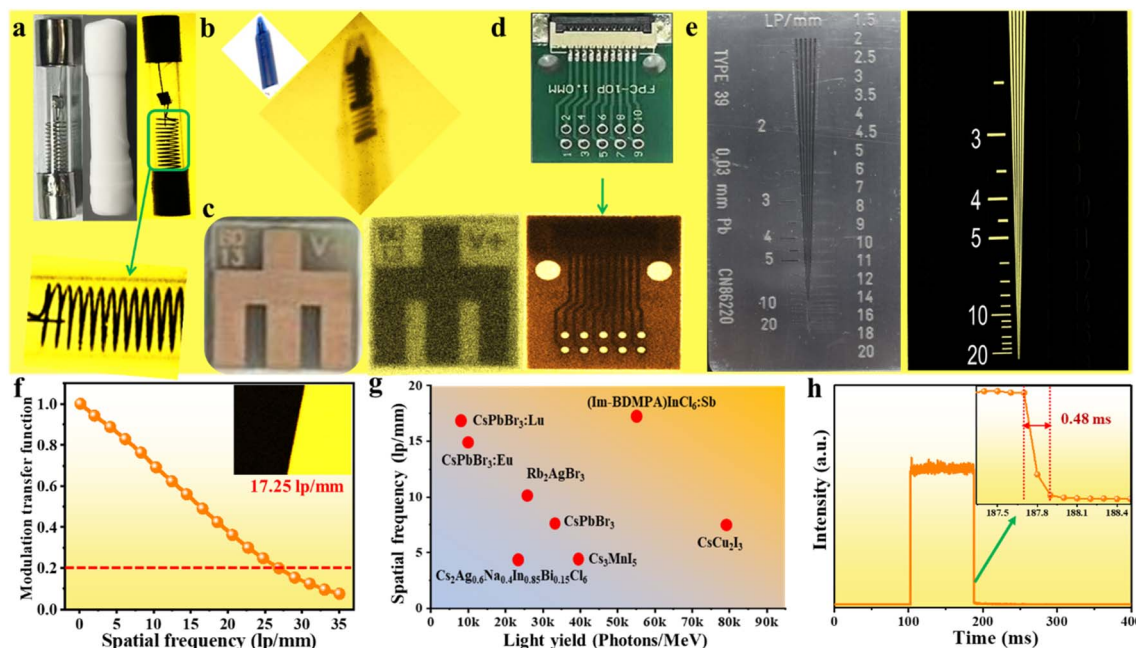


Fig. 6 Applications of X-ray imaging based on the $(\text{Im-BDMPA})\text{In}_{0.78}\text{Sb}_{0.22}\text{Cl}_6 \cdot \text{H}_2\text{O}$ screen under 50 kV X-ray irradiation: photographs and X-ray imaging of (a) an encapsulated fuse tube, (b) ball pen containing metallic spring, (c) metallic device and (d) electronic chip; (e) photograph (left) and X-ray image (right) of the standard X-ray test pattern plate; (f) modulation transfer function (MTF) curve on the X-ray image of a slanted-edge; (g) comparison of the light yield and spatial frequency of metal halide scintillations; (h) X-ray induced afterglow profile.

The soft and impressible 0D crystal structure of the halide inspires us to further investigate the external stimulus responsive luminescence switching phenomenon toward various small chemical molecules as a possible fluorescent probe. Herein, we select the (Im-BDMPA)In_{0.78}Sb_{0.22}Cl₆·H₂O based thin film as a platform to investigate the PL switching performance, which displays the same luminescence as that of bulk crystals but possesses more operability for sensing applications (Fig. 2f). To validate the sensing performance of (Im-BDMPA)In_{0.78}Sb_{0.22}Cl₆·H₂O, the PL emission spectra were monitored before and after exposing the thin film to various organic solvents over several hours. Herein, a series of small halohydrocarbon molecules or derivatives were selected as sensing targets including chloroacetic acid (CAA), dichloroacetic acid (DCAA), chloropropiophenone (CPP), dibromomethane (DBM), bromodichloromethane (BDCM), dichloromethane (DCM),

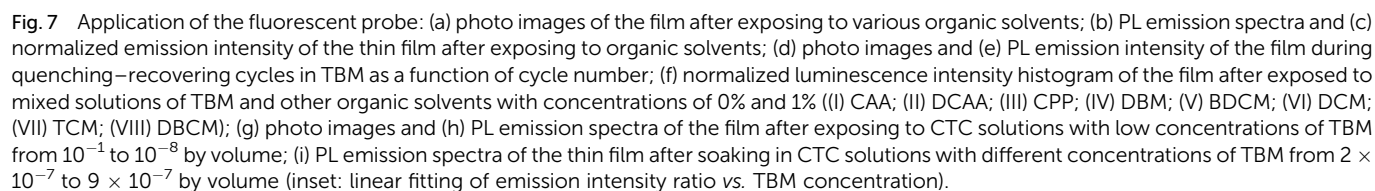

trichloromethane (TCM), dibromo-monochloro-methane (DBCM) and tribromomethane (TBM). As shown in Fig. 7a, the photo images of the thin film under UV light irradiation reveal that the fluorescence is rapidly quenched by TBM in less than one second, whereas those of others still exhibit the same bright yellow light luminescence. Detailed PL emission spectra demonstrate that the luminescence intensity of the film in TBM solvent are almost completely quenched, whereas those in other organic solvents are nearly unchanged (Fig. 7b and c). To further inspect the sensing selectivity, substantial organic solvents containing different functional groups were selected as contrast targets including alcohol, acetonitrile, acetone, tetrahydrofuran, acetylacetone, aromatic hydrocarbon (e.g., benzene, dimethylbenzene, chlorobenzene, and nitrobenzene), etc. As shown in Fig. S22,† the (Im-BDMPA)In_{0.78}Sb_{0.22}Cl₆·H₂O films display the same broad yellow emission bands as that of the freshly prepared sample with almost identical emission intensities. These contrast experiments demonstrate that the fluorescence of (Im-BDMPA)In_{0.78}Sb_{0.22}Cl₆·H₂O is solely quenched by TBM but failed for other organic solvents. More excitedly, the quenched fluorescence of the thin film by TBM can be recovered to the original yellow emission after washing with carbon tetrachloride (CTC), and the PL emission intensity can reach up to nearly 100% of original data (Fig. S23†). To more accurately confirm the repeatability of the reversible quenching-recovering process, we monitor the varied PL emission intensity of the (Im-BDMPA)In_{0.78}Sb_{0.22}Cl₆·H₂O film during consecutive impregnation-washing cycles. As shown in Fig. 7d, the thin film displays a repeatable PL quenching-recovering cycle and the luminescence is able to persistently return to the original yellow color after washing with CTC even after consecutive 20 cycles. Simultaneously, the negligible decrease of emission intensity also indicates high reversibility and repeatability (Fig. 7e). After exposing to these organic solvents, the PXRD patterns reveal strong diffraction peaks with a high crystalline degree, indicating a stable crystal structure lattice (Fig. S24–S26†). Therefore, (Im-BDMPA)In_{0.78}Sb_{0.22}Cl₆·H₂O displays reversible TBM responsive fluorescence on/off switching, which indicates the feasibility of the fluorescent probe to detect TBM.

The sharply contrasting response to TBM and other organic solvents inspires us to investigate the selectivity for sensing applications, and a series of anti-interference experiments were performed in mixed solutions of TBM and other halo-hydrocarbon solvents. As depicted in Fig. S27† and 7f, the PL emission intensities of the film were almost completely quenched after exposing to mixed solutions containing a small amount of TBM (1%) but failed in TBM free solutions, which manifest that (Im-BDMPA)In_{0.78}Sb_{0.22}Cl₆·H₂O possesses an excellent sensing selectivity toward TBM. The sensitivity of the fluorescent probe is another crucial indicator to evaluate the sensing performance in practical applications. To explore the sensitivity of the fluorescent probe, a series of dilute TBM/CTC solutions with very low concentrations from 10^{−1} to 10^{−8} by volume were further blended as representative targets. As shown in Fig. 7g and h, both the photo images and PL emission spectra indicate that the film remains to exhibit the PL

quenching phenomenon when the content of TBM is reduced to 10^{−7} (0.1 ppm). Detailed PL emission spectra toward ultra-dilute TBM/CTC solutions in the concentration range of 2 × 10^{−7} to 9 × 10^{−7} indicate that the fluorescence intensity of the film gradually decreases with the increase of TBM concentration, and the quenching effect ($I_0/I - 1$) is linearly dependent on the TBM concentration with a good linear relation ($R^2 = 0.9998$), indicating excellent detection operability (Fig. 7i). These results demonstrate that (Im-BDMPA)In_{0.78}Sb_{0.22}Cl₆·H₂O is a highly desirable fluorescent probe to detect TBM with high selectivity, sensitivity and repeatability.

To illustrate the quenching mechanism toward TBM, the UV-vis absorption spectra were firstly studied on the sample after immersing in various organic solvents. As shown in Fig. S28,† the absorption spectra do not display any change after soaking in most of the organic solvents, while the TBM-treated sample exhibits a more widespread absorption range from 200 nm to 650 nm, which overlaps partially with the emission spectrum of the as-synthesized sample, indicating significant electron exchange and self-absorption characteristics. To further verify the energy transfer between (Im-BDMPA)In_{0.78}Sb_{0.22}Cl₆·H₂O and TBM, X-ray photoelectron spectroscopy (XPS) was performed at the surface of the sample. Compared with the as-synthesized halide, the binding energies of C-2s and N-2s shift slightly to lower energy, while those of Cl-2p, In-3d and Sb-3d shift to higher energy in the TBM treated halide sample (Fig. S29†). All these investigations indicate the energy transfer between (Im-BDMPA)In_{0.78}Sb_{0.22}Cl₆·H₂O and TBM molecules, which consume drastically the excited carriers and quench the luminescence of the halide, and a similar phenomenon has been confirmed in numerous fluorescent probes.⁶⁴

Conclusions

In summary, we herein demonstrate a new 0D hybrid indium/antimony halide as a highly efficient broadband yellow light emitter with near-unity PLQY and multifunctional applications. Firstly, the broadband emission realizes a high-performance white LED with tunable color temperature. Secondly, this halide represents a new X-ray scintillator in 0D hybrid indium halide with promising X-ray imaging applications, as highlighted by the combined merits of a prominent light yield, low detection limit, ultra-high spatial resolution and negligible afterglow time. Thirdly, reversible TBM responsive luminescence off-on switching enables it to be a perfect real-time fluorescent probe to detect TBM with ultrahigh sensitivity, selectivity and repeatability. Therefore, high-performance multiple optoelectronic applications in white LEDs, X-ray scintillation and fluorescence sensors are synchronously realized in a 0D halide structural platform. These multiple applications benefit from the synergistic effects of intrinsic quantum confinement, strong electron-phonon coupling, the sufficient absorption coefficient of X-ray and the impressible structure in the 0D deformable crystal lattice. This work not only deepens the fundamental understanding of the luminescence properties of 0D hybrid halides but also realizes multiple optoelectronic applications. We believe that this



research would guide the rational design of new 0D hybrid metal halides as advanced luminescent materials in cutting-edge optoelectronic fields.

Data availability

The data that support the finding of this study are available from the corresponding author upon reasonable request.

Author contributions

D.-Y. Li and H.-Y. Kang designed the experiments and carried out material synthesis, Y.-H. Liu and J. Zhang assisted in the measurements, Y.-C. Yue helped in data analysis, and D. Yan and X.-W. Lei were responsible for supervision and revising the manuscript. All authors participated in discussing the data and writing the manuscript.

Conflicts of interest

The authors declare no conflict of interest.

Acknowledgements

We acknowledge the financial support from the National Natural Science Foundation of China (No. 22171105 and 22275021), Shandong Provincial Natural Science Foundation (No. ZR2021MB001, ZR2020KB012 and ZR2022YQ14), Fund of State Key Laboratory of Structural Chemistry (No. 20210015), Beijing Municipal Natural Science Foundation (Grant No. JQ20003) and Special Foundation of Taishan Scholar Project.

References

- 1 B. A. Rosales, L. E. Mundt, L. T. Schelhas and L. M. Wheeler, *J. Am. Chem. Soc.*, 2022, **144**, 667–672.
- 2 L. W. Zhang, R. C. Shen, J. Tan and Q. Yuan, *Chin. J. Struct. Chem.*, 2022, **41**, 2202148–2202158.
- 3 X. L. Jing, D. L. Zhou, R. Sun, Y. Zhang, Y. Y. C. Li, X. D. Li, Q. J. Li, H. W. Song and B. B. Liu, *Adv. Funct. Mater.*, 2021, **31**, 2100930.
- 4 I. Spanopoulos, I. Hadar, W. J. Ke, P. J. Guo, E. M. Mozur, E. Morgan, S. X. Wang, D. Zheng, S. Y. Padgaonkar, G. N. Reddy, E. A. Weiss, M. C. Hersam, R. Seshadri, R. D. Schaller and M. G. Kanatzidis, *J. Am. Chem. Soc.*, 2021, **143**, 7069–7080.
- 5 H. Kim, J. H. Park, K. Y. Kim, D. Lee, M. Y. Song and J. Park, *Adv. Sci.*, 2022, **9**, 2104660.
- 6 X. T. Gao, N. N. Chen, M. L. Cao, Y. Shi and Q. F. Zhang, *Chin. J. Struct. Chem.*, 2022, **41**, 2211110–2211116.
- 7 L. Mao, P. Guo, S. Wang, K. Cheetham and R. Seshadri, *J. Am. Chem. Soc.*, 2020, **142**, 13582–13589.
- 8 F. F. Gao, X. Li, Y. Qin, Z. G. Li, T. M. Guo, Z. Z. Zhang, G. D. Su, C. Y. Jiang, M. Azeem, W. Li, X. Wu and X. H. Bu, *Adv. Opt. Mater.*, 2021, **9**, 2100003.
- 9 B. Zhou, G. W. Xiao and D. P. Yan, *Adv. Mater.*, 2021, **33**, 2007571.
- 10 P. S. Lv, L. P. Li, C. Z. Wang, Z. Q. Wu, J. R. Qiu and Y. M. Yang, *Laser Photonics Rev.*, 2022, **16**, 2200389.
- 11 Z. Wang, J. T. Mo, J. J. Pan and M. Pan, *Adv. Funct. Mater.*, 2023, 2300021.
- 12 H. D. Wu, Y. S. Ge, G. D. Niu and J. Tang, *Matter*, 2021, **4**, 144–163.
- 13 O. Rabin, J. Grimm, G. Wojtkiewicz and R. Weissleder, *Nat. Mater.*, 2006, **5**, 118–122.
- 14 Y. T. Chen, C. Y. Zhao, T. T. Zhang, X. H. Wu, W. J. Zhang and S. J. Ding, *Small*, 2021, **17**, 2007543.
- 15 S. S. Cai, Y. Y. Ju, Y. M. Wang, X. W. Li, T. Guo, H. Z. Zhong and L. L. Huang, *Adv. Sci.*, 2022, 2104708.
- 16 H. J. Chen, M. Zhang, R. H. Bo, C. Barugkin, J. H. Zheng, Q. S. Ma, S. J. Huang, A. W. Y. Ho-Baillie, K. R. Catchpole and A. Tricoli, *Small*, 2018, **14**, 1702571.
- 17 G. D. Li, J. Song, J. H. Wu, Z. Y. Song, X. B. Wang, W. H. Sun, L. Q. Fan, J. M. Lin, M. L. Huang, Z. Lan and P. Gao, *ACS Energy Lett.*, 2021, **6**, 3614–3623.
- 18 Y. F. Sang, L. J. Xu and Z. N. Chen, *Chin. J. Struct. Chem.*, 2022, **41**, 2205070–2205076.
- 19 B. Zhou and D. P. Yan, *Angew. Chem., Int. Ed.*, 2019, **58**, 15128–15135.
- 20 M. Li and Z. G. Xia, *Chem. Soc. Rev.*, 2021, **50**, 2626–2662.
- 21 X. Yang, L. Ma and D. Yan, *Chem. Sci.*, 2019, **10**, 4567.
- 22 J. Q. Zhao, H. S. Shi, L. R. Zeng, H. Ge, Y. H. Hou, X. M. Wu, C. Y. Yue and X. W. Lei, *Chem. Eng. J.*, 2022, **431**, 134336.
- 23 B. Zhou and D. Yan, *Chem. Sci.*, 2022, **13**, 7429.
- 24 S. G. Zhou, Y. H. Chen, K. L. Li, X. W. Liu, T. Zhang, W. Shen, M. Li, L. Zhou and R. X. He, *Chem. Sci.*, 2023, **14**, 5415–5424.
- 25 F. Jiang, Z. N. Wu, M. Lu, Y. B. Gao, X. Li, X. Bai, Y. Ji and Y. Zhang, *Adv. Mater.*, 2023, 2211088.
- 26 G. Y. Xu, C. Y. Wang, Y. C. Li, W. Meng, G. G. Luo, M. Peng, B. Xu and Z. T. Deng, *Chem. Sci.*, 2023, **14**, 5309–5315.
- 27 Z. S. Xing, Z. C. Zhou, G. H. Zhong, C. S. Chan, Y. Y. Li, X. H. Zou, J. E. Halpert, H. B. Su and K. S. Wong, *Adv. Funct. Mater.*, 2022, **32**, 2207638.
- 28 Y. Y. Fang, J. T. Wang, L. Zhang, G. M. Niu, L. Z. Sui, G. R. Wu, K. J. Yuan, K. Wang and B. Zou, *Chem. Sci.*, 2023, **14**, 2652–2658.
- 29 Q. J. Wang, T. X. Bai, S. J. Ji, H. Y. Zhao, X. Meng, R. L. Zhang, J. K. Jiang and F. Liu, *Adv. Funct. Mater.*, 2023, **33**, 2303399.
- 30 L. J. Xu, S. J. Lee, X. S. Lin, L. Ledbetter, M. Worku, H. R. Lin, C. K. Zhou, H. Liu, A. Plaviak and B. W. Ma, *Angew. Chem., Int. Ed.*, 2020, **59**, 14120–14123.
- 31 M. Worku, Y. Tian, C. Zhou, S. Lee, Q. Meisner, Y. Zhou and B. Ma, *ACS Appl. Mater. Interfaces*, 2018, **10**, 30051.
- 32 X. Liu, Y. Li, L. Zhou, M. Li, Y. Y. Zhou and R. X. He, *Adv. Opt. Mater.*, 2022, **10**, 2200944.
- 33 X. T. Zhang, H. Y. Qiu, W. Luo, K. F. Huang, Y. Chen, J. C. Zhang, B. H. Wang, D. L. Peng, Y. Wang and K. Z. Zheng, *Adv. Sci.*, 2023, **10**, 2207004.
- 34 Y. H. Zhang, R. J. Sun, X. Y. Ou, K. F. Fu, Q. S. Chen, Y. C. Ding, L. J. Xu, L. M. Liu, Y. Han, A. V. Malko, X. G. Liu, H. G. Yang, O. M. Bakr, H. Liu and O. F. Mohammed, *ACS Nano*, 2019, **13**, 2520–2525.



- 35 J. J. Ma, W. J. Zhu, L. Lei, D. G. Deng, Y. J. Hua, Y. M. Yang, S. Q. Xu and P. N. Prasad, *ACS Appl. Mater. Interfaces*, 2021, **13**, 44596–44603.
- 36 M. M. Xing, W. H. Cao, T. Pang, X. Q. Ling and N. Chen, *Sci. Bull.*, 2009, **54**, 2982–2986.
- 37 T. Huang, Q. L. Wei, W. C. Lin, H. Peng, S. F. Yao and B. S. Zou, *Mater. Today Phys.*, 2022, **25**, 100703.
- 38 X. C. Zhang, X. L. Yu, J. Y. Wu and W. G. Huang, *Chin. J. Struct. Chem.*, 2022, **41**, 2212001–2212003.
- 39 S. Q. Sun, M. Lu, X. P. Gao, Z. P. Shi, B. Bai, W. W. Yu and Y. Zhang, *Adv. Sci.*, 2021, **8**, 2102689.
- 40 H. Fattal, T. D. Creason, C. J. Delzer, A. Yanguai, J. P. Hayward, B. J. Ross, M. H. Du, D. T. Glatzhofer and B. Saparov, *Inorg. Chem.*, 2021, **60**, 1045–1054.
- 41 J. H. Wei, J. F. Liao, L. Zhou, J. B. Luo, X. D. Wang and D. B. Kuang, *Sci. Adv.*, 2021, **7**, eabg3989.
- 42 J. H. Wei, J. B. Luo, J. F. Liao, W. T. Qu and D. B. Kuang, *Sci. China Mater.*, 2022, **65**, 764–772.
- 43 F. Zhang, X. Z. Ji, W. Q. Liang, Y. Li, Z. Z. Ma, M. Wang, Y. Wang, D. Wu, X. Chen, D. W. Yang, X. J. Li, C. X. Shan and Z. F. Shi, *Mater. Horiz.*, 2021, **8**, 3432–3442.
- 44 L. Zhou, J. F. Liao, Z. G. Huang, J. H. Wei, X. D. Wang, W. G. Li, H. Y. Chen, D. B. Kuang and C. Y. Su, *Angew. Chem., Int. Ed.*, 2019, **58**, 5277–5281.
- 45 D. Y. Li, J. H. Song, Y. Cheng, X. M. Wu, Y. Y. Wang, C. J. Sun, C. Y. Yue and X. W. Lei, *Angew. Chem., Int. Ed.*, 2022, **61**, e202206437.
- 46 A. K. Viswanath, J. I. Lee, D. Kim, C. R. Lee and J. Y. Leem, *Phys. Rev. B: Condens. Matter Mater. Phys.*, 1998, **58**, 16333.
- 47 A. M. Kelley, *ACS Nano*, 2011, **5**, 5254–5262.
- 48 Q. Zhang, H. Q. Li, Y. Ma and T. Y. Zhai, *Prog. Mater. Sci.*, 2016, **83**, 472–535.
- 49 S. X. Li, Y. Pan, W. M. Wang and Y. Li, *Chem. Eng. J.*, 2022, **434**, 134593.
- 50 Z. K. Ye, X. Lin, N. Wang, J. H. Zhou, M. Y. Zhu, H. Y. Qin and X. G. Peng, *Nat. Commun.*, 2021, **12**, 4283.
- 51 L. Zhou, K. Zhang, H. Li, W. Shen, N. Li and R. X. He, *Adv. Funct. Mater.*, 2021, **31**, 2108561.
- 52 G. F. Carpenter, M. J. Coe and A. R. Engel, *Nature*, 1976, **99**, 259.
- 53 R. J. Sun, Z. F. Wang, H. Q. Wang, Z. H. Chen, Y. G. Yao, H. P. Zhang, Y. N. Gao, X. T. Hao, H. Q. Liu and Y. H. Zhang, *ACS Appl. Mater. Interfaces*, 2022, **14**, 36801–36806.
- 54 A. G. Gandhi, H. H. Chiu, M. K. Ho, T. E. Hsu, T. Y. Li, Y. H. Wu, B. V. Kumar, P. M. Reddy, B. H. Lin, C. L. Cheng and S. Y. Wu, *ACS Appl. Nano Mater.*, 2022, **5**, 14811–14823.
- 55 Q. He, C. Zhou, L. Xu, S. Lee, X. Lin, J. Neu, M. Worku, M. Chaaban and B. W. Ma, *ACS Mater. Lett.*, 2020, **2**, 633–638.
- 56 Q. K. Kong, X. Meng, S. J. Ji, Q. J. Wang, B. Yang, T. X. Bai, X. C. Wang, Z. Y. Wang, R. L. Zhang, D. Y. Zheng, F. Liu and K. L. Han, *ACS Mater. Lett.*, 2022, **4**, 1734–1741.
- 57 K. Han, J. Jin, B. B. Su, J. W. Qiao and Z. G. Xia, *Adv. Opt. Mater.*, 2022, **10**, 2200865.
- 58 M. Zhang, J. Zhu, B. Yang, G. Niu, H. Wu, X. Zhao, L. Yin, T. Jin, X. Liang and J. Tang, *Nano Lett.*, 2021, **21**, 1392.
- 59 W. Ma, T. Jiang, Z. Yang, H. Zhang, Y. Su, Z. Chen, X. Chen, Y. Ma, W. Zhu, X. Yu, H. Zhu, J. Qiu, X. Liu, X. Xu and Y. Yang, *Adv. Sci.*, 2021, **8**, 2003728.
- 60 H. Zhang, Z. Yang, M. Zhou, L. Zhao, T. Jiang, H. Yang, X. Yu, J. Qiu, Y. Yang and X. Xu, *Adv. Mater.*, 2021, **33**, 2102529.
- 61 M. Zhang, X. Wang, B. Yang, J. Zhu, G. Niu, H. Wu, L. Yin, X. Du, M. Niu, Y. Ge, Q. Xie, Y. Yan and J. Tang, *Adv. Funct. Mater.*, 2020, **31**, 2007921.
- 62 W. Y. Shao, X. Wang, Z. Z. Zhang, J. Huang, Z. Y. Han, S. Pi, Q. Xu, X. D. Zhang, X. C. Xia and H. W. Liang, *Adv. Opt. Mater.*, 2022, **10**, 2102282.
- 63 Q. Xu, W. Y. Shao, Y. Li, X. L. Zhang, X. Ouyang, J. Liu, B. Liu, Z. Y. Wu, X. P. Ouyang, X. B. Tang and W. B. Jia, *ACS Appl. Mater. Interfaces*, 2019, **11**, 9679–9684.
- 64 Y. B. Lu, Y. Q. Liao, L. Dong, S. D. Zhu, H. R. Wen, J. Huang, X. X. Dai, P. Lian, X. M. Jiang, R. Li and Y. R. Xie, *Chem. Mater.*, 2021, **33**, 7858–7868.