



Nanoscale

Coupling Spin Defects in Hexagonal Boron Nitride to Titanium Oxide Ring Resonators

Journal:	<i>Nanoscale</i>
Manuscript ID	NR-ART-05-2022-002522.R2
Article Type:	Paper
Date Submitted by the Author:	10-Aug-2022
Complete List of Authors:	<p>Nonahal, Milad; University of Technology, Sydney Li, Chi; University of Technology, Sydney, Tjiptoharsono, Febiana; Institute of Materials Research and Engineering (IMRE) Lu, Ding; Institute of Materials Research and Engineering (IMRE), Stewart, Connor; University of Technology, Sydney Scott, John; University of Technology Sydney Toth, Milos; University of Technology, Sydney, School of Physics and Advanced Materials Ha, Son; Agency for Science, Technology and Research (A*STAR) Kianinia, Mehran; University of Technology Sydney, Maths and Physical Sciences Aharonovich, Igor; University of Technology, Sydney,</p>

SCHOLARONE™
Manuscripts

Coupling Spin Defects in Hexagonal Boron Nitride to Titanium Dioxide Ring Resonators

Milad Nonahal¹, Chi Li^{1,2}, Febiana Tjiptoharsono³, Lu Ding³, Connor Stewart¹, John Scott^{1,2}, Milos Toth^{1,2}, Son Tung Ha³, Mehran Kianinia^{1,2}, Igor Aharonovich^{1,2*}

1. School of Mathematical and Physical Sciences, Faculty of Science, University of Technology Sydney, Ultimo, New South Wales 2007, Australia

2. ARC Centre of Excellence for Transformative Meta-Optical Systems (TMOS), University of Technology Sydney, Ultimo, New South Wales 2007, Australia

3. Institute of Materials Research and Engineering, A*STAR (Agency for Science, Technology and Research), Kinesis, 138635 Singapore

KEYWORDS: Hexagonal Boron Nitride (hBN), Titanium Dioxide (TiO₂), Whispering Gallery Mode (WGM), Boron Vacancy (V_B^-),

Abstract:

Spin-dependent optical transitions are attractive for a plethora of applications in quantum technologies. Here we report on utilization of high quality ring resonators fabricated from TiO₂ to enhance the emission from negatively charged boron vacancies (V_B^-) in hexagonal Boron Nitride. We show that the emission from these defects can efficiently couple into the whispering gallery modes of the ring resonators. Optically coupled V_B^- showed photoluminescence contrast in optically detected magnetic resonance signals from the hybrid coupled devices. Our results demonstrate a practical method for integration of spin defects in 2D materials with dielectric resonators which is a promising platform for quantum technologies.

Defects in hexagonal boron nitride (hBN) provide a test bed for the study of light-matter interactions and nanophotonics with two-dimensional materials at room temperature¹⁻⁵. Among them, optically addressable spin defects have recently gained momentum due to their relevant application in quantum sensing and quantum information technologies⁶⁻¹⁰. Particularly, negatively charged boron vacancies (V_B^-) is a spin 1 system which can be mapped out through optically detected magnetic resonance (ODMR) spectroscopy at room temperature¹¹⁻¹⁵. At zero field, the transitions between two spin states ($m_s = 0$ and $m_s = \pm 1$) in the ground state result in two resonances at ~ 3.4 and ~ 3.5 GHz in the ODMR signal¹¹. Spin coherence of V_B^- has been exploited for high temporal and spatial resolution quantum sensing of temperature, strain, electric and magnetic fields¹⁶⁻²⁰.

However, the photoluminescence emission from V_B^- spans in the NIR has no clear indication of zero phonon line (ZPL) even at cryogenic temperature, and the exact electronic level structure and emission dipole of V_B^- are yet to be understood. Just recently, coupling of the defects into high-quality cavities suggests the ZPL spectral location to be around 770 nm²¹ and excited state spectroscopy of the defects revealed the spin states in the excited state²²⁻²⁴. Moreover, the defect suffers from low intrinsic brightness and quantum efficiency. This limitation can be overcome by coupling the V_B^- to micro-resonators that enables efficient control over the emission properties as such presents an attractive platform for enhanced understanding and utilization of spin defects in van der Waals materials. Recent attempts have been made to couple V_B^- into bullseye²⁵ or plasmonic²⁶ structures which results in the enhancement of the emission. Among dielectric resonators supporting whispering gallery modes (WGMs), ring structures provide high-quality factors with low mode volume which theoretically enables achieving high emission enhancement and hence are attractive alternatives²⁷⁻³⁰.

Here we realise a hybrid approach based on hBN flake as V_B^- -hosting material on top of TiO_2 as a cavity platform. Since a high-quality cavity requires relatively large refractive index of ~ 2.5 and low optical loss in the wide wavelength range in the visible and IR, TiO_2 is an attractive material for the fabrication of waveguides and photonic resonators³¹⁻³⁴. The resonator is designed to support multimode WGMs with small free spectral range (FSR) in an attempt to enhance the broad emission of V_B^- . Finally, the ODMR collected from the ring confirms the efficient coupling of spin defects in hBN into WGM modes of the TiO_2 ring resonator.

We developed a fabrication process to realize hBN/ TiO_2 hybrid resonator and to demonstrate emission enhancement of spin defect by coupling to the WGMs. Given the layered nature, hBN could be readily integrated with other systems by the stacking strategy³⁵. However, transferring hBN on cavity structures inevitably damages these fragile structures. Thus, to avoid this, a heterostructure was prepared prior to the fabrication process. The fabrication steps are described in detail in the Method section and schematically demonstrated in figure 1a. Briefly, a 200-nm of TiO_2 was first sputtered onto the Si substrate through ion-assisted deposition (IAD). The resulting film showed a smooth surface (average roughness of 0.9 nm) and high refractive index (2.3 at 800 nm). The characterization of the deposited TiO_2 film is provided in the supporting information (figure SI-1). hBN flakes were mechanically transferred from high quality bulk crystal onto the TiO_2 surface via scotch tape method. The sample was then annealed at 300 °C to remove the tape residual and maximize surface adhesion to form a stable heterostructure. At this temperature, TiO_2 phase transition and the associated change in the refractive index can be avoided to retain the low optical loss of the TiO_2 ³⁶. To increase accessibility of the defect to the cavity in hybrid approach, a thin flake (~ 20 nm) was picked for the

fabrication. Therefore, the defect could be spatially closer to the cavity resulting in improved coupling efficiency since it minimizes optical loss in the hBN material. In order to realize suspended ring resonators, an array of wheel-like structures was subsequently patterned on the heterostructure using EBL technique followed by deposition of 50 nm Cr. After liftoff, the remaining Cr acting as a metal mask for the etching step. The pattern was then transferred into the heterostructure by reactive ion etching (RIE) method (figure 1a-i). Following the RIE step, potassium hydroxide (KOH) aqueous solution was used to selectively etch the underlying Si substrate as shown in figure 1a-ii, resulting in a wheel-like hybrid resonator (figure 1a-iii). Finally, an angled ion beam was used to efficiently create V_B^- in the thin hBN flake. Transport of ions in matter (TRIM) calculation (figure SI-2a) was performed to obtain the optimal condition for generation of defects within 20 nm of hBN using a nitrogen beam at an angle of 60° and fluences of $1 \times 10^{14} \text{ cm}^{-2}$.

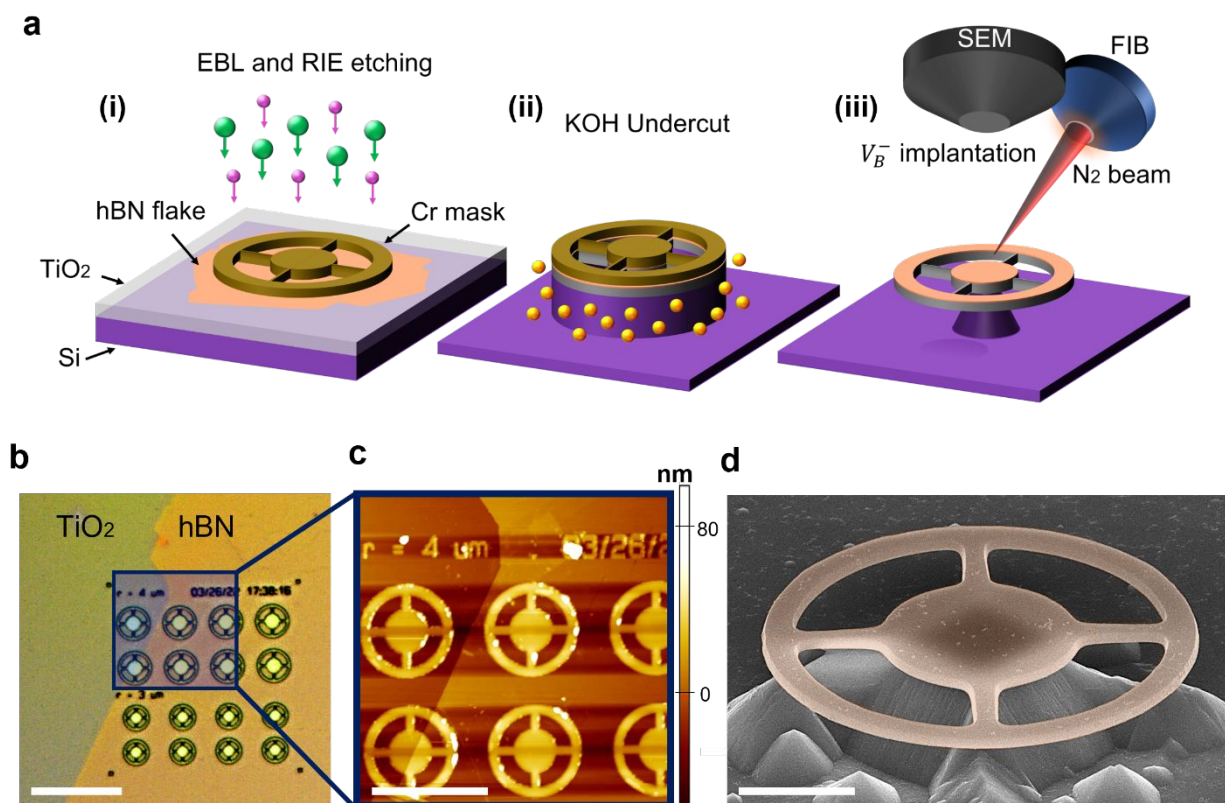


Figure 1. Fabrication of hBN/TiO₂ hybrid resonator. (a) Schematic representation of the fabrication process: (i) Lithography step to pattern a Cr metal mask (Brown steering-wheels) on hBN/TiO₂ heterostructure and then transferring the mask into the heterostructure using ICP/RIE. Green and pink balls represent SF₆, and Hydrogen species used in the latter step, respectively. (ii) Undercut of hBN/TiO₂ hybrid resonator using 10% KOH aqueous solution. (iii) Generation of spin defects in hBN using angled Nitrogen focused ion beam (FIB). (b) Optical image of aligned EBL pattern on the hBN/TiO₂ heterostructure. Scale bar: 25 μm. (c) AFM image of the patterned area.

scale bar: 10 μm . (d) 52° Tilted SEM image of the final hBN/TiO₂ hybrid resonator. The false color shows the microring. scale bar: 2 μm .

Figure 1b shows an optical microscope image of the patterned sample. The spatially precise lithography on the flake is directly visible by optical contrast showing boundaries between hBN flake and the TiO₂ substrate. The Energy-dispersive X-ray spectroscopy (EDS) analysis after fabrication of the device also indicates the presence of hBN flake on top of the post-fabricated TiO₂ resonator (figure SI-3). An Atomic Force Microscopy (AFM) image was scanned over the patterned area to confirm the thickness of patterned hBN as shown in figure 1c and figure SI-2b. A detailed structure of the final hybrid resonator is shown in a high-resolution SEM image in figure 1d. Further SEM images of the resonators are presented in the supporting information indicating the quality of the resonator after fabrication (Figure SI-4).

Next, we characterized the coupling of V_B^- to the TiO₂ resonator using a confocal photoluminescence setup (Method section). The photoluminescence spectrum collected from the center of the ring (denoted as “off-ring”) is shown in figure 2a (blue spectra) and a relatively broad emission spectrum of V_B^- spanning from 750 to 850 nm was observed. In contrast, when V_B^- was excited on the ring (denoted as “on-ring”, red spectra), superimposed peaks resulting from the coupling of V_B^- emission to WGM of the rings were observed. Since the WGMs of the resonator cover entire V_B^- emission range with short FSR of ~ 7 nm, overall V_B^- signals were significantly enhanced compared to those of from uncoupled region. The coupled signals were collected from the scattering point (the bright spot indicated by red circle in the inset) where the photons partially outcoupled into the objective. Since light is well confined inside the cavity, the scattering points are necessary for the photon collection. Since light is well confined inside the cavity, the scattering points are necessary for the photon collection from top of the ring. The holding arms on the ring resonator can be used as scattering points to collect the modes from suspended rings. A pristine TiO₂ ring resonator without hBN was also measured as a reference (figure SI-5). Normalized electric field distribution of Transverse Electric (TE) and Transverse Magnetic (TM) modes intensity was calculated using FDTD simulation as shown in figure 2b and figure SI-6. Electric field profile of the TE WGMs concentrated at the middle of the device whilst the TM field maxima confined at the top and bottom surface of the resonator as shown in the cross-sectional views. The analysis of the individual peak from high resolution spectra is shown in figure 2c. A quality factor ($Q = \lambda/\Delta\lambda$) of 2137 was obtained after fitting the peak with Lorentzian function. Characterization of more devices are shown in figure SI-7 a and a mean quality factor of 1800 was achieved in this study.

To further investigate the enhancement of the coupled signals, PL intensity was measured for both on-ring and off-ring emissions as a function of excitation power shown

in figure 2d. The intensities for both cases, were integrated over the whole range of V_B^- emission, and the resulting data were fitted with the equation $I = (I_{sat}P)/(P + P_{sat})$, where I_{sat} is the saturation intensity, and P_{sat} is the saturation power. The saturation intensities of 0.405 MHz and 0.152 MHz and powers of 0.7 and 1.7 mW was obtained from the fit to the data (solid lines) for the on-ring and off-ring, respectively. These values yield the enhancement factor of about 3 and 7 in the saturated and unsaturated regimes.

In contrast, if each individual coupled signal is examined separately, the intensity of the coupled V_B^- emission is significantly higher than the uncoupled signal. For instance, we observed an enhancement factor of about 14 for the coupled signal at ~ 790 nm as shown in figure SI-7 b.

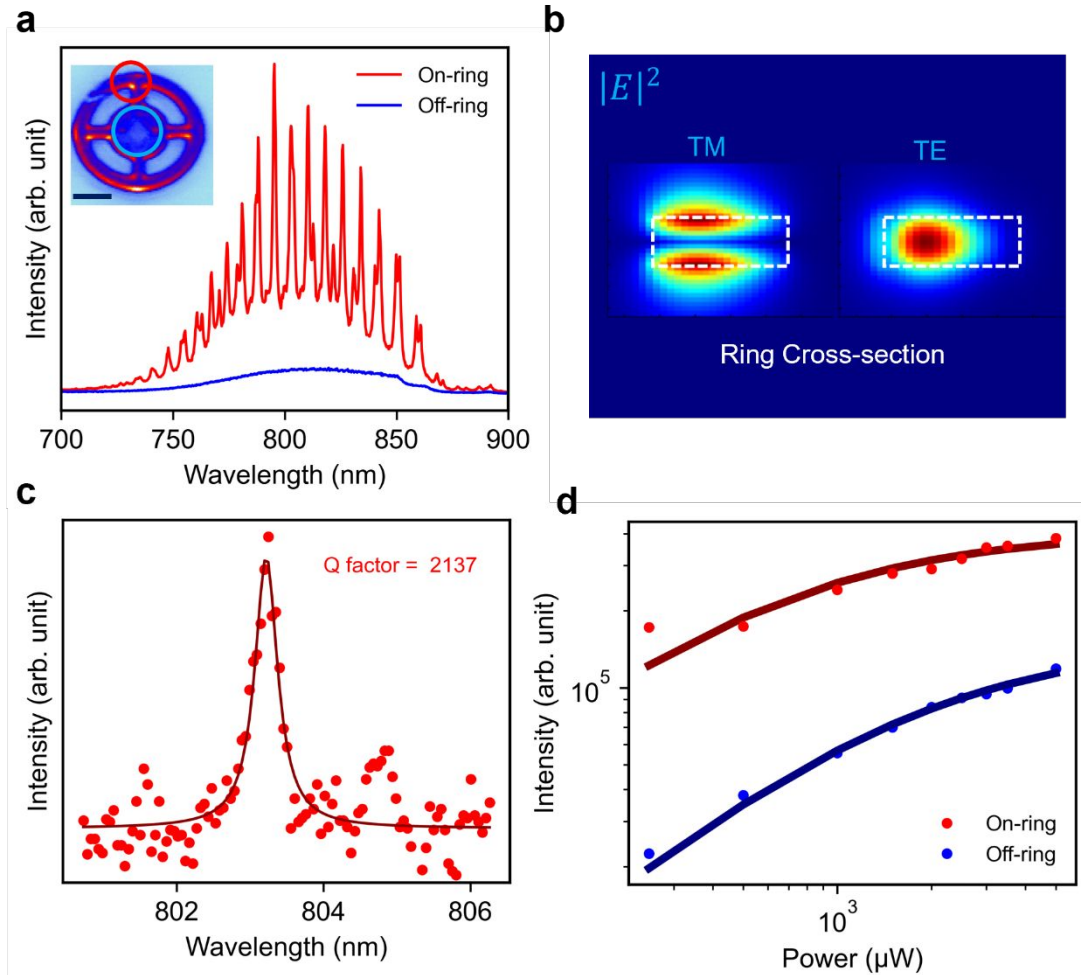


Figure 2. Optical characterization of the microring resonator. (a) PL spectrum collected on (red) and off (blue) the ring. Inset – confocal scanning image of the corresponding hybrid

resonator. Red and blue circles indicate collection spots corresponding to On and Off the ring, respectively. Scale bar: 2 μm . (b) Cross-section view of the FDTD simulation for the fundamental TE (transverse electric) and TM (transverse magnetic) modes, showing electric field distribution of the fundamental modes inside the resonator. The dash box outlines the TiO_2 cross-section view. (c) High-resolution spectra of the WGMs fitted by Lorentzian function yielding a quality factor of ~ 2100 for the fabricated ring resonator (d) Integrated PL intensity of the signals collected on (red) and off (blue) the ring at increasing excitation power.

Ultimately, to further characterize the hybrid devices, we employed ODMR spectroscopy to map spin transitions of the coupled V_B^- in local and non-local excitation configurations. The spin defect in hBN and its simplified electronic level structure is schematically depicted in figure 3a. The defect shows a triplet ground state (A_1^3) with a zero-field splitting of 3.48 GHz between the two spin states. We evaluate spin transitions from V_B^- that coupled to WGM in the local and non-local configurations. In the local configuration, the optical collection and excitation spots were overlapped, while at the non-local configuration, the excitation of the microscope was offset 180° on the ring away from the collection spot. The results and the schematic configuration of both scenarios are shown in figure 3b. The spectra recorded from non-local configuration is shown in figure 3b (purple) with similar features as the local excitation (green) indicating the efficient coupling of V_B^- into the TiO_2 ring resonator. We note that V_B^- can be excited by the guided laser in the ring as well. However, when the laser spot is fixed, no obvious emission on other part of the ring is detected, which highly suggest a low excitation efficiency in this scenario. Figure 3c shows the corresponding ODMR signals for both excitation schemes. By sweeping a microwave from 3.2 to 3.8 GHz, a reduction in the photoluminescence of the V_B^- was detected at 3.4 and 3.5 GHz. These contrasts are the result of transitions from $m_s = 0$ to $m_s = \pm 1$ in the ground state which are driven by the microwave field (figure 3a). This verifies that V_B^- emits photons carrying spin information into the resonator and effectively coupled to the WGMs. The presence of spin transitions will confirm the boron vacancy defects are active in the hBN layer after fabrications. This is important for application of such structure utilizing spin properties of optically active spin defects in hBN. Both excitation scheme showed similar ODMR contrast with slight differences stemming from lower collection efficiency through non-local excitation.

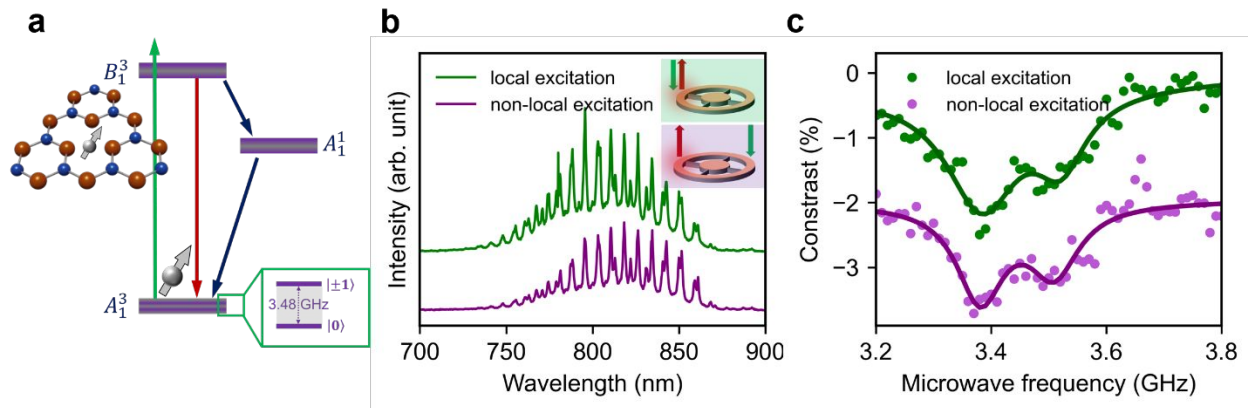


Figure 3. ODMR measurement of coupled V_B^- . (a) Schematic of the V_B^- defect and an energy diagram showing the main optical pumping cycle and the alternate cycle through the metastable state. (b) PL spectrum from coupled V_B^- in local and non-local configurations. The spectra were offset in Y-axis for clarity. The inset schematically shows these configurations. (c) ODMR measurement from coupled V_B^- in local and non-local configurations. The microwave power was set to 10 dB for both configurations. The ODMR contrast of the non-local excitation scheme was offset for clarity.

In summary, we have developed a method for fabrication of a hBN/ TiO₂ resonators with high Quality factors exceeding ~ 2000 . Coupling of V_B^- to the WGM results in the increase of photoluminescence of about 7 and 3 in the unsaturated and saturated regimes, respectively. Finally, we demonstrated the coupling of V_B^- via two excitation configurations. Importantly, in a non-local configuration, the PL intensity and the ODMR signal collected from guided photons, indicating efficient coupling of V_B^- to TiO₂ ring resonators. Our results are promising for scaling up integration of layered materials with nanophotonic resonators.

Methods:

Hybrid resonator fabrication. Following the hBN transfer step, a thin layer of e-beam polymer resist (CSAR, AllResist GmbH) was spin-coated onto the sample for 60s at 5000 rpm followed by baking on a hotplate at 170 °C for 2 minutes. EBL patterning was performed in SEM (Zeiss Supra 55 VP) with electron energy of 30 KeV, 20 pA current and a base dose of 100 $\mu\text{C}/\text{cm}^2$. The scanning beam was controlled by the Raith EBL system. After the development step, 50 nm Cr is deposited on the substrate using a magnetron sputtering machine. Afterwards, the residual polymer was removed in hot CSAR remover (AR600-71, AllResist GmbH). The patterns were transferred into the

underlying hBN/TiO₂/Si sample using ICP/RIE technique. A mixture of SF₆/H₂ as reactive gases were introduced into the ICP/RIE chamber with a ratio of 1:7 and then plasma was generated by RF power of 100 W. In the following step, the sample was immersed into a 10% KOH aqueous solution for continually 5 minutes and then placed into a beaker of water to stop basic reactions. After the undercut step, the Cr metal mask was stripped away using Cr etchant. The sample was then rinsed with IPA and water followed by annealing at 300 °C to clean the etchant and increase adhesion.

Ion Implantation. The creation of boron vacancy defects is achieved by focused ion beam irradiation in a Helios G4 PFIB UXe DualBeam microscope. Ion irradiation is performed at 60° incidence angle with respect to the surface normal to maximize the number of defects in a thin flake. A N₂ source is used, the beam energy and current are 5 kV and 75 pA respectively. A square irradiation pattern is defined over the resonator structure containing the hBN flake. The irradiation area and time are set to achieve an ion fluence of 1x10¹⁴.

FDTD simulations. The FDTD was used to calculate the WGMs of a TiO₂ ring resonator using commercial software (Lumerical FDTD). The TiO₂ ring resonator with four arms clamping on the central disk was embedded in vacuum. All dimension parameters of the whole structure and the refractive index of TiO₂ were taken from the experiment. TE/TM WGMs are excited with an in-plane electric/magnetic dipole lying on the ring avoiding the clamping points, respectively. The dipole orientation was perpendicular to the curvature of the ring. Perfectly Matched Layers (PML) were applied in all three directions. A time monitor was used to capture the decay of the field and convert the spectrum in frequency domain. The cut off wavelength of TM modes was around 1050 nm which was mainly controlled by the thickness of the ring resonator.

PL Characterization. PL spectra were recorded using a lab-built confocal setup. The devices were excited with a 532 nm continuous wave laser collimated and directed using several mirrors and lenses. The laser was focused onto the sample by a 100x and 0.9 NA objective forming around 500 nm spot through a 4f scanning system. The laser was scanned over the sample by a scanning mirror and the signals were collected by the same objective and transmitted back to the detectors. The signals were filtered by a 568-nm long pass filter and sent to a spectrometer (Princeton Instruments) or an avalanche photodiode APD (Excelitas) by a flip mirror.

ODMR characterization. For the ODMR characterization, the samples were connected to a chip holder and a wire antenna (~30 um diameter) was placed next to the structures within a few tens of micrometers. To generate microwave signals, the current was passed through the antenna by a RF generator (AnaPico APSIN) and amplified (minicircuits, ZHL-16W-43-S+). Microwave was swept over 3.2 to 3.8 GHz at -10 dbm and PL signals were

collected for 10 ms while the microwave field was on and off. The spin transitions were obtained by fitting a Lorentzian function to the data which yield two resonance frequencies at ~ 3.4 and ~ 3.5 GHz. The ODMR contrast was measured from the difference between the recorded signals in each frequency value.

Acknowledgments

The authors acknowledge financial support from the Australian Research Council (CE200100010) for financial support, the Asian Office of Aerospace Research and Development (FA2386-20-1-4014) and the Office of Naval Research Global (N62909-22-1-2028). The authors thank the ANFF (UTS node) for use of the nanofabrication facilities

References

1. J. D. Caldwell; I. Aharonovich; G. Cassabois; J. H. Edgar; B. Gil; D. N. Basov, "*Photonics with hexagonal boron nitride*" *Nature Reviews Materials* 4, 552-567 (2019)
2. B. Gil; G. Cassabois; R. Cusco; G. Fugallo; L. Artus, "*Boron nitride for excitonics, nano photonics, and quantum technologies*" *Nanophotonics* 9, 3483-3504 (2020)
3. M. Kianinia; Z.-Q. Xu; M. Toth; I. Aharonovich, "*Quantum emitters in 2D materials: Emitter engineering, photophysics, and integration in photonic nanostructures*" *Applied Physics Reviews* 9, 011306 (2022)
4. J. Comtet; B. Grosjean; E. Glushkov; A. Avsar; K. Watanabe; T. Taniguchi; R. Vuilleumier; M.-L. Bocquet; A. Radenovic, "*Direct observation of water-mediated single-proton transport between hBN surface defects*" *Nature Nanotech.* 15, 598-604 (2020)
5. C. Fournier; A. Plaud; S. Roux; A. Pierret; M. Rosticher; K. Watanabe; T. Taniguchi; S. Buil; X. Quélin; J. Barjon; J.-P. Hermier; A. Delteil, "*Position-controlled quantum emitters with reproducible emission wavelength in hexagonal boron nitride*" *Nat. Commun.* 12, 3779 (2021)
6. M. Atatüre; D. Englund; N. Vamivakas; S.-Y. Lee; J. Wrachtrup, "*Material platforms for spin-based photonic quantum technologies*" *Nature Reviews Materials* 3, 38-51 (2018)
7. D. D. Awschalom; R. Hanson; J. Wrachtrup; B. B. Zhou, "*Quantum technologies with optically interfaced solid-state spins*" *Nature Photonics* 12, 516-527 (2018)
8. H. L. Stern; Q. Gu; J. Jarman; S. Eizagirre Barker; N. Mendelson; D. Chugh; S. Schott; H. H. Tan; H. Siringhaus; I. Aharonovich; M. Atatüre, "*Room-temperature optically detected magnetic resonance of single defects in hexagonal boron nitride*" *Nat Commun* 13, 618 (2022)
9. N. Mendelson; D. Chugh; J. R. Reimers; T. S. Cheng; A. Gottscholl; H. Long; C. J. Mellor; A. Zettl; V. Dyakonov; P. H. Beton, "*Identifying carbon as the source of visible single-photon emission from hexagonal boron nitride*" *Nature materials* 20, 321-328 (2021)
10. N. Chejanovsky; A. Mukherjee; J. Geng; Y. C. Chen; Y. Kim; A. Denisenko; A. Finkler; T. Taniguchi; K. Watanabe; D. B. R. Dasari; P. Auburger; A. Gali; J. H. Smet; J. Wrachtrup, "*Single-spin resonance in a van der Waals embedded paramagnetic defect*" *Nat Mater* 20, 1079-1084 (2021)
11. A. Gottscholl; M. Kianinia; V. Soltamov; S. Orlinskii; G. Mamin; C. Bradac; C. Kasper; K. Krambrock; A. Sperlich; M. Toth; I. Aharonovich; V. Dyakonov, "*Initialization and read-out of intrinsic spin defects in a van der Waals crystal at room temperature*" *Nat Mater* 19, 540-545 (2020)
12. X. Gao; B. Jiang; A. E. Llacsahuanga Allcca; K. Shen; M. A. Sadi; A. B. Solanki; P. Ju; Z. Xu; P. Upadhyaya; Y. P. Chen; S. A. Bhawe; T. Li, "*High-Contrast Plasmonic-Enhanced Shallow Spin Defects in Hexagonal Boron Nitride for Quantum Sensing*" *Nano Lett* 21, 7708-7714 (2021)

13. N.-J. Guo; W. Liu; Z.-P. Li; Y.-Z. Yang; S. Yu; Y. Meng; Z.-A. Wang; X.-D. Zeng; F.-F. Yan; Q. Li; J.-F. Wang; J.-S. Xu; Y.-T. Wang; J.-S. Tang; C.-F. Li; G.-C. Guo, "Generation of Spin Defects by Ion Implantation in Hexagonal Boron Nitride" ACS Omega 7, 1733-1739 (2022)
14. M. Kianinia; S. White; J. E. Fröch; C. Bradac; I. Aharonovich, "Generation of Spin Defects in Hexagonal Boron Nitride" ACS Photonics 7, 2147-2152 (2020)
15. V. Ivády; G. Barcza; G. Thiering; S. Li; H. Hamdi; J.-P. Chou; Ö. Legeza; A. Gali, "Ab initio theory of the negatively charged boron vacancy qubit in hexagonal boron nitride" npj Computational Materials 6, 41 (2020)
16. A. Gottscholl; M. Diez; V. Soltamov; C. Kasper; A. Sperlich; M. Kianinia; C. Bradac; I. Aharonovich; V. Dyakonov, "Room temperature coherent control of spin defects in hexagonal boron nitride" Sci Adv 7, eabf3630 (2021)
17. A. Gottscholl; M. Diez; V. Soltamov; C. Kasper; D. Krauße; A. Sperlich; M. Kianinia; C. Bradac; I. Aharonovich; V. Dyakonov, "Spin defects in hBN as promising temperature, pressure and magnetic field quantum sensors" Nature Communications 12, 1-8 (2021)
18. D. Curie; J. T. Krogel; L. Cavar; A. Solanki; P. Upadhyaya; T. Li; Y.-Y. Pai; M. Chilcote; V. Iyer; A. Puretzky, "Correlative nanoscale imaging of strained hBN spin defects" arXiv preprint arXiv:2203.10075, (2022)
19. P. Auburger; A. Gali, "Towards ab initio identification of paramagnetic substitutional carbon defects in hexagonal boron nitride acting as quantum bits" Phys. Rev. B 104, 075410 (2021)
20. T. Yang; N. Mendelson; C. Li; A. Gottscholl; J. Scott; M. Kianinia; V. Dyakonov; M. Toth; I. Aharonovich, "Spin defects in hexagonal boron nitride for strain sensing on nanopillar arrays" Nanoscale 14, 5239-5244 (2022)
21. C. Qian; V. Villafañe; M. Schalk; G. V. Astakhov; U. Kentsch; M. Helm; P. Soubelet; N. P. Wilson; R. Rizzato; S. Mohr, "Unveiling the Zero-Phonon Line of the Boron Vacancy Center by Cavity Enhanced Emission" arXiv preprint arXiv:2202.10980, (2022)
22. S. Baber; R. N. E. Malein; P. Khatri; P. S. Keatley; S. Guo; F. Withers; A. J. Ramsay; I. J. Luxmoore, "Excited State Spectroscopy of Boron Vacancy Defects in Hexagonal Boron Nitride Using Time-Resolved Optically Detected Magnetic Resonance" Nano Lett. 22, 461-467 (2022)
23. P. Yu; H. Sun; M. Wang; T. Zhang; X. Ye; J. Zhou; H. Liu; C.-J. Wang; F. Shi; Y. Wang; J. Du, "Excited-State Spectroscopy of Spin Defects in Hexagonal Boron Nitride" Nano Lett., (2022)
24. N. Mathur; A. mukherjee; X. gao; j. luo; B. A. mccullian; T. Li; A. N. Vamivakas; G. D. Fuchs, "Excited-state spin-resonance spectroscopy of VB defect centers in hexagonal boron nitride" <https://arxiv.org/abs/2111.10855>, (2021)
25. J. E. Froch; L. P. Spencer; M. Kianinia; D. D. Totonjian; M. Nguyen; A. Gottscholl; V. Dyakonov; M. Toth; S. Kim; I. Aharonovich, "Coupling Spin Defects in Hexagonal Boron Nitride to Monolithic Bullseye Cavities" Nano Lett 21, 6549-6555 (2021)
26. N. Mendelson; R. Ritika; M. Kianinia; J. Scott; S. Kim; J. E. Froch; C. Gazzana; M. Westerhausen; L. Xiao; S. S. Mohajerani; S. Strauf; M. Toth; I. Aharonovich; Z. Q. Xu, "Coupling Spin Defects in a Layered Material to Nanoscale Plasmonic Cavities" Adv Mater 34, e2106046 (2022)
27. R. Khelifa; P. Back; N. Flory; S. Nashashibi; K. Malchow; T. Taniguchi; K. Watanabe; A. Jain; L. Novotny, "Coupling Interlayer Excitons to Whispering Gallery Modes in van der Waals Heterostructures" Nano Lett 20, 6155-6161 (2020)
28. Y. Ye; Z. J. Wong; X. Lu; X. Ni; H. Zhu; X. Chen; Y. Wang; X. Zhang, "Monolayer excitonic laser" Nature Photonics 9, 733-737 (2015)
29. L. Wang; X. Zhou; S. Yang; G. Huang; Y. Mei, "2D-material-integrated whispering-gallery-mode microcavity" Photonics Research 7, 905-916 (2019)

30. A. Das; D. J. Lee; P. K. Shandilya; S. Kim; G. Kang; D. P. Lake; B. Behera; D. Sukachev; I. Aharonovich; J.-H. Lee, "*Demonstration of hybrid high-Q hexagonal boron nitride microresonators*" ACS Photonics 8, 3027-3033 (2021)
31. A. Butcher; X. Guo; R. Shreiner; N. Deegan; K. Hao; P. J. Duda III; D. D. Awschalom; F. J. Heremans; A. A. High, "*High-Q nanophotonic resonators on diamond membranes using templated atomic layer deposition of TiO₂*" Nano Letters 20, 4603-4609 (2020)
32. J. T. Choy; J. D. Bradley; P. B. Deotare; I. B. Burgess; C. C. Evans; E. Mazur; M. Lončar, "*Integrated TiO₂ resonators for visible photonics*" Optics letters 37, 539-541 (2012)
33. C. C. Evans; C. Liu; J. Suntivich, "*TiO₂ nanophotonic sensors for efficient integrated evanescent Raman spectroscopy*" Acs Photonics 3, 1662-1669 (2016)
34. F. Qiu; A. M. Spring; S. Yokoyama, "*Athermal and high-Q hybrid TiO₂-Si₃N₄ ring resonator via an etching-free fabrication technique*" ACS Photonics 2, 405-409 (2015)
35. N. V. Proscia; H. Jayakumar; X. Ge; G. Lopez-Morales; Z. Shotan; W. Zhou; C. A. Meriles; V. M. Menon, "*Microcavity-coupled emitters in hexagonal boron nitride*" Nanophotonics 9, 2937-2944 (2020)
36. J. D. Bradley; C. C. Evans; J. T. Choy; O. Reshef; P. B. Deotare; F. Parsy; K. C. Phillips; M. Lončar; E. Mazur, "*Submicrometer-wide amorphous and polycrystalline anatase TiO₂ waveguides for microphotonic devices*" Optics express 20, 23821-23831 (2012)