



Cite this: *J. Mater. Chem. B*, 2015, **3**, 4947

Received 23rd January 2015,  
Accepted 23rd February 2015

DOI: 10.1039/c5tb00173k

[www.rsc.org/MaterialsB](http://www.rsc.org/MaterialsB)

## Toward organic electronics with properties inspired by biological tissue

Timothy F. O'Connor, Kirtana M. Rajan, Adam D. Printz and Darren J. Lipomi\*

The carbon framework common to both organic semiconductors and biological structures suggests that these two classes of materials should be easily integrated. Substantial work, however, will be required to endow synthetic electroactive materials with properties resembling those of biological tissue, which exhibits extreme elasticity, biodegradability, and the capacity for self-repair. This Highlight reviews successful integration of organic semiconductor devices with biological systems, for example, in wearable and implantable health monitors and prosthetic devices. It then points to recent work in the areas of molecularly stretchable electronics, whole devices that can degrade under physiological conditions, and conjugated polymers capable of self-healing, which together suggest the possibility of a future in which organic electronics and biological tissue can interact seamlessly.

### Tissue-like properties from organic semiconductors

The vision of organic electronics includes inexpensive,<sup>1</sup> flexible and stretchable<sup>2</sup> devices that can be fabricated by roll-to-roll printing<sup>3</sup> and integrated with moving and non-planar parts of machines,<sup>4</sup> buildings and windows,<sup>5,6</sup> and the human body.<sup>7,8</sup> Biomedical devices are regarded as an especially promising application of organic semiconductors—*i.e.*, “organic bioelectronics”<sup>9,10</sup>—because of the perceived similarity of “soft” conjugated polymers and biomaterials. Despite the carbon framework common to both organic semiconductors and biological macromolecules,  $\pi$ -conjugated molecules have few properties in common with biological tissue.<sup>2,11</sup> Conjugated polymers can be stiff (tensile modulus *ca.* 1 GPa)<sup>12–14</sup> and small-molecule semiconductors have a brittleness characteristic of all van der Waals solids (crack-onset strain *ca.* 1%).<sup>12</sup> In contrast, biological tissue is elastic (tensile modulus  $\sim$ 10–100 kPa) and tough.<sup>15</sup> Moreover, two additional properties of biological tissue—biodegradability<sup>16</sup> and the capacity for self-repair<sup>17</sup>—would be desirable for biologically integrated electronics, but are not generally possessed by organic semiconductors.

The best performance so far achieved for wearable and implantable electronic devices has been—despite the inherent flexibility of organic thin films—based on composite structures of high-performance *inorganic* devices embedded in (or upon) elastomeric supports.<sup>18–21</sup> This approach, exemplified by the work of Rogers and others,<sup>18–23</sup> uses (as one strategy) serpentine interconnects that absorb tensile strain by local bending and twisting.<sup>18</sup> The active components can be located at areas of

increased thickness<sup>20</sup> so that strain is channelled into the interconnects. These devices can also form the basis of “transient electronics”,<sup>24</sup> in which the active components, the interconnects, and the matrices can dissolve in programmable timescales under physiological conditions into harmless byproducts.<sup>25</sup>

Despite the success of systems comprising inorganic components embedded in organic matrices, further capabilities would be accessed by a complementary approach that used solely organic components.<sup>26–28</sup> That is, organics have characteristics not easily replicated in inorganic semiconductors.<sup>2</sup> These characteristics include solution-based printing,<sup>29</sup> facile tunability of optical, electronic, and mechanical properties by synthesis,<sup>30</sup> multimodal signal transduction, chemical selectivity,<sup>31</sup> programmable degradation,<sup>32</sup> and low embodied energy.<sup>2</sup> The challenges of making organic electronics softer and more responsive to chemical and mechanical stimuli are not addressed in a research strategy whose principal goal is to replicate the high semiconducting performance of inorganic materials, but are addressed in a strategy in which the advantages unique to organics are exploited to the maximum extent possible.

This paper highlights recent progress in areas of research within organic electronics that are designed to make the materials more like living tissue (interpreted broadly). The work covered may have been motivated by purposes distinct from the present goal of increasing the tissue-like behaviour of organic semiconductors (for example, making organic solar cells more resistant to mechanical failure is tantamount to making them tougher and more elastic<sup>11</sup>) but the knowledge gained is independent of the motivation. We first highlight a few applications of stretchable organic electronics in electronic skin or biomedical applications, and then cover work whose goal is to increase the (1) elasticity, (2) biodegradability, and (3)

Department of NanoEngineering, University of California, San Diego, 9500 Gilman Drive, Mail Code 0448, La Jolla, CA, 92093-0448, USA. E-mail: [dlipomi@ucsd.edu](mailto:dlipomi@ucsd.edu)



self-repair of organic electronic materials and devices. Because of the shortness of this Highlight, and because of our expertise, we restrict our focus to the above properties 1–3 of thin-film organic semiconductors and their devices. We therefore must leave discussion of composite materials such as conductive hydrogels,<sup>33</sup> important issues of polymer–cell interactions,<sup>34</sup> and electrodes and electrochemical transistors based on poly-(3,4-ethylenedioxythiophene) (PEDOT),<sup>10</sup> to the outstanding work of experts in those fields.<sup>34–37</sup>


## Stretchable and skin-like organic devices

The first requirement for devices to integrate with soft, biological structures is “stretchability”. This term implies biaxial elasticity, plasticity, or both. Systems exhibiting only flexibility—*i.e.*, a thin film of nearly any material—can conform to cylindrical or conical shapes, while systems exhibiting stretchability are capable of reversible tensile deformations and bonding to complex three-dimensional surfaces.<sup>41,42</sup> Most approaches to stretchable systems fall into one of two categories: random or deterministic composites.<sup>18</sup> The first type of approach takes randomly dispersed structures and couples them to an elastic support or matrix.<sup>38,43,44</sup> Strain applied to the bulk structure is thus accommodated by the elastic matrix, and the conducting or semiconducting properties remain intact so long as the embedded structures remain percolated. This approach has been used successfully for transparent conductive electrodes based on silver nanowires,<sup>45</sup> carbon nanotubes (Fig. 1a and b),<sup>38,44</sup> and poly(3-hexylthiophene) (P3HT) nanowires<sup>43</sup> and scaffolds for tissue engineering.<sup>46</sup> The second approach, as mentioned previously, uses deterministic patterns of rigid active components connected by wavy or otherwise stretchable interconnects.<sup>18</sup> This “island-bridge” approach is amenable to both organic<sup>47</sup> and inorganic<sup>21</sup> circuits.<sup>48</sup>

Conformability to complex biological surfaces can be achieved to some extent by using extremely thin substrates, even if they are not stretchable. For example, by building organic electronic devices on polyester foils less than 2  $\mu\text{m}$  thick, Someya, Bauer, and coworkers have produced wearable biomedical devices (Fig. 1c)<sup>26</sup> and solar cells with the highest ratio of power to mass reported (organic or of any type).<sup>49</sup> The Bao laboratory has used thin substrates and microstructured compressible dielectric layers to produce organic transistors capable of measuring the pressure waveform from the radial artery in the wrist (Fig. 1d).<sup>39</sup> A hybrid inorganic-organic material consisting of nickel nanoparticles embedded in a stretchable, self-healing polymer can sense pressure (Fig. 1e) as a piezoresistor.<sup>40</sup> Organic photovoltaic cells are also thin and lightweight enough to be implanted into the vertebrate eye (in this case, a rat, Fig. 1f) toward the long-term goal of restoring vision in the blind.<sup>7</sup>


## Toward intrinsically—“molecularly”—stretchable electronics


An emerging, third approach for generating stretchable electronic systems is perhaps the one which is least explored. That is,

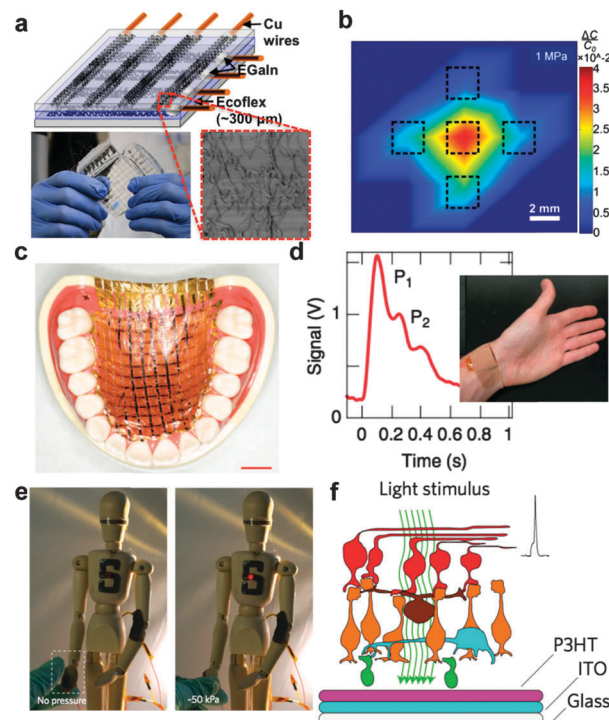

**Fig. 1** Overview of biological and biomedical applications of organic electronics. (a) Random composites, such as bundles of buckled carbon nanotubes, can be used to form stretchable, transparent, skin-like sensors of pressure and strain. By virtue of the compressibility, these devices exhibit low cross-talk between adjacent pixels (b). Reproduced with permission from ref. 38 Copyright 2011 Nature Publishing Group. (c) "Imperceptible" organic electronic devices built on ultrathin ( $<2\ \mu\text{m}$ ) polyester foils can easily conform to biological structures exhibiting complex topography. Reproduced with permission from ref. 26 Copyright 2013 Nature Publishing Group. (d) An organic thin-film transistor bearing a compressible dielectric layer can transduce the mechanical deformation of the radial artery into the pulse waveform. Reproduced with permission from ref. 39 Copyright 2013 Nature Publishing Group. (e) Self-healing elastic materials comprising metallic nanoparticles can exhibit a piezoresistive effect. Reproduced with permission from ref. 40 Copyright 2012 Nature Publishing Group. (f) Organic photodiodes placed in the vertebrate eye could form the basis of an artificial retina. Reproduced with permission from ref. 7 Copyright 2011 Nature Publishing Group.

designing and synthesizing organic conductors and semiconductors that—by virtue of their molecular structure or solid-state microstructure—are also highly elastic and ductile.<sup>2</sup> This approach, which we have nicknamed “molecularly stretchable electronics”, does not in principle rely on elastic matrices or substrates to supply the restoring force.<sup>2</sup> This strategy has been used by our laboratory<sup>13,42,50–53</sup> as well as those of Pei<sup>44,45,54–56</sup> and Bao,<sup>57–59</sup> for example, to generate stretchable piezoresistors capable of detecting human motion (Fig. 2a–c),<sup>51</sup> stretchable light-emitting devices (Fig. 2d),<sup>45</sup> and biaxially deformable solar cells that can be bonded conformally to hemispherical surfaces.<sup>42</sup> Our group has attempted to characterize the mechanical properties of  $\pi$ -conjugated polymers to understand the molecular and microstructural parameters that allow mechanical compliance and semiconducting behavior to coexist.<sup>50</sup> In particular, we have employed a technique<sup>60</sup> based on the strain-induced instability

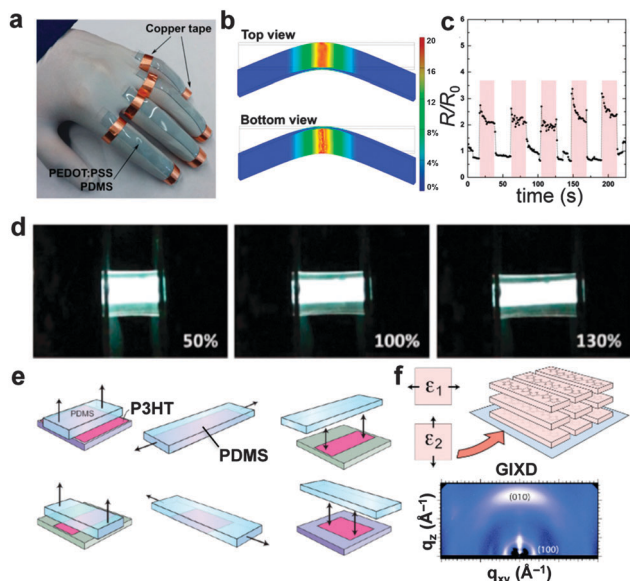

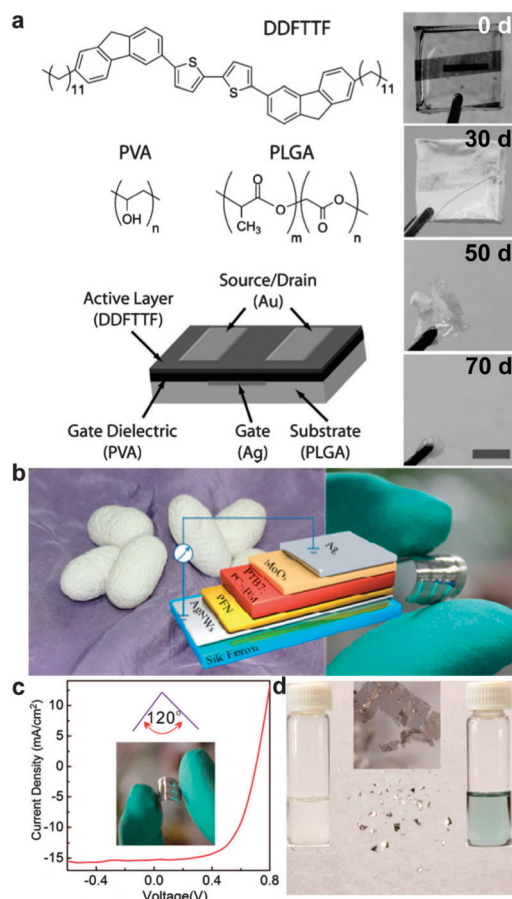

**Fig. 3** Biodegradable organic electronics. (a) Organic thin-film transistors fabricated on a biodegradable substrate decompose into byproducts that are not believed to be harmful over a period of 70 d in a solution mimicking the physiological environment. Reproduced with permission from ref. 16 Copyright 2010, Wiley-VCH Verlag, GmbH & Co. KGaA. (b) Organic solar cells fabricated on silk fibroin substrates exhibit reversible flexibility (c) and facile degradation (d). Reproduced with permission from ref. 72 Copyright 2015 American Chemical Society.

non-covalent interactions and by covalent bonds. Hydrogen bonding<sup>77,78</sup> and Diels–Alder cycloadditions<sup>55,79</sup> have been explored for these purposes. A prerequisite to both types of repair is a sufficient level of mobility of polymer chains to allow intermixing of polymer chains across the fractured interface.<sup>80,81</sup> This condition is generally satisfied in poly(3-alkylthiophenes) when the alkyl chain is heptyl or longer, for which the glass transition is significantly below room temperature.<sup>50</sup> We hypothesize that unsaturated van der Waals bonds and increased mobility of polymer chains at fractured interfaces, however, may produce skin-depth effects<sup>82</sup> that facilitate self-healing even in glassy samples.

The self-healing efficiency for polymers intended for structural applications is typically expressed as a fraction of a mechanical property (e.g., strength) of the healed material relative to that of the pristine material.<sup>76</sup> For self-healing electronic materials, however, an electronic self-healing efficiency must be used alongside a conventional one based on mechanical properties.<sup>40</sup> Recent research from the laboratory of Kahn and coworkers has shown

that conventional conjugated polymers may already exhibit the capacity for self-repair without any specialized chemical functionality.<sup>83,84</sup> In particular, laminated interfaces of P3HT showed charge-transport properties that were similar to those of pristine layers of the same thickness.<sup>83,84</sup>

## Conclusions

The design of biologically integrated electronics seems to be a problem for which organic semiconductors are an ideal solution. Despite the potential amenability of organic electronic materials to biological systems, significant work remains to be done to integrate materials from the electronic and biological realms in a way that is seamless. The strategy advocated in this Highlight is the molecular engineering of  $\pi$ -conjugated materials to have properties inspired by biological tissue: extreme elasticity, biodegradability, and the capacity for self-repair. While substantial progress toward this goal has already been made, a concerted, deliberate effort from chemists, materials scientists, engineers, biologists, and the medical community will be required to extract the maximum possible benefit from the versatility of organic semiconducting materials.

## Acknowledgements

This work was supported by startup funds from the University of California, San Diego. Additional support was provided by Air Force Office of Scientific Research (AFOSR) Young Investigator Program, Grant FA9550-13-1-0156. T. F. O. acknowledges support from the National Defense Science and Engineering Graduate Fellowship Program (NDSEG) sponsored by the Office of Naval Research (ONR).

## Notes and references

- 1 N. Espinosa, M. Hosel, D. Angmo and F. C. Krebs, *Energy Environ. Sci.*, 2012, **5**, 5117–5132.
- 2 S. Savagatrup, A. D. Printz, T. F. O'Connor, A. V. Zaretski and D. J. Lipomi, *Chem. Mater.*, 2014, **26**, 3028–3041.
- 3 K. Fukuda, Y. Takeda, Y. Yoshimura, R. Shiwaku, L. T. Tran, T. Sekine, M. Mizukami, D. Kumaki and S. Tokito, *Nat. Commun.*, 2014, **5**, 4147.
- 4 T. Someya, Y. Kato, T. Sekitani, S. Iba, Y. Noguchi, Y. Murase, H. Kawaguchi and T. Sakurai, *Proc. Natl. Acad. Sci. U. S. A.*, 2005, **102**, 12321–12325.
- 5 J. Y. Lee, S. T. Connor, Y. Cui and P. Peumans, *Nano Lett.*, 2010, **10**, 1276.
- 6 J. Jensen, M. Hosel, I. Kim, J. S. Yu, J. D. Jo and F. C. Krebs, *Adv. Funct. Mater.*, 2013, **24**, 1228–1233.
- 7 D. Ghezzi, M. R. Antognazza, R. Maccarone, S. Bellani, E. Lanzarini, N. Martino, M. Mete, G. Pertile, S. Bisti, G. Lanzani and F. Benfanati, *Nat. Photonics*, 2013, **7**, 400–406.
- 8 J. Reeder, M. Kaltenbrunner, T. Ware, D. Arreaga-Salas, A. Avendano-Bolivar, T. Yokota, Y. Inoue, M. Sekino,



- W. Voit, T. Sekitani and T. Someya, *Adv. Mater.*, 2014, **26**, 4967–4973.
- 9 C. M. Lochner, Y. Khan, A. Pierre and A. C. Aria, *Nat. Commun.*, 2014, **5**, 5745.
- 10 J. Rivnay, R. M. Owens and G. C. Malliaras, *Chem. Mater.*, 2014, **26**, 679–685.
- 11 S. Savagatrup, A. D. Printz, T. F. O'Connor, A. V. Zaretski, D. Rodriguez, E. J. Sawyer, K. M. Rajan, R. I. Acosta, S. E. Root and D. J. Lipomi, *Energy Environ. Sci.*, 2015, **8**, 55–80.
- 12 D. Takh, H. H. Lee and D. Y. Khang, *Macromolecules*, 2009, **42**, 7079–7083.
- 13 S. Savagatrup, A. S. Makaram, D. J. Burke and D. J. Lipomi, *Adv. Funct. Mater.*, 2014, **24**, 1169–1181.
- 14 B. O'Connor, E. P. Chan, C. Chan, B. R. Conrad, L. J. Richter, R. J. Kline, M. Heeney, I. McCulloch, C. L. Soles and D. M. DeLongchamp, *ACS Nano*, 2010, **4**, 7538–7544.
- 15 A. N. Annaidh, M. Ottenio, K. Bruyer, M. Destrade and M. D. Gilchrist, *IFMBE Proc.*, 2010, **31**, 1000–1003.
- 16 C. J. Bettinger and Z. N. Bao, *Adv. Mater.*, 2010, **22**, 651–655.
- 17 F. Herbst, D. Dohler, P. Michael and W. H. Binder, *Macromol. Rapid Commun.*, 2013, **24**, 203–220.
- 18 J. A. Fan, W. H. Yeo, Y. W. Su, Y. Hattori, W. Lee, S. Y. Jung, Y. H. Zhang, Z. J. Liu, H. Y. Cheng, L. Falgout, M. Bajema, T. Coleman, D. Gregoire, R. J. Larsen, Y. G. Huang and J. A. Rogers, *Nat. Commun.*, 2014, **5**, 3266.
- 19 D. H. Kim, N. Lu, Y. G. Huang and J. A. Rogers, *MRS Bull.*, 2012, **37**, 226–235.
- 20 J. Lee, J. A. Wu, M. X. Shi, J. Yoon, S. I. Park, M. Li, Z. J. Liu, Y. G. Huang and J. A. Rogers, *Adv. Mater.*, 2011, **23**, 986–991.
- 21 D. H. Kim, N. S. Lu, R. Ma, Y. S. Kim, R. H. Kim, S. D. Wang, J. Wu, S. M. Won, H. Tao, A. Islam, K. J. Yu, T. I. Kim, R. Chowdhury, M. Ying, L. H. Xu, M. Li, H. J. Chung, H. Keum, M. McCormick, P. Liu, Y. W. Zhang, F. G. Omenetto, Y. Huang, T. Coleman and J. A. Rogers, *Science*, 2011, **333**, 838–843.
- 22 S. Wagner and S. Bauer, *MRS Bull.*, 2012, **37**, 207–213.
- 23 S. P. Lacour, D. Chan, S. Wagner, T. Li and Z. Suo, *Appl. Phys. Lett.*, 2006, **88**, 204103.
- 24 S. W. Hwang, H. Tao, D. H. Kim, H. Y. Cheng, J. K. Song, E. Rill, M. A. Brenckle, B. Panilaitis, S. M. Won, Y. S. Kim, Y. M. Song, K. J. Yu, A. Ameen, R. Li, Y. W. Su, M. M. Yang, D. L. Kaplan, M. R. Zakin, M. J. Slepian, Y. G. Huang, F. G. Omenetto and J. A. Rogers, *Science*, 2012, **337**, 1640–1644.
- 25 H. L. Hernandez, S.-K. Kang, O. P. Lee, S. W. Hwang, J. A. Kaitz, B. Inci, C. W. Park, S. J. Chung, N. R. Sottos, J. S. Moore, J. A. Rogers and S. R. White, *Adv. Mater.*, 2014, **26**, 7637–7642.
- 26 M. Kaltenbrunner, T. Sekitani, J. Reeder, T. Yokota, K. Kuribara, T. Tokuhara, M. Drack, R. Schwodiauer, I. Graz, S. Bauer-Gogonea, S. Bauer and T. Someya, *Nature*, 2013, **499**, 458–463.
- 27 T. Sekitani and T. Someya, *MRS Bull.*, 2012, **37**, 236–245.
- 28 T. Sekitani, U. Zschieschang, H. Klauk and T. Someya, *Nat. Mater.*, 2010, **9**, 1015–1022.
- 29 F. C. Krebs, N. Espinosa, M. Hosel, R. R. Sondergaard and M. Jorgensen, *Adv. Mater.*, 2014, **26**, 29–39.
- 30 V. Benfenati, N. Martino, M. R. Antognazza, A. Pistone, S. Toffanin, S. Ferroni, G. Lanzani and M. Muccini, *Adv. Healthcare Mater.*, 2014, **3**, 392–399.
- 31 W. G. Huang, K. Besar, R. LeCover, P. Dullloor, J. Sinha, J. F. M. Hardigree, C. Pick, J. Swavola, A. D. Everett, J. Frechette, M. Bevan and H. E. Katz, *Chem. Sci.*, 2014, **5**, 416–426.
- 32 A. Campana, T. Cramer, D. T. Simon, M. Berggren and F. Biscarini, *Adv. Mater.*, 2014, **26**, 3874–3878.
- 33 C. Keplinger, J. Y. Sun, C. C. Foo, P. Rothemund, G. M. Whitesides and Z. Suo, *Science*, 2013, **341**, 984–987.
- 34 M. R. Abidian, J. M. Corey, D. R. Kipke and D. C. Martin, *Small*, 2010, **6**, 421–429.
- 35 P. Leleux, J. Rivnay, T. Lonjaret, J. M. Badier, C. Benar, T. Herve, P. Chauvel and G. C. Malliaras, *Adv. Healthcare Mater.*, 2015, **4**, 142–147.
- 36 E. Stavrinou, O. Winther-Jensen, B. S. Shekibi, V. Armel, J. Rivnay, E. Ismailova, S. Sanaur, G. C. Malliaras and B. Winther-Jensen, *Phys. Chem. Chem. Phys.*, 2014, **16**, 2275–2279.
- 37 N. Bhagwat, K. L. Kiick and D. C. Martin, *J. Mater. Res.*, 2014, **29**, 2835–2844.
- 38 D. J. Lipomi, M. Vosgueritchian, B. C.-K. Tee, C. H. Fox, J. A. Lee and Z. N. Bao, *Nat. Nanotechnol.*, 2011, **6**, 788–792.
- 39 G. Schwartz, B. C.-K. Tee, J. G. Mei, A. L. Appleton, D. H. Kim, H. L. Wang and Z. N. Bao, *Nat. Commun.*, 2013, **4**, 1859.
- 40 B. C.-K. Tee, C. Wang, R. Allen and Z. N. Bao, *Nat. Nanotechnol.*, 2012, **7**, 825–832.
- 41 H. C. Ko, M. P. Stoykovich, J. Z. Song, V. Malyarchuk, W. M. Choi, C. J. Yu, J. B. Geddes, J. L. Xiao, S. D. Wang, Y. G. Huang and J. A. Rogers, *Nature*, 2008, **454**, 748–753.
- 42 T. F. O'Connor, A. V. Zaretski, B. A. Shiravi, S. Savagatrup, A. D. Printz, M. I. Diaz and D. J. Lipomi, *Energy Environ. Sci.*, 2014, **7**, 370–378.
- 43 M. Shin, J. H. Song, G. H. Lim, B. Lim, J. J. Park and U. Jeong, *Adv. Mater.*, 2014, **26**, 3706–3711.
- 44 Z. B. Yu, X. F. Niu, Z. Liu and Q. B. Pei, *Adv. Mater.*, 2011, **23**, 3989–3994.
- 45 J. J. Liang, L. Li, X. F. Niu, Z. B. Yu and Q. B. Pei, *Nat. Photonics*, 2013, **7**, 817–824.
- 46 M. Simonet, N. Stingelin, J. G. F. Wismans, C. W. J. Oomens, A. Driessen-Mol and F. P. T. Baaijens, *J. Mater. Chem. B*, 2014, **2**, 305–313.
- 47 T. Sekitani, H. Nakajima, H. Maeda, T. Fukushima, T. Aida, K. Hata and T. Someya, *Nat. Mater.*, 2009, **8**, 494–499.
- 48 S. Bauer, S. Bauer-Gogonea, I. Graz, M. Kaltenbrunner, C. Keplinger and R. Schwodiauer, *Adv. Mater.*, 2014, **26**, 149–162.
- 49 M. Kaltenbrunner, M. S. White, E. D. Glowacki, T. Sekitani, T. Someya, N. S. Sariciftci and S. Bauer, *Nat. Commun.*, 2012, **3**, 770.
- 50 S. Savagatrup, A. D. Printz, D. Rodriguez and D. J. Lipomi, *Macromolecules*, 2014, **47**, 1981–1992.



- 51 S. Savagatrup, E. Chan, S. Renteria-Garcia, A. D. Printz, A. V. Zaretski, T. F. O'Connor, D. Rodriguez, E. Valle and D. J. Lipomi, *Adv. Funct. Mater.*, 2015, **25**, 427–436.
- 52 A. D. Printz, S. Savagatrup, D. Rodriguez, T. F. O'Connor and D. J. Lipomi, *Sol. Energy Mater. Sol. Cells*, 2015, **134**, 64–72.
- 53 A. D. Printz, S. Savagatrup, D. J. Burke, T. Purdy and D. J. Lipomi, *RSC Adv.*, 2014, **4**, 13635–13643.
- 54 J. Liang, L. Li, K. Tong, Z. Ren, W. Hu, X. F. Niu, Y. S. Chen and Q. B. Pei, *ACS Nano*, 2014, **8**, 1590–1600.
- 55 J. P. Li, J. Liang, L. Li, F. B. Ren, W. Hu, J. Li, S. H. Qi and Q. B. Pei, *ACS Nano*, 2014, **8**, 12874–12882.
- 56 Z. B. Yu, Q. W. Zhang, L. Li, Q. Chen, X. F. Niu, J. Liu and Q. B. Pei, *Adv. Mater.*, 2011, **23**, 664–668.
- 57 H. C. Wu, S. J. Benight, A. Chortos, W. Y. Lee, J. G. Mei, J. W. F. To, C. Lu, M. Q. He, J. B.-H. Tok, W. C. Chen and Z. N. Bao, *Chem. Mater.*, 2014, **26**, 4544–4551.
- 58 A. Chortos, J. Lim, J. W. F. To, M. Vosgueritchian, T. J. Dusseault, T. H. Kim, S. W. Hwang and Z. N. Bao, *Adv. Mater.*, 2014, **26**, 4253–4259.
- 59 D. J. Lipomi, H. Chong, M. Vosgueritchian, J. G. Mei and Z. N. Bao, *Sol. Energy Mater. Sol. Cells*, 2012, **107**, 355–365.
- 60 C. M. Stafford, C. Harrison, K. L. Beers, A. Karim, E. J. Amis, M. R. Vanlandingham, H. C. Kim, W. Volksen, R. D. Miller and E. E. Simonyi, *Nat. Mater.*, 2004, **3**, 545–550.
- 61 N. Bowden, S. Brittain, A. G. Evans, J. W. Hutchinson and G. M. Whitesides, *Nature*, 1998, **393**, 146–149.
- 62 J. T. Seitz, *J. Appl. Polym. Sci.*, 1993, **49**, 1331–1351.
- 63 D. Gargi, R. J. Kline, D. M. DeLongchamp, D. A. Fischer, M. F. Toney and B. T. O'Connor, *J. Phys. Chem. C*, 2013, **117**, 17421–17428.
- 64 Y. Cao, P. A. Smith and A. J. Heeger, *Synth. Met.*, 1991, **41–43**, 181–184.
- 65 Y. Cao, P. Smith and A. J. Heeger, *Polymer*, 1991, **32**, 1210–1218.
- 66 B. O'Connor, R. J. Kline, B. R. Conrad, L. J. Richter, D. Gundlach, M. F. Toney and D. M. DeLongchamp, *Adv. Funct. Mater.*, 2011, **21**, 3697–3705.
- 67 C. J. Bettinger, J. P. Bruggeman, A. Misra, J. T. Borenstein and R. Langer, *Biomaterials*, 2009, **30**, 3050–3057.
- 68 C. L. E. Nijst, J. P. Bruggeman, J. M. Karp, L. Ferreira, A. Zumbuehl, C. J. Bettinger and R. Langer, *Biomacromolecules*, 2007, **8**, 3067–3073.
- 69 M. Strange, D. Plackett, M. Kaasgaard and F. C. Krebs, *Sol. Energy Mater. Sol. Cells*, 2008, **92**, 805–813.
- 70 G. Mattana, D. Briand, A. Marette, A. V. Quintero and N. F. de Rooij, *Org. Electron.*, 2015, **17**, 77–86.
- 71 D. H. Kim, J. Viventi, J. J. Amsden, J. L. Xiao, L. Vigeland, Y. S. Kim, J. A. Blanco, B. Panilaitis, E. S. Frechette, D. Contreras, D. L. Kaplan, F. G. Omenetto, Y. G. Huang, K. C. Hwang, M. R. Zakin, B. Litt and J. A. Rogers, *Nat. Mater.*, 2010, **9**, 511–517.
- 72 Y. Q. Liu, N. Qi, T. Song, M. L. Jia, Z. H. Xia, Z. C. Yuan, W. Yuan, K.-Q. Zhang and B. Q. Sun, *ACS Appl. Mater. Interfaces*, 2014, **6**, 20670–20675.
- 73 M. Irimia-Vladu, E. D. Głowacki, P. A. Troshin, G. Schwabegger, L. Leonat, D. K. Susarova, O. Krystal, M. Ullah, Y. Kanbur, M. A. Bodea, V. F. Razumov, H. Sitter, S. Bauer and N. S. Sariciftci, *Adv. Mater.*, 2012, **24**, 375–380.
- 74 M. Irimia-Vladu, N. S. Sariciftci and S. Bauer, *J. Mater. Chem.*, 2011, **21**, 1350–1361.
- 75 M. Irimia-Vladu, P. A. Troshin, M. Reisinger, L. Shmygleva, Y. Kanbur, G. Schwabegger, M. Bodea, R. Schwödiauer, A. Mumyatov, J. W. Fergus, V. F. Razumov, H. Sitter, N. S. Sariciftci and S. Bauer, *Adv. Funct. Mater.*, 2010, **20**, 4069–4076.
- 76 E. B. Murphy and F. Wudl, *Prog. Polym. Sci.*, 2010, **35**, 223–251.
- 77 B. K. Ahn, D. W. Lee, J. N. Israelachvili and J. H. Waite, *Nat. Mater.*, 2014, **13**, 867–872.
- 78 A. Faghihnejad, K. E. Feldman, J. Yu, M. V. Tirrell, J. N. Israelachvili, C. J. Hawker, E. J. Kramer and H. B. Zeng, *Adv. Funct. Mater.*, 2014, **24**, 2322–2333.
- 79 N. B. Pramanik, G. B. Nando and N. K. Singha, *Polymer*, 2015, DOI: 10.1016/j.polymer.2015.01.023.
- 80 R. P. Wool and K. M. O'Connor, *J. Appl. Phys.*, 1981, **52**, 5953–5963.
- 81 S. J. Garcia, *Eur. Polym. J.*, 2014, **53**, 118–125.
- 82 C. M. Stafford, B. D. Vogt, C. Harrison, D. Julthongpiput and R. Huang, *Macromolecules*, 2006, **39**, 5095–5099.
- 83 A. L. Shu, A. Dai, H. Wang, Y. L. Loo and A. Kahn, *Org. Electron.*, 2013, **14**, 149–155.
- 84 A. Dai, Y. H. Zhou, A. L. Shu, S. K. Mohapatra, H. Wang, C. Fuentes-Hernandez, Y. D. Zhang, S. Barlow, Y. L. Loo, S. R. Marder, B. Kippelen and A. Kahn, *Adv. Funct. Mater.*, 2013, **24**, 2197–2204.

