


Showcasing research from Professor Su-II In's laboratory, Department of Energy Science & Engineering, DGIST (Daegu Gyeongbuk Institute of Science and Technology), Daegu, Republic of Korea.

Solar fuels: research and development strategies to accelerate photocatalytic CO₂ conversion into hydrocarbon fuels

Climate change is an urgent issue requiring global cooperation, which is caused by the increased emission of CO_2 from fossil fuels usages. Solar-to-fuel conversion is a promising strategy to reduce atmospheric CO_2 concentration and produce eco-friendly fuels. In this article, we accomplish a comprehensive review of photocatalytic CO_2 conversion. We offer fundamentals, challenges, and important features of photocatalysts as well as provide future avenues for photocatalytic CO_2 reduction. In addition, economic and commercial viability is given to realize technology in the near future.





Energy & Environmental Science



REVIEW

View Article Online



Cite this: Energy Environ. Sci., 2022, 15, 880

Received 1st September 2021, Accepted 8th November 2021

DOI: 10.1039/d1ee02714j

rsc.li/ees

Solar fuels: research and development strategies to accelerate photocatalytic CO2 conversion into hydrocarbon fuels

Eunhee Gong, (10) † Shahzad Ali, † Chaitanya B. Hiragond, † Hong Soo Kim, (10) † Niket S. Powar, Dongyun Kim, Hwapyong Kim and Su-Il In **

Photocatalytic production of solar fuels from CO₂ is a promising strategy for addressing global environmental problems and securing future energy supplies. Although extensive research has been conducted to date, numerous impediments to realizing efficient, selective, and stable CO2 reduction have yet to be overcome. This comprehensive review highlights the recent advances in CO2 photoreduction, including critical challenges such as light-harvesting, charge separation, and the activation of CO₂ molecules. We present promising strategies for enhancing the photocatalytic activities and discuss theoretical insights and equations for quantifying photocatalytic performance, which are expected to afford a fundamental understanding of CO_2 photoreduction. We then provide a thorough overview of both traditional photocatalysts such as metal oxides and state-of-the-art catalysts such as metal-organic frameworks and 2D materials, followed by a discussion of the origin of carbon in CO₂ photoreduction as a means to further understand the reaction mechanism. Finally, we discuss the economic viability of photocatalytic CO₂ reduction before concluding the review with proposed future research directions.

Broader context

Research into CO2 reduction has the potential to diminish our dependence on petroleum products and restrain global warming. Fossil fuels account for a large majority of global energy consumption, resulting in excessive emissions of CO2 and other harmful gases. Furthermore, the current global economy and human society are heavily reliant on fossil fuels. Thus, there is an urgent need to develop renewable energy resources to generate energy and chemicals. Photocatalytic CO2 reduction is one promising strategy for obtaining renewable energy and hydrocarbon fuels. However, we must first confront several challenges, such as limited light-harvesting and suboptimal photocatalytic activity. These challenges and potential solutions are the focus of the present review, alongside a discussion of our current theoretical understanding and consideration of the commercial/economic viability of CO2 photoreduction technology.

Department of Energy Science & Engineering, Daegu Gyeongbuk Institute of Science and Technology (DGIST), 333 Techno Jungang-daero, Hyeonpung-eup, Dalseong-gun, Daegu 42988, Republic of Korea. E-mail: insuil@dgist.ac.kr, faraday.in@gmail.com † These authors contributed equally to this work.



Eunhee Gong

Eunhee Gong received her BS degree in Fine Chemical Engineering from Chonnam National University, Republic of Korea, and her master's degree in Energy Science Engineering from DGIST, Republic of Korea. She is currently a PhD candidate under the supervision of Professor Su-Il In at DGIST. Her current research is focused on the development of nanostructured materials photocatalytic CO₂ conversion.



Shahzad Ali

Shahzad Ali received his BS and MS degrees in Chemical Engineering from COMSATS University Islamabad, Pakistan. He holds industrial and research experience related to power and renewable fuels and is currently a PhD candidate under the supervision of Professor Su-Il In at DGIST, Republic of Korea. His current research involves the development systems economical materials for photocatalytic CO₂ reduction.

1 Introduction

Global energy expenditure has skyrocketed in recent years, leading to the consumption of enormous amounts of fossil fuels such as coal, oil, and natural gas, which currently account for approximately 85% of primary energy supplies. Fossil fuel combustion is associated with the excessive emission of harmful gases (e.g., CO₂) that contribute to rising atmospheric temperatures, glacial melting, severe storms, ocean compositional changes, biodiversity loss, etc.2,3 Therefore, global warming and its severe negative impacts on the earth have emerged as hotly discussed topics in recent decades. Over the past few years, the global average atmospheric CO2 concentration has increased to over 410 ppm, which is approximately 45% higher than that prior to the Industrial Revolution. 4,5 According to the Intergovernmental Panel on Climate Change (IPCC), if this rate of CO2 emission continues, atmospheric CO₂ levels will reach 590 ppm by 2100.6 The IPCC proposed the goal of limiting the increase in global average temperature to within 1.5 °C of pre-industrial levels.^{7,8} Thus, significant efforts have been undertaken worldwide to reduce atmospheric CO₂ emissions, such as the well-known Paris

Agreement under the United Nations Framework Convention on Climate Change (UNFCCC), in which more than 190 countries affirmed their commitment to decreasing CO₂ emissions.^{4,7} There are three ways to control atmospheric CO₂: (i) lowering CO₂ emissions, (ii) capture and storage, and (iii) converting it to value-added chemicals. One promising strategy for reducing CO2 levels is using this waste product as a carbon feedstock to produce value-added compounds via catalytic reactions, opening the door to developing an artificial carbon cycle.9 The potential of CO₂ to serve as a chemical feedstock has attracted considerable research attention in numerous fields, with a particular focus on photocatalytic, 10-12 biocatalytic, 13,14 electrochemical, 15,16 thermochemical, 17,18 and photothermal 19,20 CO₂ conversion.

With the aid of sunlight, plants capture CO₂ and convert it into various organic molecules (such as carbohydrates) and oxygen in a slow rate of chemical reaction known as "natural carbon fixation". 21 Because CO2 and water are both readily available on earth, their conversion into chemical fuels mediated by sunlight may provide an eco-friendly alternative to our present energy infrastructure.22



Chaitanya B. Hiragond

Chaitanya B. Hiragond received his BS in Chemistry from Shivaji University, India, in 2012 and his MS in Organic Chemistry from Bharati Vidyapeeth Deemed University, India, in 2014. He is currently a PhD candidate under the supervision of Professor Su-Il In at DGIST, Republic of Korea. His current research focuses on developing photocatalytic materials for CO₂ conversion applications.



Hong Soo Kim

Hong Soo Kim received his BS degree from Pusan National University in 2017. He is currently pursuing an integrated MS/PhD degree under the supervision of Professor Su-Il In at DGIST, Republic of Korea. His current research interests are focused on the electrical surface modification of electrode materials that can be used in a variety of applications.



Niket S. Powar

Niket S. Powar received his BS in chemistry and MS in Organic Chemistry from Shivaji University, India, in 2013 and 2015, respectively. He subsequently received his MTech in Nanotechnology Renewable and Energy atAmrita Vishwa Vidyapeetham University, India, in 2019. He is currently a PhD candidate under the supervision of Professor Su-Il In at DGIST, Republic of Korea. His current research interest lies in

developing gas-phase photocatalysts for CO2 photoreduction to generate value-added hydrocarbon products.



Dongyun Kim

Dongyun Kim received his BS degree from the Kumoh National Institute of Technology in 2019 and his MS degree from DGIST in 2021. He is currently working toward his PhD under the supervision of Professor Su-Il In at DGIST, Republic of Korea. His research interest is in the synthesis of photocatalysts for CO2 conversion.

Artificial photocatalysis under ambient conditions offers a promising alternative to thermocatalytic and electrochemical reactions, which are typically conducted at high temperatures and pressures or driven by an external electrical potential. In 1978, Halmann became the first to describe the conversion of CO2 into formic acid, formaldehyde, and methanol using an electrochemical cell with a GaP cathode under Hg arc lamp illumination.²³ Numerous attempts at CO₂ photoconversion have subsequently been reported; nevertheless, significant problems remain with respect to activity and product selectivity owing to the inertness of CO2 molecules and the complexity of the process.²⁴ CO₂ is a thermodynamically stable and chemically inert linear molecule, such that breaking the C=O bonds requires a substantial amount of energy to drive the process.²⁵ Furthermore, the reduction of CO2 with H2O to form hydrocarbons, such as CH4, is associated with a larger positive change in the Gibbs free energy (818.3 kJ mol⁻¹) than the conversion of H₂O into H₂ and 1/2O₂ (232.2 kJ mol⁻¹) under ordinary conditions.²⁵ Although CO₂ conversion is challenging, this waste product can be transformed into other value-added compounds by exploiting appropriate catalysts to overcome the kinetic and thermodynamic barriers and drive the process. In this respect, various photocatalytic materials, such as metal oxides, chalcogenides, carbon-based materials, metal complexes, metal-organic frameworks (MOFs), metal carbides, MXenes, polymers, perovskites, and plasmonic materials, have been frequently applied.4,26-32

In general, solar light harvesting, charge separation, and surface reaction are the crucial phases in effectively converting CO₂ into chemical compounds such as CO, CH₄, HCOOH, HCHO, and CH₃OH.³³ Possible reactions of CO₂ reduction to various products and their standard redox potentials are listed in Table 1. A typical first step is single-electron transfer to CO₂ to generate $CO_2^{\bullet-}$ with a standard redox potential of -1.90 V vs.normal hydrogen electrode (NHE), which is considered the ratelimiting step owing to its large energy requirement.² Although proton-assisted multi-electron processes require significantly lower potentials, suitable catalysts must be present to generate

Table 1 CO₂ reduction to various products and corresponding standard redox potentials vs. NHE (at pH 7)

Reaction	$E_{ m redox}^0$ vs. NHE (V)	Main product	Eqn
$CO_2 + e^- \rightarrow CO_2^{\bullet -}$	-1.90	CO₂•−	(1)
$CO_2 + 2H^+ + 2e^- \rightarrow CO + H_2O$	-0.53	Carbon monoxide	(2)
$CO_2 + 2H^+ + 2e^- \rightarrow HCOOH$	-0.61	Formic acid	(3)
$CO_2 + 4H^+ + 4e^- \rightarrow HCHO + H_2O$	-0.48	Formaldehyde	(4)
$CO_2 + 6H^+ + 6e^- \rightarrow CH_3OH + H_2O$	-0.38	Methanol	(5)
$CO_2 + 8H^+ + 8e^- \rightarrow CH_4 + 2H_2O$	-0.24	Methane	(6)
$2\text{CO}_2 + 8\text{H}^+ + 8\text{e}^- \rightarrow \text{CH}_3\text{COOH} + 2\text{H}_2\text{O}$	-0.31	Acetic acid	(7)
$2CO_2 + 14H^+ + 14e^- \rightarrow C_2H_6 + 4H_2O$	-0.51	Ethane	(8)

the multiple electrons and protons needed to form the various products listed in Table 1.

Several challenges are associated with the aforementioned CO₂ photoreduction that have impeded the wider application of photocatalytic technology. In particular, it is difficult to simultaneously realize both light absorption over a broad solar spectrum and reduction-oxidation processes using a single semiconducting material. First, wide-bandgap materials, such as TiO2, ZnO, and CdS, are primarily active in the ultraviolet (UV) region.^{28,34} Second, although narrow-bandgap semiconductors such as Cu₂O are active in the visible-near-infrared (NIR) region, 35 their band potentials are unsuitable for simultaneously mediating reduction and oxidation reactions. Consequently, single-component systems have so far proved less satisfactory for photocatalysis, and numerous efforts have been made to overcome the tradeoff between these two beneficial properties of photocatalysts, such as through heterostructure formation.³⁶ Furthermore, spatial charge separation and charge transport from the catalyst surface to the reactants are important factors for reducing CO2. However, it has been reported that the charge recombination process in semiconductors is faster than the surface redox process.³⁷ Charge recombination in semiconductors can often be attributed to Coulombic attraction, a lack of charge trapping states on the catalyst surface, etc. 37,38 Thus, if the charge carriers survive



Hwapyong Kim

Hwapyong Kim received his BS degree from DGIST, Republic of Korea, in 2018. He is currently working toward his integrated MS/PhD degree under the supervision of Professor Su-Il In at DGIST. His current research interest lies in microbial fuel cells and catalysts for CO2 reduction/hydrogen evolution.



Su-Il In

Su-Il In is a professor at DGIST, Republic of Korea. He received his PhD in 2008 from the University of Cambridge, UK. He served as a postdoc at Technical University of Denmark and Penn State University (2008-2012) and later as a visiting scholar at the Department of Environmental Science & Engineering at Caltech, CA, USA (2019-2020). His current research interests are focused on energy and environmental issues, including photo/electrocatalytic CO₂ conversion, betavoltaic cells, nano-bio hybrid technology, and microbial fuel cells.

recombination, they can participate in the redox reaction. Charge separation, and interfacial charge separation in particular, can be enhanced by metal/non-metal doping, cocatalyst deposition, heterojunction formation, etc. Multicomponent systems have thus been constructed to restrict the recombination of electrons and holes. Apart from these issues, the amount of CO₂ adsorption on the catalyst surface greatly influences the catalytic performance. Catalysts with a large surface area provide more active sites for CO₂ adsorption. Meanwhile, the selectivity of photocatalytic CO2 reduction is governed by a combination of known and unknown factors. CO₂ can be reduced to various products depending upon the availability of electrons (e⁻) and protons (H⁺) and the binding strength of the formed product.³⁹ Products with a greater binding strength can receive additional electrons and protons to form highly reduced products. This usually occurs for products arising from the partial reduction of CO₂, e.g., the transformation of CO to the highly reduced product CH₄. ⁴⁰ In addition to the variation in selectivity based on the degree of reduction, C-C coupling reactions are another crucial aspect governing the selectivity. In this case, the intermediate products, rather than desorbing, preferentially undergo coupling reactions, e.g., *CH₃ radicals may couple to afford C₂H₆.⁵ Under such circumstances, the optoelectronic and structural properties of the photocatalyst must both be considered during catalyst design for optimal selectivity. Furthermore, the stability of the photocatalyst is equally important, especially in terms of scale-up and catalyst reusability.41 The major reported reason for catalyst instability is the strong oxidizing power of photogenerated holes, especially in the case of photocatalysts with a strong valence band (VB), such as TiO2. 42 These oxidizing holes or OH radicals generated by water oxidation can oxidize the products/intermediates and photocatalyst metal atoms, leading to dramatically decreased photocatalytic yields. 43,44 Various strategies to overcome this issue have been explored, such as heterostructure formation and the use of hole scavengers. 45,46 However, these strategies have not yet been reported to provide prolonged stability. These approaches are one of the core subjects of the current review, with a particular focus on surface engineering, band alteration, heterojunction construction, and hybrid formation.

In addition to the aforementioned hurdles, the roles of the various reaction parameters have yet to be fully elucidated, despite numerous efforts during catalyst design. Factors such as reactor type, temperature, pressure, and light source can exert remarkable effects on catalytic activity and stability. 47 For example, in batch and flow reactors, the product yield may vary depending upon the reactant feed ratio, catalyst amount, flow rate, etc.47 Furthermore, multi-sun system using a light concentrator affords enhanced photon flux, which can improve CO₂ conversion. 48 Evaluation of the catalytic activity in terms of efficiency and apparent quantum yield (AQY) is another critical consideration. Various parameters, such as reactor area, incident light, and collected light, should be factored into the efficiency calculation. As the catalytic yields described in the literature have been reported in a variety of units, such as ppm $\,\text{cm}^{-2}\,\,h^{-1}$ and $\,\mu\text{mol}\,\,g^{-1}\,\,h^{-1},$ a fair comparison is required.⁴⁷ Here, we suggest the equation for fair comparison.

Next, understanding the complex reaction processes and mechanism of the CO2 conversion process is vital, and quantitative isotopic measurements provide such a toolset for comprehending these aspects.⁴⁹ In conjunction with the analytical techniques of mass spectroscopy (MS) and nuclear magnetic resonance (NMR), which are frequently applied to study catalytic processes, isotopes, with their similar chemical properties, can help confirm the mechanism or product formation. For example, ¹³C-labeled CO₂ and ²H- or ¹⁸O-labeled H₂O are often used to investigate the processes of product formation, mitigating the influence of carbon impurities. Such mechanistic studies are also crucial for a comprehensive understanding of these processes.

In the past few years, research on photocatalytic CO₂ reduction has blossomed. Several review articles and perspectives have been published on the current status of photocatalytic CO2 reduction, providing an overview of recent advances, material design, present challenges, potential solutions, and so on. 4,24,31,39,50-55 Fig. 1 shows the number of research papers and review articles published each year between 2010 and 2020 according to data collected from the Web of Science database on June 10, 2021, demonstrating that the scholarly community is becoming increasingly interested in this topic. Several international institutions have also been established that are providing valuable data for research and development efforts, such as the United Nations Environment Programme (UNEP),56 the European Commission, 56 the Global Green Growth Institute (GGGI), 56,57 and the World Resources Institute (WRI).58 In addition, several international conferences have been organized on a regular basis in recent decades, such as the International Conference on Carbon Dioxide Utilization (ICCDU)^{59,60} and the International Conference on Greenhouse Gas Control Technologies (GHGT), 61 providing a forum for sharing and debating information on CO₂ emission, capture, and conversion to improve CO2 reduction research and technologies. Furthermore, climate change has become a top priority for numerous government agencies, academic institutions, and technology companies. Therefore, we believe that




Fig. 1 The number of published articles on photocatalytic CO₂ conversion each year between 2010 and 2020, retrieved from the Web of Science database using the keywords (topic) of (photo* or solar), (CO2 or carbon dioxide), and (conversion or reduction) with several additional filters such as related field and journals.

CO₂ capture and conversion technology will continue to be a promising research topic in the coming decade.

Herein, we aim to provide a current overview of photocatalytic CO₂ conversion. The review begins with the fundamental aspects and key challenges of photocatalytic CO2 reduction (Section 2) and then discusses the various strategies for overcoming these challenges (Section 3). Next, we summarize the performance of the various reported photocatalysts for CO2 reduction and tabulate their activities and reaction parameters for quick understanding and evaluation (Section 5), after first providing a theoretical basis and the equations needed to calculate photocatalytic yields and efficiencies in a standardized manner (Section 4). We then discuss important insights into the nature of the carbon species involved in CO2 photoreduction that has been gleaned from isotope labeling studies (Section 6). Next, we consider the commercial potential of photocatalytic CO2 reduction based on current and future emission restrictions (Section 7). Finally, we propose likely future research directions based on our current understanding (Section 8). We believe that this review will serve as a valuable guide to researchers involved in the design and development of photocatalytic materials and systems.

2 Fundamentals and challenges of CO₂ photoreduction

The solar-light-driven conversion of the ubiquitous waste product CO₂ to chemical fuels in the gas phase has become a hot topic of research. Semiconductors are the most suitable materials for catalytic CO₂ conversion owing to their ability to simultaneously reduce CO2 and oxidize H2O, and these materials play significant roles in all steps of the catalytic process, including adsorption, activation, dissociation, and product formation. Semiconductors possess two energy bands, namely, the VB, the highest energy band of occupied orbitals, and the conduction band (CB), the lowest energy band of vacant electronic states, which are separated by a quantum mechanically forbidden energy zone referred to as the bandgap (E_g) . When a semiconducting material is exposed to sunlight with an energy greater than or equal to the bandgap energy (i.e., $h\nu \geq E_{\rm g}$), the electrons are excited from the VB to the CB, leaving behind holes in the VB (step I in Fig. 2).⁶² The free electrons in the CB and holes in the VB transfer from the bulk to the catalyst surface (step II). Meanwhile, owing to the Coulombic force of attraction, a portion of the charges undergo recombination in the bulk before reaching the surface (step III). To complete the energy conversion process, the survived electrons and holes are transferred to surface-adsorbed CO2 and H2O molecules, respectively, resulting in a simultaneous reduction-oxidation reaction to afford the solar fuel (step IV). To achieve the photon-induced uphill CO₂ conversion, the CB of the semiconductor should be more negative than the reduction potential of CO₂, while the VB should be more positive than the oxidation potential of H₂O. Because the recombination of electrons and holes is much faster than the process of charge transfer and consumption at the catalyst interface, the lifetime of the photoexcited electrons must be sufficiently long for completion of the redox reaction. Higher photogenerated electron density at catalyst surfaces can be realized by the active separation of electrons and holes, which can robustly accelerate the rate of a redox reaction, leading to faster hydrocarbon production.³⁹ In addition, the characteristic features of the catalyst govern the product selectivity and catalyst stability; depending upon the reduction potential of the material, number of available electrons, active sites, adsorption of the intermediates, and various other factors (e.g., gas or liquid phase, reaction conditions CO_2 in the presence of H₂O), the CO₂ in the presence of H₂O can be converted into a variety of products, such as CO, CH4, and C₂H₆. An effective catalyst (i) provides maximum solar light absorption to generate electrons and holes, (ii) contains sufficient active sites for CO2 adsorption on its surface, and (iii) efficiently generates electron-hole pairs and mediates their migration to the catalyst surface. Numerous earlier studies focused on these factors in an effort to improve the catalytic performance of CO2 reduction using various types of catalysts and different reaction conditions. However, because the reduction process entails several complex steps, it is not as straightforward as it may initially appear, with particular challenges being (i) limited light absorption, (ii) charge recombination, (iii) adsorption/activation of CO2 molecules, (iv) photostability of the catalyst materials, (v) development of a facile and reasonable synthetic process, and (vi) underlying mechanism/C1 and C₂ selectivity (Fig. 2). We will briefly discuss these challenges of photocatalytic CO₂ conversion in the remainder of this section.

2.1 Limited light absorption

The critical processes in CO₂ photoreduction reactions are (i) the formation of charge carriers through light absorption and electron excitation and (ii) the reaction of surface electrons with CO2 molecules. As previously discussed, the electronic band structure of the catalyst is a crucial factor in light-driven CO2 conversion, where a catalyst with appropriate redox potentials is required to drive the process smoothly from a thermodynamic standpoint. As depicted in Fig. 3, various semiconducting materials have been explored for this purpose. 63-66

The solar spectrum comprises approximately 5% UV radiation, 43% visible radiation, and 52% infrared (IR) radiation; clearly, the visible and IR regions account for the majority. Thus, catalysts that primarily absorb visible/IR light can be expected to produce the maximum amount of charge to mediate the desired reaction. However, most of the commonly used semiconductors possess unsuitable bandgaps or band potentials to absorb sufficient sunlight for driving the process toward product formation. Although the band potentials of wide-bandgap semiconductors are suitable for mediating the redox process, they are only active in the shorter wavelength region. For example, TiO₂ is the most commonly applied semiconductor in this process; however, its wide bandgap (3.2 eV) limits light absorption to the UV region (λ = 390 nm) and pristine TiO₂ is inactive with respect to visible-light-induced CO₂ conversion.

Various strategies have been investigated in an effort to overcome the limited light absorption ability of TiO2, which

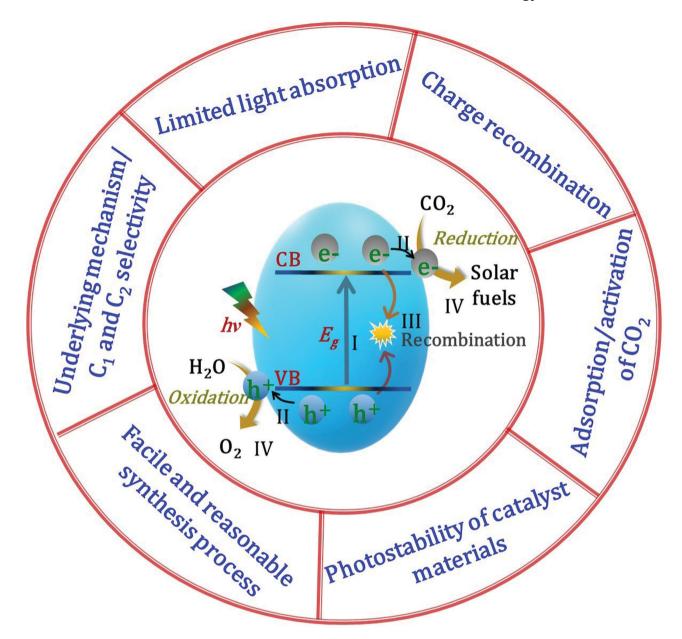


Fig. 2 Schematic illustration and challenges of the photocatalytic CO₂ conversion process.

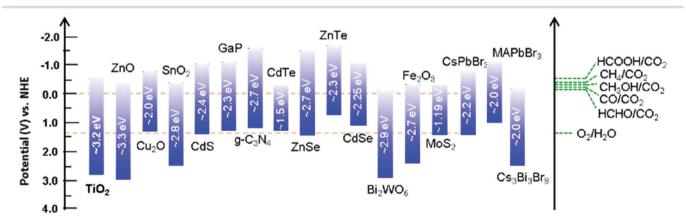


Fig. 3 Band potentials and corresponding bandgap energies of various selected photocatalysts relative to the redox potential involved in CO₂ photoreduction to various products.

will be discussed in greater detail in the following sections (Section 5.1). Some narrow-bandgap semiconductors displaying strong light absorption in the visible region have been reported to convert CO₂ into solar fuels; however, such a small bandgap inevitably leads to the simultaneous occurrence of reduction and oxidation processes on the surface and fast charge recombination, such that sacrificial agents are required to scavenge the holes.⁶⁷ For example, Cu₂O is a promising catalyst for CO₂ conversion owing to its narrow bandgap (ca. 2.2 eV), which affords efficient photon absorption in the visible region of the solar spectrum. However, this narrow bandgap also causes rapid recombination of photogenerated charges, meaning that pristine Cu₂O still exhibits poor catalytic performance; in addition, the holes cause Cu2O to self-oxidize, reducing its photostability.⁶⁸ Thus, by combining a narrow-bandgap material with a wide-bandgap semiconductor, light absorption in both the UV and visible regions can be effectively increased; such combinations have been widely documented in the literature. 43,68

Another viable strategy for improving the photoconversion performance of photocatalysts is broadening their light absorption capability in the IR/NIR region;³¹ however, few such catalysts have so far been reported, with the exception of WO₃, ⁶⁷ B₁₃P₂, ⁶⁹ etc. The real challenge associated with absorption in the NIR region is its low photonic energy, which can only provide low redox potentials in semiconductors.⁷⁰ However, considering current trends in nanotechnology, it is anticipated that NIR-active materials displaying superior catalytic properties to conventional semiconductors will ultimately be developed. Therefore, the primary challenge with respect to light absorption is developing catalysts that can function over a wide range of the solar spectrum including the UV, visible, and NIR regions.

2.2 Charge recombination

In photocatalytic CO₂ conversion on semiconductors, stable charge separation on the catalyst surface plays a critical role in converting CO2 into value-added products. The relatively low quantum efficiency of most reported photocatalysts can be attributed to the occurrence of charge recombination before the surface reactions of electrons and holes with CO2 and water.71 Thus, slow recombination or fast charge separation of the photoexcited carriers is a key factor in improving solar fuel production via CO2 reduction. Although electrons and holes are separated through the CB and VB, respectively, this process is quite tricky owing to the Coulombic force of attraction between the two species; Durrant and co-workers have demonstrated such recombination in organic solar cells.⁷² Because there is no driving force to drag the bound electrons and holes apart in pristine semiconductors, they are vulnerable to recombination, which hinders their participation in surface redox reactions.⁷³ Moreover, the non-radiative relaxation of excited electrons to the ground state causes electron-hole recombination on the nanosecond timescale. In contrast, electron transfer at the semiconductor interface is typically two or three orders of magnitude slower than the electron-hole recombination rate. Consequently, the charge dynamics at the surface of semiconductors determine the rate of surface redox reactions and play

a crucial role in photocatalytic CO2 reduction. Charge recombination can interfere with charge separation and interfacial charge transfer, making it one of the main limiting factors in the solar-to-energy conversion process. 71 Recombination can occur both in the bulk and on the surface of the catalyst. In general, the charge carrier mobility is closely related to the distance from the bulk to the surface, which determines the rate of bulk recombination, while surface recombination can be caused by the absence of sufficient active sites or trapping states on the catalyst surface. As a result, catalysts with efficient charge separation and high intrinsic mobility can prevent recombination. To improve charge separation, nanoengineered materials have been explored that significantly reduce the distance between the point of charge generation and the catalyst surface.


Nanostructured semiconductors, because of their high surface-area-to-volume ratio, short charge migration distance, and tunable electronic properties, possess numerous advantages over their bulk counterparts for photocatalysis.⁷⁴ Previous studies have revealed that the characteristics of a catalyst, such as morphology, crystal structure, and particle size, effectively determine the rates of charge transport and recombination. 75,76 The morphology of a catalyst can significantly affect the charge carrier dynamics. For example, because of increased charge separation, 1D nanostructured TiO2 materials such as nanotubes, nanofibers, and nanorods exhibit far superior catalytic activity to TiO2 nanoparticles.^{77–79} The distance between the point of charge generation and the catalyst interface can also be reduced using 1D nanostructures. Durrant and co-workers performed an interesting study on the relationship between charge recombination and the crystal phase using transient absorption spectroscopy (TAS), which elucidated the charge carrier dynamics in TiO₂. 38 The authors compared mesoporous TiO₂ nanostructures (with a size of 20 nm) and bulk TiO2 (with a size of 50-200 nm) and found that the photogenerated charge carriers produced in the former easily reached the surface, whereas those in the latter did not and remained in the bulk. However, the results also revealed that nanostructuring did not improve the recombination rates, indicating that surface-state-mediated recombination is not a key pathway in the case of TiO2. Instead, charge recombination was dependent on the crystal phase of TiO2, as demonstrated by the rapid charge recombination in rutile TiO2 and superior charge separation capacity over time in anatase TiO2. Similarly, Maity et al. analyzed the bulk charge carrier dynamics in single crystals of rutile and anatase TiO2 and discovered that the anatase phase exhibited a slower recombination rate than the rutile phase.80 Various strategies have been explored over the years to avoid such recombination, including defect formation, doping with metals or non-metals, cocatalyst deposition, heterojunction formation, etc. For instance, a number of studies have demonstrated that the deposition of plasmonic nanoparticles (e.g., Au, Ag, Pt) onto semiconductors can reduce charge recombination by creating a Schottky barrier, resulting in an increased excitons lifetime.⁸¹

2.3 Adsorption/activation of CO₂

As is well known, CO2 is a thermodynamically stable molecule with linear geometry; therefore, its reduction is challenging. However, it can be transformed into other value-added compounds under

appropriate conditions. In this respect, the adsorption and activation of CO2 molecules on catalyst surfaces are the critical kinetic factors in producing solar fuels. There are four key steps in this process: (i) adsorption of CO₂ molecules on the catalyst surface, (ii) activation of the CO₂ molecules to form partially charged CO₂• anion radicals or intermediates, (iii) C=O bond dissociation to afford another chemical product after reaction with an electron and a proton, and (iv) desorption of the newly formed product from the catalyst surface.82 Zou and co-workers described the possible configurations for the adsorption of CO2 molecules on

a catalyst surface (Fig. 4(a)).65 For most metal oxides and sulfides, the C or O atoms of CO₂ form weak bonds to single metal sites by hybridization of the 2p and 3d orbitals to generate intermediate products. 83 Compared to the highly stable C=O bonds of CO₂, the weak M-O or M-C bonds can be readily cleaved, enabling the formation of CO or higher hydrocarbons (after protonation). Moreover, the nature of the binding of CO₂ molecules on the catalyst surface determines the activity and selectivity of the catalytic reaction. For example, in the case of TiO2, several studies have shown that the binding energy of CO2 on a rutile surface

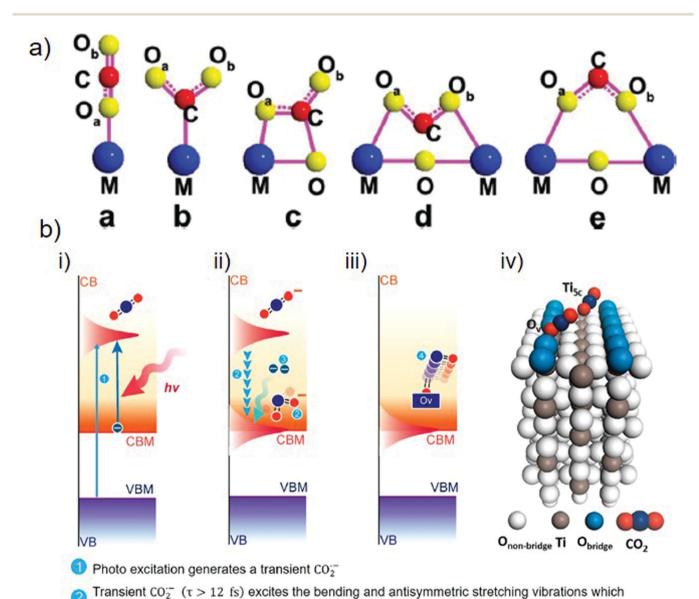

induce CO2 LUMO stabilization (10 fs)

- Hot electron trapped by CO₂ and form a new CO₂⁻⁻ (<80 fs)
- CO2 dissociates in Ov (30-40 fs)

Fig. 4 (a) Various configurations of adsorbed CO₂ molecules on a photocatalyst surface. Reproduced with permission from ref. 65, Copyright 2020, American Chemical Society. (b) Photocatalytic CO₂ reduction over a TiO₂(110) surface showing the adsorption and activation of a CO₂ molecule: (i)–(iii) stepwise activation of a CO_2 molecule over time and (iv) adsorption of CO_2 molecules at O_2 and Ti_{5c} sites. Reproduced with permission from ref. 82, Copyright 2020, American Chemical Society.

is -0.34 eV, while it increases to -1.08 eV on defective TiO₂. 84 Therefore, defective TiO₂ with oxygen vacancies or Ti³⁺ states offers more binding sites for CO2 molecules, which act as active sites for the desired reaction.

The activation of CO2 molecules is a vital step in the photocatalytic CO2 reduction process. Chu et al. used timedependent ab initio simulations (nonadiabatic molecular dynamics (NAMD)) to investigate the activation of CO2 molecules on the surface of rutile TiO₂(110).82 According to the findings, once the electrons have been excited from the VB to the CB of TiO₂, the addition of an electron to the LUMO of the CO₂ molecule results in the formation of a transient CO₂•anion radical possessing a bent geometry (step 1, Fig. 4(b)-(i)). This bending originates from the repulsion between the free electrons of the oxygen atom and the added electron. If CO₂•has a lifespan of more than 12 fs, with the help of oxygen vacancy, the excitation of vibrational modes (bending and antisymmetric stretching) will stabilize the LUMO of the CO₂ molecules to below the conduction band minimum (CBM) of the catalyst within 10 fs (step 2, Fig. 4(b)-(ii)). This form of electronic state alignment can persist for more than 100 fs. Within a timescale of 80 fs, CO₂ captures the electrons present on the catalyst surface (step 3, Fig. 4(b)-(ii)) and can subsequently dissociate to afford the product (i.e., CO) within 30-40 fs after the trapping of the electrons (step 4, Fig. 4(b)-(iii)). Because the Ti_{5c} sites have lower adsorption energies for binding CO₂ molecules, the results indicate that the association of CO2 with oxygen vacancies is more favorable for the excitation of the antisymmetric stretching mode (Fig. 4(b)-(iv)). The formation of products can differ according to the available electrons and protons participating in the chemical reaction.

Poor CO₂ adsorption decreases the amount of CO₂ available for the reduction. Hence, the efficiency of CO₂ reduction can be significantly improved by enhancing CO2 adsorption on the catalyst surface. In addition to oxygen vacancies, as discussed above, surface functionalization of catalysts with hydroxyl (OH) or amino (NH₂) groups can increase CO₂ adsorption. These functional groups are most likely to donate electrons to CO2 molecules, resulting in negatively charged $HCO_2^{\delta-}$ species that enhance CO2 adsorption.85 Increased CO2 adsorption ability has also been realized using catalysts with a large surface area, which provides more active sites for the catalytic reaction. Hiragond et al. reported hierarchical nanostructures that displayed increased CO₂ adsorption owing to their unique structures and surface morphologies, including nanofibers, nanotubes/rods, nanosheets, nanoflowers, etc.86 The deposition of alkali or alkaline-earth metals with a greater affinity toward acidic CO2 molecules on catalyst surfaces can also promote the adsorption of CO₂ on photocatalysts.⁴⁸

2.4 Photostability of catalyst materials

Although several solar-active catalysts displaying significant activity for CO₂ photoreduction have been reported, most of them suffer from instability. Therefore, photocatalyst stability is a major issue that has severely hampered the practical application of these catalysts. Photocatalyst instability may

originate from a number of sources, including transitions from active to inactive photocatalytic oxidation states, buildup of reaction intermediates that are difficult to reduce, oxidation of the products, and morphological changes. 42,87 In addition, reverse reactions may also play a role. For example, Punchihewa and co-workers observed the photoreduction of CO2 to formaldehyde and methanol in high yield after 30-45 min; however, the activity decreased after a specific time.88 This decreased activity was caused by a hole-mediated back-reaction that was faster than the CO2 reduction.

Under light irradiation, equal amounts of electrons and holes should be formed on the catalyst; however, these electrons and holes may cause photocorrosion due to reduction or oxidation of the catalyst itself. For example, Xu and co-workers reported the degradation of CdS by photogenerated holes. Changes in the oxidation state typically occur when the redox potential of a photocatalyst lies within its bandgap, whereupon the photogenerated electrons and holes can reduce or oxidize the photocatalyst. In the case of Cu₂O, the holes were reported to have insufficient oxidizing ability for water oxidation and therefore preferentially oxidized Cu₂O, resulting in loss of the active oxidation state.⁴⁴ Similarly, inefficient utilization of the electrons for photocatalytic CO2 reduction led to the reduction of Cu2O to Cu. In addition, some photocatalysts have very strong oxidizing power, resulting in the generation of active hydroxyl radicals from water, which can subsequently oxidize the intermediates of photocatalytic CO₂ reduction to appreciably decrease the reaction yield. 42

Catalyst stability is typically investigated by cycling tests in a batch/flow reactor in conjunction with various analytical techniques. Catalysts often become deactivated after repeated cycling for the reasons mentioned above, such that the surface active sites are no longer available to mediate the redox process. 89 Li and co-workers studied the deactivation mechanism of a Cu/TiO2 surface using in situ X-ray absorption spectroscopy (XAS) and diffuse reflectance infrared Fourier transform spectroscopy (DRIFTS).46 The air-calcined Cu/TiO2 surface was dominated by the Cu2+ state, whereas the sample after treatment at 200 °C under H2 was rich in Cu+ and oxygen vacancies. The post-treatment sample (Cu/Ti(H₂)) displayed 50% higher activity toward CO formation. The authors reported that the deactivation of Cu/Ti(H₂) was attributable to the consumption of OH groups and Cu active sites by holes. The Cu/Ti(H2) catalytic activity decreased from a maximum of 7.5 μ mol g⁻¹ h⁻¹ to 3.5 μ mol g⁻¹ h⁻¹ after 7 h. *In situ* XAS results revealed that the photooxidation of Cu⁺ to Cu²⁺ altered the environment of Cu and led to the decrease in the CO2 photoreduction activity.

Various strategies have been applied to overcome these issues, including the use of hole scavengers to preserve the active oxidation states and intermediates. In addition, a variety of heterostructures and hybrid combinations have been developed to improve the stability of the Cu₂O catalyst; for example, the formation of Cu₂O/TiO₂ heterostructures was reported to protect the Cu₂O from photocorrosion. 43 Recently, Ali et al. reported that a Z-scheme heterostructure based on reduced titania and Cu₂O displayed high photostability over 42 h (seven cycles) with

improved catalytic activity for the photoreduction of CO2 to CH₄. ⁴⁴ This high stability was attributed to the Z-scheme charge transfer that successfully inhibited the photocorrosion of Cu₂O. In addition, thermal and oxidative/reductive treatments (H₂O₂ or mild acid exposure) have also been applied to eliminate the adsorbed unwanted intermediates. Vacuum annealing can also restore the activity of a catalyst, which is likely attributable to the regeneration of oxygen vacancies or decomposition of adsorbed intermediates on the catalyst surface. The use of cocatalysts or shielding materials such as graphene to prevent oxidation is also an option. These techniques and their respective advantages will be discussed in the following sections.⁹⁰ Furthermore, Feng and co-workers suggested that increasing the light intensity using a solar concentrator can prevent catalyst deactivation owing to the influence of temperature under multi-sun conditions increasing product desorption.⁴⁸ Considering the crucial role of catalyst stability in photocatalytic CO₂ reduction, more detailed research is necessary to elucidate the deactivation mechanisms.

2.5 Development of facile and reasonable synthetic processes

To date, a variety of photocatalytic materials have been investigated, each with unique size, shape, appearance, physicochemical properties, and so on. All of these properties are influenced by the synthetic strategy adopted to prepare the catalyst. For many years, CO₂ conversion has been a central focus of research into semiconducting nanomaterials, especially in the case of TiO₂.91 Advanced synthesis techniques can facilitate precise manipulation of the size, morphology, crystal facet, pore network, and structural periodicity. Thus, various rational design and synthesis methodologies have been explored for both single and multicomponent (hybrid) catalysts. For example, bandgap-engineered TiO2 has been reported to be beneficial for CO2 reduction. In addition, various studies have reported the synthesis of reduced titania using thermal treatment with aluminum or magnesium at high temperatures of 500-700 °C.92 However, such high-temperature synthesis methodologies are not feasible for large-scale applications. In this respect, other studies have demonstrated the synthesis of reduced titania with abundant oxygen vacancies or Ti3+ states at lower temperatures (ca. 350 °C) using NaBH4 as a reducing agent. 93 Recently, MXenes have emerged as extremely promising materials for catalytic applications. In contrast to conventional 2D nanosheets that are typically obtained *via* an etching process involving hazardous acids such as hydrofluoric acid (HF), MXenes can also be synthesized in a convenient and facile manner through a hydrothermal approach in NaOH solution or electrochemical etching.94

In addition to the methods used to prepare the pristine semiconductors, the techniques used for cocatalyst deposition can also influence catalytic performance. Loading with a cocatalyst is typically accomplished using methods such as galvanic dispersion, photodeposition, wet chemical approaches, and impregnation. 92 Our previous studies demonstrated that flawless Schottky junctions between semiconductors and cocatalysts could be obtained using a simple photodeposition process at ambient temperature. 5,93,95,96 Most heterojunction combinations

have been widely synthesized using in situ hydrothermal, coprecipitation, solvothermal, vacuum annealing, and sonochemical approaches. 97 The synthetic procedure may vary depending upon the composition and heterostructure, e.g., p-n junction, coreshell, Z-scheme, and S-scheme. Various studies have demonstrated that simple procedures can afford facile heterostructure combinations under ambient conditions. For example, in our recent study. Cu2O-reduced titania heterojunctions were obtained via a facile, unique low-temperature thermochemical method followed by photodeposition.44 All of these synthetic routes have been frequently applied over the years to prepare catalysts with optimal optoelectronic properties. Nevertheless, the continued development of comprehensive synthetic approaches that meet the requirements of simplicity, cost-effectiveness, high performance (e.g., catalytic activity, selectivity, and physicochemical stability), and scalability remains necessary to satisfy engineering requirements for large-scale applications.

2.6 Underlying mechanism/C₁ and C₂ selectivity

Understanding the mechanisms of CO₂ photoreduction into various products is challenging owing to numerous known and unknown phenomena. Multiple factors, such as the catalyst properties, band potentials, surface defects, CO2 adsorption characteristics, and nature of the active sites and interface, can significantly influence the reaction pathway. The CO2 reduction pathway involves a series of steps after CO₂ activation, which are dependent on the number of electrons produced, electron transfer to CO₂ molecules, C-O bond breaking, the formation of intermediate species, H2O oxidation to generate protons, coupling of intermediates with protons, new bond formation, etc. There exist various pathways for CO2 reduction to valueadded products on a semiconductor surface, including the formaldehyde, carbene, and glyoxal pathways, 9,98 as depicted in Fig. 5. As explained above, all of these pathways begin with the adsorption and activation of CO2 molecules on the catalyst surface.

In the formaldehyde pathway, CO2 activation proceeds via binding of one of the O atoms to the active site of the catalyst. One electron transfer to the CO2 molecule leads to the formation of a CO₂• radical, and subsequent addition of a proton generates a COOH radical intermediate. Next, the consecutive addition of a proton and an electron to *COOH yields formic acid. Then, the formic acid accepts two protons to afford formaldehyde and water. It has been reported that the photoconversion of formic acid to formaldehyde has the most significant kinetic barrier in this pathway.⁹⁹ Methanol and methane can also be produced through this pathway in subsequent steps depending upon the available electrons and protons, where methane formation proceeds through the °CH3 radical intermediate.

This route can account for the production of formic acid, formaldehyde, methanol, and methane but not CO, which is one of the most commonly generated products during the CO₂ reduction process.

The carbene pathway can lead to CO formation with the consumption of two electrons, where the CO may be either a side product or an intermediate that reacts further to form

Formaldehyde pathway

$$O = C = O$$

$$O = C$$

$$O = C = O$$

$$O = C$$

$$O$$

Fig. 5 General pathways for photocatalytic CO₂ reduction: formaldehyde, carbene, and glyoxal. Adapted from ref. 9, Copyright 2020, Royal Society of Chemistry.

methane or methanol. Here, the active sites of the catalyst bind with the C atom of CO₂. The formation of methanol or methane via the CO intermediate is dependent upon the adsorption strength between CO and the catalyst surface; the CO may either rapidly desorb from the surface or accept electrons and protons to produce subsequent products. The subsequently generated •CH3 radical may react with OH to form methanol or accept a proton and an electron to afford methane. According to the literature, the carbene pathway has been experimentally demonstrated to be the most commonly followed mechanism for the production of CO and other hydrocarbons, with the intermediates easily detectable using various advanced analytical techniques such as electron paramagnetic resonance (EPR).³⁹ The formation of such hydrocarbons *via* the carbene pathway is well known as a "proton-coupled electron transfer" (PCET), which is kinetically reliant on the partial electron density on the catalyst surface and the concentration of accessible protons. This pathway is complicated because CO2 requires two electrons and protons to generate CO, yet the production of higher hydrocarbons through PCET requires more electrons; for example, the generation of CH₄ and CH₃OH requires eight and six electrons, respectively. Although significant progress in the photoreduction of CO2 to afford CO or HCOOH has been reported in the literature, there remains a gap in the research when it comes to converting CO2 into

higher hydrocarbons such as C_2H_5OH , C_2H_4 , and C_2H_6 with high efficiency and selectivity. ²⁵

The third potential route for CO_2 conversion is the glyoxal pathway, in which the two O atoms of CO_2 coordinate to the catalyst active site in a bidentate manner to produce numerous products. Initially, the $CO_2^{\bullet-}$ radical interacts with H^+ to generate a bidentate formate, which then couples with another H^+ to afford formic acid. Subsequent electron and oxygen transfer lead to formyl radicals (HCO^{\bullet}), which dimerize to generate glyoxal prior to the formation of C_2 and C_3 products. Similar to the previous two pathways, the combination of CO_3 with a proton leads to CO_3 formation with the elimination of CO_3 as a byproduct. The CO_3 radical can also form CO_3 products depending upon the presence of other intermediates in the system.

Although various studies have explored these CO_2 reduction pathways both theoretically and experimentally, the multiple steps, intermediates, and byproducts involved in the reaction make the process more complex with respect to C_2 selectivity. The density of the photogenerated electrons/holes and stabilization of the intermediates influence the C_2 selectivity of the reaction; for instance, the stabilization of ${}^{\bullet}CH_3$ radicals is desirable for achieving C_2 selectivity. However, this is hampered by (i) rapid hydrogenation of these intermediates to form C_1 products and (ii) repulsive forces between the oppositely




Fig. 6 Photocatalytic performance of graphene-wrapped TiO₂ showing the formation of C₁ and C₂ products. Reproduced with permission from ref. 102, Copyright 2013, Wiley-VCH.

charged intermediates, which hinder C-C coupling. The creation of adjacent reaction sites displaying opposite charges could be used to weaken the repulsive forces between adsorbed reaction intermediates, especially CO₂• or CO*, and provide a platform for the coupling of these adsorbates. Therefore, such reaction sites are highly desirable, stabilizing the °CH3 radicals, and overcoming the interadsorbate repulsive forces. 101 For instance, as shown in Fig. 6, graphene has been reported to provide such sites and mediate the formation of a C2 product when coupled with TiO2.

3 Strategies to improve CO₂ photoreduction

3.1 Energy band structure engineering

As we discussed in Section 2.1, the electronic structure of the photocatalyst is crucial for improving the photocatalytic activity. The photocatalytic performance is highly dependent on the energy band structure (i.e., bandgap and band positions) because the bandgap determines the range of light absorption while the appropriate band positions are required for the photocatalytic redox potentials. Various strategies for tuning the electronic structures of photocatalysts have been reported to date.⁵⁴ One such strategy is the introduction of defects to improve light absorption. For instance, Mao and co-workers first demonstrated the use of the disorder-engineering approach to prepare "black" TiO2 composed of crystalline TiO2 and disordered surface TiO2, thereby introducing new energy levels. 103 Black TiO₂ possesses a narrower bandgap (2.18 eV) compared to TiO2 (3.2 eV), which extends the light absorption. Several other approaches for synthesizing reduced TiO₂ have since been explored, such as ion implantation, 104 the magnesiothermic method, 105 and hydride ball milling. 106 Here, not only the defects but also the midgap energy band, which refers to the additional electronic states under the CB of TiO2, help to maximize the utilization of solar energy.

The electronic structure is highly influenced by band bending, which was first suggested for the metal-semiconductor contact by Schottky and Mott. 107,108 When a metal and semiconductor come into contact, the work function difference between the two leads to electron transfer until the Fermi levels are aligned. At equilibrium, the concentration of free charge carriers is different for the metal and semiconductor, resulting in the formation of an electric field at the interface. Consequently, the energy band may bend upward or downward at the interface depending upon the work functions of the metal and semiconductor. For instance, downward band bending was reported for reduced TiO2 at the interface between N-doped graphene oxide and reduced TiO2, which facilitated electron transfer and inhibited electron-hole recombination, resulting in improved photocatalytic activity. 96 Besides TiO2, band structure engineering has been conducted for graphitic carbon nitride (g-C₃N₄), an emerging polymeric photocatalyst, which possesses a moderate bandgap (2.7 eV) and an easily tunable electronic structure. 109 The CB of g-C₃N₄ is composed of C p₂ orbitals, while the VB consists of the N p_z orbitals. 110 Approaches for narrowing the bandgap include elemental doping, 111 variation of the linking monomer, 112 and copolymerization. 113

3.2 Non-metal doping and metal cocatalysts

Doping is one method for increasing the photocatalytic CO₂ conversion efficiency by creating sub-energy levels within the bandgap, thereby extending the range of light absorption into the visible region. Non-metal dopants such as nitrogen (N), boron (B), carbon (C), sulfur (S), and phosphorus (P) in anatase TiO₂ have been investigated. 114 For example, substitutional doping of the O atoms in anatase TiO2 with N atoms led to upward bending of the VB edge and a narrower bandgap owing to orbital mixing of the 2p states of O with the 2p states of N. Furthermore, Hashimoto and co-workers reported that N doping of TiO₂ resulted in not only mixing of the orbitals but also an isolated N 2p band above the O 2p valence states, thereby improving the visible-light photocatalytic performance of TiO2. 115 In addition to N doping, the effects of doping TiO2 with other non-metals, including B, 116 C, 117 P, 118 and S, 119 have also been investigated, leading to visible-light-active photocatalysts by reducing the bandgap.

Metal cocatalysts have also been extensively applied to improve CO₂ photoreduction performance. These can act as electron traps that facilitate electron-hole separation and ultimately improve the photocatalytic activity of semiconductor materials. 120 In particular, noble-metal cocatalysts, such as copper (Cu), 121 gold (Au), 122 silver (Ag), 123 palladium (Pd), 124 and rhenium (Rh), 125 can enhance photocatalytic conversion. For example, Biswas and co-workers developed Pt-TiO2 nanostructured films using a gas-phase deposition method and examined the correlation between the size of the Pt nanoparticles (NPs) and photocatalytic activity (Fig. 7). 126 When the size of the Pt NPs was too small, larger energy band separation occurred owing to the quantum confinement effect, inhibiting the electron transfer from TiO₂ to Pt. Conversely, when the size of the Pt NPs was too large, the energy band position was similar to that of bulk Pt, thereby acting as a recombination site for the photoexcited electrons and holes.

Bimetallic cocatalyst systems have also been explored to improve photocatalytic activity and selectivity. For instance,




Fig. 7 Schematic diagram of CO_2 photoreduction mechanism on $Pt-TiO_2$ nanostructured films. The magnified circle (center) shows that the photogenerated electrons can move rapidly inside the highly oriented TiO_2 single crystals and flow to the deposited Pt NPs, where the redox reaction occurs to convert CO_2 into CO and CH_4 . The right side of the figure illustrates the energy levels of the $Pt-TiO_2-CO_2$ system. H^+ and H^+ indicate protons and holes, respectively. Reproduced with permission from ref. 126, Copyright 2012, American Chemical Society.

the combination of Cu and Au has been reported, where Cu provided high affinity for CO2 to mediate the photocatalytic CO2 reduction while Au improved the visible-light absorption owing to its surface plasmonic effects. 127 In another example, a Pt@Cu2O core-shell structured bimetallic system was studied, where the Cu₂O shell activated the CO₂ molecules to enable photocatalytic CO₂ conversion in the presence of H₂O, while the Pt core acted as an electron trap to extract electrons from TiO2. 128 The Cu2O shell on the Pt core also suppressed the reduction reaction of H2O to H2, which otherwise competes with the CO₂ reduction reaction, thereby increasing the CO₂ conversion activity. Similarly, Long et al. reported the alloying of Cu with Pd to achieve high selectivity for CH₄ production by isolating the Cu atoms in a Pd matrix. 129 In this case, the Cu NPs served as the active sites for CO₂ conversion, but these are susceptible to oxidation under ambient conditions. The alloying approach thus reduced the oxidation of Cu, while the Pd lattice inhibited the H₂O reduction reaction. Pd also exhibits strong binding to H atoms, thus suppressing the H2 evolution reaction and affording high selectivity for CH₄ formation.

3.3 Heterostructure formation

Efficient photocatalytic CO_2 reduction always requires a photocatalyst that can provide large amounts of photogenerated electrons and holes with strong redox potentials. However, by doing so, the optical response of the photocatalyst is compromised because only wide-bandgap photocatalysts can provide strong redox potentials. ¹³⁰ On the contrary, a narrow-bandgap photocatalyst could be applied for enhanced light harvesting, but this requires choosing between a strong oxidation potential and a strong reduction potential. Hence, combining suitable narrow-bandgap photocatalysts could help overcome this tradeoff and realize synergistic effects. ¹³¹

The classification of heterostructures with respect to their band alignment suggests that there exist three main types, namely, straddling alignment (type I), staggered alignment (type II), and broken alignment (type III), as depicted in Fig. 8. In type I heterostructures, the photogenerated charges originating from S_1 tend to remain at S_2 ; therefore, no charge separation is achieved. Although this type of charge transfer is beneficial




Fig. 8 Heterojunction classification based on the charge transfer mechanism. Reproduced with permission from ref. 132, Copyright 2016, Wiley-VCH.

for luminescent materials, it is ineffective for photocatalytic CO_2 reduction. In stark contrast, for type III heterostructures, both the CB and VB edges of S_1 lie below the CB of S_2 . Finally, in type II heterostructures, charge separation is achieved but at the expense of lower redox potential. Therefore, type II heterostructures appear to be the most favorable for photocatalytic CO_2 reduction and have been reported in various studies. Nonetheless, this is not regarded as an efficient scheme to combine two photocatalysts because the photogenerated charges lose energy during the transfer process. 132

The Z-scheme charge transfer mechanism has the potential to solve the constraints of the aforementioned charge transfer. Under this scheme, the photogenerated charges of both photocatalysts with weak redox potentials recombine with each other while preserving the desired strong charges for photocatalytic CO_2 reduction. This type of charge transfer seems justified because of the electrostatic force of attraction between two opposite charges. In addition to these beneficial attributes, this type of charge transfer is also advantageous for improving photocatalyst stability. For example, Cu is susceptible to facile oxidation because its oxidation potential lies within its bandgap. However, by constructing a Cu (i.e., S_2) Z-scheme heterostructure with a semiconductor possessing suitable band alignment (i.e., S_1), Cu oxidation can be avoided. C

In addition to the direction of the charge transfer, the geometry of the heterostructures also determines their classification. In this regard, interfacial contact between the constituent photocatalysts with high surface area confers beneficial features for the photocatalytic reactions. Various Z-scheme heterostructure geometries have been reported in the literature, which can be classified as (i) core–shell heterostructures, (ii) surface-deposited heterostructures, and (iii) Janus-like systems. The first type has limited exposure of the core to the reaction system, while

the second suffers from stability issues due to fast corrosion. 43,134,135 However, the synthesis of Janus structures is challenging. In this regard, Ali et al. developed reduced titania-Cu2O Z-scheme heterostructures, somewhat like Janus structures, by using the charge trapping ability of an amorphous shell of reduced titania. 44 Under irradiation, the photogenerated electrons accumulated in the amorphous core, causing Cu²⁺ ions to preferentially accumulate at the edges. The resulting structure not only exposed both photocatalysts to the reactants but also maintained the stability of Cu owing to the higher concentration of electrons.

3.4 Surface modification

Surface characteristics play a major role in CO₂ adsorption and activation. Two important types of surface modification are surface functionalization and the deposition of metal complexes. Because CO₂ is electrophilic, the introduction of basic groups such as hydroxyl or amine moieties to a photocatalyst can enhance CO₂ adsorption. Some studies have investigated the influence of alkalization on the adsorption of CO₂ by TiO₂. Treatment with different alkali solutions, such as NaOH, Na₂CO₃, KOH, and K₂CO₃, was reported to have various effects on CO₂ adsorption. 138 The use of NaOH afforded the highest CO2 adsorption owing to the highest amount of free -OH groups. Furthermore, the preparation of layered hydroxide materials rich in surface hydroxyl groups via exfoliation also led to enhanced CO2 uptake. 139 Similarly, amine functionalization (-NH species) enables the direct bonding of CO2 molecules. Thus, Liao et al. described the covalent attachment of ethanolamine to ZnO nanosheets via the hydroxyl groups to afford an amine-functionalized surface for the chemisorption of CO₂ molecules. 140 In addition, He et al. reported that the treatment of TiO2 with HF modulated the ratio of crystal structure facets ((001)/(101)) to improve the dissociation of H₂O and reduction of CO2.141

The deposition of metal complexes is another approach for surface modification. Early research focused on the combination of semiconductors and mononuclear metal complexes. However, such materials typically exhibit poor stability and insufficient oxidation ability, which has led to the consideration of hybrid materials as preferred alternatives. Nakada et al. revealed that a hybrid material based on g-C₃N₄ and a Ru complex displayed high efficiency and selectivity for specific hydrocarbons. 22,142 By using 2-(1,3-dimethyl-2,3-dihydro-1H-benzimidazol-2-yl)benzoic acid as a sacrificial reducing agent, reverse electron transfer was suppressed to achieve a high quantum yield and selective CO formation.

The morphology/dimensionality of a material surface is another crucial issue that can be used to accelerate the kinetics of photocatalysis. 143,144 Low-dimensional materials, defined as nanostructured materials smaller than 100 nm, possess unique optical and electronic properties that originate from quantum confinement and plasmon resonance effects. 144-148 Lowdimensional materials can be classified into three categories, namely, (i) zero-dimensional (0D), (ii) one-dimensional (1D), and (iii) two-dimensional (2D) structures.

Zero-dimensional structures, such as nanoparticles, nanospheres, and quantum dots (QDs), are constrained on the nanoscale in all three dimensions. For these structures, high photocatalytic CO2 conversion can be achieved through the excellent light harvesting, satisfactory charge carrier density, and abundant surface sites. 147-152 Among such structures, the most extensively used are carbon QDs (CQDs), which exhibit a broad light absorption spectrum due to π -plasmon absorption in the core carbon nanocrystals, thereby enabling the $\pi \to \pi^*$ transition of conjugated carbon atoms in the UV-visible region. 153-155 It can be utilized not only in CQDs but also in semiconductor QDs and is advantageous for multi-electron and proton reduction. 156,157

One-dimensional structures also possess an attractive morphology that provides excellent charge transfer and extended carrier lifetimes owing to the unique distribution of state density coupled with intrinsically higher reactivity. 158-160 In general, 1D structures have high aspect ratios with diameters ranging from 1 to 100 nm, and they include various morphologies such as nanowires, nanotubes, nanobelts, nanoribbons, and nanotubes. As 1D structures contain no grain boundaries, the electron transport distance is greatly reduced, thus improving the electron transfer efficiency and decreasing electron-hole recombination leading to high photocatalytic CO2 conversion (Fig. 9(a)-(c)). 159-161 The unique characteristics of 1D structures, including relatively large specific surface areas and good chemical stability, can be used to assemble various heterogeneous surface structures. 162-164

Two-dimensional structures, including nanosheets, nanoflakes, and thin films, have typical thicknesses ranging from several atoms to <100 nm, leading to larger surface-area-tovolume ratios compared to 1D structures. Furthermore, 2D structures display enhanced electron-hole separation, high charge carrier mobility, and reduced recombination. 144,166 Among the various 2D structural materials, graphene, which is composed of single-layer carbon nanosheets with a hexagonal packed lattice structure, has received a great deal of attention in the field of photocatalytic CO2 conversion owing to its remarkably high surface area, excellent electrical conductivity $(>10^3 \text{ S m}^{-1})$, and good flexibility. ^{90,167,168} Liang et al. reported that the coupling of graphene with TiO2 showed larger enhancement in photocatalytic CO2 conversion, attributed to superior electric mobility of graphene (Fig. 9(d) and (e)). 165

3.5 Reactor design

The design of reactors for photocatalytic CO2 reduction also exerts an important influence on the CO₂ conversion efficiency. In addition, the use of different reactor geometries and reaction conditions can render it difficult to compare reaction rates and vields. 47,169-171 In general, photocatalytic CO2 reduction is conducted in either batch reactor or continuous-flow reactor systems.

In the case of batch reactors, the reduction is typically performed in a pressurized reactor vessel equipped with an optically transparent window and an external temperature controller to adjust the sample temperature. However, there is always the possibility of the readsorption of products and subsequent reverse or side reactions, e.g., re-oxidation to CO₂. ^{172,173} Consequently, the yield during batch

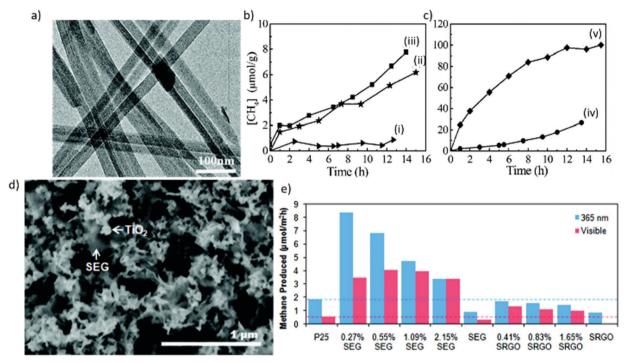


Fig. 9 (a) Transmission electron microscopy (TEM) image of Zn_2GeO_4 nanoribbons, and (b and c) CH_4 generation over (i) bulk Zn_2GeO_2 , (ii) nanoribbons, (iii) 1 wt% Pt-loaded nanoribbons, (iv) 1 wt% RuO2-loaded nanoribbons, and (v) 1 wt% RuO2 + 1 wt% Pt-coloaded nanoribbons as a function of light irradiation time. Reproduced with permission from ref. 161, Copyright 2010, American Chemical Society. (d) Scanning electron microscopy (SEM) image of an annealed SEG-P25 nanocomposite, and (e) CO₂ photoreduction by SEG-P25 and SRGO-P25 nanocomposites under UV (365 nm) and visible illumination, where SEG and SRGO denote solvent-exfoliated graphene and solvent-reduced graphene oxide, respectively. Reproduced with permission from ref. 165, Copyright 2011, American Chemical Society.

reactions may decrease owing to the continuous accumulation of the target product as well as byproducts such as oxygen. ^{174,175} In this regard, one effort by Pipelzadeh et al. involved a pressure swing reactor in which the reaction mixture was periodically evacuated from the batch reactor and reinjected. This continuous recycling of the products helped overcome the issues of product readsorption and limited mass transfer, increasing the CO production yield to 30-80%. In another effort to improve the photocatalytic yield, a specially designed twin reactor was employed where protons (H⁺)

generated in one compartment were transported to a separate compartment for CO₂ reduction, as shown in Fig. 10(a). 177,178 This configuration helped overcome the mass transfer limitation and thereby improve the photocatalytic yield. Overall, batch reactor systems make it difficult to compare photocatalytic performance and are often not a suitable option for applications involving prolonged and large-scale reactions.

On the other hand, in continuous-flow reactor systems, the reactants and products are moving at a constant flow rate

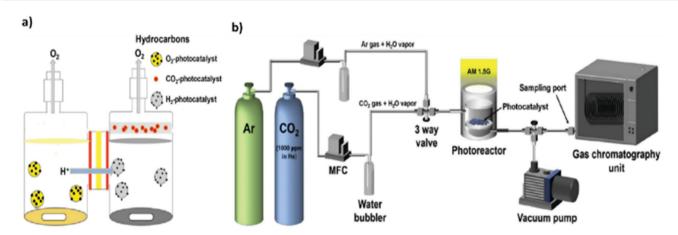


Fig. 10 Illustration of two setups for photocatalytic CO₂ reduction: (a) twin reactor. Reproduced with permission from ref. 177, Copyright 2018, Elsevier. (b) Continuous-flow reactor. Reproduced with permission from ref. 93, Copyright 2017, Elsevier.

inside the vessel while the reaction is in progress (Fig. 10(b)).^{5,93} Continuous-flow reactor systems can avoid the problems of batch reactors, such as product readsorption on the photocatalyst surface, 172,173 but are also associated with the challenge of a very limited contact time between the reactants and photocatalyst surface owing to the short residence time. 47,179,180

As shown in Fig. 11(a), a photoreactor using optical fibers to optimize the light path was developed. 181 In contrast to a conventional photoreactor composed of a cylindrical vessel equipped with a quartz window to allow light to enter, optical fibers coated with the catalyst were installed in such a manner as to occupy the maximum possible volume of the reactor, thus improving the contact between the catalyst, reactants, and light and affording high conversion efficiency. 182 However, optical fiber photoreactors are difficult to commercialize owing to several disadvantages, including low adhesion strength of catalyst on the fibers, relatively low surface area, and the effective utilization of only approximately 20-30% of the total reactor volume. To compensate for this, a monolith-type photoreactor was also reported as shown in Fig. 11(b).¹⁷⁰

The use of the monolithic catalyst enabled efficient light harvesting and high photon flux owing to its unique structure and high surface-area-to-volume ratio. 170,183 Nevertheless. monolith-type photoreactors have the disadvantage that they cannot be used with visible light because of their low penetration depth through the microchannels. Therefore, a combination of a monolithic catalyst and optical fibers can be anticipated to overcome this issue.

In one such effort, Xiong et al. reported the use of a monolithic catalyst with a honeycomb structure through which optical fibers had been inserted.¹⁸⁴ This configuration successfully enhanced the photoreaction. In a similar manner, Liou et al. inserted carved polymethylmethacrylate (PMMA) optical fibers into a NiO/InTaO4-coated monolith with a honeycomb structure. 185 This reactor afforded an improved product yield when applied to photocatalytic CO2 reduction owing to the large surface area, high photocatalyst loading, and effective light utilization. In another attempt, Cao and co-workers reported a double-chamber reactor as depicted in Fig. 12. Separation of the oxidation and reduction reactions helped to

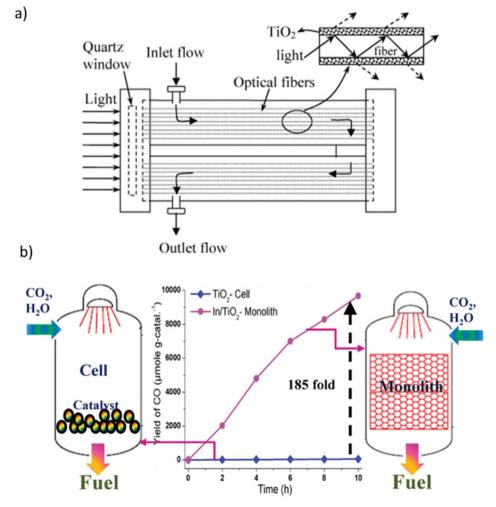


Fig. 11 (a) Schematic diagram of an optical fiber reactor, reproduced with permission from ref. 181, Copyright 2007, Elsevier. (b) Comparison of photocatalytic CO₂ reduction with H₂O using cell- and monolith-type photoreactors. Reproduced with permission from ref. 170, Copyright 2013, Elsevier.




Fig. 12 Schematic diagram of a monolithic two-sided Cu₂O/graphene/ TNA photoreduction reaction system. Reproduced with permission from ref. 186, Copyright 2016, Elsevier.

achieve stability of the monolithic two-sided Cu₂O/graphene/ TNA photocatalyst for up to 60 h.186

3.6 Optimization of selectivity

As we discussed in Section 2, the CO₂ photoreduction process occurs through a multistep reaction mechanism. Thus, optimization of the product selectivity is always a critical aspect. In general, formaldehyde, carbene, and glyoxal may be formed as intermediate products during the reaction. As such, it is essential for the practical applications of CO2 reduction technology to optimize the selectivity to obtain pure products.98 The main obstacle here is that the reaction mechanism is not yet completely understood at the molecular level. However, several optimization strategies have been reported to date, such as modulating the bandgap, tailoring the surface composition, alkaline treatment of the catalyst, the loading of specific metals at a particular concentration, and improving the interfacial properties.⁵² As discussed in Section 3.4, the CO₂ photoreduction process can be improved by surface modification, and such strategies can also be applied to enhance the selectivity. For example, surface modification with hydrophobic-hydrophilic groups can favor the formation of specific hydrocarbons, in addition to influencing the reaction rate, by altering the affinity of the catalyst surface for H₂O molecules. ¹⁸⁷ He et al. studied the fluorination of anatase TiO₂ nanosheets, which introduced Ti³⁺ species on the catalyst surface that favored the conversion of CO₂ to CO₂•-.¹⁴¹ Subsequently, Xing et al. confirmed that the fluorination treatment had no effect on the CO2 adsorption. 188 Instead, fluorination treatment induces the built-in electric field by the substitutional F to surface oxygen vacancies. As a result, it increased the rate of CH4 and CO formation. However, the development of more eco-friendly strategies that avoid the use of fluorine would be desirable.

Moreover, the photocatalyst acidity or basicity can also contribute to product selectivity. Subrahmanyam et al. studied various metal oxide/metal composites, including TiO₂/Pd, CuO/ZnO, and Li₂O/TiO₂, supported on MgO, Al₂O₃, or SiO₂. They found that the basic oxide supported systems displayed reasonable selectivity for the photoreduction of CO2 to C₁-C₃ compounds. In contrast, the acidic oxide supported catalysts exhibited good selectivity for the generation of C1 compounds. More interestingly, the C1-C3 selectivity remains independent of the confirmed photocatalyst. In conclusion, several strategies may be adopted to optimize the selectivity of CO₂ photoreduction, but it remains necessary to understand the underlying reactions at the molecular level, including the heats of formation and the adsorption and desorption energies of the hydrocarbon products.

4 Theoretical insights and equations

Density functional theory for CO₂ photoreduction

Density functional theory (DFT) has attracted enormous attention over the last few decades as a means to understand the kinetics and thermodynamics of reaction mechanisms. 190 In the case of CO₂ photoreduction, some crucial questions must be answered to overcome the barriers to commercialization, including (i) the nature of the reaction mechanism, (ii) the driving force behind CO₂ photoreduction, and (iii) the optimal parameters for achieving the desired photoreduction efficiency. Although these questions seem challenging, it is essential to answer them to establish a robust foundation for CO2 photoreduction technology.89,191

To date, the development of semiconductor photocatalysts has been a primary focus of CO₂ reduction technology; however, the anticipated efficiency has not yet been realized. Therefore, we need to understand the molecular-level reaction mechanisms responsible for the conversion of CO2 to hydrocarbons. For instance, the carbophilic and oxophilic interactions with the catalyst surface affect the product selectivity.

The kinetic model offers opportunities to design the photoreactor to avoid variable photon flux. In addition, the adsorption and desorption of CO2 molecules on the surface of the photocatalyst also affects other parameters such as light transport, temperature, and pressure. 192,193 In the initial stages of research, the microkinetic method was applied to understand the molecular-level interactions of CO2 molecules on the catalyst surface; however, this method does not consider the roles of heat and mass transfer. Thus, with quantum advanced computational modeling, most studies have discussed the reaction kinetics and adsorption energy (Gibbs free energy) of the CO2 molecules, intermediates, and products. Experimental kinetics studies have also been used to elucidate the reaction mechanism at the molecular level. 89 The Langmuir-Hinshelwood (LH)-based CO₂ photoreduction kinetic model can be used to obtain insights into the reacting reagent species, with both the numerator and denominator terms in eqn (9):

$$r = kI^{\alpha} \times \frac{\prod_{i=1}^{n} k_{i} p_{i}}{\left(1 + \sum_{i=1}^{z} k l P_{i}\right)}$$

$$(9)$$

where r is the rate of reaction (μ mol g_{cat}^{-1} h⁻¹), k is the rate constant (μ mol $g_{cat}^{-1} h^{-1}$), I is the irradiance (W m⁻²), α is the reaction order of light intensity (dimensionless), K_i denotes the

equilibrium adsorption constants for the reactants and products (bar $^{-1}$), P_i denotes the partial pressures of the reactants and products (bar), n denotes the adsorbed reactants involved in the primary surface reaction, and z designates all reactants and products. 194 Thus, to explain the microkinetics, the LH-based model has been used effectively under light transport, scattering, and the heat and mass transfer during the molecular rearrangements. The LH-based photoreduction model has also been applied to describe CO_2 and $\mathrm{H}_2\mathrm{O}$ diffusion inside the photocatalytic material.

Initially, this theory was primarily used to obtain insights into the electronic structure. Moreover, this theory is mainly dependent upon quantum calculations; it uses the exchange correlation functional to map the interaction electron to the non-interaction electron system, affording the ground state density. Two main types of approximation are used in these calculations, namely, the local density approximation and the generalized gradient approximation (GGA). In the former case, the calculation depends upon the functional electronic density at a given point in space, which leads to a substantial drawback. 195,196 Although the local density approximation provides an insight into the atomic energies and energy barriers, it has several disadvantages. Thus, a new approach referred to as the Hubbard model was introduced because the local density and generalized gradient approximations failed to explain the transition metals. 197 Various strategies have incorporated the gradient wave (GW) estimation, which yields excellent outcomes for bandgaps, and the Bethe-Salpeter equation (BSE) for absorption spectra. 198 These techniques are regularly used because of their unusually low computational expense. The precision of the DFT approach is heavily dependent upon the functionals used. In ab initio studies, the GGA is most commonly performed using the Perdew-Burke-Ernzerhof (PBE) functional. DFT can be used to evaluate the stability of a photocatalyst and the adsorption energies of CO₂ and the intermediate products. Here, we discuss some representative results involving theoretical calculations pertaining to CO₂ photoreduction. 199

Li et al. performed DFT calculations to examine the catalytic activation of CO2 on Cu2O(110) surfaces.200 Cu2O has been identified as a remarkable candidate for CO2 photoreduction owing to its unique electrical and optical properties. Different crystal facets often display distinct catalytic properties; for instance, Cu₂O nanocrystals with (100) or (110) surfaces slowly decompose during the reaction, whereas the Cu₂O(111) surface has been theoretically shown to possess high stability and rhombic dodecahedral nanocrystals exhibit optimum photocatalytic activity. The DFT study used the Vienna Ab initio Simulation Package (VASP) to simulate the Cu₂O(110) surface morphology and calculate the energies during CO2 and CO adsorption. Projector augmented-wave (PAW) atomic pseudopotentials were utilized with a cutoff energy of 400 eV for the plane wave basis set, while the GGA with the PBE parametrization was utilized for the exchange correlation functional. GGA is significantly affected by 3d electrons, so the development energies of 3d transitionmetal oxides shows large in fault. Furthermore, to examine the active sites responsible for the catalytic activity, the authors

simulated the grazing-incidence X-ray absorption near-edge structure (XANES) by the Grazing-incidence X-ray absorption near-edge structure (GIXANES).200 It is also matched in surface studies due to the limited penetration depth and small X-ray incident angle. In this work, to simulate the surface behavior. only several key layers of the Cu₂O(110) section were considered for the slab model. The calculated spectra for the few layers of Cu particles on the ideal surface are presented in Fig. 13(a). The calculated spectra for ideal, O-deficient, and CO2-adsorbed (CO_{2,O-vac}) surfaces utilizing the few layers, along with the corresponding second-derivative spectra, are shown in Fig. 13(b). These spectra were adjusted by coordinating with the edge positions of the surface slab. As shown in Fig. 13(b), the three types of surface displayed similar spectral shapes with small changes in the intrinsic energies. Compared with the ideal surface, the edge position (zero point of the second derivative) of the O-deficient surface displayed a shift toward lower energy of approximately 0.3 eV. After CO₂ adsorption, the edge position moved back toward higher energy, which validates the increase of the surface Cu oxidation states because of the charge transfer to the CO₂ atom. Hence, aligned spectra of before changing the oxidation state (Cu) and after changing the oxidation both spectra gives the information with rising the energy edges; the changes in the surface oxidation states manifest themselves as changes in the energy of the rising edges.

Tafreshi et al. performed DFT calculations for a Ag₃PO₄/ g-C₃N₄ nanocomposite to elucidate its electronic properties and photocatalytic activity.202 The VB was composed of the d orbitals of Ag and the p orbitals of O, while the CB consisted of the p orbitals of C and N and the s orbital of Ag. The bandgap decreased from 2.75 eV for pristine Ag₃PO₄ and 3.13 eV for single-layer g-C₃N₄ to only 2.52 eV for the Ag₃PO₄/g-C₃N₄ nanocomposite. The authors also studied the adsorption geometries and energies of the reaction intermediates for CO2 photoreduction. The heterostructure was found to be thermodynamically favorable for CO2 reduction and displayed high selectivity for CH4. The intermediates HCOOH* and HOCOH* were responsible for the generation of CH₄. The most exothermic calculated reaction energy (-2.826 eV) was that for the conversion of trans-COOH to HCOOH*, during the least reaction energy (-0.182 eV) for the hydrogenation of CH₂O* to CH₂OH* and HCO* to cis-HCOH. The results revealed that the Ag atoms at the interface of Ag₃PO₄ and C₃N₄ served as charge recombination centers. In addition, the calculations indicated that the Ag atoms formed midgap states at the interface, leading to a smaller bandgap for this nanocomposite.

Furthermore, Zhao *et al.* conducted DFT calculations of metal/ZnO nanocomposites based on Au, Ag, or Pd and porous ZnO nanosheets (NSs) to investigate the molecular-level reaction mechanism. The calculated potential energy diagrams for CO_2 to CH_4 conversion on the nanocomposites are presented in Fig. 13(c)–(f). The calculated adsorption energies were 0.29 eV on pristine ZnO NSs, -2.07 eV on Au/ZnO NSs, -1.89 eV on Ag/ZnO NSs, and -1.74 eV on Pd/ZnO NSs. A stable HCO_2 hydrogenation intermediate $(CO_2^* + H \rightarrow HCO_2^*)$ bonded with the ZnO nanosheet was considered for understanding the

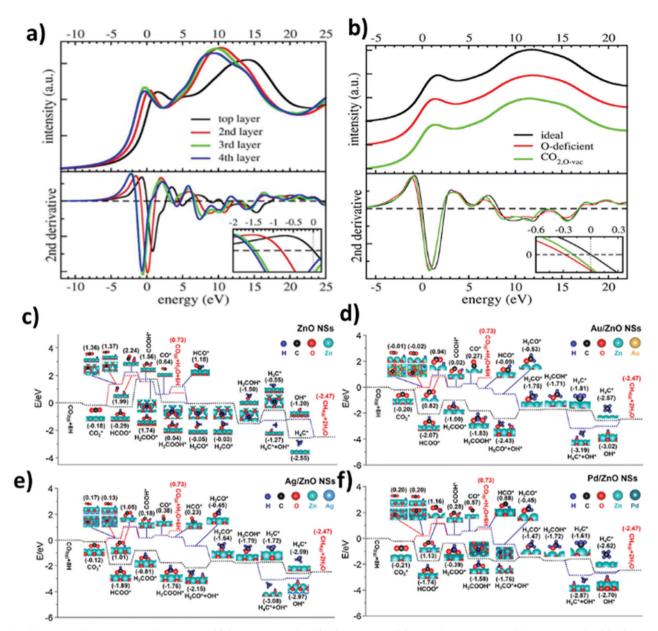


Fig. 13 Calculated Cu K-edge XANES spectra for (a) Cu atoms on a Cu₂O(110) surface and (b) ideal, O-deficient, and CO₂-adsorbed Cu₂O(110) surfaces. Reprinted with permission from ref. 200, Copyright 2018, American Chemical Society. (c)-(f) Calculated potential energy (E, eV) diagrams for the CO₂ to CH₄ reaction on (c) Zn₄₉O₄₉, (d) Zn₄₉O₄₉/Au₁₂₈(111), (e) Zn₄₉O₄₉/Ag₁₂₈(111), and (f) Zn₃₆O₃₆/Pd₉₈(111). Reproduced with permission from ref. 201, Copyright 2019, Elsevier.

reaction mechanism. The loading of metals on the Zn nanosheets reduced the adsorption energy, confirming the thermodynamic feasibility of the first step of hydrogenation. After that new rate-determining reaction mechanism was studied, which is observed during the dehydroxylation process. The adsorption enthalpies decreased in the order of Au/ZnO NSs (+0.68 eV) > Ag/ZnO NSs (+0.51 eV) > Pd/ZnO NSs (+0.29 eV). Thus, it was concluded that the loading of metal nanoparticles altered the molecular pathway for the conversion of CO₂ to CH₄.

Overall, the determination of precise reaction intermediates and pathways using DFT calculations remains challenging. However, this approach at least provides supporting evidence for experimental observations. Furthermore, our understanding of the interactions of protons with photocatalyst surfaces is becoming more advanced, although there is still room for improvement. More investigation of the influence of electronically excited states and the solvent on photocatalyst performance is needed. Irrespective of their known limitations, GGA pseudopotentials with basic van der Waals corrections are the principal methodology. Later on, more extensive screening effects will be considered for realizing further improvements in photocatalysts. In addition, to enhance the photocatalytic performance to large scale production, we have to estimate the electronic distribution of catalyst.

4.2 Equations for gas-phase CO₂ photoreduction and CO₂ electrochemical reduction

4.2.1 AQY/TON/TOF/faradaic efficiency. Many of the terms and equations used in the field of photocatalysis are similar to those used in thermal catalysis. However, some problems can occur if they are directly applied to photocatalysts. For example, although the terms turnover number (TON) and turnover frequency (TOF) appear to have similar meanings, ²⁰³ they actually have different definitions in the context of catalysis. 204 TON is the ratio of the number of products (N) per number of active sites (Na), whereas TOF is TON divided by time (t), indicating the frequency of conversion: 98,203,205

TOF
$$(s^{-1} m^{-2}) = \frac{1}{Na} \frac{dN}{dt}$$
 (10)

Although this equation is convenient for homogeneous photocatalysts, it is not readily applicable to heterogeneous photocatalysts; because it is difficult to determine the actual active sites and the properties of a heterogeneous catalyst are not directly proportional to its area. In this regard, the efficiency of heterogeneous photocatalysts can be determined in a different way. In photochemistry, for example, the apparent quantum yield (AQY) is often used:5,93,203,206,207

AQY (%) =
$$\frac{\text{Number of reacted electrons}}{\text{Number of incident photons}} \times 100\%$$
 (11)

Number of reacted electrons = number of moles of product (mol) \times the number of required electron (8) \times N_A

Number of incident photons = $\frac{\text{Light absorbed by photocatalyst}}{}$ Average photon energy

× time

(13)

Light absorbed by photocatalyst = $H (1000 \text{ W m}^{-2}) \times A (\text{m}^2)$

Average photon energy =
$$\frac{hc}{\lambda}$$
 (15)

In these equations, N_A is Avogadro's number (6.022 \times 10^{23} mol^{-1}), h is Planck's constant (6.626 × 10^{-34} J s⁻¹), H is the incident light intensity, A is the irradiation area, and c is the speed of light (3 \times 10⁸ m s⁻¹). AQY is defined as the ratio of the number of electrons participating in the photocatalytic reaction to the number of photons absorbed within a specified wavelength range, under the assumption that all photons are absorbed by the photocatalyst. 98,203 For example, the number of electrons required for the production of 1 mol of CH₄ by photocatalytic CO2 reduction can be calculated using eqn (12). The incident photon flux can also be calculated from eqn (13)–(15). In eqn (14), the value of H for a given reactor can be reliably determined using a reference cell; this value is 1000 W m⁻² at AM 1.5. The average photon energy can be

determined from the incident light wavelength as expressed in egn (15).5

Electrocatalysts have also received considerable attention in the field of CO2 reduction for mediating specific redox reactions on an electrode surface. 208 Because these electrochemical processes involve electron transfer reactions, the performance is typically measured by the faradaic efficiency (FE):²⁰⁹⁻²¹¹

$$FE = \frac{vf_x PF\alpha}{RTI} \times 100\%$$
 (16)

where x denotes the specific gaseous product, ν is the CO₂ flow rate, f_x is the volume concentration of the product in the gas flow delivered to the gas chromatograph at a given sampling time, P is the ambient pressure (1.05 \times 10⁵ Pa), R is the gas constant (8.314 J mol⁻¹ K⁻¹), T is room temperature (298 K), α is the number of electrons transferred for the CO₂-to-product conversion (e.g., $\alpha_{co} = 2$), F is the Faraday constant (96 485 C mol⁻¹), and I is the current at the given sampling time. $^{209,212-214}$

$$EE = \frac{E^0 \times FE}{E^0 + \eta} \times 100\%$$
 (17)

where E^0 is the standard thermodynamic potential, FE is the faradaic efficiency, and η is the overpotential at the applied current density. 212 The denominator of eqn (17) can be derived from the cell voltage (E_{cell}). The energetic efficiency (EE) is generally measured from the cell voltage of a two-electrode system because it is difficult to know the counter-electrode potential and voltage drop by electrolyte. ²¹³ A high EE value means that little energy is required to produce the target product.²¹⁴ In the case of FE, we can obtain information about the number of electrons converted to the target product, but it is dependent on the applied potential of the electrochemical reaction. Although EE is the efficiency to consider energy input during electrochemical reaction, EE cannot make quantitative comparisons due to using only two electrode measurement. Jouny et al. listed the EE values for electrochemical CO₂ reduction to C₁-C₃ compounds.²¹⁴

4.2.2 Efficiency/selectivity for CO₂ reduction. The most precise method to determine photocatalytic activity is to measure the amount of product. For CO₂ reduction, the photocatalytic performance can be calculated by dividing the amount of product by the reaction time and mass of catalyst: 95,98,207,215

Product yield (µmol g⁻¹ h⁻¹)

$$= \frac{(C_{\text{final}} - C_{\text{initial}}) \times \text{volume of product mixture}}{\text{Amount of photocatalyst (g)} \times \text{photoreaction time (h)}}$$
(18)

Rate of evolution (µmol cm² h⁻¹)

$$= \frac{\text{Amount of product (μmol)}}{\text{Exposed area of photocatalyst (cm^2)} \times \text{time (h)}}$$
(19)

where *C* is the concentration of the mixture.

The plot seems a saturation instead of linear graph because the product formation is not linear over time. 98 Therefore, the average efficiency of a catalyst depends upon the measurement time. The irradiation time is related to catalytic stability, and it is recommended to use the same reaction time when attempting to compare different catalysts.²¹⁶

When multiple products are present simultaneously, the selectivity for a particular product such as CH4 or CO can be calculated:93

Selectivity (%) =
$$\frac{\text{Amount of desired product}}{\text{Total amount of all products}} \times 100\%$$
 (20)

The efficiency can also be expressed by the input vs. output (e.g., in terms of energy). In this case, the total mass is usually used as the denominator in eqn (21).98 This can be calculated using the following equations:5,217

$$\eta_{\rm eff}(\%) = \frac{\text{Thermodynamic energy of product}}{\text{Input light energy}} \times 100\%$$
 (21)

Thermodynamic energy of product (cm⁻² h⁻¹)
=
$$[CH_4]$$
 (mol cm⁻² h⁻¹) $\times \Delta H$ (810 kJ mol⁻¹) (22)

Input light energy (for a 100 mW light source) = 0.100 W cm^{-2}

When the products of CO2 reduction are analyzed by chromatography, the results are measured in ppm. However, when expressed in ppm, it is difficult to immediately understand the actual amount of product. Therefore, many researchers express the amount of product in molar units. 44,218 Some recent reports have confusion in calculation, for example, Sorcar et al. reported less accurate assumption and calculation results. 5,93,95 Therefore, we suggest better calculation method that extends the application to gas-phase reactions:44

$$CH_4$$
 yield in μ mole = [CH_4 yield in ppm]
× [moles of the gaseous mixture containing CH_4]
(25)

CH₄ yield in ppm

$$= \frac{\mu \text{mol of CH}_4}{\text{moles of gaseous mixture}}$$

$$= \frac{\text{Peak area of the CH}_4 \text{ from tested sample}}{\text{Peak area of the standard CH}_4} \times 100\%$$

Moles of gaseous mixture =
$$\frac{\text{Volume of gaseous mixture }(L)}{\text{Molar volume }(L \text{ mol}^{-1})}$$

Molar volume =
$$\frac{RT}{P}$$

= $\frac{0.08206 \text{ atm L mol}^{-1} \text{ K}^{-1} \times 298 \text{ K}}{1 \text{ atm}}$

If the performance of photocatalysts can be reliably compared, it will be very beneficial to the field of solar fuel generation. We believe that the equations presented in this

review will prove valuable to researchers and encourage further progress in the field.

5 Materials for CO₂ photoreduction

5.1 Metal oxides

Metal oxides are widely used in photocatalysis because of their high earth-abundance and exceptional stability under various conditions. Several features of metal oxides are of particular relevance to photocatalysis, such as morphology/composition, light absorption characteristics, and charge transport properties. In 1972, Fujishima and Honda reported the production of hydrogen from TiO2 under light illumination, which was the starting point for metal oxide-based photocatalysts and attracted worldwide attention.²¹⁹ Since then, numerous studies on metal oxide photocatalysts have been conducted. A comparison of metal oxide-based photocatalysts is presented in Table 2.

5.1.1 Titanium dioxide (TiO₂). Besides the aforementioned strategies to improve the CO₂ reduction activity of TiO₂, numerous other modification approaches have been investigated with respect to the crystal phase, crystal facet, surface defect, addition of cocatalyst, etc.

TiO₂ naturally exists in three polymorphs: anatase, brookite, and rutile. Among them, anatase, rutile, and anatase/rutile mixed phase (Degussa, P25) have been extensively studied for CO₂ photoreduction owing to their suitable optoelectronic properties. Brookite is the least commonly reported polymorph in photocatalysis as a result of the difficulty associated with obtaining high-purity brookite nanocrystallites.²⁵⁷ In 2012, Andino and co-workers performed first-principles calculations on cluster and periodic slab systems to investigate the interaction between CO₂ and the brookite (210) surface. ²⁵⁸ The results indicated that perfect brookite is not a suitable catalyst for CO₂ photoreduction, whereas the oxygen-deficient brookite (210) surface displayed improved performance. Compared with the oxygen-deficient anatase (101) surface, the oxygen-deficient brookite (210) surface exhibited stronger interactions with CO2, favoring to form bent CO₂ molecules. In the same year, this group also experimentally studied the use of defective brookite for CO₂ photoreduction and reported that the surface defects (oxygen vacancies and Ti³⁺) provided additional active sites for CO2 adsorption and activation, leading to improved performance compared to anatase and rutile.220 In situ DRIFTS analysis revealed that the surface oxygen vacancies and Ti³⁺ promoted the formation of the CO₂•- intermediate and facilitated its rapid reaction with H₂O to afford higher CO₂ reduction activity to generate CH₄.

Controlling the crystal facet is also an effective strategy for enhancing photocatalytic activity. Exposing high-energy surfaces, especially reactive crystal facets, has long been considered to increase photocatalytic activity. For instance, anatase TiO2 is usually dominated by the {101} facet, which is thermodynamically stable. In 2008, a pioneering study by Lu and co-workers reported the synthesis of anatase TiO₂ with a high percentage of exposed {001} facets, which possess high surface energy and reactivity. 259 More recently, Jaroniec and co-workers investigated the

Open Access Article. Published on 16 2021. Downloaded on 18.09.24 14:53:17.

This article is licensed under a Creative Commons Attribution 3.0 Unported Licence.

 Table 2
 Metal oxide-based materials for photocatalytic CO₂ reduction

Catalyst	Feed gas composition	Light source	Reducing agent	Reaction conditions	Reactor type	Yield	Ref.
TiO_{2-x}	99.999% CO_2 , water bubbler (H_2O_2)	150 W solar simulator (90 mW cm ⁻²)	H_2O	100 mg sample	Flow reactor	CO: 17 μ mol $g^{-1} h^{-1}$ CH.: 2 μ mol $g^{-1} h^{-1}$	220
${ m TiO_2}$	In situ generated $CO_2 + H_2O$ vapor (NaHCO ₂ + HCl)	C.	H_2O	100 mg sample in Pyrex Batch reactor reactor (200 mL)	Batch reactor	CH ₄ : 1.35 μ mol g ⁻¹ h ⁻¹	221
${ m TiO_{2-x}^{-x}}$ ${ m TiO_2/Ni(OH)_2}$	$CO_2 + H_2O$ In situ generated $CO_2 + H_2O$ (NaHCO ₃ + H SO ₃)	300 W Xe lamp (AM 1.5 filter) 350 W Xe lamp (40 mW cm $^{-2}$)	H ₂ O H ₂ O	50 mg sample		CH ₄ : 1.63 μ mol g ⁻¹ h ⁻¹ CH ₄ : 2.20 μ mol g ⁻¹ h ⁻¹ CO: 0.71 μ mol g ⁻¹ h ⁻¹	188 222
Pt/TiO ₂	$CO_{2} + H_{2}O$	400 W Xe lamp (UV range, $250-388 \text{ nm} \cdot 19.6 \text{ mW cm}^{-2}$)	H_2O			CH_4 : 1361 μ mol g^{-1} (5 h)	126
PdCu/TiO ₂	$CO_2 + H_2O$		H_2O	5 mg sample		${ m CH_4}$: 19.6 ${ m \mu mol~g^{-1}~h^{-1}}$	129
Au–Cu nanoalloy supported on TiO ₂	99,995% $CO_2 + H_2O$		H_2O	Sample film	Batch reactor	Batch reactor CH_4 : 2000 $\mu mol g^{-1} h^{-1}$	127
g - C_3N_4/ZnO	In situ generated $CO_2 + H_2O$ (NaHCO ₃ + H SO conserve colution)	300 W simulated solar Xe arc	H_2O	100 mg sample		CH ₃ OH: 0.6 μ mol g ⁻¹ h ⁻¹	223
$ m ZnO/Au/g\text{-}C_3N_4$ $ m ZnO/ZnTe$ $ m Mo\text{-}Doped$ $ m WO_3\cdot0.33H_2O$	$\frac{1}{102}$ $\frac{1}{2}$ $$	' UV lamp ' Xe lamp (420 nm cutoff) ' Xe lamp	H ₂ O H ₂ O H ₂ O	Film-type sample 10 mg sample 25 mg sample in closed		CO: 862.1 µmol m ⁻² h ⁻¹ CH ₄ : 44.564 µmol g ⁻¹ h ⁻¹ CH ₄ : 5.3 µmol g ⁻¹ h ⁻¹	224 225 226
Ag-Modified ${ m ZnGa_2O_4}$	$_{\rm NaHCO_3}^{\rm nil.})$	400 W high-pressure Hg lamp	H_2O	ryrex reactor (600 mL) 1.0 g sample	Flow reactor	CO: 155.0 μ mol $g^{-1}h^{-1}$ H_2 : 8.5 μ mol $g^{-1}h^{-1}$ O ₂ :	227
Ga_2O_3	$NaHCO_3 + CO_2$	UV light ($ca. 254 \text{ nm}$, 13 mW cm ⁻²)	H_2O	100 mg sample		CO: 100 μ mol $g^{-1} h^{-1}$	228
$\begin{array}{l} Pt/Zn-\beta-Ga_2O_3 \ nanorods \\ Pt-RuO_2/Zn_2GeO_4 \\ InVO_4 \end{array}$	CO_2/H_2O (99.999% $CO_2 + 20 \mu L H_2O$) High-purity $CO_2 + 1 mL DI$ 0.4 mL DI ($H_2O vapor$) High-purity	15 W UV-C lamps (5.94 mW cm $^{-2}$) 300 W Xe lamp 300 W Xe lamp	H ₂ O H ₂ O H ₂ O	15 mg sample 100 mg sample 0.1 g sample		CH ₃ OH: 0.19 μ mol $g^{-1}h^{-1}$ CH ₄ : 100 μ mol $g^{-1}(16h)$ CO: 18.28 μ mol $g^{-1}h^{-1}$ CO:	229 161 230
	CO_2					130 μ mol g $^{+}$ (7 h) CH ₄ : 2 μ mol g^{-1} (7 h)	
$\mathrm{Bi_2WO_6}$ (LSPR)	$CO_2 + H_2O$	$\rm UV\text{-}vis\ light\ (200\ mW\ cm^{-2})$	H_2O	5 mg sample with 0.2 mL pure water		CH ₄ : 9.9 μ mol g ⁻¹ h ⁻¹ Stability: 3 h	231
CuO-Nb ₃ O ₈	0.5 M KHCO ₃ aqueous solution, adjusted to pH 12 with NaOH	UV (Hg-Xe lamp, 240–300 nm)	H_2O	Dispersed sample in olass reactor (500 mL)		CO: 1.4 µmol (20 h)	232
CuO _x -ZnO	$\mathrm{CO}_2 + \mathrm{H}_2\mathrm{O}$	$300 \text{ W} \text{ Xe lamp } (320-780 \text{ nm}, 100 \text{ mW cm}^{-2})$	H_2O	5 mg sample		C_2H_4 : 2.7 µmol g ⁻¹ h ⁻¹ (32.9%)	233
						CH ₄ : 2.2 μ mol g ⁻¹ h ⁻¹ (26.9%) CO: 3.3 μ mol g ⁻¹ h ⁻¹ Stability: 4 cycles (1 cycle = 8 h)	
Co_3O_4	0.5 mL DI (water vapor) 99.999% CO_2	$200 \text{ W} \text{ Xe lamp (} 100 \text{ mW cm}^{-2}\text{)}$	H_2O	5 mg sample		CO: 46.3 μ mol $g^{-1} h^{-1}$ Stability: 4 eycles (1 eycle = 5 h)	234
Cu-Pt/TiO ₂	99.99% CO ₂ water bubbler	Outdoor sunlight (normalized to a H_2O global AM 1.5 value of 100 nW cm ⁻²)	$\mathrm{H}_2\mathrm{O}$	$2 imes 2 ext{ cm}^2$ sample		Hydrocarbon: $111 \text{ ppm cm}^{-2} \text{ h}^{-1}$	78
MgO/Pt-TiO ₂	CO ₂ 4 mL water (H ₂ O vapor)	30 nm,	H_2O	20 mg sample		CH ₃ : 11 µmol g ⁻¹ h ⁻¹ CO: 0.03 µmol g ⁻¹ h ⁻¹ H ₂ : 11 µmol g ⁻¹ h ⁻¹ Stability: 3 cycles	235
${ m TiO}_{2-x}$	99.999% CO_2 water bubbler (H_2O vapor)	UV: 100 W Hg lamp Visible: 450 W H ₂ O Xe lamp with UV filter	H_2O	40 mg sample 150 $^{\circ}\mathrm{C}$		(1 cycle = 10 h) CO: 54.5 μ mol g ⁻¹ h ⁻¹	236
$Ag-TiO_2$ (LSPR)	99.9999% CO ₂ + H ₂ O	(400–700 nm) 6 W UV lamp (47.23 mW m ⁻²)	H_2O	100 mg sample		CH_4 : 86.5 μ mol g^{-1} (15 h)	237

Table 2 <i>(continued)</i>							
Catalyst	Feed gas composition	Light source	Reducing agent	Reaction conditions	Reactor type	Yield	Ref.
Pt _{1%} -0.50-Graphene/	$CO_2 + H_2O$	100 W Xe solar simulator with AM	H_2O	40 mg sample	Flow reactor	CH ₄ : 37.0 µmol g ⁻¹ h ⁻¹	95
Cu _{1.00%} -Pt _{0.35%} -Blue	$CO_2 + H_2O$	1.00 W Xe solar simulator with AM H_2O	H_2O	40 mg sample	Flow reactor	$c_{2}^{-1}c_{3}^{-1}c_{4}^{-1}c_{5$	5
Hybrid carbon @TiO_2	In situ generated $CO_2 + H_2O_3$	300 W Xe arc lamp without filter	H_2O	100 mg sample		CH ₄ : 4.2 μ mol $g^{-1}h^{-1}$	238
nonow spheres Au/TiO ₂ /BiVO ₄	$(NaTCO_3 + H_2SO_4)$ $CO_2 + H_2O$	300 W Xe arc lamp (area of $\frac{2}{5}$ $\frac{1}{5}$ cm ²)	H_2O	0.2 g sample		CH ₃ OH: 9.1 μ III01 g II CH ₄ : 7.5 μ III01 g ⁻¹ h ⁻¹ CO: 3 E IIII01 α ⁻¹ h ⁻¹	239
$\rm ZnFe_2O_4/RGO/In_2O_3$	$CO_2 + H_2O$	3.3 cm) 300 W Xe arc lamp (area of $\frac{2}{2} = \frac{2}{2} \frac{2}{2} \frac{2}{2}$	H_2O	0.1 g sample in cylind-		CO: 2.3 μ IIIOI g II CH_4 : 1.95 μ IIIOI $g^{-1} h^{-1}$ CO: 9.95 μ IIIOI $g^{-1} h^{-1}$	240
$\mathrm{SnS}_2/\mathrm{SnO}_2$	CO_2 (400 mL 99.999% $CO_2 + 0.5$ mL	3.3 cm) 300 W Xe lamp	H_2O	tical reactor (100 mil.) 4 mg sample		CO: 6.65 μ IIIOI g II CO: 48.01 μ IIIOI g II $^{-1}$	241
CeO_{2-x} Au/TiO_{2-x}	$CO_{2} = (99.999\% \ CO_{2} + H_{2}O) \ CO_{2} = (99.999\% \ CO_{2} + H_{2}O)$	300 W Xe lamp 50 W UV (365 nm, 49.5 mW cm ⁻²) 50 W vis (530 nm, 64.9 mW cm ⁻²)	H ₂ O H ₂ O	50 mg sample 50 mg catalyst		CO: 1.68 µmol g ⁻¹ h ⁻¹ CO: 7.52 µmol g ⁻¹ h ⁻¹ CH ₄ : 3.57 µmol g ⁻¹ h ⁻¹	242 243
PDA-TiO ₂ TiO ₂ /UiO-66	${\rm CO_2} + {\rm H_2O} \left({ m NaHCO_3} + { m H_2SO_4} \right) \ { m CO_2} \left({ m 99.999\%} \ { m CO_2} + { m H_2O} \right)$	300 W Xe lamp 300 W Xe lamp	H ₂ O H ₂ O	50 mg catalyst 50 mg catalyst		$C_2 n_6$: 0.39 μ m of $g^{-1} h^{-1}$ CH_4 : 1.50 μ m of $g^{-1} h^{-1}$ CH_4 : 17.9 μ m of $g^{-1} h^{-1}$	244 245
PbO/TiO_2 $HPJs$	$CO_2 + H_2O (NaHCO_3 + H_2SO_4)$	300 W Xe lamp	H_2O	60 mg catalyst		CO: 2.0 μ mol g m CH ₄ : 53.21 μ mol g ⁻¹ h ⁻¹	246
${ m TiO_2/AuCu/ZIF-8}$	CO_2 (99.999% $CO_2 + H_2O$)	$300 \text{ W} \text{ Xe lamp } (100 \text{ mW cm}^{-2})$	H_2O	$2 \times 2 \text{ cm}^2$ film		CO: 5.99 μ mol g $^{-}$ n $^{-}$ CO: 83 μ mol g $^{-1}$ h $^{-1}$ CH $^{-}$ 3 0 μ mol $^{-1}$ h $^{-1}$	247
Flame-annealed TiO ₂ CuTCPP/P25m	CO_2 (99.999% $CO_2 + H_2O$) CO_2 (99.999% $CO_2 + H_2O$)	AM 1.5G (100 mW cm ⁻²) 300 W Xe lamp	H_2O H_2O	100 mg catalyst		CH_4 : 3.9 μ miol g $^{-1}$ CH_4 : 156.5 μ mol g^{-1} h^{-1} CH_4 : 19.39 μ mol g^{-1} h^{-1}	218 248
${ m PtRu/TiO_2}$	CO_2 (99.999% $CO_2 + H_2O$)	300 W Xe lamp (80 mW cm ⁻² ,	H_2O	100 mg catalyst		CO: 2.68 μ mol g n CH ₄ : 38.7 μ mol g ⁻¹ h ⁻¹ CO: 2.6 μ mol g ⁻¹ h ⁻¹	249
NCQDs/P25	CO_2 (99.999% $CO_2 + H_2O$)	320 < 7 < 700 mill) 300 W Xe lamp	H_2O	50 mg catalyst		CO: 2.0 μ IIIOI g II CO: 23.66 μ IIIOI $g^{-1}h^{-1}$ CH: 15.03 μ IIIO] $g^{-1}h^{-1}$	155
Au/Ag-TiO ₂	$\mathrm{CO}_2 + \mathrm{H}_2$	35 W Xe lamp (20 mW cm ⁻²) 200 W Hg reflector lamp	H_2	10 mg catalyst		CO: 1813 μ mol g^{-1} h ⁻¹	250
$\rm Au\text{-}MMT/TiO_2$	$\mathrm{CO}_2 + \mathrm{H}_2$	(130 mW cm) UV: 200 W Hg reflector lamp Vis: 100 W Xe lamp	H_2	Monolithic support		UV: CO: 1223 µmol g ⁻¹ h ⁻¹ CH ₄ : 12 µmol g ⁻¹ h ⁻¹ Vis: CO: 199 µmol g ⁻¹ h ⁻¹	251
ZIF-8/TiO ₂ Pt-1.0-Reduced titania Pt/TiO ₂ /Aut8@SiO ₂ Coordination polymer of	CO ₂ (99.999% CO ₂ + H ₂ O) 1000 ppm CO ₂ (He-based) + H ₂ O CO ₂ (99.999% CO ₂ + H ₂ O) Humidified CO ₂ (CO ₂ + H ₂ O)	100 W Xe lamp (100 mW cm ⁻²) 100 W Xe lamp 5 W LED lamp (365 nm/530 nm) 4 W UV lamp (365 nm)	H ₂ O H ₂ O H ₂ O	100 mg catalyst, 5 bar 70 mg catalyst 32 mg catalyst 10 mg catalyst		CO: 45.16 µmol g n CO: 45.16 µmol g n h 1 CH4: 1.13 µmol g n h 1 CH4: 2.98 µmol g n h 1 CO: 4.09 µmol g n h 1	176 252 253 254
Oslo-27-Mg/TiO $_2$ Mesoporous TiO $_2$	CO_2 (99.999% $CO_2 + H_2O$)	250 W Xe lamp	H_2O	100 mg catalyst		CH ₄ : 2.35 µmol g ⁻¹ h ⁻¹ CH ₄ : 0.192 µmol g ⁻¹ h ⁻¹	255
Cu/TiO_2	CO_2 (99.999% $CO_2 + H_2O$)	$150 \text{ W lamp } (90 \text{ mW cm}^{-2})$	H_2O	50 mg catalyst		CO: 0.145 μ mol g n CO: 3.8 μ mol g ⁻¹ h ⁻¹ CH : 0.69 μ mol g ⁻¹ h ⁻¹	40
$\mathrm{Cu/TiO_2} ext{-}\mathrm{SiO_2}$	CO_2 (99.999% $CO_2 + H_2O$)	Xe lamp	H_2O	100 mg catalyst		CH4: 0.08 μ III01 g II CO: 60 μ III01 g II h II CH : 10 μ III01 g II h II	87
Reduced titania–Cu ₂ O CuO–TiO _{2–x} N _x	1000 ppm CO ₂ (He-based) + H ₂ O CO ₂ (99.95% CO ₂ + H ₂ O)	100 W Xe lamp 300 W Xe lamp (100 mW cm $^{-2}$)	H_2O H_2O	40 mg catalyst 100 mg catalyst	Flow reactor	CH ₄ : 41.3 ppm g ⁻¹ h ⁻¹	44 256

Review

photocatalytic CO2 reduction activity of anatase TiO2 with co-exposed {001} and {101} facets.²²¹ DFT calculations of the electronic structures of the two facets revealed that their Fermi levels were located at distinct positions. Therefore, the {001} and {101} surfaces formed surface heterojunctions, which led to efficient photogenerated charge transfer and separation. Anatase TiO₂ specimens with different ratios of exposed {101} and {001} facets were prepared by the addition of HF solution, and the optimal ratio for photocatalytic CO2 reduction was determined to be 45:55.

Defective TiO₂ (TiO_{2-x}) with oxygen vacancies and Ti³⁺ was reported to exhibit enhanced visible-light absorption owing to the induced mid-gap band. 103 Although the presence of Ti³⁺ improves the absorption of visible light by narrowing the bandgap, it also reduces the reduction potential, leading to slow kinetics for the photocatalytic CO₂ reduction.²⁵ In 2018, Xing et al. reported that fluorination can improve the reduction potential of TiO_{2-x} crystals by replacing surface oxygen vacancies with doped F atoms, resulting in the formation of a built-in electric field (Fig. 14).188 This finding was supported by DFT calculations indicating an upward shift in the Ti3+ energy level upon fluorination, leading to a methane production rate of 1.63 μ mol g⁻¹ h⁻¹ (13 times that for untreated TiO_{2-x}). Recently, Sorcar et al. reported facile low-temperature synthesis techniques for reduced TiO2. Reduced TiO2 showed narrow band gap, wellaligned band position for CO₂ reduction reaction, and decreased charge recombination, promoting CO₂ photoreduction. However, it showed poor reproducibility in CO₂ conversion performance and less accuracy in equation. 5,93,95

Morphological engineering has also been explored to increase the photocatalytic CO₂ reduction efficiency of TiO₂. Properly designed structures can help overcome the inherent challenges of photocatalysis such as light absorption. Xu and co-workers found that 1D TiO2 nanofibers displayed remarkable photocatalytic CO2 reduction activity.222 This was ascribed to the 1D




Fig. 14 (a) Schematic illustration of the influence of different Ti³⁺ impurity levels between MSCs (mesoporous single crystal) and F-MSCs (Fluorinated MSCs), where ΔE represents the kinetic overpotential of the reduction process. (b) Time evolution of CH₄ production over various samples under solar light irradiation for 4 h (300 W xenon lamp with an AM 1.5 filter, CO_2 + H₂O). (c) Selectivity of photocatalytic reduction of CO₂ and H₂O vapor over MSCs and F-MSCs. Reproduced with permission from ref. 188. Copyright 2018, American Chemical Society

morphology enabling increased absorption of reflected and scattered light. Furthermore, the nanofiber structure maximized the number of exposed active sites, ultimately affording high photocatalytic performance. In addition, 2D nanostructured materials have recently attracted substantial attention owing to their remarkable intrinsic properties such as good charge transport and large surface area.260 For example, compared to bulk materials, ultrathin TiO₂/g-C₃N₄ structures provide short electron transfer pathways, leading to superior photocatalytic CO2 reduction activity.

5.1.2 Other metal oxides. Numerous studies have been conducted on other metal oxides. For example, Yu et al. reported the use of a binary g-C₃N₄/ZnO photocatalyst synthesized through a one-step calcination process for CO2 reduction.223 UV-vis diffuse reflectance spectra revealed improved sunlight utilization and photocatalytic activity tests indicated enhanced production of CH₃OH. These results demonstrated the benefits of the intimate interfacial contact between the two phases. Moreover, DFT calculations were performed to confirm the electronic band structures and electron transport rates of ZnO and g-C₃H₄. The calculated charge carrier effective mass (m_e^*) was greatly decreased by the interfacial contact in the binary photocatalyst, leading to more effective electron transfer during the photocatalytic reaction. Furthermore, Li et al. reported a ZnO/Au/g-C₃N₄ (3-ZAC) microneedle film displaying local surface plasmon resonance (LSPR) effects. 224 The Au NPs added to the interface of ZnO/g-C₃N₄ acted as an electron transfer bridge and LSPR excited source for the faster separation of electronhole pairs. Furthermore, Ehsan and He reported the synthesis of a ZnO/ZnTe photocatalyst with a common cation heterostructure through a one-pot hydrothermal approach.²²⁵ The ZnO/ZnTe photocatalyst possessed a flower-like nanostructure and displayed the heterojunction characteristics of both p-type ZnTe and n-type ZnO. Through this heterogeneous structure, charge transfer and photocatalytic activity were promoted, allowing the conversion of CO2 into CH4. Meanwhile, Wang et al. studied homogeneous Mo-doped WO₃·0.33H₂O, which displayed improved photocatalytic activity and selectivity for CO₂ reduction to CH₄. ²²⁶ The Mo doping improved the ability of the material to store and localize photogenerated electrons and boosted the transfer of photoexcited electrons, leading to high levels of CH₄ production.

Wang et al. reported a highly crystalline spinel-phase ZnGa₂O₄ modified with Ag that exhibited high activity and selectivity toward photocatalytic CO evolution. 227 The optimized the crystal size and specific surface area of the ZnGa₂O₄ photocatalyst was synthesized at a calcination temperature of 1123 K for 40 h. Also, by depositing Ag NPs on the ZnGa₂O₄ sample surface through the chemical reduction method, well-formed metallic Ag NPs with a small size and good dispersion were obtained, thereby improving the selectivity and increasing CO evolution. Similarly, Akatsuka et al. reported the synthesis of a Ga2O3 photocatalyst with coexisting β and γ phases under optimized calcination conditions, which played an important role in the photocatalytic reduction of CO₂ and H₂O into CO.²²⁸ The boundaries between the two phases served as active sites for the CO2 reduction, while

defects distributed on the Ga2O3 surface acted as active sites for the water splitting. Furthermore, Yoon et al. studied Pt/Znembedded β-Ga₂O₃ nanorods, which improved the reduction of CO2 into CH3OH owing to the synergistic effect of increased defect sites and high charge transfer.²²⁹ In another example, Liu et al. used a binary ethylenediamine (En)/water solvent system to synthesize single-crystalline Zn₂GeO₄ nanoribbons with lengths of hundreds of micrometers, a thickness of approximately 7 nm (corresponding to five repeating cell units), and aspect ratios (length to width) of up to 10000:1.161 In addition, the photoactivity of Zn₂GeO₄ was improved in terms of CH₄ generation, which was ascribed to the following reasons: (i) a high specific surface area of 22.87 m² g⁻¹; (ii) improved crystal quality, eliminating the possibility of any grain boundaries and/or other interfaces; (iii) the ultralong longitudinal dimensions of the nanoribbons, which provided sufficiently spacious transport channels for charge separation; and (iv) the ultrathin geometry of the nanoribbons, which allowed charge carriers to move rapidly from the interior to the surface for participation in the photoreduction reaction.

Layered Bi₂WO₆ is another candidate catalyst and the most studied layered oxide material for photocatalytic applications owing to its suitable bandgap of 2.8 eV, which enables light harvesting in the visible region. Several studies on Bi₂WO₆ materials in conjunction with other metal NPs, semiconductors, and carbon-based materials have been reported. For example,

Kong et al. anchored CQDs on ultrathin Bi₂WO₆ (UBW) nanosheets using a single-step hydrothermal process. 261 This anchoring afforded extended light absorption in the visible-NIR region. In addition, the hybrid photocatalyst displayed several significant advantages for CO2 photoreduction, such as (i) the exposed active facets (001) of UBW improving CO₂ adsorption, (ii) CQDs up-converted photoluminescence properties, and (iii) the electron-withdrawing nature of CQDs. Catalytic CO2 conversion was performed in a gas-phase flow reactor system under illumination from a 500 W Xe lamp. The optimized catalyst exhibited photocatalytic CO₂ reduction into CH₄ with a catalytic activity of 7.19 μ mol g⁻¹, which was approximately 9.5 and 3 times greater than those observed for bare Bi₂WO₆ nanoplatelets and UBW, respectively. In 2019, Kong and co-workers demonstrated a surface-engineered 2D/2D p-n heterojunction catalyst based on Bi₂WO₆/BiOI (i.e., BWO/BOI). ²⁶² Oxygen-vacant BWO (BWO-OV) nanosheets were synthesized by a hydrothermal approach and then self-assembled with BOI. Fig. 15(a) shows the crystal structure of BWO-OV, which displayed intense light absorption in the visible region that extended into the NIR region. Furthermore, the p-n junction heterostructure enhanced the optical absorption over a broad range covering the UV-vis-NIR region (Fig. 15(b)). As a result, the optimized BWO-OV/BOI heterostructure exhibited the highest catalytic activity for CO_2 reduction into CH_4 (18.32 µmol g^{-1}) compared to other combinations under illumination from a 500 W Xe lamp (Fig. 15(c)). Thus, the coexistence of surface defects

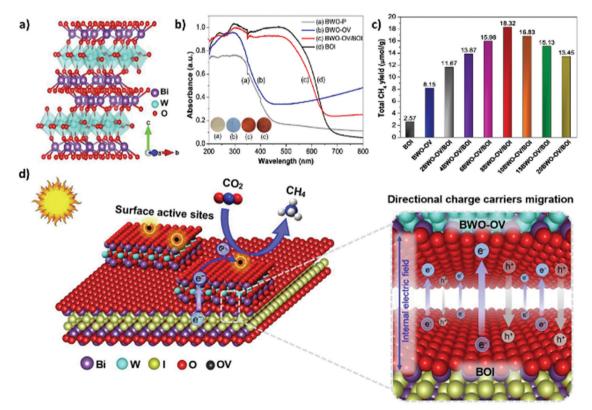


Fig. 15 (a) Crystal structure of oxygen-deficient Bi₂WO₆, (b) UV-vis absorption spectra of various samples, (c) photocatalytic CO₂ reduction activity of various catalysts toward CH_4 formation, and (d) schematic illustration of the CO_2 reduction mechanism on the Bi_2WO_6/BOI composite. Reproduced with permission from ref. 262, Copyright 2019, Elsevier.

and p-n heterojunctions was demonstrated to effectively improve the optoelectronic performance of the catalyst and ultimately the catalytic activity. The mechanism of photocatalytic CO2 reduction to CH₄ over BWO-OV/BOI is depicted in Fig. 15(d). The oxygen vacancies over BWO significantly enhanced the optical properties, and the p-n heterojunctions established an internal electric field between BWO and BOI that improved the charge separation and hindered electron-hole recombination.

Meanwhile, other researchers have attempted to improve the CO₂ conversion efficiency of photocatalysts by using metal oxide materials in conjunction with organic and inorganic compounds. Li et al. studied a novel Z-scheme ternary hierarchical photocatalyst based on ZnFe₂O₄, In₂O₃, and reduced graphene oxide (RGO).²⁴⁰ The combination of ZnFe₂O₄ and In₂O₃ provided a wide visible-light absorption range and a suitable conduction bandgap position (ca. -1.5 eV), while the addition of RGO promoted charge separation by serving as an electron mediator. The synthesis of ZnFe₂O₄/RGO/In₂O₃ hollow tubules was confirmed by both steady-state and time-resolved surface photovoltage spectroscopy, which indicated a prolonged photogenerated charge carrier lifetime and improved charge carrier separation compared to bare ZnFe₂O₄ and In₂O₃. The most exciting fact is that neither bare ZnFe₂O₄ nor ZnFe₂O₄/In₂O₃ exhibited OH generation in a series of reaction processes, whereas bare In₂O₃ and ZnFe₂O₄/RGO/In₂O₃ displayed strong signals corresponding to OH as confirmed by EPR analysis. This finding suggests that the photogenerated electrons were transferred from the CB of In₂O₃ to the VB of ZnFe₂O₄, resulting in a large quantity of •OH groups. These properties allowed the Z-scheme ZnFe₂O₄/RGO/In₂O₃ catalyst to exhibit high CO2 conversion. Meanwhile, Yin et al. reported the synthesis of Cu(II)-grafted Nb₃O₈ nanosheets.²³² The small size of the Cu(II) nanoclusters (<3 nm), which were composed of amorphous oxides, promoted the accumulation of excited electrons to drive the efficient multi-electron reduction of oxygen. By grafting the Nb₃O₈ nanosheets and Cu(II) cocatalysts, which not only increased the specific surface area of the catalyst but also shortened the electron transport distance, CO2 was more effectively converted to CO.

Recently, numerous studies have been conducted on the evolution of C2 (e.g., C2H4) and higher hydrocarbons during the photocatalytic CO₂ reduction.²⁶³ However, this is associated with many challenges owing to the relatively low efficiency of multi-electron transfer and slow dynamics of C-C coupling. The formation of the key intermediates of *OC-CO and *OC-COH required for the production of C2 and higher hydrocarbons from CO2 over photocatalysts is also very difficult compared to electrocatalytic reactions. 264,265 Because photocatalysts produce lower electron densities upon light irradiation. 266,267 Wang et al. reported the use of CuO_x@p-ZnO to convert CO₂ into C₂H₄.²³³ The authors synthesized the hybrid material by replacing some of the Zn²⁺ ions in ZIF-8 with Cu²⁺ to afford a uniform Cu/Zn atomic ratio as shown in Fig. 16(a)-(f). XAFS analysis revealed the occurrence of surface changes during the photocatalytic reaction, as shown in Fig. 16(g)-(i). During the photocatalytic CO2 reduction, partial reduction of Cu²⁺ occurred owing to the transfer of electrons from p-ZnO, resulting in the formation of a Cu⁺ surface layer on the




Fig. 16 (a) TEM image, (b) high-resolution TEM image, (c) annular darkfield TEM image, and (d)-(f) elemental mapping images of $CuO_x@p-ZnO_x$ (g) Copper K-edge X-ray absorption near-edge structure (XANES) spectra for pristine Cu foil, Cu₂O, CuO, and CuO_x@p-ZnO collected after 0, 2, 4, and 8 h of photoreaction. (h) Fourier-transformed k^2 -weighted ($\gamma(k)$) EXAFS spectra and (i) relative contents of CuO and Cu₂O on CuO_x@ p-ZnO after 0, 2, 4, and 8 h of photoreaction. Reproduced with permission from ref. 233, Copyright 2021, American Chemical Society.

 CuO_x matrix. CO_2 reduction then took place on the CuO_x matrix; following the two-electron reduction to CO, a portion of the generated *CO species desorbed to form gaseous CO, while other *CO species remained trapped on the CuO_x matrix. This enabled subsequent electron transfer to further reduce the surfacebound *CO into CH₄ and C₂H₄ via the intermediates *CHO and *OC-COH, respectively. The results indicated that the hybrid CuO_r@p-ZnO catalyst had a lower binding energy than ordinary Cu_2O and a high Gibbs free energy (ΔG) for the formation of the *OC-CO intermediate.

5.2 Graphene-based photocatalysts

In recent years, graphene, a valuable carbon-based 2D material composed of a single sheet of sp²-hybridized C atoms arranged in a hexagonal lattice, 168 has been the subject of rigorous research owing to its diverse range of potential applications. Graphene exhibits a variety of desirable characteristics, such as electrical conductivity, high surface area (ca. 2600 m² g⁻¹), and the ability to activate molecules. 268-270 The addition of graphene to photocatalysts has proved beneficial for (i) suppressing the recombination of photogenerated electrons and holes, (ii) enhancing CO_2 adsorption owing to π - π conjugation between graphene and CO2, (iii) activating CO2 molecules, (iv) improving the corrosion resistance, (v) increasing the surface area, and (vi) enhancing light absorption, 167,271-276 all of which are advantageous for photocatalysis.

Highly-mobile electrons, which are usually called π electrons, are used to mediate the bonding with other graphene sheets or metals or metal oxides. As a result of this bonding, a strong interaction is developed between the graphene and semiconductor through which the former can readily take away the photogenerated electrons.²⁷⁷⁻²⁷⁹ The abundant literature on graphene-based photocatalysts indicates that the Fermi level/ work function (0 V vs. NHE) of these photocatalysts remains below the CB of many metal oxide-based photocatalysts. Owing to this band alignment, the photogenerated electrons are transferred to the graphene surface, while the holes preferentially remain on the surface of the metal oxide, thereby affording spatial separation of the electrons and holes at the interface.

In contrast, only a few studies have considered the role of graphene as a hole conductor.95 Illustrative examples of such charge separation by graphene/TiO2 systems are presented in Fig. 17(a) and (c), in which the presence of graphene remarkably suppressed the charge recombination confirmed by TRPL and PL.

Graphene absorbs the entire solar spectrum owing to its zero bandgap and black color. However, despite this extended range of light absorption, it is unable to provide the photogenerated charges required for CO2 reduction. To exploit the light harvesting, it is essential to load an appropriate amount of

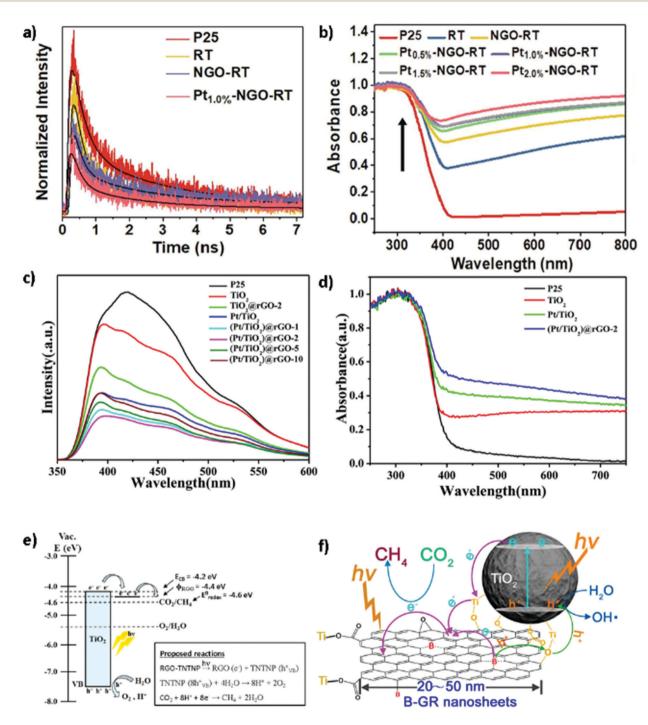


Fig. 17 (a) Time-resolved photoluminescence (PL) spectra and (b) UV-vis spectra for graphene added to reduced TiO₂ (RT). Reproduced with permission from ref. 96, Copyright 2020, Elsevier. (c) PL spectra and (d) UV-vis spectra for graphene added Pt/TiO2. Reproduced with permission from ref. 280, Copyright 2016, Elsevier. Illustrative examples of (e) a graphene derivative-metal oxide composite with bandgap alignment and proposed proton-assisted multi-electron reactions, reproduced with permission from ref. 281, Copyright 2013, Elsevier, and (f) TiO₂/B-GR (boron doped graphene nanosheets) showing the proposed electron-hole transfer reaction, reproduced with permission from ref. 282, Copyright 2013, American Chemical Society.

graphene onto the metal oxide semiconductor. Otherwise, it shields the surface of the photocatalyst and thus obstructs the light absorption and other photocatalytic properties as well by curtailing the generation of the photogenerated pairs. This optimal graphene amount engages in electronic interactions with photocatalysts, e.g., TiO₂, by which the absorption is enhanced. 102,283 Almost all of the studies pertaining to graphenemetal oxide photocatalysts have reported this behavior. 284,285 For example, Li and co-workers reported that the addition of graphene enhanced the light absorption of Pt-TiO2, respectively, as shown in Fig. 17(d).²⁸⁰ Similar study was also reported by Hiragond and co-workers for hydrothermally grown graphene over reduced TiO2 (RT), respectively (Fig. 17(b)).96

In addition to the outstanding optoelectronic properties of graphene, its specific surface area is regarded as the maximum among all synthesized materials. Consequently, the use of graphene to prepare photocatalysts can be expected to considerably increase the surface area and therefore the number of exposed reaction sites. These reaction sites of graphene enable π - π interactions with CO₂, thus increasing its adsorption. In addition, π - π conjugation can further destabilize and activate CO2, leading to an appreciable enhancement in the CO2 reduction activity. 90,286 Under light irradiation, graphene is known to receive electrons from metal oxides, where they reduce the CO₂ in the presence of protons, while the leftover holes at the metal oxide oxidize water to generate protons, which is necessary for the CO2 reduction. Fig. 17(e) shows the proposed charge transfer and reaction scheme when graphene is used as a cocatalyst or to form heterostructures. In these studies, various geometries of graphene have been used, including QDs and few layers of 2D sheets. In all of these circumstances, the addition of graphene has proved efficacious for improving the optoelectronic properties of the photocatalysts, where the graphene-based photocatalysts were found to harvest light at longer wavelengths. As a result, abundant photogenerated charges were generated and efficiently utilized for CO2 reduction owing to the additional role of graphene in preventing these charges from undergoing recombination.287

Doped graphene materials, e.g., boron-doped graphene 288 or nitrogen-doped graphene,289 have also proved efficacious for CO₂ reduction. Boron doping has been found to alter the morphology of the photocatalyst to afford nanoribbons, which facilitates directional charge transfer, while nitrogen doping enhanced the CO₂ adsorption. The mechanism of the charge transfer and band alignment for B-GR is depicted in Fig. 17(f).²⁸²

Some studies have also reported the use of graphene oxide (GO) for photocatalytic CO2 reduction through bandgap engineering. In this regard, studies by Chen and co-workers described Cu-modified GO, where the Fermi level of the Cu became more negative owing to electron transfer to Cu, while holes accumulated on the graphene surface. 290 Therefore, this study completely contradicts the previous reports. Sorcar et al. reported similar results, where the upward band bending of the TiO₂ compelled the electrons to remain in the reduced titania while the holes were transferred to GO.95 The performance of graphene-based photocatalysts is summarized in Table 3.

The combination of graphene with other photocatalytic materials has also been reported to enhance the C2 selectivity. For example, Chen and co-workers reported the formation of CH₃CHO over Cu NPs (4-5 nm) anchored on GO, which they ascribed to the effective charge separation at the Cu-GO interface in which the electrons accumulated at Cu while the holes tended to remain on the graphene.290 Sorcar et al. reported a similar type of hole accumulation for their graphene-wrapped blue titania (BT), and they also reported the formation of a C2 product (C₂H₆).⁹⁵ They proposed that synergistic effects involving the graphene and electron-enriched Ti3+ states of BT generated •CH3 radicals, which underwent "radical substrate reactions" to form C₂H₆. Zou and co-workers also reported C₂H₆ formation owing to these synergistic effects for their graphene-TiO2 hybrid material. 102

The literature suggests that graphene wrapping is also conducive for improving photocatalyst stability. One possible reason for this could be the oxidation of water on the graphene surface, which avoids the contact of the photocatalyst with both holes and water. Sorcar et al. reported such example, where they used graphene-wrapped reduced BT (G/RBT) deposited with Pt and found that holes were transferred to graphene upon light irradiation.95 During photocatalytic CO2 reduction tests, this material remained stable for six cycles (42 h in total). Another study by Tang and co-workers also reported the efficacy of graphene wrapping for sustaining the photocatalytic performance of Cu₂O.¹⁷⁸ The authors noted that graphene addition allowed the photocatalysts to exhibit continuous and enhanced CO production for almost 20 h, which was longer than that observed for pristine Cu₂O and air-oxidized Cu₂O (Fig. 18(a)). One possible reason for this could be the prevention of oxidation of the Cu₂O. A similar study by Cao and co-workers reported the role of graphene in mitigating Cu oxidation. 186 Upon comparison of the pristine Cu₂O/TNA with post-reaction (10 h) samples of Cu2O/TNA and Cu2O/graphene/TNA, the authors observed the oxidation of Cu for the graphene-free samples. Owing to this beneficial effect of the graphene, Cu₂O/graphene/TNA exhibited stable performance over 10 consecutive cycles with a performance loss of only 18%, as shown in Fig. 18(b).

5.3 Metal-organic frameworks

Metal-organic frameworks (MOFs) are micro/mesoporous hybrid crystalline materials in which organic linker ligands coordinate and interconnect metal ions or metal cluster nodes. As a result of this coordination network, MOFs possess a porous structure with high pore volume and large surface area. These materials can display physisorption due to van der Waals forces. Thus, MOFs can serve as good absorbents for capturing chemicals such as CO2. To date, MOFs have been applied in numerous research fields, such as gas purification, 302 hydrogen storage, 303 carbon capture, 304 electrocatalysis, 305 photocatalysis, 306 semiconductors, 307 and drug delivery.308

Both the organic linker ligands and the metal ions or cluster nodes of MOFs can be tailored for photocatalytic applications. For example, Zecchina and co-workers reported that the metal ions or metal cluster nodes can act as semiconductor QDs,

Table 3 Graphene-based materials for photocatalytic CO₂ reduction

Ho (NeirGO, +HG) One one caref filter	Catalyst	Feed gas composition	Light source	Reducing agent	Reaction conditions	Reactor type	Yield	Ref.
Moist DOZ 1000 WX e are lamp H ₂ O Now Se are lamp Now Se are lamp H ₂ O Now Se are lamp Now Se are lamp H ₂ O Now Se are lamp Now Se ar	Graphene-Zn _{0.5} Cd _{0.5} S	In situ generated CO ₂ +	1	H ₂ O	100 mg sample in reactor (200 mL)	Gas phase	CH ₃ OH: 1.96 µmol g ⁻¹ h ⁻¹	291
Moist CO ₂ 100 W Mcm ⁻² 100 mg of sample, 300 mL, 2 h. 1 1000 ppm moist CO ₂ 100 W Xe are lamp H ₂ O 100 mg of sample dispersed in 20 mL, 2 h. 1 1000 ppm moist CO ₂ 100 W Xe are lamp H ₂ O 100 mg of sample in reactor (230 mL) 2 m	Cu ₂ O/graphene/TNA	n ₂ O (NancO ₃ + nCl)	(400 nm cutoff filter)		Double-chamber reactor (250 mL), two-sided sample (calculated area of 1 cm²) unoton exchange reaction for 10 h	Liquid phase	CH ₃ OH: 45 μ mol cm ⁻² h ⁻¹ Stability: 6 cycles	186
Highly pure moist CO ₂ 100 W Xe are lamp H ₂ O 10 ang of sample dispersed in 230 m. Case phase batch CH ₁ : 11 sign pin moist 11 Highly pure moist CO ₂ 300 W Xe are lamp H ₂ O 10 ang of sample dispersed in 230 m. Case phase batch CH ₁ : 11 sign pin moist CO ₂ 100 W Xe are lamp H ₂ O 11 g sample in reactor (230 ml.) Case phase batch CH ₁ : 11 sign pin moist CO ₂ 100 W Xe are lamp H ₂ O 10 ang of photocaulyst dispersed over Cantinuousedhow CH ₁ : 21 sign moist CO ₂ 100 W Xe are lamp H ₂ O 10 ang of photocaulyst dispersed over Cantinuousedhow CH ₁ : 21 sign moist CO ₂ 100 W W xe are lamp H ₂ O 10 ang photocaulyst in reactor (230 ml.) Cantinuousedhow CH ₁ : 21 sign moist CO ₂ 100 W Xe are lamp H ₂ O 10 ang photocaulyst in reactor (35 ml.) Case phase reactor Cate and Ch ₁ : 21 sign moist CO ₂ 100 W Xe are lamp H ₂ O 10 ang photocaulyst in reactor (83 ml.) Case phase reactor Cate and Ch ₁ : 21 sign moist CO ₂ 100 W Xe are lamp H ₂ O 10 ang photocaulyst in reactor (83 ml.) Case phase reactor Cate and Ch ₂ : 21 sign moist CO ₂ 100 W Xe are lamp H ₂ O 10 ang photocaulyst in reactor (83 ml.) Case phase reactor Cate and Ch ₂ : 21 sign moist CO ₂ 100 W Xe are lamp H ₂ O 10 ang photocaulyst in reactor (83 ml.) Case phase reactor Cate and Ch ₂ : 21 sign moist CO ₂ 10 w W Xe are lamp H ₂ O 10 ang photocaulyst in reactor (83 ml.) Cate phase Cate and Ch ₂ : 21 sign moist CO ₂ 10 w W xe are lamp H ₂ O 10 ang photocaulyst in seated Cate and Ch ₂ : 21 sign moist CO ₂ 10 w W xe are lamp H ₂ O Cate and Ch ₂ : 21 sign moist CO ₂ 10 w W xe are lamp H ₂ O Cate and ca	Cu/GO	Moist CO ₂	300 W halogen lamp	H_2O	100 mg of sample, 300 mL, 2 h	Gas phase	CH.OH: 2 04 umol g ⁻¹ h ⁻¹	290
Highly pure moist CO ₂ 300 W Xe are lamp H ₂ O 10 mg of sample dispersed in 230 mL Case-phase batch Case-phase batch CAs 240 mm Case-phase batch CAs 240 mm Case-phase batch CAs 240 mm CAS 2	G-TNT (titania	1000 ppm moist CO_2	100 W Xe arc lamp	H_2O	Reactor volume: 15.4 cm ³	Gas-phase batch	CH_4 : 1.98 ppm cm ⁻² h ⁻¹	215
Host generated CO ₂ + 300 W Xe are lamp H ₂ O 10 mg of photocatalyst dispersed over Continuouseflow CH ₂ C ₂ C ₃ C ₃ C ₃ C ₄ H ₂ C ₃ C ₄ C ₄ C ₃ C ₄ C ₄ C ₃ C ₄	nanotubes) G-Ti _{0.91} O ₂ hollow	Highly pure moist CO_2			10 mg of sample dispersed in 230 mL	reactor Gas-phase batch	CH ₄ : 1.14 μ mol g^{-1} h^{-1}	279
Hydro Director, 1 (1.2) (1.2	spheres RGO-CdS	In situ generated CO ₂ +		H_2O	100 mg sample in distilled water (10 mL)	reactor Gas phase	CO: 8.91 μ III01 g II CH ₄ : 2.51 g ⁻¹ h ⁻¹	275
Moist pure CO_2 300 W Xe are lamp H ₂ O 40 mg of photocatalyst dispersed over continuous-flow character (25 mL) 40 mg of photocatalyst dispersed over continuous-flow character (25 mL) 40 mg of photocatalyst dispersed over continuous-flow character (25 mL) 40 mg of photocatalyst dispersed over continuous-flow character (25 mL) 40 mg of photocatalyst dispersed over continuous-flow character (25 mL) 40 mg of photocatalyst dispersed over continuous-flow character (25 mL) 40 mg of photocatalyst dispersed over continuous-flow character (25 mL) 40 mg photocatalyst in reactor (35 mL) 40 mg photocatalyst dispersed over case phase reactor character (35 mL) 40 mg photocatalyst dispersed over case phase reactor (35 mL) 40 mg photocatalyst dispersed over case phase reactor (35 mL) 40 mg photocatalyst dispersed over case phase reactor (41; 5.37 mnol g ⁻¹ h ⁻¹ dispended (300 mm filter) 40 mg photocatalyst dispersed (35 mL) and reactor (41; 5.37 mnol g ⁻¹ h ⁻¹ dispended (300 mm filter) 40 mg photocatalyst dispersed (35 mL) and reactor (41; 5.37 mnol g ⁻¹ h ⁻¹ dispended (300 mm filter) 40 mg photocatalyst dispersed (300 mL) are calculated (300 mL) are calculat	${\rm Graphene-TiO}_2$	H_2O (NaHCO ₃ + HCI) Moist pure CO_2	$(\lambda \ge 420 \text{ nm})$ 300 W Xe arc lamp	H_2O	ın glass reactor 0.1 g sample in reactor (230 mL)		$AQY = 0.8\%$ CH_4 : 8 μ mol g^{-1} h^{-1} CH_4 : 9 μ mol g^{-1} h^{-1}	102
1000 ppm moist CO ₂ 100 W Xe are lamp H ₂ O 20 mg of photocatalyst dispersed over continuous-flow 2H ₂ 259 jmmol g ⁻¹	Pt/TiO ₂)/rGO	Moist pure CO ₂	300 W Xe arc lamp (320–780 nm)	$\rm H_2O$	8 h	Continuous-flow gas-phase reactor	C2.16: 10.05 μ III.0. $g = 1$ CH ₄ : 41.3 μ III.0 $g = 1$ h^{-1} CO: 0.4 μ III.0 g^{-1} h^{-1} H ₂ : 5.6 μ III.0 g^{-1} h^{-1} AOY = 1 93%	280
Moist pure CO2 100 W Hg vapor lamp H ₂ O Teflon reactor (25 mL) Gas phase 4.5 times more CH ₄ than for daylight bulb H ₂ O 10 mg photocatalyst in reactor (85 mL) 2.5 times more CH ₄ than for 2.5 times CH ₄ than for 2.5 t	Pt-G/RBT	1000 ppm moist CO_2	100 W Xe arc lamp	$\rm H_2O$	40 mg of photocatalyst dispersed over ceramic disc, illuminated for 7 h	Continuous-flow gas-phase reactor	CCH ₄ : 259 μ mol g ⁻¹ C ₂ H ₆ : 77 μ mol g ⁻¹ AOY = 7.9%	95
Moist pure CO ₂ 300 W Xe are lamp (92.999%) (300 < λ < 400 mm) (300 < λ < 400 mm) (300 < λ < 400 mm) (300 < λ = 400 mm) (300 < λ = 400 mm) (300 ppm moist CO ₂ 15 W daylight bulb (30.999%) (300 W Xe are lamp (400 mm filter)) (2. > 420 mm) (400 mm filter) (400 mm	SEG-P25 nanocomposites	Moist pure CO ₂	100 W Hg vapor lamp $(\lambda = 365 \text{ nm})$ and 60 W daylight bulb	$\rm H_2O$	Teflon reactor (25 mL)	Gas phase	P.5 under UV 7.2 times more CH ₄ than for P.5 under UV P.5 under visible	165
Moist pure CO ₂ 15 W daylight bulb H_2O Under ambient temperature and preseducity of H_2O are for 10 h acceptance flow. CH ₄ : 5.87 μ mol g ⁻¹ has bottocatalyst dispersed over H_2O and 2 mJ. H_2O (Barley) and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Barley) and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 3 mg. H_2O (Barley) and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 3 mg. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.0 μ mol g ⁻¹ has been acceptance and 2 mJ. H_2O (Cr. 7.1 μ mol mol mol mol mol mol mol mol mol	3R/TiO ₂ (graphene- supported TiO ₂	Moist pure CO ₂ (99.999%)	300 W Xe arc lamp (300 $< \lambda < 400 \text{ nm}$)	$\rm H_2O$	10 mg photocatalyst in reactor (85 mL)		CH ₄ : 27.8 μ mol g ⁻¹ h ⁻¹ CO: 70.8 μ mol g ⁻¹ h ⁻¹ AOY = 0.0847%	272
Highly pure moist CO ₂ 15 W daylight bulb H ₂ O	GO-OTiO ₂ binary	Moist pure CO ₂ (99.999%)	15 W daylight bulb	H_2O		Continuous-flow gas-phase reactor	CH ₄ : 1.718 µmol g ⁻¹ h ⁻¹	292
1000 ppm moist CO_2 100 W Xe arc lamp O_2 40 mg photocatalyst dispersed over O_2 100 W Xe arc lamp O_3 200 W Xe arc lamp O_4 200 mg photocatalyst, 200 mL O_4 200 mg photocatalyst, 200 mL O_4 200 mg photocatalyst, 200 mL O_4 200 mg O_4	$ m 3R/g$ - $ m C_3N_4$	Highly pure moist CO ₂		H_2O	Under ambient temperature and pressure for 10 h	Continuous-flow gas-phase reactor	CH_4 : 5.87 µmol g ⁻¹	293
Ethyl acetate (solvent) 300 W Xe arc lamp ($\lambda > 420$ nm) bottle (35 mL), 10 h reaction time (300 W Xe arc lamp (400 nm filter) (400 nm filter) (5 mL) in sealed Pyrex bottle (12 mL), 4 h (20 (NaHCO ₂ + H ₂ SO ₄) (TEOA) (TEOA	et-NGO-RT	1000 ppm moist CO_2	100 W Xe arc lamp	H_2O	40 mg photocatalyst dispersed over ceramic disc. illuminated for 7 h	Gas-phase flow reactor	CH_4 : 252.0 nmol g ⁻¹ Stability: 5 cycles	96
Pure CO ₂ 300 W Xe arc lamp (400 nm filter) In situ generated CO ₂ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₃ O (NaHCO ₃ + H ₂ SO ₄) H ₄ D (NaHCO ₃ + H ₂ SO ₄) H ₅ O (NaHCO ₃ + H ₂ SO ₄) H ₆ D (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₇ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ SO ₄) H ₃ O (NaHCO ₃ + H ₂ SO ₄) H ₄ O (NaHCO ₃ + H ₂ SO ₄) H ₂ O (NaHCO ₃ + H ₂ O ₄) H ₂ O (NaHCO ₃ + H ₂ O ₄) H ₃ O (NaHCO ₃ + H ₂ O ₄) H ₄ O (NaHCO ₃ + H ₂ O ₄) H ₅ O (NaHCO ₃ + H ₂ O ₄) H ₆ O (NaHCO ₃ + H ₂ O ₄) H ₇ O (NaHCO ₃ + H ₂ O ₄) H ₇ O (NaHCO ₃ + H ₂ O ₄) H ₇ O (NaHCO ₃ + H ₂ O ₄) H ₇ O (NaHCO ₃ + H ₂ O ₄) H ₇ O (NaHCO ₃ + H ₂ O ₄) H ₇ O (NaHCO ₃ + H ₂ O ₄) H ₇ O (NaHCO ₃ + H ₂ O ₄) H ₇ O (NaHCO ₃ + H ₂ O ₄) H ₇ O (NaHCO ₃ + H ₂ O ₄) H ₇ O (NaHCO ₃ + H ₂ O ₄) H ₇ O (NaHCO ₃ + H ₂ O ₄) H ₇ O (NaHCO ₃ + H ₂ O (NaHCO ₃	$ m Ss_4PbBr_e/rGO$	Ethyl acetate (solvent)	300 W Xe arc lamp $(\lambda > 420 \text{ nm})$	$\rm H_2O$			CO: 11.4 μ mol g ⁻¹ h ⁻¹ Stability: 6 cycles	294
In situ generated CO ₂ + 300 W Xe arc lamp H_2O 50 mg photocatalyst, 200 mL H_2O (NaHCO ₃ + H_2SO_4) H ₂ O (NaHCO ₃ + H_2SO_4) High-purity CO ₂ 300 W Xe arc lamp H_2O Triethanolamine 95 wt% of the catalyst and 3 mg H_2O (10 µmol) in 8 mL H_2O cutoff filter) of acetonitrile, 2 mL of H_2O , and 2 mL Stability: 5 cycles of triethanolamine, 20 °C, 7 h	SsPbBr ₃ -USGO-α-Fe ₂ O ₃ ultrathin and smallize graphene oxide)	Pure CO ₂	300 W Xe arc lamp (400 nm filter)	H_2O	4 mg as-prepared nanomaterial in acetonitrile/deionized water (200: 1 (v/v), 5 mL) in sealed Pyrex bottle (12 mL). 4 h	Liquid phase	CO: 14.6 μ mol g ⁻¹ h ⁻¹	295
High-purity CO ₂ 300 W Xe arc lamp Triethanolamine 95 wt% of the catalyst and 3 mg Liquid phase CO: 27.0 μmol g ⁻¹ (99.999%) (120 nm long-pass (TEOA) [Ru(bpy) ₃]Cl ₂ ·6H ₂ O (10 μmol) in 8 mL H ₂ : 9.0 μmol g ⁻¹ Cutoff filter) of acetonitrile, 2 mL of H ₂ O, and 2 mL Stability: 5 cycles of triethanolamine, 20 °C, 7 h	znO/graphene	<i>In situ</i> generated CO ₂ + H ₂ O (NaHCO ₃ + H ₂ SO ₄)	300 W Xe arc lamp	$\rm H_2O$	50 mg photocatalyst, 200 mL	Gas-phase batch reactor	CO: 3.38 µmol g ⁻¹ h ⁻¹ CH ₄ : 0.59 µmol g ⁻¹ h ⁻¹ CH ₃ OH: 0.09 µmol g ⁻¹ h ⁻¹ Stabilive: 5 cycles	296
	Ni@GC	High-purity CO ₂ (99.999%)	300 W Xe arc lamp (420 nm long-pass cutoff filter)	Triethanolamine (TEOA)	95 wt% of the catalyst and 3 mg $[Ru(bpy)_3]Cl_2 \cdot 6H_2O$ (10 µmol) in 8 mL of acetonitrile, 2 mL of H_2O , and 2 mL of triethanolamine, 20 °C, 7 h	Liquid phase	CO: 27.0 μ mol g ⁻¹ H ₂ : 9.0 μ mol g ⁻¹ Stability: 5 cycles	297

Fable 3 (continued)

Ref.	298	299	300	281	301
Yield	CH ₃ OH: 15.21% of reaction 298 mixture Stability: 4 cycles AQY = 1.175%	CH ₃ OH: 1945.9 mmol $g^{-1} h^{-1}$ (12.27% of reaction mixture)	CH ₃ OH: 1228.0 µmol g ⁻¹ h ⁻¹ Stability: 6 cycles	CH_4 : 5.67 ppm cm ⁻² h ⁻¹	CO: 2.59 μ mol $g^{-1} h^{-1}$ CH ₄ : 0.33 μ mol $g^{-1} h^{-1}$ Stability: 4 cycles
Reactor type	ıL Liquid-phase batch reactor	h	Liquid phase	Gas phase	Gas phase
Reaction conditions	100 mg photocatalyst dissolved in 50 mL Liquid-phase of 0.04 M NaHCO ₃ , under UV light batch reactor	150 mg in 50 mL carbonated water, 48 h	24 h	$2.0 \times 2.0 \text{ cm}^2$ photocatalyst film in reactor (15.4 mL)	50 mg photocatalyst, 3 h
agent	Na ₂ SO ₃ (hole scavenger)		H_2O/DMF	H_2O	
Light source	: 500 W metal halide lamp	500 W metal halide lamp	20 W white LED bulb (85 W m^{-2})	100 W Xe arc lamp	350 W Xe arc lamp (420 nm cutoff filter)
Feed gas composition Light source	AgCuInS ₂ -graphene-TiO ₂ Pure CO ₂ gas (filling for 500 W metal halide 30 min)	LaYAgO ₄ -Graphene-TiO ₂ Carbonated water	CO ₂ saturated with water/DMF	1000 ppm moist CO_2	dS Moist pure ${\rm CO}_2$
Catalyst	AgCuInS ₂ -graphene-Ti	LaYAgO ₄ -Graphene-Ti	rGO-CuO	RGO-TiO ₂ NPs	N-Doped graphene–CdS Moist pure CO ₂

while the organic ligand linkers can play the role of antennas for sensitizing the QDs. 309 In terms of functionalizing MOFs, post-synthesis modification (PSM) is the general method for anchoring catalytic sites to MOFs to increase their photocatalytic activity. MOFs can be modified with proper combination of nodes and organic linking groups by anchoring photocatalytically active species. This affords a single photocatalytic reaction site, in contrast to other PSM methods that lead to heterogeneously scattered sites. Catalytically active species supported on MOFs prepared via PSM methods have been designed to meet a variety of catalytic applications. However, MOFs may lose their catalytic selectivity or performance if the anchored catalytic sites on the ligands induce unexpected forms by interactions between the metal complexes and a solid surface.

To solve this problem, Dengrong et al. used MOF-253-Ru(CO)₂Cl₂, which is constructed by MOF-253 supported Ru carbonyl complex.310 MOF-253 was adopted as a platform for constructing a photocatalytic system that displayed improved charge transfer. MOF-253-Ru(CO)₂Cl₂ exhibited a photocatalytic CO₂ conversion rate of 8.23 µmol g⁻¹ h⁻¹ for HCOO⁻ under visible-light irradiation for 8 h. Ru(bpy)2Cl2 was used to photosensitize MOF-253-Ru(CO)2Cl2 in the visible region through N,N-chelation of the Ru(bpy)₂Cl₂ by the MOF-253 surface sites to afford immobilized $[Ru(bpy)_2(X_2bpy)]^{2+}$ on the MOF surface. Li et al. synthesized a Cu₃(BTC)₂(a)TiO₂ hybrid photocatalyst possessing the unique structure shown in Fig. 19(a), consisting of a Cu₃(BTC)₂ octahedral microcrystal core and TiO₂ shell. The TiO₂ semiconductor shell underwent facile photoexcitation to produce excitons. In addition, the TiO₂ shell and Cu₃(BTC)₂ core afforded a microporous structure that favored the capture of gas molecules in the catalyst core and provided photocatalytic reaction sites. The photoexcited electrons produced on the TiO₂ shell were transferred to the interface state of Cu₃(BTC)₂@ TiO₂ (Fig. 19(b)), whereupon they activated CO₂ on the Cu sites of Cu₃(BTC)₂. Cu₃(BTC)₂@TiO₂ showed a CH₄ production of 2.64 μ mol g⁻¹h⁻¹ (Fig. 19(c)). In other words, the core-shell structure of this MOF-based semiconductor was well constructed to produce excitons and provide a microporous core for gas molecule capture.311

In another study, Kong and co-workers designed a core-shell halide perovskite@MOF composite with enhanced CO2 reduction activity. 312 Coating of the ZIF shell onto the surface of CsPbBr₃ was achieved in situ by dispersing CsPbBr3 QDs in a mixture of the metal precursor and imidazole ligand (Fig. 19(d)). This coating and the increased charge separation efficiency were key factors underlying the observed CH4 selectivity, where the improved moisture stability of the CsPbBr₃ QDs, CO₂ capture ability, and charge separation efficiency contributed to the enhanced photoconversion efficiency of CO2 into CO and CH4. Two different ZIFs were prepared: (i) ZIF-8 using a Zn precursor and (ii) ZIF-67 using a Co precursor. CsPbBr₃ was then coated onto the ZIFs, as demonstrated by TEM images, STEM images, and elemental mapping data. The Co-based ZIFs acted as a cocatalyst for CsPbBr₃ to improve the optical properties of the hybrid sample CsPbBr₃/ZIF-67 compared to pristine CsPbBr₃ and the Zn-based

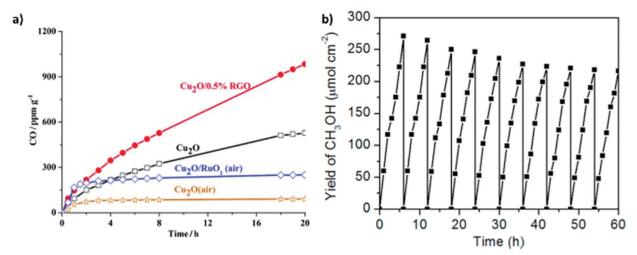


Fig. 18 Stability exhibited by (a) Cu₂O upon the addition of graphene. Reproduced with permission from ref. 178, Copyright 2014, NCBI and (b) stability exhibited by Cu₂O/TNA upon the addition of graphene. Reproduced with permission from ref. 186, Copyright 2016, Elsevier

composite, resulting in high catalytic activity for CO₂ reduction into CO and CH4 with an electron consumption rate of 29.630 μmol g⁻¹ h⁻¹. The catalyst also displayed high stability over six cycles.

Xu et al. synthesized a photocatalytically activated porphyrinbased semiconducting PCN-222 system (Fig. 19(e)) that exhibited superior efficiency to the ligand alone. 313 The high CO₂ capture ability of the MOF in acetonitrile effectively increased the photocatalytic efficiency. Furthermore, the results of PL spectroscopy and ultrafast transient absorption spectroscopy revealed that highly stable electron trap states of PCN-222 suppressed electron-hole recombination, thus improving the photocatalytic CO₂ conversion efficiency.

Dong et al. reported the bimetallic MOF PCN-250-Fe₂M (M = Mn, Zn, Ni, Co), which displayed improved photocatalytic activity and selectivity for reducing CO2 into CO compared to the monometallic analogue PCN-250-Fe₃. 314 PCN-250-Fe₃ and PCN-250-Fe₂M were synthesized by a solvothermal method (Fig. 19(f)), in which the Fe^{II} metal ions of the Fe₂^{III}Fe^{II} metal cluster of PCN-250-Fe₃ could be replaced with other M^{II} species (M = Mn, Zn, Ni, Co). In the conversion of CO_2 to CO, formation of the carboxyl intermediate (*COOH) is the rate-limiting step for CO₂ reduction. DFT calculations indicated that doping with the second metal enhanced the adsorption of CO2 molecules and restrained the hydrogen evolution reaction (HER). Therefore, the photocatalytic efficiency and selectivity for the conversion of CO₂ to CO improved for all of the bimetallic PCN-250-Fe₂M derivatives compared to PCN-250-Fe3. In particular, the Mn-containing bimetallic catalyst PCN-250-Fe₂Mn displayed the highest photocatalytic CO formation rate of 21.51 mmol h⁻¹ g⁻¹ under visible-light irradiation, as shown in Fig. 19(g).

Various approaches have been explored for increasing the photocatalytic efficiency of MOF-based photocatalysts, such as the use of semiconductors and perovskites, regulating the combination of metal ion or complex, and the introduction of trap sites. It is also possible to enhance the efficiency by tuning the light absorption sites through bandgap engineering. Meanwhile, the

selectivity can be improved by modifying the CO₂ adsorption sites. However, long-term stability is still a key limitation of MOF-based photocatalysts. The photocatalytic CO2 reduction performance of MOF-based photocatalysts is summarized in Table 4.

5.4 Transition-metal dichalcogenides

Two-dimensional materials are emerging nanomaterials that possess interesting electrical and optical properties. These materials may consist of a single layer or several layers but are typically less than 5 nm in thickness. In contrast, the lateral size may be several hundred nanometers. Transition-metal dichalcogenides (TMDCs) are superior 2D materials such as MoS₂, WS₂, SnS₂, MoSe₂, and WSe₂. 316 TMDCs have attracted substantial attention owing to their low cost and excellent catalytic activity, which is comparable to that of noble metals. The TMDC nanostructure contains active sites on both edges and basal planes that provide opportunities for electrocatalysis and photocatalysis. 317,318 Optimization of the semiconductor and metallic phases can alter the chemical kinetics, electrical transport, and intrinsic catalytically active sites. The fundamental structural features of TMDCs and strategies for enhancing their catalytic activity were recently reviewed.³¹⁹ TMDCs can be represented by the general formula MX2, where M is a transition-metal atom belonging to groups IVB-VIIB of the periodic table and X is a chalcogen atom such as S, Se, or Te. The typical structure can be denoted X-M-X, in which a central layer of metal atoms is sandwiched between two layers of chalcogen atoms. 320 The monolayer of TMDCs can be stacked owing to van der Waals forces of attraction between each layer. The unit cell structure may possess trigonal prismatic or octahedral geometries. The trigonal prismatic geometry may exist as 2H or 3R polymorphs, which attributes the same metal element but atomic configuration difference in structure. The 2H and 3R phases exhibit hexagonal and rhombohedral symmetry, respectively. In addition, the metallic 1T phase displays tetragonal symmetry with octahedral coordination of the metal

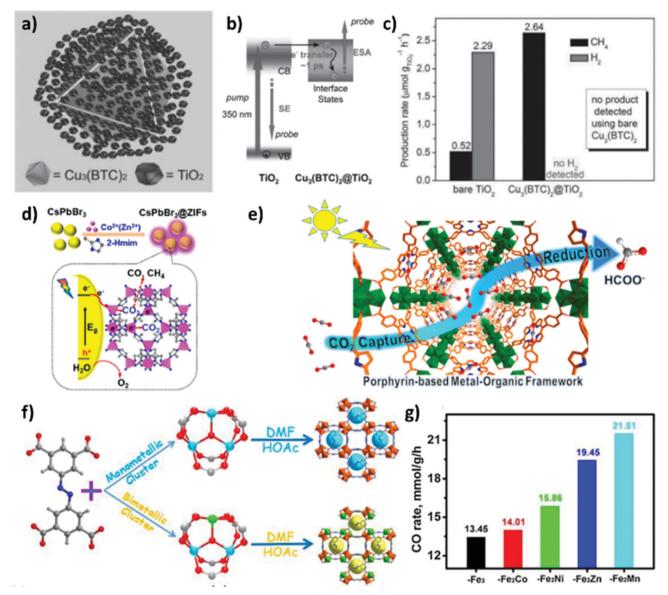


Fig. 19 (a) Core-shell structure, (b) charge transfer mechanism, and (c) production rates of CH₄ and H₂ from CO₂ for Cu₃(BTC)₂@TiO₂. Reproduced with permission from ref. 311, Copyright 2014, Wiley-VCH. (d) Synthetic procedure and CO2 reduction process for CsPbBr₃/ZIFs. Reproduced with permission from ref. 312, Copyright 2018, American Chemical Society. (e) Schematic illustration of photocatalytic CO2 reduction by PCN-222. Reproduced with permission from ref. 313, Copyright, 2015 American Chemical Society. (f) Synthetic route to PCN-250-Fe₃ and PCN-250-Fe₂M (M = Mn, Zn, Ni, Co) by the reaction of Fe₃ (or Fe₂M) clusters and 3,3',5,5'-azobenzene tetra-carboxylic acid (H_4abtc) ligand, and (g) comparison of photocatalytic reaction results for PCN-250-Fe₃ and PCN-250-Fe₂M in terms of CO production. Reproduced with permission from ref. 314, Copyright 2020, Elsevier.

atom. The electronic structures of these phases vary depending on the filling of the d orbitals, which alters the energy band structure to afford semiconductor or metallic characteristics.³²¹

Overall, these aspects determine the type of structure that can be obtained for a specific application. TMDCs have been extensively used in electrodes for electrochemical and photoelectrochemical CO2 reduction owing to their high electronic conductivity and redox surface area. 315,322 In contrast, there have been few reports describing their use as photocatalysts for CO2 reduction. The most important considerations in regard to photocatalysis are exciton generation and charge separation; however, the intrinsic mobility of electrons and holes can be limited in TMDCs.³²³ Cheng and Liu studied the electron and hole mobility in these materials using density functional perturbation theory and Wannier interpolation of the electronphonon matrix. 324 This study revealed that two types of scattering processes (i.e., longitudinal optical and longitudinal acoustic phonon scattering) limit the charge mobility and are not dependent upon the effective mass of the atoms. However, the charge mobility was found to be influenced by the electrical polarization changes induced by atomic vibration. Furthermore, the two types of scattering processes impede the charge carriers. This investigation indicated that MoS2 and WS2 exhibit higher charge carrier mobility with respect to other chalcogens because they exclusively

Table 4 MOF-based materials for photocatalytic CO₂ reduction

			Reducing	h			
Catalyst	Feed gas composition	Light source	agent	Reaction conditions	Reactor type	Yield	Ref.
Sensitized MOF-253- Ru(CO) ₂ Cl ₂	Sensitized MOF-253 – Moist CO_2 + MeCN/TEOA $Ru(CO)_2Cl_2$ (10:1, 6 mL)	Xe lamp ($\lambda = 420$ –800 nm)	TEOA	TEOA 5 mg photocatalyst	Gas phase	HCOO ⁻ : 8.23 µmol (8 h) 310	310
$Cu_3(BTC)_2$ $@TiO_2$	$CO_2 + H_2O$ (5 mL)	UV irradiation ($\lambda > 400 \text{ nm}$)	H_2O	300 mg photocatalyst in batch reactor (100 mL)	Batch reactor (100 mL)	Batch reactor (100 mL) $$ CH ₄ : 2.64 μ mol $$ g $_{TiO_2}^{-1}$ $$ h $^{-1}$ 311	311
$CsPbBr_3@ZIF-67$	$\mathrm{CO_2} + \mathrm{H_2O}\left(10\ \mu\mathrm{L}\right)$	100 W Xe lamp (150 mW cm $^{-2}$) H_2O	H_2O	mL)	Pyrex reactor (40 mL)	Pyrex reactor (40 mL) Electron consumption rate: 312 $29.630 \mu mol g^{-1} h^{-1} (3 h)$	312
PCN-222	MeCN/TEOA (10:1 (v/v), 60 mL) 300 W Xe degassed with CO_2	300 W Xe lamp ($\lambda = 420-800 \text{ nm}$) TEOA	TEOA	50 mg photocatalyst	Gas phase	HCOO ⁻ : 3 µmol h ⁻¹	315
$PCN-250-Fe_2Mn$	$\overrightarrow{CO_2}$ (1 atm) + MeCN/H ₂ O (15:1) with TIPA	CO_2 (1 atm) + MeCN/H ₂ O (15:1) 300 W Xe lamp (λ > 420 nm) with TIPA	H_2O	5 mg photocatalyst	Pyrex reactor (100 mL)	Pyrex reactor (100 mL) CO: 21.51 mmol $g^{-1} h^{-1}$ AQY = 2.60%	314

display acoustic phonon scattering, whereas other chalcogenides exhibit both types of scattering. Therefore, most studies have been performed using MoS2 and WS2. Meier et al. investigated tuning of the bandgap for MoS2 nanoflowers to achieve CO2 conversion to CO.325 The MoS2 nanoflowers were synthesized using single- and three-zone furnaces (SZF and TZF, respectively) with different temperature ramping rates, which led to changes in the bandgap. A high ramping rate influenced the development of the flake surface and edges containing the coordinated atoms, and edges rich in Mo displayed high catalytic activity. However, further increasing the ramping rate resulted in the formation of MoS₂ nanosheets, which exhibited reduced photocatalytic activity. Among the various synthetic approaches, the optimized SZF procedure afforded ca. 0.21 μ mol $g_{cat}^{-1} h^{-1}$ of CO formation, as illustrated in Fig. 20(a). Furthermore, to enhance the CO evolution, MoS2 was treated with H2, which reduced the oxidation state for the Mo, resulting in the highest rate of CO production at 100 °C, as shown in Fig. 20(b).

Despite the above efforts, the CO production has remained limited, and MoS₂ is typically used as a cocatalyst or composite component to enhance charge transfer. Hence, Tu et al. reported the in situ growth of MoS2 nanosheets on TiO2, resulting in close contact between the two components to improve the interfacial area. 331 This close contact afforded nanojunctions that reduced electron-hole recombination. Furthermore, the Mo edges exhibited metallic characteristics with a high d-electron density and stabilized the intermediates through electrostatic attraction to enhance the yield of CH3OH during CO2 reduction. Different morphologies of TiO2 can also be exploited to further improve the charge separation and transport. In this regard, Xu et al. developed the 1D TiO₂ and MoS₂ heterostructure illustrated in Fig. 20(c).³²⁶ They optimized the ratio of TiO₂ and MoS₂ for photocatalytic CO₂ reduction to form CH₄ and CH₃OH. The pure TiO₂ nanofibers exhibited CH₃OH production rate of 0.72 μmol g⁻¹ h⁻¹. But, after loading with MoS2, the production of CH4 and CH3OH was enhanced by 2.86 and 2.55 µmol g⁻¹ h⁻¹, respectively. The origin of the improved CO2 photoreduction may be the higher Fermi level of MoS2 with respect to TiO2, enabling the transfer of excited electrons from TiO₂ to the MoS₂ sheets and then to adsorbed CO₂ molecules under UV-vis irradiation.

Nevertheless, the expected photocatalytic performance has not yet been realized. Jung et al. reported the synthesis of a hierarchical structure composed of mesoporous TiO2 on graphene with a few layers of MoS₂. 327 The mesoporous TiO₂ facilitated the adsorption of CO2 and also decreased the electron diffusion length. TiO₂ and MoS₂ comprised the heterostructure in this hierarchical structure, while graphene assisted in the separation of photoinduced electron-hole pairs. Few-layered MoS₂ was used because it has active edges that reduce the electron transfer path and have larger amount of the unsaturated S atoms at the edges, thereby improving the CO₂ reduction performance. Moreover, few-layered MoS2 exhibits quantum confinement, leading to the more negative CB shown in Fig. 20(d). Increasing the number of MoS₂ layers to more than 5 or 6 resulted in an unsuitable CB alignment for CO₂ reduction. Upon applying this structure to CO₂ photoreduction, the

authors observed CO as the main product and subsequently compared the performance with the non-mesoporous and nonmacroporous structures of TiO₂ with MoS₂ as a heterostructure. The resulting CO yields were 92.33 μ mol g⁻¹ h⁻¹ for the mesoporous TiO₂/MoS₂/graphene structure and 70.09 and 27.09 μ mol g⁻¹ h⁻¹ for the non-mesoporous and non-macroporous structures of TiO2, respectively. This study demonstrates the roles of synergistic effects, surface area, and a porous support heterostructure.327 Furthermore, the above discussion shows that CO2 fixation and CB alignment are crucial aspects of CO₂ photoreduction.

Long et al. studied the influence of the S/Se ratio in a MoS_xSe_y/TiO₂ heterostructure, and found that this parameter changed the band edges and C1 and C2 product selectivity. 328 The CO₂ photoreduction performance was examined for different S/Se ratios, and photocatalyst formed the CH₃CH₂OH as a C₂ product. Adjusting the S/Se ratio to 2:3 increased the formation of formic acid as a C₁ product. The influence of the S/Se ratio on the product selectivity is shown in Fig. 20(e). The metallic character was governed by the S/Se ratio, which thus determined the MoS_rSe_v bandgap. The increase in the CBM of MoS_rSe_v with increasing Se content mirrored the decrease in electronegativity from S to Se, which also led to a diminishing electric potential. Then again, consistently specific photocatalytic CO₂ fixation requires an excellently tunable energetic site of the photocatalyst. The S/Se ratio-dependent CBM of MoS_xSe_y enables the selective production in photocatalytic CO₂ fixation.

The applications of TMDCs in CO₂ reduction are not limited to TiO2 but have also been extended to other metal oxides such as SnO₂. Bilawal et al. studied the SnO₂/Ag/MoS₂ heterostructure to enhance the charge separation and CO₂ reduction performance.³²⁹ Here, they used MoS₂ nanoflowers owing to their high surface area and appropriate conduction band for SnO₂, and added Ag NPs to obtain a suitable work function. The resulting heterostructure facilitated the photon-to-electron charge transfer through the cascade band alignment. Fig. 20(f) shows the observed yields of CO and CH₄, which varied upon changing the ratio of SnO₂ to MoS₂/Ag.

The p-n junction of p-MoS₂/n-Bi₂S₃ nanorods has also been studied for CO2 reduction. The treatment of MoS2 at high temperature affords sulfur vacancies that lead to high CO2 adsorption. Kim et al. exploited these sulfur vacancies in MoS₂ to obtain a p-n junction catalyst with improved optical properties by heterostructure formation with Bi₂S₃.³³⁰ They observed CO and CH_4 yields of 40 and 42.5 μ mol g^{-1} , respectively, after 10 h of light illumination. In addition, Wang et al. reported a unique marigold-like SiC@MoS2 nanoflower structure for photocatalytic CO₂ reduction.³³² In this case, the MoS₂ was responsible for H₂O oxidation owing to its high hole mobility, while the high electron mobility of SiC contributed to the CO₂ reduction. The authors measured the photocatalytic activity under visible light and observed a CH4 production rate of 323 μ L g⁻¹ h⁻¹ and O₂ evolution rate of 620 μ L g⁻¹ h⁻¹. As shown in Fig. 20(g), two paths were available for CO2 reduction, namely, hydrogenation (CO₂ → HCOOH → HCHO → CH₃OH → CH_4) and deoxygenation ($CO_2 \rightarrow CO \rightarrow C^{\bullet} \rightarrow {}^{\bullet}CH_3 \rightarrow CH_3OH/$ CH₄). The stability of the SiC@MoS₂ photocatalyst was dependent upon the stability of the MoS2 nanosheets. Dai et al. studied a

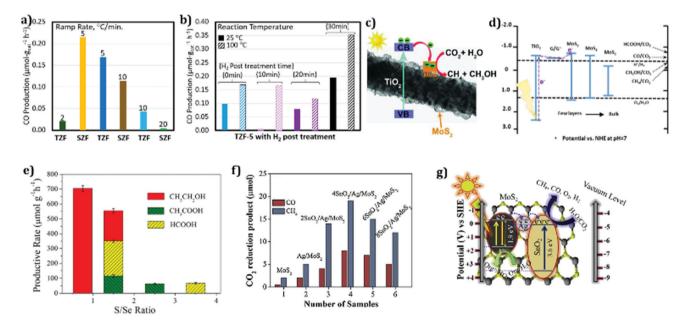


Fig. 20 (a) CO₂-to-CO photoreduction performance of MoS₂ nanoflowers synthesized using the SZF and TZF approaches and (b) influence of H₂ posttreatment on the CO₂ reduction activity. Reproduced with permission from ref. 325, Copyright 2018, American Chemical Society. (c) Photocatalytic CO₂ reduction by a TiO₂/MoS₂ heterostructure. Reproduced with permission from ref. 326, Copyright 2018, Wiley-VCH. (d) Charge separation and transport phenomena in TiO2/MoS2/graphene. Reproduced with permission from ref. 327, Copyright 2018, American Chemical Society. (e) Influence of the S/Se ratio on C₁ and C₂ product selectivity during CO₂ photoreduction. Reproduced with permission from ref. 328, Copyright 2020, American Chemical Society. (f) Photocatalytic performance of SnO₂/Ag/MoS₂ for CO₂ reduction to generate CO and CH₄. Reproduced with permission from ref. 329, Copyright 2020, Elsevier. (g) Reaction pathway for CH4 formation on the surface of SiC@MoS2. Reproduced with permission from ref. 330, Copyright 2019, MDPI.

Table 5 TMDC-based materials for photocatalytic CO2 reduction

Catalyst	Feed gas composition	Light source	Reducing agent	Reaction conditions	Reactor type	Yield	Ref.
MoS ₂ nanoflowers	$CO_2 + H_2O$	1600 W Xe arc lamp	H ₂ O	Reaction temperature maintained at 16 °C	_	CO: 0.22 µmol g ⁻¹ h ⁻¹ CH ₄ : 0.17 µmol g ⁻¹ h ⁻¹	325
MoS ₂ -TiO ₂	CO ₂ + 1 M NaHCO ₃	350 W Xe lamp	_	Catalyst treated at 300 °C under Ar for 2 h	_	CH ₃ OH: 10.6 μmol g ⁻¹ h ⁻¹	331
$1\mathrm{D}/2\mathrm{D}~\mathrm{TiO}_2/\mathrm{MoS}_2$	$CO_2 + H_2O$	350 W Xe lamp	H_2O	50 mg sample in 10 mL H_2O	_	CH ₃ OH: 2.55 μmol g ⁻¹ h ⁻¹ CH ₄ : 2.86 μmol g ⁻¹ h ⁻¹	326
Mesoporous TiO ₂ / few-layered MoS ₂ / graphene	$CO_2 + H_2O$	350 W Xe lamp	H_2O	Reaction mixture kept for several hours at 40 $^{\circ}\mathrm{C}$	_	CO: 92.33 µmol g ⁻¹ h ⁻¹	327
TiO_2 - MoS_xSe_y	CO ₂ + NaHCO ₃	350 W Xe lamp	_	0.2 MPa CO ₂ and 0.1 M NaHCO ₃ (H ₂ source), room temperature	_	CH ₃ CH ₂ OH: 704.38 μ mol g ⁻¹ h ⁻¹	328
SnO ₂ /Ag/MoS ₂	$CO_2 + H_2O$	350 W Xe lamp	H_2O	0.1 g catalyst dispersed in 6 mL H ₂ O	Flow reactor	CO: 9 µmol g ⁻¹ h ⁻¹ CH ₄ : 20 µmol g ⁻¹ h ⁻¹	329
$\mathrm{Bi}_2\mathrm{S}_3/\mathrm{MoS}_2$	99.99% CO ₂ + H ₂ O	Xe lamp (150 mW cm ⁻²)	H_2O	Reaction temperature 60 °C	Batch reactor	CO: 40 µmol g ⁻¹ (10 h) CH ₄ : 42.5 µmol g ⁻¹ (10 h)	330
$3D\text{-SiC}@2D\text{-MoS}_2$	$CO_2 + H_2O$	300 W Xe lamp		40 mL reaction mixture at 298 K	Schlenk flask reactor	CH ₄ : 323 µL g ⁻¹ h ⁻¹	332
MoS_2/Bi_2WO_6	99.99% CO ₂ + H ₂ O	350 W Xe lamp	H_2O	50 mg catalyst in 50 mL DI water	_	CH ₃ OH: 36.7 μmol g ⁻¹ h ⁻¹ C ₂ H ₅ OH: 36.6 μmol g ⁻¹ h ⁻¹	333
MoS ₂ nanosheets	99.99% CO_2 + 0.5 M NaHCO_3 , 0.5 M NaOH , or 0.5 M NaCl	UV light	H_2O	$0.1\mathrm{g}\;\mathrm{MoS}_2$ in 50 mL DI water	_	CH ₃ OH: 27.4/11.2/ 7.8 μ mol g ⁻¹ h ⁻¹ CH ₃ CHO: 2.2/2.5/4.8 μ mol g ⁻¹ h ⁻¹ (for NaHCO ₃ /NaOH/NaCl)	334

MoS₂/B_{i2}WO₆ composite photocatalytic material for CO₂ photoreduction.³³³ The hierarchical flower-like structure displayed significant activity in the visible spectrum, and the MoS2 acted as a cocatalyst. Thus, after 4 h of light illumination, methanol and ethanol were produced as the primary products with yields of 36.7 and 36.6 μ mol g_{cat}^{-1} , respectively.

Considerable progress is still needed to realize satisfactory performance from TMDCs, and the stability of exfoliated 2D nanosheets in particular remains a massive challenge. After all, the bulk forms possess indirect bandgaps, and chalcogens based on transition metals do not usually exhibit high charge carrier mobility. Successfully overcoming these challenges may allow 2D TMDCs to find practical applications in photocatalytic CO2 reduction. The photocatalytic activities of TMDCs are summarized in Table 5.

MXenes 5.5

Recently, MXenes, another class of 2D materials, have received enormous attention owing to their high electrical conductivity, large specific surface area, hydrophilicity, and tunable composition. 335-339 MXenes possess a lamellar structure with anisotropic properties and can be represented by the general formula $M_{n+1}AX_n$, where M is a transition metal, n = 1, 2, or 3, A is an A-group in theperiodic table (mostly IIIA and IVA), and X is C or N. 340 The MAX phase is hexagonally stacked where the tight M layer is inserted with the pure A-group layer, and the X elements fill the octahedral sites.341 The first MXene to be discovered was $Ti_3C_2T_x$, where T_x represents a surface terminated group and since then more than 30 other compositions have also been reported.342 Ti₃C₂ is primarily synthesized by the exfoliation of Ti₃AlC₂ with HF. This method is expected to afford various compositions.341,342 To date, MXenes have been exploited in

applications such as lithium-ion batteries, 343 electrochemical supercapacitors, ³⁴⁴ and fuel cells. ³⁴⁵ In addition to these energy storage applications, they have also been explored as promising photocatalytic materials. 346-349 The 2D structure of MXenes affords a high surface area and good pore structure, making these materials an excellent choice for enhanced CO2 adsorption and photocatalytic activity. Moreover, MXenes may serve as efficient cocatalysts in photocatalysis owing to their good electronic conductivity, adjustable bandgap, and strong metallic characteristics. 350 The Ran group reported the use of Ti₃C₂/CdS for H₂ generation and demonstrated that Ti₃C₂ is a promising cocatalyst for photocatalytic applications, providing an alternative to noble metals.351

To date, several Ti₃C₂-based heterostructured photocatalysts have been studied for CO2 conversion. For example, Low et al. prepared TiO2/Ti3C2 by in situ calcination and successfully applied it to photocatalytic CO₂ conversion. 336 Ultrathin layered 2D Ti₃C₂ was first synthesized and then combined with TiO₂ using simple calcination at various temperatures. The composite exhibited a high surface area with a unique rice crust-like structure. The high electronic conductivity of Ti₃C₂ was found to be beneficial for the migration of photogenerated electrons from TiO2 to Ti3C2. Photocatalytic CO2 reduction mainly afforded CH₄ along with a small amount of other products such as CH₃OH and C2H5OH, and the catalytic activity for CH4 formation was approximately 3.1 times higher than that for pristine TiO2. The enhanced catalytic activity was ascribed to the large surface area, improved CO2 adsorption, and the heterogeneous interface between TiO₂ and Ti₃C₂, which improved the charge separation. In another study, Pan et al. presented a functional MXene/ CsPbBr3 system for CO2 reduction to CO and CH4, in which the CsPbBr₃ was grown in situ on 2D Ti₃C₂ NSs. 352 In this study,

HCl-HF solution was used to etch Ti₃AlC₂ to obtain Ti₃C₂T_x NSs, upon which cubic CsPbBr3 was grown in situ to afford the final nanocomposites. The PL and time-resolved PL quenching was observed for the composite sample, indicating efficient charge transfer through the CsPbBr₃/MXene interface. The optimized composite mediated the reduction of CO₂ to CO (26.32 μ mol g⁻¹ h⁻¹) and CH_4 (7.25 µmol $g^{-1} h^{-1}$). Therefore, such perovskite/2D composites can be used to realize efficient photocatalysis.

It is well known that the combination of 2D/2D heterojunctions provides superior structural stability owing to the substantial interfacial contact.336 In this regard, Yu and co-workers reported the heterostructure combination of 2D Bi₂WO₆ with 2D Ti₃C₂ NSs. 353 The incorporation of Ti₃C₂ led to enhanced CO₂ adsorption owing to the increased surface area. The 2D/2D sandwich-like Ti₃C₂/Bi₂WO₆ system displayed excellent charge transfer for CO₂ reduction. Under light irradiation, the photoexcited electrons transferred from the CB of Bi₂WO₆ to Ti₃C₂ through the ultrathin layered heterostructure and reacted with adsorbed CO2 molecules. Therefore, the photocatalytic CO₂ reduction activity toward CH₄ and CH₃OH was significantly improved. Moreover, DFT calculations revealed that the excellent conductivity of Ti₃C₂ was beneficial for rapid charge transport. Subsequently, Yang et al. demonstrated that Ti₃C₂/g-C₃N₄ nanosheet heterojunctions exhibited improved catalytic activity for CO2 reduction into CO and CH₄. 335 The intimate contact between two 2D materials also leads to good charge separation. Hence, the catalytic activity of Ti₃C₂/g-C₃N₄ for CO₂ reduction toward CO and CH₄ reached rates of 5.19 and 0.044 μ mol h⁻¹ g⁻¹, respectively. This catalytic activity was approximately eightfold higher than that for pristine g-C₃N₄. Significantly, BET isotherm experiments revealed higher chemical affinity between CO₂ molecules and the catalyst surface, which contributed to the improved catalytic performance.

In addition to these binary composites, Wu et al. also described the ternary heterostructure composition Ti₃C₂T_x/ (001)TiO₂/C₃N₄, which was synthesized by in situ oxidation/ electrostatic self-assembly.350 The heterojunction composed of Ti₃C₂T_x/(001)TiO₂ NSs with highly exposed {001} TiO₂ facets was first synthesized by the in situ oxidation of $Ti_3C_2T_x$ NSs. Next, the ternary composite with C₃N₄ was obtained by exploiting the electrostatic attraction between the opposite charges.

This 2D/2D heterojunction combination provided broad electron transfer channels that significantly enhanced the charge separation properties, while the incorporation of the 2D MXene into TiO₂/C₃N₄ increased the catalytic activity. The heterojunction catalyst displayed threefold higher CO2 conversion activity compared to pristine TiO₂ or C₃N₄. A similar TiO₂/C₃N₄/Ti₃C₂ composite was explored in another study by combining 0D Ti₃C₂ QDs with 2D/2D core-shell TiO₂/C₃N₄ heterojunctions.²⁶⁰ First, ultrathin C₃N₄ was deposited on the TiO₂ nanosheets by the thermal condensation of urea to form a core-shell structure. Then, the as-prepared Ti₃C₂ QDs were electrostatically assembled on the C₃N₄ shell. The close attachment of the Ti₃C₂ QDs on the TiO₂/ C₃N₄ is due to van der Waals interactions. Theoretical and experimental results indicated that the charge transfer in the ternary composite occurred via a dual heterojunction involving the S-scheme for TiO₂/C₃N₄ and the Schottky scheme for the C₃N₄/ Ti₃C₂ QDs. The QDs extracted the electrons from C₃N₄, enabling S-scheme charge transfer between TiO2 and C3N4. As a result, the composite exhibited a CO evolution rate of 4.39 μ mol g⁻¹ h⁻¹.

Therefore, MXenes can be fruitfully applied as cocatalysts for photocatalytic CO₂ conversion. In particular, their 2D nature affords a large surface area, providing a promising alternative option to expensive noble metals. Until recently, most studies have focused on the synthesis of MXenes with HF, which may represent one of the primary drawbacks of these systems; the use of such hazardous chemicals may not be desirable for large-scale MXene production. However, various studies are underway to replace such chemicals. For example, Shah and co-workers reported the synthesis of MXenes by electrochemical etching in HCl solution. 354 In time, this research may permit the large-scale synthesis of MXenes by environmentally friendly approaches using less hazardous chemicals.

The photocatalytic CO₂ reduction performance of MXenebased materials is summarized in Table 6.

5.6 Perovskites

Perovskite materials ranging from oxides to halides have stimulated enormous interest for catalytic applications owing to their exciting features such as cost-effectiveness, tunable bandgaps, high surface area, and surface defects for charge trapping.⁵⁰ Moreover, in terms of altering the redox potentials, the

Table 6 MXene-based materials for photocatalytic CO₂ reduction

Catalyst	Feed gas composition	Light source	Reducing agent	Reaction conditions	Reactor type	Yield	Ref.
Ti_3C_2/g - C_3N_4	$CO_2 + H_2O$ $(H_2SO_4 + NaHCO_3)$	300 W Xe lamp (420 nm cutoff)	H_2O	20 mg catalyst	_	CH ₄ : 0.044 μmol g ⁻¹ h ⁻¹ CO: 5.19 μmol g ⁻¹ h ⁻¹	335
TiO_2/Ti_3C_2	$CO_2 + H_2O$ (HCl + NaHCO ₃)	300 W Xe lamp	_	50 mg catalyst in Pyrex reactor (200 mL)	_	CH ₄ : 0.22 μmol h ⁻¹	336
$Ti_3C_2T_x/(001)TiO_2/$ C_3N_4	$CO_2 + H_2O (H_2O + 15 \text{ vol}\% \text{ TEOA})$	_	TEOA	5 mg catalyst on glass in reactor (80 mL)	_	CH ₄ : 1.97 ppm h^{-1} CO: 15.0 ppm h^{-1}	350
$CsPbBr_3/Ti_3C_2T_x$	CO ₂ (ethyl acetate)	300 W Xe lamp (>420 nm cutoff)	_	_	_	CH ₄ : 7.25 µmol g ⁻¹ h ⁻¹ CO: 26.32 µmol g ⁻¹ h ⁻¹	352
Ti_3C_2/Bi_2WO_6	$CO_2 + H_2O$ $(H_2SO_4 + NaHCO_3)$	300 W Xe lamp	_	100 mg catalyst in Pyrex glass reactor (200 mL)	Batch	CH ₄ : 1.78 µmol g ⁻¹ h ⁻¹ CH ₃ OH: 0.44 µmol g ⁻¹ h ⁻¹	353
$\mathrm{TiO_{2}/C_{3}N_{4}/Ti_{3}C_{2}}$	$CO_2 + H_2O$ $(H_2SO_4 + NaHCO_3)$	350 W Xe lamp	$\rm H_2O$	30 mg catalyst in two-neck Pyrex reactor	_	CH ₄ : 1.20 μmol g ⁻¹ h ⁻¹ CO: 4.39 μmol g ⁻¹ h ⁻¹	260

structural flexibility of perovskites makes them quite different from traditional semiconductors. The ideal perovskite has the general formula ABX3, in which A and B are different cations and X denotes oxide/halide anions surrounded by B cations.

CaTiO₃ was the first perovskite material discovered, and this formula has since been extended to a variety of new forms, such as A2BX6, A2BB'X6, and so on.355 This structure allows the formation of lattice deficiencies, which can be advantageous for tuning the optoelectronic properties. Besides simple perovskites, layered perovskites and their derivatives display excellent properties such as structural stability and low cost. Previously, oxide perovskites were primarily used as catalyst materials; however, halide perovskites are now one of the most commonly used materials for photocatalytic CO2 conversion. Therefore, we will first discuss recent progress in oxide perovskite photocatalysts before considering halide perovskites.

Depending on the type and composition of the A and B sites, oxide perovskites exhibit different band structures and optoelectronic properties. In addition, replacing or doping the A, B, or O sites with other metal or non-metal elements can change the chemical composition and symmetry of oxide perovskites, which can be beneficial for tuning the material properties, such as band potentials, light absorption, and CO₂ adsorption.³⁵⁶ Consequently, the photocatalytic performance of oxide perovskites can be altered by changing their composition, structure, morphology, and heterostructure combination. In 1978, Hemminger and colleagues demonstrated the photo-assisted conversion of CO2 into CH₄ on the surface of SrTiO₃(111) for the first time without using an electrochemical cell.357 Since this pioneering work, various perovskites have been examined for CO2 conversion applications. However, pure SrTiO₃ is not considered a suitable catalyst because of its large bandgap (>3.0 eV) and light absorption mainly in the UV region; thus, surface modification, heterostructure formation, and metal NP deposition have frequently been applied to increase its sensitivity to visible light. For instance, Luo et al. prepared Ti-rich and Sr(OH)2-decorated SrTiO₃ catalysts and explored the effects of surface modification on CO₂ photoreduction.³⁵⁸

The results revealed that Ti-rich SrTiO₃ possesses a narrow bandgap due to a lower Ti 3d ground-state level, which increased light harvesting in the visible region. Therefore, it exhibited high photocatalytic activity toward CO formation (26.4 μmol g⁻¹) compared to pristine SrTiO₃ (18.4 µmol g⁻¹) and Sr(OH)₂modified SrTiO₃ (13.8 μmol g⁻¹). In another study, oxygendeficient self-doped $SrTiO_{3-\delta}$ was utilized for the photoconversion of CO2 into CH4.359 To obtain Ti3+ states accompanied by oxygen vacancies, the catalyst was synthesized by a combustion process with high-temperature heat treatment. This resulted in improved CO2 adsorption on the surface of the oxygen-deficient catalysts and thus increased CO2 reduction activity. Metal NPs have also been employed in this field owing to their unique features originating from surface plasmon resonance (SPR). For example, Li et al. demonstrated the synergistic effects of metal cocatalysts on oxide perovskites, which significantly enhanced the response to visible light as a result of the plasmonic effect and electron extraction properties of the metal NPs. 360 In this study, Rh

metal was grafted onto SrTiO₃ prior to the loading of Au NPs as a photosensitizer. With 99.4% selectivity for CO formation, the optimized SrTiO3, i.e., Rh(PD)-Au@SrTiO3, demonstrated 153and 22-fold higher catalytic activity than pristine Rh@SrTiO₃ and Au@SrTiO3 samples, respectively.

As discussed earlier, the integration of two semiconducting materials to form a heterojunction combination can be a promising strategy for improving catalytic activity owing to the efficient charge separation via the closely connected interface. In one study, RuO₂ NPs were supported on SrTiO₃ and the resulting composites were found to exhibit improved catalytic activity for CO2 photoreduction with H2 in a flow reactor system. 361 Remarkably, the authors also studied the influence of the photothermal behavior of the catalyst toward CH₄ formation at 150 °C. The improved catalytic activity was attributed to the high CO₂ adsorption by SrTiO₃ and efficient charge separation between RuO2 and SrTiO3. Heterojunction combinations of oxide perovskites with TiO2 (e.g., CaTiO3/TiO2) have also been reported.362 Later, additional oxide perovskites with A site substitution were found to mediate photocatalytic CO₂ conversion. For example, Teramura and co-workers studied the photoreduction of CO_2 over $ATaO_3$ (A = Li, Na, K) using H_2 as a reductant. The strong chemisorption of CO2 molecules was observed on the surface of LiTaO3, and the catalytic activity followed the order LiTaO₃ > NaTaO₃ > KTaO₃. Similarly, Zhou et al. investigated photocatalytic CO₂ reduction over alkaline tantalates, i.e., MTaO₃ (M = Li, Na, K), with 3D hierarchical structure obtained using activated carbonized wood as a template. 364 The template provided a high surface area that enhanced the light harvesting and gas diffusion properties. The results indicated that the CO and CH4 formation rates upon CO2 reduction were enhanced by 3.1 and 8.4 times, respectively, by the deposition of the Au cocatalyst on NaTaO₃. The formation of CO and CH₄ over NaTaO₃ was attributed to the suitable band potentials that simultaneously reduced CO₂ and oxidized H2O. Both of these studies demonstrated that alkaline NaTaO3 has a synergistic effect on reducing CO2 to CO and CH₄. Although CO selectivity was observed under a H₂ environment, the presence of H2O led to the formation of both CO and CH₄. In another study, the lanthanum-based oxide perovskite LaCoO₃ was utilized as a cocatalyst on a Ru complex for the reduction of CO₂ to CO under light irradiation.³⁶⁵ The results revealed 20-fold higher activity compared to the system lacking LaCoO₃, in addition to 76% selectivity for CO formation and an AQY of 1.36%. Similarly, MnCo₂O₄ microspheres have been utilized as a stable cocatalyst for the conversion of CO₂ to CO.³⁶⁶

The morphology of perovskite nanocrystals is another crucial factor in tuning the properties of the catalyst to improve the catalytic reaction rate. In this regard, Shi et al. prepared Pt-loaded g-C₃N₄/NaNbO₃ nanowires and studied their photocatalytic CO2 reduction behavior.367 The resulting composite displayed improved catalytic activity for CH4 formation (6.4 μmol g⁻¹ h⁻¹) compared to Pt-loaded g-C₃N₄ and Pt-loaded NaNbO₃, which originated from the improved charge separation through the closely connected interface, increased surface area due to the nanowire morphology of NaNbO3, efficient charge transport through the heterostructure, and suitable band

Review

potentials for CO2 reduction to CH4. In addition, Kumar and co-workers designed the UV-vis-NIR-active catalyst Ag₂CrO₄/Ag/ BiFeO₃@RGO, composed of a Ag-mediated Ag₂CrO₄/BiFeO₃ heterojunction on an RGO matrix.³⁶⁸ Each of the components made a significant contribution to improving the conversion of CO₂ into CO and CH₄. For example, the BiFeO₃ and Ag₂CrO₄ served as the photoreduction and photooxidation systems, respectively, while the plasmonic Ag NPs mediated the electron donation and the RGO improved the redox capabilities by enhancing the electron mobility. In another study, Wang and colleagues synthesized Ag-deposited H₂SrTa₂O₇ (HST) using a polymerizable complex and an ion-exchange method.³⁶⁹ Owing to the anisotropy of the layered HST perovskite structure, photoinduced electrons and holes gathered on the edges and basal plane. The Ag NPs reduced the kinetic barrier to CO formation and captured more electrons from the perovskite to reduce CO₂ to CO, thereby impeding the reduction of H⁺ to H₂. The optimal Ag-loaded sample (Ag/HST) displayed twofold higher reduction ability than pure HST with approximately 60% selectivity for CO formation. In an effort to improve the charge separation, Tu et al. reported a layered ferroelectric perovskite of SrBi₄Ti₄O₁₅ NSs for CH₄ evolution in a gas-solid phase system without the use of any cocatalyst or sacrificial agent. 370 The ferroelectric characteristics of SrBi₄Ti₄O₁₅ (SBTO-1) afforded efficient bulk charge separation and high charge mobility. The catalyst was synthesized via a soft chemical method by adding NaOH as a mineralizer. Post-treatment annealing was then conducted at 350 °C (SBTO) and 650 °C (SBTO-2) to tune the ferroelectric polarization. Notably, SrBi₄Ti₄O₁₅ displayed significant photocatalytic performance in the reduction of CO2 to CH4 with a rate of 19.8 μmol g⁻¹ h⁻¹, along with a small amount of CO formation (Fig. 21(a) and (b)).


The catalyst was found to be 8- and 283-fold more active than the reference samples of Bi₄Ti₃O₁₂ and BiOBr, respectively, with a CH₄ selectivity of 93% and an AQY of 1.33% at 365 nm. Time-dependent in situ DRIFTS analysis confirmed the conversion of CO₂ into CH₄ and CO on the SBTO surface (Fig. 21(c)). According to the calculated band potential value, the negative CB of SrBi₄Ti₄O₁₅ provided a strong driving force for improving CO₂ conversion (Fig. 21(d)). Remarkably, the layered nanocrystal structure with well-aligned distorted polyhedra enhanced the charge separation because the electrons and holes migrated separately to the TiO₂ and Bi₂O₂²⁺ layers (Fig. 21(e)).

Another type of material is metal halide perovskites, which are represented by the general formula ABX3, where A and B are cations and X is an anion. 12 Following the successful utilization of methylammonium lead halide perovskites in solar cell and LED applications in 2009, halide perovskites have attracted considerable attention in the field of photocatalysis. To date, several halide perovskites with various compositions have been reported where A = methylammonium (MA), formamidinium (FA), or Cs, B = Pb, Bi, or Sn, and X = Cl, Br, or I. However, similar to pristine metal oxides or any other semiconductors, pristine metal halide perovskites are associated with several drawbacks, such as poor light absorption, poor charge separation, and rapid charge recombination. In an effort to improve

these aspects, halide perovskites have been combined with various secondary materials or cocatalysts such as graphene, metal NPs, metal oxides, and metal carbides. In particular, the moisture stability of these perovskites has been significantly improved by embedding them into polymers or metal oxides/complexes. For example, Xu et al. established heterojunctions based on TiO₂ nanofibers and CsPbBr3 QDs that promoted electron-hole separation and improved the photoconversion efficiency compared to the pristine perovskite. 373 Such hybridization enabled the preparation of heterojunctions with the highest redox ability.

Similarly, some other heterostructure combinations have been reported. For example, in 2017 Xu et al. reported that the rate of electron consumption increased by 25.5% upon combining CsPbBr3 with graphene oxide.374 In addition, Jiang and coworkers described an ingenious ternary heterostructure based on CsPbBr3 nanocrystals and a hierarchical branched ZnO nanowire/macroporous graphene oxide composite. 375 In this case, the RGO played an important role by simultaneously adsorbing and activating CO₂ molecules via π - π interactions and conjugation, which most likely accelerated the catalytic CO₂ conversion. The 3D cross-linked morphology provided a larger active surface area as well as pathways for rapid electron transport and mass transfer. Furthermore, 1D branched ZnO is simple to synthesize, inexpensive, and has ideal energy band potentials for CO2 reduction. In contrast to pristine CsPbBr3, which reduced CO2 to CO and CH₄ with reasonable activity, the hybrid composite displayed an increased rate of CH4 formation. Hence, the selectivity for CH₄ formation correspondingly increased from 78.2% for CsPbBr₃ to 96.7% for the ternary composite. Similarly, Wang et al. synthesized Cs₄PbBr₆ wrapped with defective RGO hybrids through antisolvent precipitation and applied these materials to CO₂ photoconversion. 294

The presence of oxygen defects in the rGO nanosheets ultimately extended the lifetime of the electron-hole pairs. Here, COOH and OH moieties acted as anchor points for the hybridization of rGO with CsPbBr3 through forming Pb-O-C bonds. Some additional combinations of metal halide perovskites with graphene oxide have also been reported.³⁷⁶ For example, the MOF nanocomposite CsPbBr₃-UiO-66(NH₂) has been studied for photocatalytic CO2 conversion and was found to display high catalytic activity for CO formation (98.57 µmol g⁻¹).³⁷⁷ The increased activity and stability were driven by the high surface area, enhanced visible-light absorption, efficient charge separation in the QDs, and presence of the UiO-66(NH₂) nanocomposites. The selective formation of CO upon CO2 photoreduction was attributed to the dynamically favorable band potentials of CsPbBr₃ and the HOMO/LUMO levels of UiO-66(NH₂) for efficiently mediating the 2H⁺/2e⁻ process. In another work, Kong and co-workers designed a core-shell halide perovskite@MOF composite that exhibited enhanced CO2 reduction activity.312 In this work, coating of the ZIF shell onto the surface of the CsPbBr₃ QDs was achieved in situ by dispersing the latter into a solution of the metal ion precursor and imidazole ligand. This coating improved the moisture stability of the CsPbBr3 QDs in addition to the CO2 capture ability and charge separation efficiency, ultimately resulting in enhanced photoconversion efficiency of CO2 to CO and CH4.

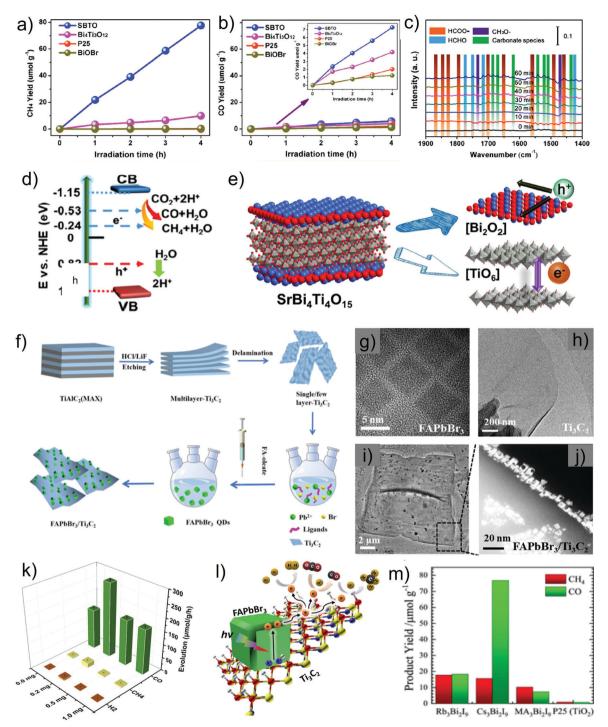

 $\textbf{Fig. 21} \hspace{0.2cm} \textbf{(a)} \hspace{0.2cm} \textbf{CH}_4 \hspace{0.2cm} \textbf{and} \hspace{0.2cm} \textbf{(b)} \hspace{0.2cm} \textbf{CO} \hspace{0.2cm} \textbf{ evolution} \hspace{0.2cm} \textbf{ over} \hspace{0.2cm} \textbf{SrBi}_4 \textbf{Ti}_4 \textbf{O}_{15} \hspace{0.2cm} \textbf{ (SBTO)} \hspace{0.2cm} \textbf{ catalysts} \hspace{0.2cm} \textbf{and} \hspace{0.2cm} \textbf{ several} \hspace{0.2cm} \textbf{ reference} \hspace{0.2cm} \textbf{ samples,} \hspace{0.2cm} \textbf{ (c)} \hspace{0.2cm} \textbf{ in} \hspace{0.2cm} \textbf{ situ} \hspace{0.2cm} \hspace{0.2cm} \textbf{DRIFTS} \hspace{0.2cm} \textbf{ analysis} \hspace{0.2cm} \textbf{ showing} \hspace{0.2cm} \textbf{ the} \hspace{0.2cm} \textbf{ (a)} \hspace{0.2cm} \textbf{ (b)} \hspace{0.2cm} \textbf{ (b)} \hspace{0.2cm} \textbf{ (c)} \hspace{0.2cm} \textbf{ in} \hspace{0.2cm} \textbf{ situ} \hspace{0.2cm} \textbf{ DRIFTS} \hspace{0.2cm} \textbf{ analysis} \hspace{0.2cm} \textbf{ showing} \hspace{0.2cm} \textbf{ the} \hspace{0.2cm} \textbf{ (b)} \hspace{0.2cm} \textbf{ (c)} \hspace{0.2cm} \textbf{ in} \hspace{0.2cm} \textbf{ situ} \hspace{0.2cm} \textbf{ DRIFTS} \hspace{0.2cm} \textbf{ analysis} \hspace{0.2cm} \textbf{ showing} \hspace{0.2cm} \textbf{ the} \hspace{0.2cm} \textbf{ (c)} \hspace{0.2cm} \textbf{ in} \hspace{0.2cm} \textbf{ situ} \hspace{0.2cm} \textbf{ DRIFTS} \hspace{0.2cm} \textbf{ analysis} \hspace{0.2cm} \textbf{ showing} \hspace{0.2cm} \textbf{ the} \hspace{0.2cm} \textbf{ (c)} \hspace{0.2cm} \textbf{ in} \hspace{0.2cm} \textbf{ situ} \hspace{0.2cm} \textbf{ DRIFTS} \hspace{0.2cm} \textbf{ analysis} \hspace{0.2cm} \textbf{ showing} \hspace{0.2cm} \textbf{ the} \hspace{0.2cm} \textbf{ (c)} \hspace{0.2cm} \textbf{ in} \hspace{0.2cm} \textbf{ situ} \hspace{0.2cm} \textbf{ DRIFTS} \hspace{0.2cm} \textbf{ analysis} \hspace{0.2cm} \textbf{ showing} \hspace{0.2cm} \textbf{ the} \hspace{0.2cm} \textbf{ (c)} \hspace{0.2cm} \textbf{ (c)} \hspace{0.2cm} \textbf{ in} \hspace{0.2cm} \textbf{ situ} \hspace{0.2cm} \textbf{ DRIFTS} \hspace{0.2cm} \textbf{ (c)} \hspace{0.2cm} \textbf{ (c)}$ intermediate products formed on SBTO catalysts under light irradiation at various time intervals, (d) energy band diagram for an SBTO catalyst, and (e) structure of the SBTO units showing electron-hole separation in different directions. Reproduced with permission from ref. 370, Copyright 2019, $Elsevier. \ (f) \ Synthetic \ route \ to \ FAPbBr_3/Ti_3C_2, \ (g)-(i) \ TEM \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ STEM \ image \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ STEM \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ STEM \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ STEM \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ STEM \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ STEM \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ STEM \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ STEM \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ STEM \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ STEM \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ STEM \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ STEM \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ stemp \ images \ of \ FAPbBr_3/Ti_3C_2, \ and \ their heterojunction, \ (j) \ dark-field \ stemp \ images \ of \ FAPbBr_3/Ti_3C_2, \ (j) \ dark-field \ stemp \ images \ of \ FAPbBr_3/Ti_3C_2, \ (j) \ dark-field \ stemp \ images \ of \ FAPbBr_3/Ti_3C_2, \ (j) \ dark-field \ stemp \ images \ of \ stemp \ of \ stemp \ images \ of \ stemp \$ (k) photocatalytic CO₂ reduction performance of FAPbBr₃/x-Ti₃C₂ samples (x is mg of Ti₃C₂), (l) structure of FAPbBr₃/Ti₃C₂ heterojunction for CO₂ reduction. Reproduced with permission from ref. 371, Copyright 2021, American Chemical Society. (m) CO and CH4 formation over various Bi-based perovskite nanocrystals. Reproduced with permission from ref. 372, Copyright 2019, American Chemical Society.

Tang et al. conducted a theoretical study on the mechanism of CO2 reduction by performing DFT calculations of Fe- and Co-doped CsPbBr₃.³⁷⁸ The results showed that the doped

perovskite displayed better adsorption ability of the activated intermediate CO2 • That led to improved catalytic activity. Free energy calculations suggested that the product selectivity of the

pristine perovskite lay toward CO formation, whereas the selectivity shifted toward CH₄ formation upon Fe or Co doping. Shyamal et al. also investigated Fe(II)-doped CsPbBr3 perovskite and observed enhanced catalytic activity and selectivity toward CH₄ formation.³⁷⁹ The formation of CH₄ was drastically improved upon Fe doping, while the pristine perovskite was selective toward CO evolution. The product selectivity of doped CsPbBr₃ was related to the adsorption-desorption characteristics, where the more positive adsorption energy of the CH₄ molecule enabled it to desorb rapidly from the catalytic surface, which was the major reason for the high selectivity. Similarly, other studies have reported the Co, Ni, and Mn doping of perovskite nanocrystals. 380,381 Apart from metal doping, a composite based on CsPbBr3 nanocrystals and 2D Pd NSs has been reported as a highly efficient and stable catalyst for gas-phase photocatalytic CO₂ reduction with H₂O vapor. 382 This combination formed a Schottky contact and improved the electron consumption rate compared with the pristine perovskite nanocrystals. Subsequently, the transition-metal complex Ni(tpy) was immobilized on CsPbBr₃ nanocrystals, which provided abundant active sites for capturing CO₂ molecules through the metal complexes.³⁸³ Meanwhile, the polypyridyl rings efficiently captured and stored electrons for the CO2 reduction process. As a result, the efficiency of CO2 photoreduction to CO/CH₄ increased by a factor of 26.

Cesium-based metal halide perovskites are commonly used for photocatalytic CO₂ reduction; however, changing the metal component (A site) may alter the optoelectronic properties of the catalyst. In this regard, Wu and co-workers encapsulated CH₃NH₃PbI₃ (MAPbI₃) QDs in the pores of the Fe-porphyrinbased MOF PCN-221(Fex) and studied its photocatalytic CO2 reduction behavior to afford CO/CH₄. 384 The encapsulation improved the perovskite stability and the close contact between these materials shortened the charge transfer distance, resulting in very high catalytic activity. In another case, formamidinium lead bromide (FAPbBr₃) perovskite QDs were applied to CO2 photoreduction in various reaction media, where water acted as a proton source and the solvent allowed maximum CO2 saturation.385 Similarly, improved catalytic activity was reported upon Schottky heterojunction formation between FAPbBr3 and Ti₃C₂ nanosheets.³⁷¹ The excellent metallic conductivity and high surface area of Ti₃C₂ were beneficial for improving the optoelectronic properties of the catalyst. Briefly, FAPbBr₃ QDs were grown in the presence of Ti₃C₂ using the hot injection method (Fig. 21(f)). Spectroscopic analysis confirmed the strong interaction between FAPbBr3 and Ti3C2, facilitating separation of the photogenerated electrons through the interface. The formation of FAPbBr₃/Ti₃C₂ could also be observed in the TEM and STEM images (Fig. 21(g)-(j)). Analysis of the optoelectronic properties revealed that the Ti₃C₂ nanosheets acted as an electron acceptor, allowing for the rapid transfer of photoexcited electrons in FAPbBr₃. The electron consumption rate for FAPbBr₃/Ti₃C₂ was reported to be 717.18 μ mol g⁻¹ h⁻¹, which was approximately two-fold higher than that for the bare FAPbBr₃ sample (Fig. 21(k) and (l)).

Although a variety of metal halide perovskites have shown promise as materials for photocatalytic CO2 reduction, the

mass production of lead-based perovskite materials remains problematic owing to the unavoidable issue of lead toxicity, obstructing the long-term viability of this technology. As a result, numerous research efforts have been dedicated to creating environmentally safe lead-free halide perovskite materials for photocatalytic applications. In this regard, Zhou and co-workers studied nanocrystals of the halide double perovskite Cs2AgBiBr6 synthesized via a hot-injection method, which displayed excellent electron consumption (105 μmol g⁻¹) under AM 1.5 G illumination.386 The synthesized nanocrystals were reported to be highly stable in mild polar solvents for more than three weeks, even in the presence of light and humidity. Another recent study used the injection of a precursor at room temperature followed by heating of the reaction mixture to construct 2D multilayered Cs₂AgBiX₆ (X = Cl, Br, I) nanoplatelets.³⁸⁷ Nanoplatelets possess several desirable characteristics such as exposed facets, wellarranged surface atomic symmetries, and quantum confined photocarriers. The authors synthesized a series of double perovskites by varying the halide composition and combinations, and Cs₂AgBiBr₆ was found to display efficient photocatalytic performance. To investigate the influence of the nanoplatelet morphology, the catalytic performance of the Cs₂AgBiBr₆ nanoplatelets was compared to that of simple nanocrystals. The results revealed that the nanoplatelets exhibited higher CO and CH₄ production rates than the nanocrystals (eight-fold higher electron consumption rate over 6 h). NPLs have anisotropically confined charge carriers and long diffusion length, resulted in such an improved catalytic performance.

Besides these materials, Cs2AgBiBr6 nanocrystals were combined with g-C₃N₄ to form Z-scheme and type-II heterojunction systems using toluene and CH₂Cl₂, respectively. 388 Interestingly, by altering the CB of g-C₃N₄ and the VB of Cs₂AgBiBr₆, the Z-scheme combination displayed superior photocatalytic CO₂ reduction to CH₄, whereas the type-II heterojunction system exhibited CO selectivity. In 2020, Lu et al. reported the photoconversion of CO2 upon changing the B site to the aforementioned layered double halide perovskite, i.e., Cs₃Sb₂Br₉. The surface-exposed Sb sites led to higher reactivity for CO₂ reduction and thus improved catalytic activity. Changing the cation may also lead to different catalytic behavior; for example, Bhosale et al. fabricated Bi-based perovskite photocatalysts (i.e., Cs₃Bi₂I₉, Rb₃Bi₂I₉, and MA₃Bi₂I₉) using a top-down ultrasonication approach.372 They revealed that the cation and crystal structure of the perovskite play important roles in determining the catalytic activity and CO2 reduction pathway using EPR and diffuse-reflectance infrared spectra. The photocatalytic CO₂ reduction activities toward CO and CH4 of the perovskite nanocrystals followed the order Cs₃Bi₂I₉ > Rb₃Bi₂I₉ > MA₃Bi₂I₉ > TiO₂ (Fig. 21(m)). In addition, the EPR results indicated that Cs₃Bi₂I₉ displayed higher catalytic activity than the other perovskites owing to its greater ability to generate electron-hole pairs.

The studies discussed above suggest unique strategies for obtaining lead-free perovskite-based catalytically active materials for mediating efficient photocatalytic CO₂ conversion reactions. The photocatalytic CO₂ reduction performance of perovskitebased catalysts is summarized in Table 7.

 Table 7
 Perovskite-based materials for photocatalytic CO2 reduction

Catalyst	Feed gas composition	Reducing Light source agent	lg Reaction conditions	Reactor type	Yield	Ref.
Ti-Rich SrTiO ₃ SrTiO _{3-δ} Au/Rh@SrTiO ₃	CO_{2} (10 mL) + $H_{2}O$ (10 μ L) 98% CO_{2} + 2% $H_{2}O$ CO_{2} + $H_{2}O$	300 W Xe lamp (0.190 W cm ⁻²) H_2O 300 W Xe lamp (420 nm filter) H_2O 300 W Xe lamp (L42 filter) H_2O	20 mg sample 0.3 g sample 75 mg sample	Gas phase Gas phase Gas-phase batch reactor	CO: 26.4 µmol g ⁻¹ (6 h) CH ₄ : 0.25 µmol m ⁻² h ⁻¹ CO: 369.2 µmol g ⁻¹ h ⁻¹ H ₂ : 69.4 µmol g ⁻¹ h ⁻¹ CH: 2.8 µmol g ⁻¹ h ⁻¹	358 359 360
${ m RuO_2-SrTiO_3}$	$CO_2 + H_2 (4:1 (mol/mol))$	300 W UV-vis Xe lamp —	50 mg sample	Gas-phase flow	$_{4}^{4}$: 14.6 mmol $_{9}^{-1}$ $_{1}^{-1}$	361
${ m CaTiO_3/TiO_2}$	$CO_2 + H_2O$	$300 \text{ W} \text{ Xe lamp}$ H_2O	10 mg sample in quartz tube (43 mL)		CO: 11.72 μ mol $g^{-1} h^{-1}$	362
$\mathrm{Li}/\mathrm{K/Na-TaO_3}$	CO_2 (150 µmol) + H_2 (50 µmol)	200 W Hg-Xe lamp —	2.0 g sample in quartz reactor	Gas phase	CO: $0.42 \mu mol g^{-1} (10 h)$	363
$NaTaO_3$	$CO_2 + H_2O$ (80 kPa of CO2, 2 mL H_2O)	200 W Hg-Xe arc lamp —	50 mg sample in Pyrex reaction cell, 2 ml. DI water	Gas phase	CO: 173 nmol $g^{-1} h^{-1}$ CH: 36 nmol $g^{-1} h^{-1}$	364
$LaCoO_3$	(3:2:1)	300 W Xe lamp (420 nm cutoff H_2O filter)	1 mg sample with Ru-complex and TEOA as photosensitizer and electron donor, respectively, reaction con-	Gas phase	CO: 28.5 µmol (1 h) AQY = 1.36%	365
$\mathrm{MnCo_2O_4}$	High purity of CO ₂ in solvent (5 ml. 203 H-O/acetonitrile)	300 W Xe lamp (420 nm cutoff H_2O filter)	4 µmol sample, Ru-complex, and TEOA in reactor (80 m1.)	Gas-phase batch	CO: 27 µmol (1 h)	366
g - $C_3N_4/NaNbO_3$	$CO_2 + H_2O$	300 W Xe arc lamp H_2O	50 mg sample, 2 mL H_2O in Pyrex glass vessel	Gas phase	CO: $0.39 \ \mu mol \ g^{-1}$	367
$ m Ag_2CrO_4/Ag/$ m RiveO@RGO	99.99% $CO_2 + H_2O$	UV, visible, NIR H_2O	40 mg sample, 40 mL DI water in	Gas phase	CH ₄ : 180 μ mol g ⁻¹ (8 h)	368
$\mathrm{SrBi}_4\mathrm{Ti}_4\mathrm{O}_{15}$	In situ generated $\mathrm{CO_2} + \mathrm{H_2O}$ (NaHCO ₃ (1.3 g) + $\mathrm{H_2SO_4}$ (15 mL))	300 W Xe lamp ($\lambda > 420 \text{ nm}$) —	100 mg sample dispersed in DI $\mathrm{H}_2\mathrm{O}$ and dried at 80 $^\circ\mathrm{C}$	Gas-phase batch reactor	CH ₄ : 19.8 μ mol g ⁻¹ h ⁻¹ CO: 1.74 μ mol g ⁻¹ h ⁻¹ AOY = 1.33% (365 μ m)	370
${ m Ag/H_2SrTa_2O_7}$	CO_2 (95% Ar, 5% CO_2) + H_2O	300 W Xe lamp ($\lambda > 200 \text{ nm}$) —	200 mg sample	Gas-phase flow	CO: 0.39 μ mol $g^{-1} h^{-1}$	369
${ m TiO_2/CsPbBr_3}$	High-purity CO_2 (99.99%)	300 W Xe arc lamp H_2O	10 mg sample, 30 mL acetonitrile, 100 μ L H ₂ O in quartz/Pyrex hybrid reaction cell	ase	CO: 9.02 μ mol $g^{-1} h^{-1}$	373
CsPbBr ₃ QDs/GO	Ethyl acetate (10 mL) + CO_2	100 W Xe lamp (AM 1.5 filter) —	4 mg sample in sealed Pyrex bottle (40 mL)	Gas phase	CO: 58.7 μ mol $g^{-1}(12 h)$ 3 CH ₄ : 29.6 μ mol $g^{-1}(12 h)$ H ₂ : 1.58 μ mol $g^{-1}(12 h)$	374
CsPbBr ₃ /BZNW/ MRGO	CO ₂	150 W Xe lamp (AM 1.5 G and H_2O 420 nm optical filter, 100 mW cm ⁻²)	20 μL distilled water and evaporated at 120 $^{\circ} C$ for 2 min, Pyrex reaction cell	Gas phase	CH ₄ : 6.29 μ mol g^{-1} h^{-1} (3 h) CO: 0.8 μ mol g^{-1} h^{-1} (3 h)	375
$\mathrm{Cs_4PbBr_6/rGO}$	CO ₂ + ethyl acetate	300 W Xe lamp (420 nm filter, H_2O 100 mW cm ⁻²) 100 mW cm ⁻²)	5 mg sample, 5 mL ethyl acetate, and Gas phase 5 µL water mixed in sealed Pyrex bottle (35 mL)	Gas phase	CO: 11.4 μ mol $g^{-1} h^{-1}$	294
$CsPbBr_3/USGO/$ α -Fe $_2O_3$	CO_2	300 W Xe lamp (420 nm filter, H_2O 100 mW cm ⁻²)	4 mg sample mixed with acetonitrile/ deionized water (200: 1 (v/v), 5 mL) in sealed Pyrex bottle (12 mL)	I	CO: 73.8 µmol g ⁻¹ h ⁻¹	376
$CsPbBr_3 QDs/UiO-66(NH_2)$	High-purity CO_2 + ethyl acetate	300 W Xe lamp (420 nm UV H_2O cutoff filter)	10 mg sample dispersed in H_2O /cthyl Gas phase acetate (1:300 (v/v)), 10 μ L H_2O in Perex reaction cell	Gas phase	CO: 98.57 μ mol g^{-1} CH ₄ : 3.08 μ mol g^{-1} (12 h)	377
CsPbBr ₃ @zeolitic imidazolate		${ m CO}_2$ + ${ m H}_2{ m O}$ vapor (H2O evaporated 100 W Xe lamp (AM 1.5G filter, H2O at 120 $^{\circ}{ m C}$ for 2 min)	4.5 ms sample (film) in sealed Pyrex bottle (40 mL)	Gas phase	Electron consumption rate: 29.630 μ mol g ⁻¹ h ⁻¹ (3 h) AQY = 0.035%	
Co- and Fe-CsPbBr ₃ Fe(11)-CsPbBr ₃	Theoretical DFT study using DMol ₃ $CO_2 + H_2O$ (H_2O evaporated at 3 $120~^{\circ}C$ for 2 min)	3 300 W Xe lamp (150 mW cm $^{-2}$) H ₂ O	5 mg sample mixed with ${\rm CO_2}$ and 10 μL ${\rm H_2O}$ in sealed Pyrex bottle (25 mL)	Gas phase	CO: 6.1 μ mol $g^{-1} h^{-1} (3 h)$ CH ₄ : 3.2 μ mol $g^{-1} h^{-1} (3 h)$	378 379

Table 7 (continued)

lable / (confinited)							
Catalyst	Feed gas composition	Light source	Reducing agent	Reaction conditions	Reactor type	Yield	Ref.
Co-CsPbBr ₃ / Cs ₄ PbBr ₆	CO ₂ + acetonitrile (methanol as hole scavenger)	300 W Xe lamp (100 mW m ⁻²) $\rm{H_2O}$	H ₂ O	4 mg sample added to acetonitrile/ H ₂ O/MeOH (5:15:15 µL) in sealed Parex hortle (12 m1)		CO: 1835 μ mol g ⁻¹ (15 h)	380
Ni- and Mn-doped CsPbCl ₃ nanocrystals	${\rm CO}_2$	300 W Xe lamp (AM 1.5 filter) \rmH_2O vapor	H ₂ O vapor		Gas phase	CO: 169.37 µmol g ⁻¹ h ⁻¹ (for Ni) CO: 152.49 µmol g ⁻¹ h ⁻¹ (for Mn)	381
CsPbBr ₃ /Pd nanosheets	${\rm CO_2}$ + ${\rm H_2O}$ (${\rm H_2O}$ evaporated at 120 $^\circ{\rm C}$ for 3 min)	150 W Xe lamp (Zolix, AM 1.5 G and 420 nm optical filter, 100 mW cm^{-2})	$\rm H_2O$ vapor	$\rm H_2O$ vapor 5.3 mg catalyst (film) and 10 μL water Gas phase sealed Pyrex bottle (40 mL)	Gas phase	CO: 12.63 μ mol $g^{-1}(3 h)$ CH4: 10.41 μ mol $g^{-1}(3 h)$ AOY = 0.033%	382
[Ni(terpy) ₂] ²⁺ (Ni(tpy)) CsPbBr ₃ nanocrystals Ni(try)-CsPbBr ₃	CO_2 + ethyl acetate	300 W Xe lamp (SolarEdge 700, 100 mW cm ⁻² , $\lambda > 400$ nm)	$\mathrm{H}_2\mathrm{O}$	5 mg catalyst in ethyl acetate/water solution (5 mL, 49:1 (v/v)) in Pyrex photoreactor (reactor maintained at 25 °C)	I	CO + CH ₄ : 1724 μ mol g ⁻¹ (4 h)	383
Fe/CH ₃ NH ₃ PbI ₃ (MAPbI ₃)	CO ₂ + ethyl acetate	300 W Xe lamp	H_2O	4 mg catalyst, 5 mL ethyl acetate and - $H_2O(1:0.012 \text{ (v/v))}$ injected into sealed Pyrex bottle (10 mL)	I	$CO + CH_4$: 1559 µmol g ⁻¹	384
$FAPbBr_3 QDs$	CO ₂	$300 \text{ W Xe lamp (} 100 \text{ mW cm}^{-2}\text{)} \text{ H}_2\text{O}$	H_2O	4 mg catalyst in 1 mL H_2O or ethyl acetate in sealed Pyrex bottle (40 mL)	1	CO: 181.25 μ mol g ⁻¹ h ⁻¹	385
${ m FaPbBr_3/Ti_3C_2}$	CO_2	$300 \text{ W Xe lamp (}100 \text{ mW cm}^{-2}\text{)} \text{ H}_2\text{O}$	H_2O		Gas phase	CO: 283.41 µmol g ⁻¹ h ⁻¹ CH ₄ : 17.67 µmol g ⁻¹ h ⁻¹ H ₂ : 1.33 µmol g ⁻¹ h ⁻¹	371
$\mathrm{Cs_2AgBiBr_6}$	Pure CO ₂ + ethyl acetate (pretreated with 4 A molecular sieves to remove residual water)	100 W Xe lamp (AM 1.5 G filter)	I	15 mg catalyst in sealed Pyrex bottle (40 mL)	I	CO: 14.1 μ mol g^{-1} (6 h) CH ₄ : 9.6 μ mol g^{-1} (6 h)	386
$\mathrm{Cs}_2\mathrm{AgBiX}_6$	Dry ethyl acetate + CO ₂ (99.9%)	405 nm laser diode	I	2 mg catalyst, 10 mL ethyl acetate in sealed headspace reactor (20 mL)	I	CO: $ca. 25.06 \text{\mu mol g}^{-1}(6 \text{h})$ CH ₄ : $ca. 40.06 \text{\mu mol g}^{-1}(6 \text{h})$ AQY = 0.035%	387
$\mathrm{Cs}_2\mathrm{AgBiBr}_6\mathrm{@g}\mathrm{-C}_3\mathrm{N}_4$	$Cs_2AgBiBr_6@g-C_3N_4$ Pure CO_2 + ethyl acetate + methanol	Xe lamp (80 mW cm^{-2})	I	15 mg catalyst, 4 mL ethyl acetate, 1 mL methanol in Schlenk glass bottle (25 mL)	Gas phase	$CO + CH_4$: 2.0 μ mol $g^{-1} h^{-1}$ 388	388
$\mathrm{Cs_3Sb_2Br_9}$	Pure ${\rm CO}_2$	300 W Xe lamp with AM 1.5 irradiation	I	ca. 50–100 mg catalyst, pre-dried octadecene in water-jacketed Pyrex photoreactor (reaction maintained at 25 °C)	I	CO: 510 μ mol g^{-1} (4 h)	389
Bi-Based perovskite nanocrystals	99.99% CO ₂ + H ₂ O vapor	32 W UV lamp (305 nm)	$ m H_2O$	st in 1 mL trichloromethane ied by N ₂ gas flow in quartz :(230 mL)	Gas phase	For Cs ₃ Bi ₂ I ₉ (10 h); CO: 77.6 µmol g ⁻¹ CH ₄ : 14.9 µmol g ⁻¹ For Rb ₃ Bi ₂ I ₉ (10 h); CO: 18.2 µmol g ⁻¹ CH ₄ : 17.0 µmol g ⁻¹ For MA ₃ Bi ₂ I ₉ (10 h); CO: 7.2 µmol g ⁻¹	275 Strike Strik

5.7 Plasmonic materials

The LSPR permits NPs to harvest light it is dependent upon the size of nanoparticles. The resulting interaction of the light and free electrons in the CB of the NPs causes oscillation of the surface electrons with the incident light. LSPR permits the gathering of light photons and creates energized charge transporters and heat. These charge transporters can be utilized to drive chemical reactions. In plasmonic catalysis, the exchange of photoexcited charge transporters from metal NPs to the reactants. The formation of heterostructures based on LSPR and photocatalysts is an exciting approach for CO₂ photoreduction.³⁹⁰ Recently, several studies have attempted to apply plasmonic engineering to CO₂ photoreduction. ^{391–393} Under light irradiation, free electrons produce an electrical dipole moment by displacing the electrical field to nuclei. Concurrently, the Coulombic attraction between the electrons and nuclei generates a restoring force to produce the resonant oscillation of electrons. This phenomenon is called the quasi-static effect and it significantly enhances light absorption. 394,395 In this regard, Kumari et al. reported the use of Ag plasmonic NPs for CO2 reduction under visible-light irradiation.³⁹⁶ They studied discrete adsorbates by in situ surface-enhanced Raman spectroscopy and estimated the product formation energy using DFT simulations.

Fig. 22(a) shows the results for a physisorbed CO₂ molecule, which was found to lie a considerable distance (3.4 Å) from the Ag surface in the simple structure form with a somewhat out-ofplane geometry for OCO (108.7°). To represent the effect of plasmonic excitation, the authors considered a charge-separated condition of the CO_2 /metal complex with a -1 charge along the CO₂ molecule and a +1 charge on the Ag surface. After geometry

relaxation, the CO_2 held an electronic charge of -0.4 (balanced by a positive charge of +0.4 on Ag). Reliant upon the binding motif of $CO_2^{\delta-}$ on the surface, O atoms facing catalyst surface (Fig. 22(b)) or C atom facing catalyst surface (Fig. 22(c)), the structure of adsorbate, free energy, and registered Raman spectrum changed. However, the OCO vibration mode was estimated to be in the range of 1200-1300 cm⁻¹ range, which was not observed in this study. This charged $CO_2^{\delta-}$ exhibited a bent geometry, the activated type of CO_2 . Indeed, energy optimization of $CO_2^{\delta-}$ on Ag in the vicinity of a surface-adsorbed $H^{\delta+}$ induced the development of a surface-adsorbed HOCO* intermediate (Fig. 22(d) and (e)). However, the O and H atoms pointed away from the surface. The CO vibration stretching mode at 2231 cm⁻¹ (Fig. 22(f)) showed that adsorbed CO is formed.

Furthermore, the decoration of bimetallic Au/Ag NPs on the top of TiO2 nanowires was reported to synergistically enhance the light absorption.²⁵⁰ The surface electrons of Au/Ag become excited and transferred to the CB of TiO2. While Au/Ag NPs could act as electron sink and allow a longer lifetime for photoexcited electrons. Therefore, the authors observed the evolution of CO (1813 μ mol $g_{cat}^{-1} h^{-1}$) as the primary product with 98% selectivity. In addition, the plasmonic effects of Au in CO₂ photoreduction have also been studied. Collado et al. demonstrated that the deposition of small Au nanoparticles on TiO2 resulted in the formation of C1 and C2 products under UV irradiation.³⁹⁷ Upon increasing the amount of Au from 0.5 to 3.0 wt%, the production of CH₄ improved with respect to CH₃OH, H₂, and CO owing to the better charge separation and a number of electrons. Furthermore, Zeng et al. reported the controlled fabrication of a plasmonic Z-scheme Au/TiO2

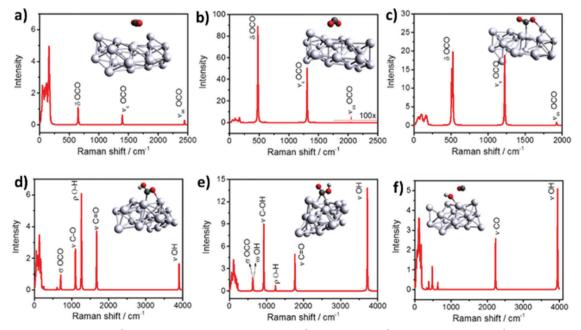


Fig. 22 (a) Physisorbed CO₂, (b) CO₂ $^{\delta-}$ anion with both O atoms facing the Ag $^{\delta+}$ surface, (c) CO₂ $^{\delta-}$ anion binding to the Ag $^{\delta+}$ surface via C and O atoms, (d) HOCO* intermediate bound to the Ag surface via both C and O atoms, (e) HOCO* intermediate bound to the Ag surface via a C atom, and (f) surfacebound CO* and OH* formed from dissociation of a HOCO* intermediate with both O atoms facing the Ag surface. Reproduced with permission from ref. 396, Copyright 2018, American Chemical Society

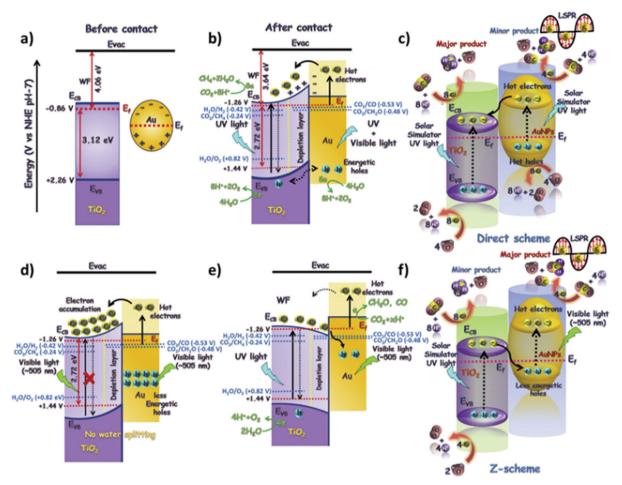


Fig. 23 (a) Band energies of TiO2 and Au before contact, (b) Schottky junction formation between Au and TiO2 and their Fermi level alignment during CO₂ reduction under simulated sunlight (traditional SPR assisted scheme shown in the blue text), (c) schematic representation of CH₄ formation by Au-PMTiNTs under simulated sunlight, (d) hot-electron injection from Au NPs into TiO₂ across Schottky barrier under visible light by LSPR, (e) recombination of the accumulated electron in TiO2 originated from the Au NP by LSPR, which forms the plasmonic Z-scheme, and (f) schematic illustration of overall Zscheme for photocatalytic CO₂ photoreduction to CH₂O. Reproduced with permission from ref. 398, Copyright 2020, Elsevier.

catalyst for CO₂ photoreduction, as shown in Fig. 23(a)–(f).³⁹⁸ This catalyst was synthesized by charge-controlled pulsed anodization and provided tunable product selectivity. The photonic crystals were composed of TiO₂ nanotube arrays (referred to as periodically modulated titanium dioxide nanotube arrays (PMTiNTs)) decorated with the gold nanoparticle to form the plasmonic effect. The authors identified two pathways that afforded different selectivity.

Under simulated sunlight (AM 1.5G), CH₄ and CO were found to be the major and minor products, respectively. This indicated that direct charge transfer of sufficiently energetic electrons to the CB of TiO2 and specific photonic bandgaps avoided the defect-mediated low-energy charge transfer that might produce other hydrocarbons, as shown in Fig. 23(c). In addition, owing to the lower reduction potential of CO2/CH4 with respect to CO₂/CO and CO₂/CH₂O, CH₄ formation may be thermodynamically favorable. Furthermore, when the Au NPs were illuminated with 532 nm light, strong absorption was observed owing to the LSPR. However, under visible-light irradiation, a slight positive shift of 25 mV is driven by hot-electron transfer

into CB energy of TiO2 across the Schottky junction, followed by absorption and plasmonic dephasing as illustrated in Fig. 23(d); thereby leaving the positively charged holes on the Au NPs. Under simulated sunlight, an accumulation-type interfacial band alignment was formed that promoted strong electron transfer from TiO_2 to Au, as shown in Fig. 23(e) and (f).

Thus, a large flux of electrons recombines with holes produced from the Au by plasmonic damping, making the TiO₂ photocatalytically active. Although these hot electrons underwent thermalization within picoseconds, gas evolution indicated charge transfer to the CO₂ molecules. Thus, the key point of this study is that optically controlled product selectivity is a most delicate technique.

In conclusion, plasmonic photocatalysis provides an opportunity for the optimization of hydrocarbon products during CO₂ reduction. However, this field must still face the challenge of understanding the reaction mechanism for various photocatalysts. Its major drawbacks include the high energy input, low yield, and poor catalyst stability. Several in situ spectroscopy techniques may help elucidate the complex reaction mechanisms at the molecular level.

Table 8 Plasmonic materials for photocatalytic CO2 reduction

Catalyst	Feed gas composition	Light source	Reducing agent	Reaction conditions	Reactor	Yield	Ref.
Ag@Ni/SiO ₂	$CO_2 + H_2 + N_2 (1:4:1)$	405 nm laser light	H_2	50 mg sample	_	CH ₄ selectivity: 55%	399
Au NP (TiO ₂ /Au)	99.9999% CO ₂ + H ₂ O (7:25)	UV	H_2O	100 mg sample, $50~^{\circ}\mathrm{C}$	Flow reactor	CH ₄ : 74.1 μmol g ⁻¹ (15 h)	397
Au/Ag alloy coated on TiO ₂	$CO_2 + H_2$	150 mW cm^{-2}	H_2	10 mg sample	Batch reactor	CO: 1053 µmol g ⁻¹ h ⁻¹ CH ₄ : 1813 µmol g ⁻¹ h ⁻¹	250
Au/g-C ₃ N ₄	99.999% CO ₂ + H ₂ O	300 W Xe lamp	H_2O	50 mg sample	Flow reactor	CO: 13.17 µmol g ⁻¹ (2 h) CH ₄ : 3.10 µmol g ⁻¹ (2 h)	400
Au/TiO ₂	99.99% CO ₂ + H ₂	252 nm (150 mW cm ⁻²)	H_2	Sample coated ceramic monolith	Monolith flow reactor	CO: 1223 µmol g ⁻¹ h ⁻¹ CH ₄ : 42 µmol g ⁻¹ h ⁻¹	251
Pt/Au-SiO ₂	$CO_2 + CH_4$	Xe lamp (LA-251, 0.6 W cm ⁻²)	_	20 mg sample	_	CO: 122.1 µmol g ⁻¹ min ⁻¹ CH ₄ : 55.3 µmol g ⁻¹ min ⁻¹	
Ag@TiO ₂ core–shell	$CO_2 + H_2O$	300 W Xe	H_2O	_	Pyrex glass reactor	CH ₄ : 14.8 µmol g ⁻¹ (3 h)	402
Au@TiO ₂ yolk-shell hollow spheres	$CO_2 + H_2O$	300 W Xe lamp	$\rm H_2O$	10 mg sample and 0.4 mL DI water	Flow reactor	CH ₄ : 2.57 μ mol g ⁻¹ h ⁻¹ C ₂ H ₆ : 1.67 μ mol g ⁻¹ h ⁻¹	403
Au-Cu nanoalloy supported on TiO ₂	99.995% $CO_2 + H_2O$	1000 W Xe lamp	$\rm H_2O$	Sample film	Batch reactor	CH ₄ : 2000 μ mol g ⁻¹ h ⁻¹	127
Ag-AgCl/C ₃ N ₄	99.999% CO ₂ + H ₂ O	15 W daylight map	H_2O	Sample coated on glass rods for immobilization	Tubular fixed-bed reactor	CH ₄ : around 10 μ mol g ⁻¹ (10 h)	404

Nevertheless, plasmonic photocatalysis has immense potential for realizing high CO₂ photoreduction yields in the near future. The photocatalytic CO₂ reduction activity of plasmonic materials is summarized in Table 8.

6 Origin of carbon in CO₂ photoreduction

Photocatalysts typically contain a certain amount of deposited carbonaceous species, especially on the surface, and various suggestions have been put forward for their origin. Literature reports have ascribed these species to a combination of the following factors: (i) the attachment of organic materials to the photocatalyst during synthesis, e.g., the use of methanol as a hole scavenger during photodeposition; (ii) CO2 adsorption from the air to form various species such as "C", "CO₃²⁻", and "HCO₃" as shown in eqn (26) and (27); and (iii) the adsorption of other organic molecules such as HCOOH from the air. 405-408 These species have been reported to be adsorbed by reactive surface sites, which are typically oxygen vacancies (Vo) and hydroxyl groups (OH⁻). The formation mechanism of these species has been reported to consume the surface defects as shown in eqn (26) and (27). In this regard, Zou and coworkers monitored the surface saturation of amorphous zinc germanate (α-ZnGeO) with CO₂ using C 1s X-ray photoelectron spectroscopy. 408 In addition, Diebold and co-workers observed the selective adsorption of HCOOH from the air by extremely clean TiO₂ under a controlled environment. 405

$$CO_2 + O_v \rightarrow C + O_2 \tag{26}$$

$$CO_2 + OH^- \rightarrow HCO_3^-$$
 (27)

The carbonaceous species, when illuminated under an inert or CO₂ containing atmosphere, decompose to form hydrocarbon products similar to those generated by photocatalytic CO₂ reduction. Moreover, in some cases, the yield under an inert atmosphere can even exceed that under CO2, as reported by Xu and co-workers for their Bi₂WO₆-TiO₂ nanosheets (B-T) as shown in Fig. 24(a).407 They also observed a photocatalytic yield under anhydrous conditions, as presented in Fig. 24(b), further confirming the presence of hydrocarbon residues. On this basis, the authors recommended the organic-free synthesis of photocatalytic materials. In a similar study, Mul and co-workers found that Cu(1)/TiO2 synthesized using an organic compound (polyethylene glycol (PEG)) generated more CO compared to the same catalyst synthesized without PEG. 409 They thus attributed the CO to carbon deposits originating from the PEG and proposed the mechanism shown in eqn (28) and (29). In addition to organic compounds, surface-adsorbed CO2 and water can also be transformed into products. Under such circumstances, there is a need for the two reactions, i.e., photodecomposition of the carbonaceous species and photocatalytic CO2 reduction, to be evaluated separately.

$$CO_2 + C \rightarrow 2CO$$
 (28)

$$H_2O + C \rightarrow CO + H_2$$
 (29)

A photocatalyst with pre-adsorbed carbonaceous species may exhibit two types of activity depending upon the reactants consumed. The first is transient activity, in which the photocatalyst exhibits a sudden rise in photocatalytic yield during the initial minutes of photocatalytic CO₂ reduction, and the second is steady-state activity, in which the photocatalyst displays a continuous low yield. The former originates from the consumption of pre-adsorbed species such as HCO₃ and formate, while the latter results from the real photocatalytic sites mediating CO2 reduction.412 Considering the participation of these two reactions, the overall yield determination could be misleading. Therefore, to evaluate the actual yield, it is essential to estimate the yield derived from the pre-adsorbed carbonaceous species. 409,413 In this regard,

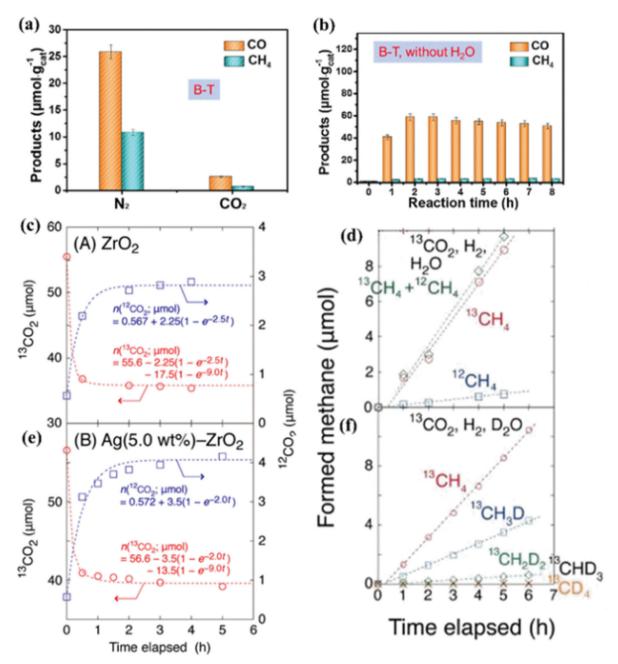


Fig. 24 (a) and (b) Photocatalytic yields exhibited by B-T under (a) humid CO_2 and N_2 and (b) anhydrous N_2 . Reproduced with permission from ref. 407, Copyright 2018, Elsevier. (c) and (e) 13CO₂ exchange reactions under UV-vis light for (c) ZrO₂ and (e) Ag-ZrO₂. Reproduced with permission from ref. 410, Copyright 2019, American Chemical Society. (d) and (f) Photocatalytic yields from irradiation of Ni-ZrO2 under (d) 13CO2, H2, and H2O, and (f) 13CO2, H2, and D₂O. Reproduced with permission from ref. 411, Copyright 2021, Wiley-VCH.

various treatment methods and spectroscopic techniques could be applied. There have been several reports of methods suitable for removing the carbonaceous/hydrocarbonaceous species, including thermal treatment, prolonged illumination, air/vacuum annealing, and washing with various solvents. ^{252,414,415} As far as the efficacy of such remedial methods is concerned, these species can be reduced using such techniques, but it is hard to completely eliminate them. For example, Mul and co-workers reported that under repeated cycles of irradiation the yield from the carbonaceous species decreased substantially but did not disappear. 415 Zou and

co-workers presented an interesting explanation for this behavior, noting the formation of oxygen vacancies in their α-ZnGeO catalyst under light irradiation, which upon exposure to the ambient environment readily adsorbed CO2.408 This adsorbed CO2 may be the source of the photocatalytic yield under inert conditions. Therefore, these carbonaceous species are formed continuously and cannot be easily removed. Moreover, the discussed methods may result in alterations to the morphology and reactivity; thus, it is highly desirable to develop methods for solving this issue without altering the beneficial photocatalytic properties.

Isotopic labeling studies with ¹³CO₂ have indicated that carbonate anions intercalated within layered double hydroxide (LDH) tend to exchange atmospheric CO2 via dynamic breathing. 416 Taking advantage of this phenomenon, 13CO₂ can be used as a reactant molecule to trace the actual activity originating from photocatalytic CO₂ reduction. In this regard, various studies have reported the utilization of ¹³CO₂ as a tracer molecule, where the resulting products (i.e., ¹³CO and ¹³CH₄) definitively originate from the ¹³CO₂ photoreduction reaction confirmed by gas chromatography-mass spectrometry (GC-MS). However, most of these studies were performed in batch reactors; although this permits determination of the relative contributions to the product yields, the reaction rate cannot be reliably calculated, which could lead to inaccurate kinetic real reaction rates of photocatalytic 13CO2 reduction by continuously monitoring the yields of 13CO and 13CH4. 410,411 In addition, they also explored the exchange of ¹³CO₂ with already adsorbed ¹²CO₂ under irradiation. They found that the exchange of CO2 molecules eventually reached equilibrium, as shown in Fig. 24(c) and (e), and under irradiation this occurred rapidly. 410 Considering the presence of pre-adsorbed CO2 and other carbonaceous species, the yield originated from both sources, as shown in Fig. 24(d). They also noted the ratio of product formation rate is agreement with D (Deuterium) ratio in reactant (8.9%), as shown in Fig. 24(f). Under such circumstances, the pre-adsorbed water/hydroxyl groups acted as a source of H+; therefore, in addition to confirming the origin of carbon, the origin modeling of the reactions. 5,407

Izumi and co-workers provided insights into the evaluation of the hydrogen are also important, which could be determined by following similar procedures. 411 In addition to isotopic analysis of the gaseous products, the intermediate products of ¹³CO₂ over the surface of the photocatalyst could be analyzed by secondary-ion mass spectrometry (SIMS) to further confirm the origin of the products. One such study was performed by Zou and co-workers, in which they confirmed the presence of ¹³C on the surface of α-Zn-Ge-O owing to its deposition during the reduction of ¹³CO₂. ⁴⁰⁸ Moreover, the participation of both hydrogen and carbon from H₂O and CO₂, respectively, has been confirmed by NMR studies. 42,417 In conclusion, understanding the origin of carbon in photocatalytic CO₂ reduction is vital and it has been studied by state-of-art equipment such as GC-MS, SIMS, and NMR.

7 Economic/commercial viability

The worldwide sequestration of CO₂ emissions currently accounts for a mere 1% of the total CO_2 generated. The resulting continuous increase in atmospheric CO2 concentrations is placing increasing pressure on governments to restrict emissions, and the eventual implementation of regulations for CO₂ capture is inevitable. 418 When this happens, the CO₂ utilization landscape will be realigned and the trend will shift to CO₂ capture, storage, and utilization technologies. 419 The resulting investments will largely go to technologies that are not viable prior to these regulations. It is anticipated that investors will be primarily interested in technologies that offer maximum benefits by producing valuable chemicals or fuels from CO₂. To date, urea and methanol production facilities are the major industrial consumers of CO2, but the scale of these industries is insufficient. 420 Hence, finding new opportunities for utilizing CO2 while producing value-added products will surely prove useful.421

Thermal power generation and the transportation sector account for two-thirds of CO2 emissions; therefore, finding viable CO2 conversion solutions for these sectors will enhance the scale of CO₂ harvesting. 422 Various alternative technologies to CO2 reduction, such as photovoltaics, hydroelectricity, and wind power, are becoming increasingly popular because of their renewability and sustainability. 423,424 However, considering the current rate of adoption of these technologies, it may take some time to replace fossil energy and reduce its deleterious effects on the environment. 425,426 In addition, the energy garnered by these resources cannot be directly applied to the current transportation infrastructure until there is a large-scale shift to electric vehicles. 427 Therefore, the major portion of fossil utilities still requires viable, renewable, and eco-friendly solutions. 424 Under these circumstances, the continued use of fossil resources will necessitate carbon capture facilities, which will eventually make the use of fossil fuels expensive. 428 Thus, reversing the combustion reaction to produce fuels for transportation will eventually lead to mega-scale CO2 harvesting while producing high-value products.419

Photocatalytic CO₂ reduction can be considered the reverse of combustion, enabling the transformation of CO₂ to solar fuels using sunlight and water under ambient conditions. 429 Although the industrial-scale process of thermocatalytic CO₂ reduction can also facilitate this transformation, these systems operate at elevated pressures and temperatures and require additional energy inputs and reducing agents such as H₂. 430 If these are not obtained from renewable resources, the net effects are not promising. Hence, photocatalytic CO₂ reduction seems lucrative relative to its peers with respect to commercialization owing to its numerous environmental and economic benefits. 431 In this regard, considerable solar-to-fuel efficiencies (STF) have been achieved. For example, Rajh et al. reported an efficiency of 10.1% using their earth-abundant Cu₂O photocatalyst. 432 Although an STF of 10.1% is sufficient for commercialization, sustaining this efficiency over prolonged periods remains challenging. Therefore, despite the promise of these technologies, their commercialization is still hindered by catalyst instability.

High-value hydrocarbon products such as C₂H₄ and C₂H₆ provide another avenue for commercialization. However, the activity and stability remain low. 433 C2 products from photocatalytic CO2 reduction have a high market value compared to C₁ products. 434 The production of longer-chain hydrocarbons with higher market value (e.g., propane) could further enhance the possibilities. 435 With the remarkable recent advances in these technologies, there is currently great interest in converting CO2 to C2 and higher hydrocarbon products owing to their greater economic benefits. 433 However, realizing C2 selectivity is

challenging owing to the complex steps involved in the overall reaction. 436 Furthermore, by following this route the CO₂ harvesting scale will be low because specialty products are utilized in smaller volumes.419

Government subsidies are the major source of financing for emerging renewable technologies because these technologies are initially not competitive with respect to their well-established rivals; for example, biodiesel is subsidized to compete with mineral diesel. 437,438 However, to obtain such financial support, the technology should be at the pilot/bench scale with considerable efficiencies; for instance, KIT in Germany has successfully converted renewable energy to methane with 51.3% conversion efficiency under the "Power to Gas" project and is committed to extending the energy conversion efficiency to 80%. 439,440 Another example is high-temperature co-electrolysis to convert CO2 and steam to syngas, which proceeds with an efficiency of up to 70%. 419,441 However, to the best of our knowledge, no pilot plant for photocatalytic CO2 reduction has yet been established.

8 Outlook

The conversion of CO2 into value-added chemicals using sunlight is now well established. Although many of the earlier studies into CO₂ photoconversion focused on improving the photocatalytic activity, there are also numerous other crucial parameters that warrant serious attention. For example, photocatalyst stability is as important as high activity. 186 However, in contrast to the extensive body of research focusing on achieving optimal activity, only limited information exists regarding the possible causes of deactivation. 415 These causes include loss of the active oxidation state under irradiation, the buildup of irreducible reaction intermediates, and morphological changes. 87,408,442 Various efforts have been made to circumvent these issues, such as the use of hole scavengers, construction of heterostructures to retain the desired oxidation states, and thermal and other treatments to remove the intermediates.²⁵² However, considerable work is still required to circumvent the need for non-renewable hole scavengers and ineffective and energy-intensive photocatalyst regeneration processes.90

In this review, various reasons have been discussed which contribute to destabilizing the photocatalyst. The widely identified reasons include losing active oxidation states of photocatalyst and accumulation of the reaction intermediates over the surface of the photocatalyst, i.e., carbon. Therefore, it is mandatory to overcome these limitations to achieve commercial-scale viability. In this regard, photocatalyst is required to re-attain the active oxidation states without being taken out of the reactor. Literature suggests that single metal atom photocatalyst can regain their lost active oxidation states just by exposing them to air, which arises from metal-support interactions. 443 Moreover, intense UV irradiation under inert-humid conditions is believed to decompose the reaction intermediates. The protons generated from water oxidation will be utilized to reduce the already present carbonaceous species, and subsequently, activity can be restored. The researchers should focus on such developments which can make the photocatalytic reusable system simpler.

Besides stability, product selectivity is also underexplored, and in this regard, it is highly desirable to develop photocatalysts with the ability to mediate C-C coupling reactions by stabilizing the intermediate products. Several factors influence the product selectivity of CO2 conversions, including the type of materials, band potentials of semiconductors, the intermediate stabilization, etc. Furthermore, the reaction medium has a crucial influence on product selectivity; for example, CH₃OH, C₂H₅OH, and formaldehyde can be generated in an aqueous system, while CO, CH₄, and C₂H₆ production are more feasible in a gas phase system. In the literature, most of the photocatalysts have been reported for C₁ products like CO and CH₄; however, limited studies have been carried out for C2 selectivity. Literature suggests that metal nanoparticles like Pt, Pd, Au, etc., deposited on semiconductors have selectivity for CH₄ formation due to their ability to supply sufficient protons. For the C2+ product, the C-H bonds can be formed by C-O bond cleavage and continuous protonation. The density of photogenerated electrons/holes and the stability of intermediates also impact the reaction's C₂ selectivity; for example, stabilization of •CH₃ radicals is beneficial for achieving C₂ selectivity. Theoretically, the breakage of the C-O bonds at the single-metal site is easier than at the dual-metal site because the dual-metal site has a higher charge density due to the charge transfer. Thus, the intermediates become more stable at the dual-metal site.444 To prove the theoretical calculation, in situ/operando XAS analysis can provide the experimental observation on the local coordination environment and oxidation states of the metal center during the reaction. As a result, for C2 selectivity, it is preferable to carefully design catalysts to regulate the reaction intermediates. The combination of graphene with other semiconducting materials has been reported to enhance the C2 selectivity.

To achieve an industry-relevant photocatalytic CO₂ reduction, CO₂ capture, utilization, and storage also should be considered. 445 An effective solution is still needed to avoid such additional costs, despite the use of abundant and cheap reactants. Furthermore, if the photocatalytic CO₂ conversion-efficiency is low, then the CO₂ concentration in the products may be too high to permit their direct use, thus necessitating separation of the hydrocarbons and CO₂. 446 One possible solution is passing the gaseous mixture through gas separation membranes, although the installation and operation of these systems would also lead to higher costs.447 Therefore, it would be highly desirable to search for solutions that help avoid these extra processing steps. 131

To avoid the construction of CO2-collecting infrastructure, CO₂ can be captured from the atmosphere. This abundant resource, if it can be harnessed, would provide many benefits: it avoids the purification and storage of CO₂, and in some cases, it contains abundant moisture, thus avoiding the need for humidification. 448 However, the use of low concentration CO₂ is associated with its own disadvantages, such as low adsorption over a photocatalyst. On the other hand, strategies to minimize the need for post-reaction product purification are also needed, such as the development of photocatalysts that can adsorb CO₂ and H₂O in higher amounts. Subsequently, the reactant-laden photocatalyst could be subjected to irradiation

under controlled conditions to yield a CO₂-free product mixture. Therefore, it would be desirable to explore such photocatalysts that can selectively adsorb atmospheric CO2 and H2O with high stability.

Thermal effects can also lead to an enhancement in the yield of the solar products of photocatalytic CO₂ reduction. 41 One possible way to exploit these effects is the concentration of solar light, which does not require the use of any fossil fuels. However, to enable photothermal reactions, special attention must be paid to the design of photoreactors and photocatalysts with good durability to withstand the harsh conditions. Fortunately, rather than raising the bulk temperature, the photocatalyst surface could be locally heated through LSPR. For example, Izumi and co-workers found that the temperature increased to 392 K owing to Ag LSPR. This dual role of light provides another avenue for enhancing the activity by taking advantage of synergistic effects, but this is only feasible with well-designed photocatalysts and must be explored further. 410 Furthermore, the use of renewable hole scavengers such as glycerol, a byproduct of biodiesel manufacture, would also be desirable. In addition, facile photocatalyst regeneration processes must be developed, as in the case of some single-metal-atom catalysts, for which regeneration can be conveniently accomplished simply by exposing the catalyst to the environment.47

Considering the immense potential of CO2 reduction, huge investments are in place, and these will surely escalate in the near future. For instance, the Musk Foundation recently announced the \$100 million X PRIZE for carbon removal. 449 Similarly, the European Innovation Council has offered a €5 million prize for the development of a bench-scale prototype for artificial photosynthesis. 450 Therefore, considering the current and future investments, it can be anticipated that CO₂ reduction will eventually find a route to commercialization. In this regard, photocatalytic CO₂ reduction could make a strong impression in terms of attracting investment. Such heavy investments in this field will expedite further research and help realize the true potential of photocatalytic CO₂ reduction.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

The authors acknowledge financial support from the Ministry of Science and ICT in Korea (2021R1A2C2009459 and 2021M3I3A1085039). This paper is dedicated to Professor Michael R. Hoffman (Caltech, USA) and Professor Wan In Lee (Inha University, Korea), who have contributed to the research and development of photocatalytic fields throughout their lives.

References

1 Z. Wang, H. Song, H. Liu and J. Ye, Angew. Chem., Int. Ed., 2020, 59, 8016-8035.

- 2 W.-H. Wang, Y. Himeda, J. T. Muckerman, G. F. Manbeck and E. Fujita, Chem. Rev., 2015, 115, 12936-12973.
- 3 G. M. Hallegraeff, J. Phycol., 2010, 46, 220-235.
- 4 J. He and C. Janáky, ACS Energy Lett., 2020, 5, 1996-2014.
- 5 S. Sorcar, Y. Hwang, J. Lee, H. Kim, K. M. Grimes, C. A. Grimes, J.-W. Jung, C.-H. Cho, T. Majima, M. R. Hoffmann and S.-I. In, Energy Environ. Sci., 2019, 12, 2685-2696.
- 6 S. S. Meryem, S. Nasreen, M. Siddique and R. Khan, Rev. Chem. Eng., 2018, 34, 409-425.
- 7 U. Nations, 21st Conference of the Parties, United Nations Framework Convention on Climate Change, UNFCCC, Paris, 2015.
- 8 S. Nitopi, E. Bertheussen, S. B. Scott, X. Liu, A. K. Engstfeld, S. Horch, B. Seger, I. E. L. Stephens, K. Chan, C. Hahn, J. K. Nørskov, T. F. Jaramillo and Ib Chorkendorff, Chem. Rev., 2019, 119, 7610-7672.
- 9 T. Kong, Y. Jiang and Y. Xiong, Chem. Soc. Rev., 2020, 49, 6579-6591.
- 10 P. Abbasi, M. Asadi, C. Liu, S. Sharifi-Asl, B. Sayahpour, A. Behranginia, P. Zapol, R. Shahbazian-Yassar, L. A. Curtiss and A. Salehi-Khojin, ACS Nano, 2017, 11, 453-460.
- 11 C. Hiragond, S. Ali, S. Sorcar and S.-I. In, Catalysts, 2019, 9, 370.
- 12 C. B. Hiragond, N. S. Powar and S.-I. In, Nanomaterials, 2020, 10, 2569.
- 13 J. Ye, J. Yu, Y. Zhang, M. Chen, X. Liu, S. Zhou and Z. He, Appl. Catal., B, 2019, 257, 117916.
- 14 S. K. Kuk, Y. Ham, K. Gopinath, P. Boonmongkolras, Y. Lee, Y. W. Lee, S. Kondaveeti, C. Ahn, B. Shin, J. Lee, S. Jeon and C. B. Park, Adv. Energy Mater, 2019, 9, 1900029.
- 15 Q. Lu and F. Jiao, Nano Energy, 2016, 29, 439-456.
- 16 M.-Y. Lee, K. T. Park, W. Lee, H. Lim, Y. Kwon and S. Kang, Crit. Rev. Environ. Sci. Technol., 2020, 50, 769-815.
- 17 R. C. Pullar, R. M. Novais, A. P. F. Caetano, M. A. Barreiros, S. Abanades and F. A. C. Oliveira, Front. Chem., 2019, 7,601.
- 18 X.-Y. Wu and A. F. Ghoniem, Prog. Energy Combust. Sci., 2019, 74, 1-30.
- 19 J. Jia, P. G. O'Brien, L. He, Q. Qiao, T. Fei, L. M. Reyes, T. E. Burrow, Y. Dong, K. Liao, M. Varela, S. J. Pennycook, M. Hmadeh, A. S. Helmy, N. P. Kherani, D. D. Perovic and G. A. Ozin, Adv. Sci., 2016, 3, 1600189.
- 20 X. Meng, T. Wang, L. Liu, S. Ouyang, P. Li, H. Hu, T. Kako, H. Iwai, A. Tanaka and J. Ye, Angew. Chem., Int. Ed., 2014, 53, 11478-11482.
- 21 H. Li, W. Tu, Y. Zhou and Z. Zou, Adv. Sci., 2016, 3, 1500389.
- 22 Y. Zhou, Z. Wang, L. Huang, S. Zaman, K. Lei, T. Yue, Z. Li, B. You and B. Y. Xia, Adv. Energy Mater, 2021, 11, 2003159.
- 23 M. Halmann, Nature, 1978, 275, 115-116.
- 24 P. Zhang and X. W. Lou, Adv. Mater., 2019, 31, 1900281.
- 25 X. Chang, T. Wang and J. Gong, Energy Environ. Sci., 2016, 9, 2177-2196.
- 26 O. Ola and M. M. Maroto-Valer, J. Photochem. Photobiol. C, 2015, 24, 16-42.
- 27 D. Li, M. Kassymova, X. Cai, S.-Q. Zang and H.-L. Jiang, Coord. Chem. Rev., 2020, 412, 213262.

- 28 Y. Y. Lee, H. S. Jung and Y. T. Kang, J. CO2 Util., 2017, 20, 163-177.
- 29 T. Yui, A. Kan, C. Saitoh, K. Koike, T. Ibusuki and O. Ishitani, ACS Appl. Mater. Interfaces, 2011, 3, 2594-2600.
- 30 H. Zhang, G. Liu, L. Shi and J. Ye, Adv. Energy Mater., 2018, 8, 1701343.
- 31 X. Jiao, K. Zheng, Z. Hu, Y. Sun and Y. Xie, ACS Cent. Sci., 2020, 6, 653-660.
- 32 S. Trivedi, D. Prochowicz, A. Kalam, M. M. Tavakoli and P. Yadav, Renewable Sustainable Energy Rev., 2021, 145, 111047.
- 33 J. Ran, M. Jaroniec and S. Qiao, Adv. Mater., 2018, 30, 1704649.
- 34 K. Yang, Z. Yang, C. Zhang, Y. Gu, J. Wei, Z. Li, C. Ma, X. Yang, K. Song, Y. Li, Q. Fang and J. Zhou, Chem. Eng. J, 2021, 418, 129344.
- 35 M. Yang, M. Gao, M. Hong and G. W. Ho, Adv. Mater., 2018, 30, 1802894.
- 36 X. Xiang, F. Pan and Y. Li, Adv. Compos. Hybrid Mater., 2018, 1, 6-31.
- 37 T.-H. Lai, K. Katsumata and Y.-J. Hsu, Nanophotonics, 2021, 10, 777-795.
- 38 M. Sachs, E. Pastor, A. Kafizas and J. R. Durrant, J. Phys. Chem. Lett., 2016, 7, 3742-3746.
- 39 J. Fu, K. Jiang, X. Qiu, J. Yu and M. Liu, Mater. Today, 2020, 32, 222-243.
- 40 L. Liu, F. Gao, H. Zhao and Y. Li, Appl. Catal., B, 2013, 134, 349-358.
- 41 F. Zhang, Y.-H. Li, M.-Y. Qi, Y. M. A. Yamada, M. Anpo, Z.-R. Tang and Y.-J. Xu, Chem Catal., 2021, 1, 1-26.
- 42 N. M. Dimitrijevic, B. K. Vijayan, O. G. Poluektov, T. Rajh, K. A. Gray, H. He and P. Zapol, J. Am. Chem. Soc., 2011, 133, 3964-3971.
- 43 M. E. Aguirre, R. Zhou, A. J. Eugene, M. I. Guzman and M. A. Grela, Appl. Catal., B, 2017, 217, 485-493.
- 44 S. Ali, J. Lee, H. Kim, Y. Hwang, A. Razzaq, J.-W. Jung, C.-H. Cho and S.-I. In, Appl. Catal., B, 2020, 279, 119344.
- 45 F. Zhang, Y.-H. Li, M.-Y. Qi, Z.-R. Tang and Y.-J. Xu, Appl. Catal., B, 2020, 268, 118380.
- 46 L. Liu, C. Zhao, J. T. Miller and Y. Li, J. Phys. Chem. C, 2016, 121, 490-499.
- 47 S. Ali, M. C. Flores, A. Razzaq, S. Sorcar, C. B. Hiragond, H. R. Kim, Y. H. Park, Y. Hwang, H. S. Kim, H. Kim, E. Gong, J. Lee, D. Kim and S.-I. In, Catalysts, 2019, 9, 727.
- 48 S. Sorcar, S. Yoriya, H. Lee, C. A. Grimes and S. P. Feng, Mater. Today Chem., 2020, 16, 100264.
- 49 Y. Lin, C. Deng, L. Wu, Y. Zhang, C. Chen, W. Ma and J. Zhao, Energy Environ. Sci., 2020, 13, 2602-2617.
- 50 W.-J. Yin, B. Weng, J. Ge, Q. Sun, Z. Li and Y. Yan, Energy Environ. Sci., 2019, 12, 442-462.
- 51 S. Xie, W. Ma, X. Wu, H. Zhang, Q. Zhang, Y. Wang and Y. Wang, Energy Environ. Sci., 2021, 14, 37-89.
- 52 X. Li, J. Yu, M. Jaroniec and X. Chen, Chem. Rev., 2019, 119, 3962-4179.
- 53 A. Bavykina, N. Kolobov, I. S. Khan, J. A. Bau, A. Ramirez and J. Gascon, Chem. Rev., 2020, 120, 8468-8535.

- 54 G. Chen, G. I. N. Waterhouse, R. Shi, J. Zhao, Z. Li, L. Wu, C. Tung and T. Zhang, Angew. Chem., Int. Ed., 2019, 58, 17528-17551.
- 55 Z. Kovačič, B. Likozar and M. Huš, ACS Catal., 2020, 10, 14984-15007.
- 56 D. P. Van Vuuren, E. Stehfest, D. E. H. J. Gernaat, J. C. Doelman, M. Van den Berg, M. Harmsen, H. S. de Boer, L. F. Bouwman, V. Daioglou, O. Y. Edelenbosch, B. Girod, T. Kram, L. Lassaletta, P. L. Lucas, H. Meijl, C. Müller, B. J. Ruijven, S. v. d. Sluis and A. Tabeau, Glob. Environ. Change, 2017, 42, 237-250.
- 57 A. Dechezleprêtre, R. Martin and S. Bassi, Handbook on Green Growth, Edward Elgar Publishing, 2019.
- 58 H. N. Larsen, C. Solli and J. Pettersena, Energy Procedia, 2012, 20, 354-363.
- 59 T. Inui, M. Anpo, K. Izui, S. Yanagida and T. Yamaguchi, Advances in chemical conversions for mitigating carbon dioxide, Elsevier, 1998.
- 60 S.-E. Park, J.-S. Chang and K.-W. Lee, Carbon Dioxide Utilization for Global Sustainability: Proceedings of the 7th International Conference on Carbon Dioxide Utilization, Seoul, Korea, October 12-16, 2003, Elsevier, 2004.
- 61 B. Eliasson, P. Riemer and A. Wokaun, Greenhouse gas control technologies, Elsevier, 1999.
- 62 J. L. White, M. F. Baruch, J. E. Pander III, Y. Hu, I. C. Fortmeyer, J. E. Park, T. Zhang, K. Liao, J. Gu and Y. Yan, Chem. Rev., 2015, 115, 12888-12935.
- 63 H. Wang, H. Rong, D. Wang, X. Li, E. Zhang, X. Wan, B. Bai, M. Xu, J. Liu, J. Liu, W. Chen and J. Zhang, Small, 2020, 16, 2000426.
- 64 P. D. Tran, L. H. Wong, J. Barber and J. S. C. Loo, *Energy* Environ. Sci., 2012, 5, 5902-5918.
- 65 W. Tu, Y. Zhou and Z. Zou, Adv. Mater., 2014, 26, 4607-4626.
- 66 H. Huang, B. Pradhan, J. Hofkens, M. B. J. Roeffaers and J. A. Steele, ACS Energy Lett., 2020, 5, 1107-1123.
- 67 L. Liang, X. Li, Y. Sun, Y. Tan, X. Jiao, H. Ju, Z. Qi, J. Zhu and Y. Xie, Joule, 2018, 2, 1004-1016.
- 68 S. Rej, M. Bisetto, A. Naldoni and P. Fornasiero, J. Mater. Chem. A, 2021, 9, 5915-5951.
- 69 L. Shi, X. Ren, Q. Wang, W. Zhou and J. Ye, J. Mater. Chem. A, 2021, 9, 2421-2428.
- 70 X. Wang, F. Wang, Y. Sang and H. Liu, Adv. Energy Mater., 2017, 7, 1700473.
- 71 A. J. Cowan and J. R. Durrant, Chem. Soc. Rev., 2013, 42, 2281-2293.
- 72 T. M. Clarke and J. R. Durrant, Chem. Rev., 2010, 110, 6736-6767.
- 73 T.-H. Lai, K. Katsumata and Y.-J. Hsu, Nanophotonics, 2020, 10, 777-795.
- 74 X. Chen, C. Li, M. Grätzel, R. Kostecki and S. S. Mao, Chem. Soc. Rev., 2012, 41, 7909-7937.
- 75 X. Wang, A. Kafizas, X. Li, S. J. A. Moniz, P. J. T. Reardon, J. Tang, I. P. Parkin and J. R. Durrant, J. Phys. Chem. C, 2015, 119, 10439-10447.
- 76 C. Liu, K. Huang, W.-T. Park, M. Li, T. Yang, X. Liu, L. Liang, T. Minari and Y.-Y. Noh, Mater. Horiz., 2017, 4, 608-618.

- 77 X. Li, H. Liu, D. Luo, J. Li, Y. Huang, H. Li, Y. Fang, Y. Xu and L. Zhu, Chem. Eng. J., 2012, 180, 151-158.
- 78 O. K. Varghese, M. Paulose, T. J. LaTempa and C. A. Grimes, Nano Lett., 2009, 9, 731-737.
- 79 P. Reñones, A. Moya, F. Fresno, L. Collado, J. J. Vilatela and A. Víctor, I. CO2 Util., 2016, 15, 24-31.
- 80 P. Maity, O. F. Mohammed, K. Katsiev and H. Idriss, J. Phys. Chem. C, 2018, 122, 8925-8932.
- 81 X. Meng, L. Liu, S. Ouyang, H. Xu, D. Wang, N. Zhao and J. Ye, Adv. Mater., 2016, 28, 6781-6803.
- 82 W. Chu, Q. Zheng, O. V. Prezhdo and J. Zhao, J. Am. Chem. Soc., 2020, 142, 3214-3221.
- 83 X. Li, Y. Sun, J. Xu, Y. Shao, J. Wu, X. Xu, Y. Pan, H. Ju, J. Zhu and Y. Xie, Nat. Energy, 2019, 4, 690-699.
- 84 W.-J. Yin, B. Wen, Q. Ge, X.-B. Li, G. Teobaldi and L.-M. Liu, Dalton Trans., 2020, 49, 12918-12928.
- 85 P. Liu, X. Peng, Y.-L. Men and Y.-X. Pan, Green Chem. Eng., 2016, 18, 139-143.
- 86 C. B. Hiragond, S. Ali, S. Sorcar and S.-I. In, Catalysts, 2019, 9, 370.
- 87 Y. Li, W. N. Wang, Z. Zhan, M. H. Woo, C. Y. Wu and P. Biswas, Appl. Catal., B, 2010, 100, 386-392.
- 88 K. Tennakone, A. H. Jayatissa and S. Punchihewa, J. Photochem. Photobiol. A Chem., 1989, 49, 369-375.
- 89 F. Fresno, I. J. Villar-García, L. Collado, E. Alfonso-González, P. Reñones, M. Barawi and V. A. de la Peña O'Shea, J. Phys. Chem. Lett., 2018, 9, 7192-7204.
- 90 J. Low, J. Yu and W. Ho, J. Phys. Chem. Lett., 2015, 6, 4244-4251.
- 91 D. Chen, X. Zhang and A. F. Lee, J. Mater. Chem. A, 2015, 3, 14487-14516.
- 92 L. Andronic and A. Enesca, Front. Chem., 2020, 8, 565489.
- 93 S. Sorcar, Y. Hwang, C. A. Grimes and S.-I. In, Mater. Today, 2017, 20, 507-515.
- 94 V. Natu, R. Pai, M. Sokol, M. Carey, V. Kalra and M. W. Barsoum, Chem, 2020, 6, 616-630.
- 95 S. Sorcar, J. Thompson, Y. Hwang, Y. H. Park, T. Majima, C. A. Grimes, J. R. Durrant and S.-I. In, Energy Environ. Sci., 2018, 11, 3183-3193.
- 96 C. B. Hiragond, J. Lee, H. Kim, J.-W. Jung, C.-H. Cho and S.-I. In, Chem. Eng. J., 2020, 416, 127978.
- 97 H. Wang, L. Zhang, Z. Chen, J. Hu, S. Li, Z. Wang, J. Liu and X. Wang, Chem. Soc. Rev., 2014, 43, 5234-5244.
- 98 S. N. Habisreutinger, L. Schmidt-Mende and J. K. Stolarczyk, Angew. Chem., Int. Ed., 2013, 52, 7372-7408.
- 99 Y. Ji and Y. Luo, ACS Catal., 2016, 6, 2018-2025.
- 100 W. Ong, L. K. Putri and A. R. Mohamed, Chem. Eur. J., 2020, 26, 9710-9748.
- 101 E. Vahidzadeh, S. Zeng, A. P. Manuel, S. Riddell, P. Kumar, K. M. Alam and K. Shankar, ACS Appl. Mater. Interfaces, 2021, 13, 7248-7258.
- 102 W. Tu, Y. Zhou, Q. Liu, S. Yan, S. Bao, X. Wang, M. Xiao and Z. Zou, Adv. Funct. Mater., 2013, 23, 1743-1749.
- 103 X. Chen, L. Liu, Y. Y. Peter and S. S. Mao, Science, 2011, 331, 746-750.

- 104 N. Liu, V. Häublein, X. Zhou, U. Venkatesan, M. Hartmann, M. Mačković, T. Nakajima, E. Spiecker, A. Osvet, L. Frey and P. Schmuki, Nano Lett., 2015, 15, 6815-6820.
- 105 A. Sinhamahapatra, J.-P. Jeon and J.-S. Yu, Energy Environ. Sci., 2015, 8, 3539-3544.
- 106 X. Zhou, N. Liu, J. Schmidt, A. Kahnt, A. Osvet, S. Romeis, E. M. Zolnhofer, V. R. R. Marthala, D. M. Guldi, W. Peukert, M. Hartmann, K. Meyer and P. Schmuki, Adv. Mater., 2017, 29, 1604747.
- 107 N. F. Mott, Mathematical Proceedings of the Cambridge Philosophical Society, Cambridge University Press, 1938, vol. 34, pp. 568-572.
- 108 W. Schottky, Naturwissenschaften, 1938, 26, 843.
- 109 X. Wang, K. Maeda, A. Thomas, K. Takanabe, G. Xin, J. M. Carlsson, K. Domen and M. Antonietti, Nat. Mater., 2009, 8, 76-80.
- 110 A. B. Jorge, D. J. Martin, M. T. S. Dhanoa, A. S. Rahman, N. Makwana, J. Tang, A. Sella, F. Corà, S. Firth, J. A. Darr and P. F. McMillan, J. Phys. Chem. C, 2013, 117, 7178-7185.
- 111 J. Fu, J. Yu, C. Jiang and B. Cheng, Adv. Energy Mater., 2018, 8, 1701503.
- 112 V. S. Vyas, F. Haase, L. Stegbauer, G. Savasci, F. Podjaski, C. Ochsenfeld and B. V. Lotsch, Nat. Commun., 2015, 6, 1-9.
- 113 L. Wang, Y. Wan, Y. Ding, S. Wu, Y. Zhang, X. Zhang, G. Zhang, Y. Xiong, X. Wu, J. Yang and H. Xu, Adv. Mater., 2017, 29, 1702428.
- 114 R. Asahi, T. Morikawa, T. Ohwaki, K. Aoki and Y. Taga, Science, 2001, 293, 269-271.
- 115 H. Irie, Y. Watanabe and K. Hashimoto, J. Phys. Chem. B, 2003, 107, 5483-5486.
- 116 G. Liu, J. Pan, L. Yin, J. T. S. Irvine, F. Li, J. Tan, P. Wormald and H. Cheng, Adv. Funct. Mater., 2012, 22, 3233-3238.
- 117 L. Zhang, M. S. Tse, O. K. Tan, Y. X. Wang and M. Han, J. Mater. Chem. A, 2013, 1, 4497-4507.
- 118 N. O. Gopal, H.-H. Lo, T.-F. Ke, C.-H. Lee, C.-C. Chou, J.-D. Wu, S.-C. Sheu and S.-C. Ke, J. Phys. Chem. C, 2012, 116, 16191-16197.
- 119 X. Yan, K. Yuan, N. Lu, H. Xu, S. Zhang, N. Takeuchi, H. Kobayashi and R. Li, Appl. Catal., B, 2017, 218, 20-31.
- 120 Z. Sun, N. Talreja, H. Tao, J. Texter, M. Muhler, J. Strunk and J. Chen, Angew. Chem., Int. Ed., 2018, 57, 7610-7627.
- 121 M. Liu, L. Zheng, X. Bao, Z. Wang, P. Wang, Y. Liu, H. Cheng, Y. Dai, B. Huang and Z. Zheng, Chem. Eng. J., 2021, 405, 126654.
- 122 Y. J. Jang, J.-W. Jang, J. Lee, J. H. Kim, H. Kumagai, J. Lee, T. Minegishi, J. Kubota, K. Domen and J. S. Lee, Energy Environ. Sci., 2015, 8, 3597-3604.
- 123 G. Li, Y. Sun, Q. Zhang, Z. Gao, W. Sun and X. Zhou, Chem. Eng. J., 2021, 410, 128397.
- 124 N. Blommaerts, N. Hoeven, D. A. Esteban, R. Campos, M. Mertens, R. Borah, A. Glisenti, K. De Wael, S. Bals, S. Lenaerts, S. W. Verbruggen and P. Cool, Chem. Eng. J., 2021, 410, 128234.
- 125 Y. Zhu, Z. Xu, Q. Lang, W. Jiang, Q. Yin, S. Zhong and S. Bai, Appl. Catal., B, 2017, 206, 282-292.

- 126 W.-N. Wang, W.-J. An, B. Ramalingam, S. Mukherjee, D. M. Niedzwiedzki, S. Gangopadhyay and P. Biswas, J. Am. Chem. Soc., 2012, 134, 11276-11281.
- 127 S. Neatu, J. A. Maciá-Agulló, P. Concepción and H. Garcia, J. Am. Chem. Soc., 2014, 136, 15969-15976.
- 128 Q. Zhai, S. Xie, W. Fan, Q. Zhang, Y. Wang, W. Deng and Y. Wang, Angew. Chem., 2013, 125, 5888-5891.
- 129 R. Long, Y. Li, Y. Liu, S. Chen, X. Zheng, C. Gao, C. He, N. Chen, Z. Qi, L. Song, J. Jiang, J. Zhu and Y. Xiong, J. Am. Chem. Soc., 2017, 139, 4486-4492.
- 130 J. C. Wang, L. Zhang, W. X. Fang, J. Ren, Y. Y. Li, H. C. Yao, J. S. Wang and Z. J. Li, ACS Appl. Mater. Interfaces, 2015, 7,
- 131 G. Y. Yao and Z. Y. Zhao, J. Mater. Chem. C, 2020, 8, 8567-8578.
- 132 L. Guo, Y. Wang and T. He, Chem. Rec., 2016, 16, 1918-1933.
- 133 Q. Xu, L. Zhang, J. Yu, S. Wageh, A. A. Al-Ghamdi and M. Jaroniec, Mater. Today, 2018, 21, 1042-1063.
- 134 Q. Yuan, D. Liu, N. Zhang, W. Ye, H. Ju, L. Shi, R. Long, J. Zhu and Y. Xiong, Angew. Chem., 2017, 129, 4270-4274.
- 135 Y. Liu, B. Zhang, L. Luo, X. Chen, Z. Wang, E. Wu, D. Su and W. Huang, Angew. Chem., Int. Ed., 2015, 54, 15260-15265.
- 136 S. N. Talapaneni, G. Singh, I. Y. Kim, K. AlBahily, A. H. Al-Muhtaseb, A. S. Karakoti, E. Tavakkoli and A. Vinu, Adv. Mater., 2020, 32, 1904635.
- 137 X. Meng, S. Ouyang, T. Kako, P. Li, Q. Yu, T. Wang and J. Ye, Chem. Commun., 2014, 50, 11517-11519.
- 138 J. Z. Y. Tan, S. Gavrielides, H. R. Xu, W. A. Thompson and M. M. Maroto-Valer, RSC Adv., 2020, 10, 27989-27994.
- 139 T. Xiong, W. Cen, Y. Zhang and F. Dong, ACS Catal., 2016, 6, 2462-2472.
- 140 Y. Liao, Z. Hu, Q. Gu and C. Xue, Molecules, 2015, 20, 18847-18855.
- 141 Z. He, L. Wen, D. Wang, Y. Xue, Q. Lu, C. Wu, J. Chen and S. Song, Energy Fuels, 2014, 28, 3982-3993.
- 142 A. Nakada, K. Koike, K. Maeda and O. Ishitani, Green Chem., 2016, 18, 139-143.
- 143 H. A. E. Omr, M. W. Horn and H. Lee, Catalysts, 2021, 11, 418.
- 144 D. Voiry, H. S. Shin, K. P. Loh and M. Chhowalla, Nat. Rev. Chem., 2018, 2, 1-17.
- 145 J. Zhao, M. A. Holmes and F. E. Osterloh, ACS Nano, 2013, 7, 4316-4325.
- 146 A. D. Yoffe, Adv. Phys., 1993, 42, 173-262.
- 147 K. A. S. Fernando, S. Sahu, Y. Liu, W. K. Lewis, E. A. Guliants, A. Jafariyan, P. Wang, C. E. Bunker and Y.-P. Sun, ACS Appl. Mater. Interfaces, 2015, 7, 8363-8376.
- 148 M. Zhou, S. Wang, P. Yang, C. Huang and X. Wang, ACS Catal., 2018, 8, 4928-4936.
- 149 J. Sheng, Y. He, J. Li, C. Yuan, H. Huang, S. Wang, Y. Sun, Z. Wang and F. Dong, ACS Nano, 2020, 14, 13103-13114.
- 150 C. Huang, J. Qiao, R.-N. Ci, X.-Z. Wang, Y. Wang, J.-H. Wang, B. Chen, C.-H. Tung and L.-Z. Wu, Chem, 2021, 7, 1244-1257.
- 151 J. A. Caputo, L. C. Frenette, N. Zhao, K. L. Sowers, T. D. Krauss and D. J. Weix, J. Am. Chem. Soc., 2017, 139, 4250-4253.

- 152 Z. Zhang, K. Edme, S. Lian and E. A. Weiss, J. Am. Chem. Soc., 2017, 139, 4246-4249.
- 153 Y. Deng, M. Chen, G. Chen, W. Zou, Y. Zhao, H. Zhang and Q. Zhao, ACS Omega, 2021, 6, 4247-4254.
- 154 H. Li, X. Zhang and D. R. MacFarlane, Adv. Energy Mater., 2015, 5, 1401077.
- 155 M. Li, M. Wang, L. Zhu, Y. Li, Z. Yan, Z. Shen and X. Cao, Appl. Catal., B, 2018, 231, 269-276.
- 156 H. Wu, X. Li, C. Tung and L. Wu, Adv. Mater., 2019, 31, 1900709.
- 157 J. Wang, T. Xia, L. Wang, X. Zheng, Z. Qi, C. Gao, J. Zhu, Z. Li, H. Xu and Y. Xiong, Angew. Chem., Int. Ed., 2018, 57, 16447-16451.
- 158 C. Huang, R. Guo, W. Pan, J. Tang, W. Zhou, X. Liu, H. Qin and P. Jia, Appl. Surf. Sci., 2019, 464, 534-543.
- 159 H. Zhu, X. Gao, Y. Lan, D. Song, Y. Xi and J. Zhao, J. Am. Chem. Soc., 2004, 126, 8380-8381.
- 160 A. Selmani, M. Špadina, M. Plodinec, I. Delač Marion, M. G. Willinger, J. Lützenkirchen, H. D. Gafney and E. Redel, J. Phys. Chem. C, 2015, 119, 19729-19742.
- 161 Q. Liu, Y. Zhou, J. Kou, X. Chen, Z. Tian, J. Gao, S. Yan and Z. Zou, J. Am. Chem. Soc., 2010, 132, 14385-14387.
- 162 W. Zhou, Z. Yin, Y. Du, X. Huang, Z. Zeng, Z. Fan, H. Liu, J. Wang and H. Zhang, Small, 2013, 9, 140-147.
- 163 J. Huang, Y. Lai, F. Pan, L. Yang, H. Wang, K. Zhang, H. Fuchs and L. Chi, Small, 2014, 10, 4865-4873.
- 164 M. Ge, C. Cao, J. Huang, S. Li, Z. Chen, K.-Q. Zhang, S. S. Al-Deyab and Y. Lai, J. Mater. Chem. A, 2016, 4, 6772-6801.
- 165 Y. T. Liang, B. K. Vijayan, K. A. Gray and M. C. Hersam, Nano Lett., 2011, 11, 2865-2870.
- 166 Y. Li, Y.-L. Li, B. Sa and R. Ahuja, Catal. Sci. Technol., 2017, 7, 545-559.
- 167 Q. Xiang, B. Cheng and J. Yu, Angew. Chem., Int. Ed., 2015, 54, 11350-11366.
- 168 K. S. Novoselov, A. K. Geim, S. V. Morozov, D. A. Jiang, Y. Zhang, S. V. Dubonos, I. V. Grigorieva and A. A. Firsov, Science, 2004, 306, 666-669.
- 169 K. Li, X. An, K. H. Park, M. Khraisheh and J. Tang, Catal. Today, 2014, 224, 3-12.
- 170 M. Tahir and N. S. Amin, *Appl. Catal.*, A, 2013, 467, 483–496.
- 171 S. Delavari and N. A. S. Amin, Appl. Energy, 2016, 162, 1171-1185.
- 172 M. Dilla, R. Schlögl and J. Strunk, ChemCatChem, 2017, 9, 696-704.
- 173 S. In, M. G. Nielsen, P. C. K. Vesborg, Y. Hou, B. L. Abrams, T. R. Henriksen, O. Hansen and I. Chorkendorff, Chem. Commun., 2011, 47, 2613-2615.
- 174 X. Zhan, C. Yan, Y. Zhang, G. Rinke, G. Rabsch, M. Klumpp, A. I. Schäfer and R. Dittmeyer, React. Chem. Eng., 2020, 5, 1658-1670.
- 175 A. Visan, J. R. van Ommen, M. T. Kreutzer and R. G. H. Lammertink, Ind. Eng. Chem. Res., 2019, 58, 5349-5357.
- 176 E. Pipelzadeh, V. Rudolph, G. Hanson, C. Noble and L. Wang, Appl. Catal., B, 2017, 218, 672-678.
- 177 Z. Xiong, C.-C. Kuang, K.-Y. Lin, Z. Lei, X. Chen, B. Gong, J. Yang, Y. Zhao, J. Zhang, B. Xia and J. C. S. Wa, J. CO2 Util., 2018, 24, 500-508.

- 178 X. An, K. Li and J. Tang, ChemSusChem, 2014, 7, 1086-1093.
- 179 K. Adachi, K. Ohta and T. Mizuno, Sol. Energy, 1994, 53, 187-190.
- 180 H. Yamashita, H. Nishiguchi, N. Kamada, M. Anpo, Y. Teraoka, H. Hatano, S. Ehara, K. Kikui, L. Palmisano, A. Sclafani, M. Schiavello and M. A. Fox, Res. Chem. Intermed., 1994, 20, 815-823.
- 181 T. V. Nguyen and J. C. S. Wu, Appl. Catal., A, 2008, 335, 112-120.
- 182 J. C. S. Wu, T.-H. Wu, T. Chu, H. Huang and D. Tsai, Top. Catal., 2008, 47, 131–136.
- 183 A. A. Khan and M. Tahir, J. CO2 Util., 2019, 29, 205-239.
- 184 Z. Xiong, Z. Lei, S. Ma, X. Chen, B. Gong, Y. Zhao, J. Zhang, C. Zheng and J. C. S. Wu, Appl. Catal., B, 2017, 219,
- 185 P.-Y. Liou, S.-C. Chen, J. C. S. Wu, D. Liu, S. Mackintosh, M. Maroto-Valer and R. Linforth, Energy Environ. Sci., 2011, 4, 1487-1494.
- 186 F. Li, L. Zhang, J. Tong, Y. Liu, S. Xu, Y. Cao and S. Cao, Nano Energy, 2016, 27, 320-329.
- 187 H. Yamashita, K. Ikeue, T. Takewaki and M. Anpo, Top. Catal., 2002, 18, 95-100.
- 188 M. Xing, Y. Zhou, C. Dong, L. Cai, L. Zeng, B. Shen, L. Pan, C. Dong, Y. Chai, J. Zhang and Y. Yin, Nano Lett., 2018, 18, 3384-3390.
- 189 M. Subrahmanyam, S. Kaneco and N. Alonso-Vante, Appl. Catal., B, 1999, 23, 169-174.
- 190 S. Poudyal and S. Laursen, Catal. Sci. Technol., 2019, 9, 1048-1059.
- 191 N. G. Moustakas and J. Strunk, Chem. Eur. J., 2018, 24, 12739-12746.
- 192 B. Ohtani, Phys. Chem. Chem. Phys., 2014, 16, 1788-1797.
- 193 J. Colina-Márquez, F. Machuca-Martínez and G. L. Puma, Environ. Sci. Technol., 2010, 44, 5112-5120.
- 194 W. A. Thompson, E. Sanchez Fernandez and M. M. Maroto-Valer, ACS Sustainable Chem. Eng., 2020, 8, 4677-4692.
- 195 J. P. Perdew and A. Zunger, Phys. Rev. B: Condens. Matter Mater. Phys., 1981, 23, 5048.
- 196 J. P. Perdew, J. A. Chevary, S. H. Vosko, K. A. Jackson, M. R. Pederson, D. J. Singh and C. Fiolhais, Phys. Rev. B: Condens. Matter Mater. Phys., 1992, 46, 6671.
- 197 P. Verma and D. G. Truhlar, Theor. Chem. Acc., 2016, 135, 1-15.
- 198 E. E. Salpeter and H. A. Bethe, Phys. Rev., 1951, 84, 1232.
- 199 L. Hedin and S. Lundqvist, Solid state physics, Elsevier, 1970, vol. 23, pp. 1-181.
- 200 L. Li, R. Zhang, J. Vinson, E. L. Shirley, J. P. Greeley, J. R. Guest and M. K. Y. Chan, Chem. Mater., 2018, 30,
- 201 J. Zhao, B. Liu, L. Meng, S. He, R. Yuan, Y. Hou, Z. Ding, H. Lin, Z. Zhang, X. Wang and J. Long, Appl. Catal., B, 2019, 256, 117823.
- 202 S. S. Tafreshi, A. Z. Moshfegh and N. H. de Leeuw, J. Phys. Chem. C, 2019, 123, 22191-22201.
- 203 S. E. Braslavsky, A. M. Braun, A. E. Cassano, A. V. Emeline, M. I. Litter, L. Palmisano, V. N. Parmon and N. Serpone, Pure Appl. Chem., 2011, 83, 931-1014.

- 204 S. Kozuch and J. M. L. Martin, ACS Catal., 2012, 2, 2787-2794.
- 205 T. Bligaard, R. M. Bullock, C. T. Campbell, J. G. Chen, B. C. Gates, R. J. Gorte, C. W. Jones, W. D. Jones, J. R. Kitchin and S. L. Scott, ACS Catal., 2016, 6, 2590-2602.
- 206 Y.-J. Yuan, Z.-J. Ye, H.-W. Lu, B. Hu, Y.-H. Li, D.-Q. Chen, J.-S. Zhong, Z.-T. Yu and Z.-G. Zou, ACS Catal., 2016, 6, 532-541.
- 207 C. T. K. Nguyen, N. Q. Tran, S. Seo, H. Hwang, S. Oh, J. Yu, J. Lee, T. A. Le, J. Hwang, M. Kim and H. Lee, Mater. Today, 2020, 35, 25-33.
- 208 R. L. McCreery, Chem. Rev., 2008, 108, 2646-2687.
- 209 X.-M. Hu, H. H. Hval, E. T. Bjerglund, K. J. Dalgaard, M. R. Madsen, M.-M. Pohl, E. Welter, P. Lamagni, K. B. Buhl, M. Bremholm, M. Beller, S. U. Pedersen, T. Skrydstrup and K. Daasbjerg, ACS Catal., 2018, 8, 6255-6264.
- 210 H.-Y. Jeong, M. Balamurugan, V. S. K. Choutipalli, E. Jeong, V. Subramanian, U. Sim and K. T. Nam, J. Mater. Chem. A, 2019, 7, 10651-10661.
- 211 K. Jiang, H. Wang, W.-B. Cai and H. Wang, ACS Nano, 2017, 11, 6451-6458.
- 212 D. T. Whipple and P. J. A. Kenis, J. Phys. Chem. Lett., 2010, 1, 3451-3458.
- 213 J. Bullock, D. F. Srankó, C. M. Towle, Y. Lum, M. Hettick, M. C. Scott, A. Javey and J. Ager, Energy Environ. Sci., 2017, 10, 2222-2230.
- 214 M. Jouny, W. Luc and F. Jiao, Ind. Eng. Chem. Res., 2018, 57, 2165-2177.
- 215 M. Zubair, H. Kim, A. Razzaq, C. A. Grimes and S. Il In, J. CO2 Util., 2018, 26, 70-79.
- 216 T. Maschmeyer and M. Che, Angew. Chem., 2010, 122, 1578-1582.
- 217 S. Docao, A. R. Koirala, M. G. Kim, I. C. Hwang, M. K. Song and K. B. Yoon, Energy Environ. Sci., 2017, 10, 628-640.
- 218 P. Kar, S. Zeng, Y. Zhang, E. Vahidzadeh, A. Manuel, R. Kisslinger, K. M. Alam, U. K. Thakur, N. Mahdi, P. Kumar and K. Shankar, Appl. Catal., B, 2019, 243, 522-536.
- 219 A. Fujishima and K. Honda, Nature, 1972, 238, 37-38.
- 220 L. Liu, H. Zhao, J. M. Andino and Y. Li, ACS Catal., 2012, 2, 1817-1828.
- 221 J. Yu, J. Low, W. Xiao, P. Zhou and M. Jaroniec, J. Am. Chem. Soc., 2014, 136, 8839-8842.
- 222 A. Meng, S. Wu, B. Cheng, J. Yu and J. Xu, J. Mater. Chem. A, 2018, 6, 4729-4736.
- 223 W. Yu, D. Xu and T. Peng, J. Mater. Chem. A, 2015, 3, 19936-19947.
- 224 X. Li, H. Jiang, C. Ma, Z. Zhu, X. Song, H. Wang, P. Huo and X. Li, Appl. Catal., B, 2021, 283, 119638.
- 225 M. F. Ehsan and T. He, Appl. Catal., B, 2015, 166, 345-352.
- 226 H. Wang, L. Zhang, K. Wang, X. Sun and W. Wang, Appl. Catal., B, 2019, 243, 771-779.
- 227 Z. Wang, K. Teramura, S. Hosokawa and T. Tanaka, J. Mater. Chem. A, 2015, 3, 11313-11319.
- 228 M. Akatsuka, Y. Kawaguchi, R. Itoh, A. Ozawa, M. Yamamoto, T. Tanabe and T. Yoshida, Appl. Catal., B, 2020, 262, 118247.

- 229 H. J. Yoon, J. H. Yang, S. J. Park, C. K. Rhee and Y. Sohn, Appl. Surf. Sci., 2021, 536, 147753.
- 230 Q. Han, X. Bai, Z. Man, H. He, L. Li, J. Hu, A. Alsaedi, T. Hayat, Z. Yu, W. Zhang, J. Wang, Y. Zhou and Z. Zou, J. Am. Chem. Soc., 2019, 141, 4209-4213.
- 231 C. Lu, X. Li, Q. Wu, J. Li, L. Wen, Y. Dai, B. Huang, B. Li and Z. Lou, ACS Nano, 2021, 15, 3529-3539.
- 232 G. Yin, M. Nishikawa, Y. Nosaka, N. Srinivasan, D. Atarashi, E. Sakai and M. Miyauchi, ACS Nano, 2015, 9, 2111-2119.
- 233 W. Wang, C. Deng, S. Xie, Y. Li, W. Zhang, H. Sheng, C. Chen and J. Zhao, J. Am. Chem. Soc., 2021, 143, 2984-2993.
- 234 L. Wang, J. Wan, Y. Zhao, N. Yang and D. Wang, J. Am. Chem. Soc., 2019, 141, 2238-2241.
- 235 S. Xie, Y. Wang, Q. Zhang, W. Deng and Y. Wang, ACS Catal., 2014, 4, 3644-3653.
- 236 L. Liu, Y. Jiang, H. Zhao, J. Chen, J. Cheng, K. Yang and Y. Li, ACS Catal., 2016, 6, 1097-1108.
- 237 L. Collado, A. Reynal, F. Fresno, M. Barawi, C. Escudero, V. Perez-Dieste, J. M. Coronado, D. P. Serrano, J. R. Durrant and V. A. de la peña O'Shea, Nat. Commun., 2018, 9, 4986.
- 238 W. Wang, D. Xu, B. Cheng, J. Yu and C. Jiang, J. Mater. Chem. A, 2017, 5, 5020-5029.
- 239 J. Bian, Y. Qu, X. Zhang, N. Sun, D. Tang and L. Jing, J. Mater. Chem. A, 2018, 6, 11838-11845.
- 240 J. Li, F. Wei, C. Dong, W. Mu and X. Han, J. Mater. Chem. A, 2020, 8, 6524-6531.
- 241 F. You, J. Wan, J. Qi, D. Mao, N. Yang, Q. Zhang, L. Gu and D. Wang, Angew. Chem., 2020, 132, 731-734.
- 242 T. Ye, W. Huang, L. Zeng, M. Li and J. Shi, Appl. Catal., B, 2017, 210, 141-148.
- 243 K. Wang, J. Lu, Y. Lu, C. H. Lau, Y. Zheng and X. Fan, Appl. Catal., B, 2021, 292, 120147.
- 244 A. Meng, B. Cheng, H. Tan, J. Fan, C. Su and J. Yu, Appl. Catal., B, 2021, 289, 120039.
- 245 Y. Ma, Q. Tang, W. Y. Sun, Z. Y. Yao, W. Zhu, T. Li and J. Wang, Appl. Catal., B, 2020, 270, 118856.
- 246 J. Jin, S. Chen, J. Wang, C. Chen and T. Peng, Appl. Catal., B, 2020, 263, 118353.
- 247 T. Butburee, Z. Sun, A. Centeno, F. Xie, Z. Zhao, D. Wu, P. Peerakiatkhajohn, S. Thaweesak, H. Wang and L. Wang, Nano Energy, 2019, 62, 426-433.
- 248 L. Wang, S. Duan, P. Jin, H. She, J. Huang, Z. Lei, T. Zhang and Q. Wang, Appl. Catal., B, 2018, 239, 599-608.
- 249 Y. Wei, X. Wu, Y. Zhao, L. Wang, Z. Zhao, X. Huang, J. Liu and J. Li, Appl. Catal., B, 2018, 236, 445–457.
- 250 M. Tahir, B. Tahir and N. A. S. Amin, Appl. Catal., B, 2017, 204, 548-560.
- 251 M. Tahir, Appl. Catal., B, 2017, 219, 329-343.
- 252 A. Razzaq, A. Sinhamahapatra, T.-H. Kang, C. A. Grimes, J.-S. Yu and S.-I. In, Appl. Catal., B, 2017, 215, 28–35.
- 253 S. Bera, J. E. Lee, S. B. Rawal and W. I. Lee, Appl. Catal., B, 2016, 199, 55-63.
- 254 M. Wang, D. Wang and Z. Li, Appl. Catal., B, 2016, 183, 47–52.
- 255 T. Wang, X. Meng, P. Li, S. Ouyang, K. Chang, G. Liu, Z. Mei and J. Ye, Nano Energy, 2014, 9, 50-60.

- 256 S. In, D. D. Vaughn and R. E. Schaak, Angew. Chem., Int. Ed., 2012, 51, 3915-3918.
- 257 H. Lin, L. Li, M. Zhao, X. Huang, X. Chen, G. Li and R. Yu, J. Am. Chem. Soc., 2012, 134, 8328-8331.
- 258 M. M. Rodriguez, X. Peng, L. Liu, Y. Li and J. M. Andino, J. Phys. Chem. C, 2012, 116, 19755-19764.
- 259 H. G. Yang, C. H. Sun, S. Z. Qiao, J. Zou, G. Liu, S. C. Smith, H. M. Cheng and G. Q. Lu, Nature, 2008, 453, 638-641.
- 260 F. He, B. Zhu, B. Cheng, J. Yu, W. Ho and W. Macyk, Appl. Catal., B, 2020, 272, 119006.
- 261 X. Y. Kong, W. L. Tan, B.-J. Ng, S.-P. Chai and A. R. Mohamed, Nano Res., 2017, 10, 1720-1731.
- 262 X. Y. Kong, W. Q. Lee, A. R. Mohamed and S.-P. Chai, Chem. Eng. J., 2019, 372, 1183-1193.
- 263 J. Hao, D. Yang, J. Wu, B. Ni, L. Wei, Q. Xu, Y. Min and H. Li, Chem. Eng., 2021, 423, 130190.
- 264 M.-P. Jiang, K.-K. Huang, J.-H. Liu, D. Wang, Y. Wang, X. Wang, Z.-D. Li, X.-Y. Wang, Z.-B. Geng, X.-Y. Hou and S.-H. Feng, Chem, 2020, 6, 2335-2346.
- 265 H. Sheng, M. H. Oh, W. T. Osowiecki, W. Kim, A. P. Alivisatos and H. Frei, J. Am. Chem. Soc., 2018, 140, 4363-4371.
- 266 J. Wu, Y. Huang, W. Ye and Y. Li, Adv. Sci., 2017, 4, 1700194.
- 267 G. A. Ozin, Adv. Mater., 2015, 27, 1957-1963.
- 268 A. A. Balandin, S. Ghosh, W. Bao, I. Calizo, D. Teweldebrhan, F. Miao and C. N. Lau, Nano Lett., 2008, 8, 902-907.
- 269 C. Lee, X. Wei, J. W. Kysar and J. Hone, Science, 2008, 321, 385-388.
- 270 X. Du, I. Skachko, A. Barker and E. Y. Andrei, Nat. Nanotechnol., 2008, 3, 491.
- 271 S. Cui, X. Sun and J. Liu, ChemSusChem, 2016, 9, 1698-1703.
- 272 Z. Xiong, Y. Luo, Y. Zhao, J. Zhang, C. Zheng and J. C. S. Wu, Phys. Chem. Chem. Phys., 2016, 18, 13186-13195.
- 273 K. M. Cho, K. H. Kim, H. O. Choi and H.-T. Jung, Green Chem., 2015, 17, 3972-3978.
- 274 P. Li, Y. Zhou, H. Li, Q. Xu, X. Meng, X. Wang, M. Xiao and Z. Zou, Chem. Commun., 2014, 51, 800-803.
- 275 J. Yu, J. Jin, B. Cheng and M. Jaroniec, J. Mater. Chem. A, 2014, 2, 3407-3416.
- 276 S. Xie, Y. Wang, Q. Zhang, W. Fan, W. Deng and Y. Wang, Chem. Commun., 2013, 49, 2451-2453.
- 277 L. Gu, J. Wang, H. Cheng, Y. Zhao, L. Liu and X. Han, ACS Appl. Mater. Interfaces, 2013, 5, 3085-3093.
- 278 Y. Chen, H. Gao, J. Xiang, X. Dong and Y. Cao, Mater. Res. Bull., 2018, 99, 29-36.
- 279 W. Tu, Y. Zhou, Q. Liu, Z. Tian, J. Gao, X. Chen, H. Zhang, J. Liu and Z. Zou, Adv. Funct. Mater., 2012, 22, 1215–1221.
- 280 Y. Zhao, Y. Wei, X. Wu, H. Zheng, Z. Zhao, J. Liu and J. Li, Appl. Catal., B, 2018, 226, 360-372.
- 281 A. Razzaq, C. A. Grimes and S.-I. In, Carbon, 2016, 98, 537-544.
- 282 M. Xing, F. Shen, B. Qiu and J. Zhang, Sci. Rep., 2014, 4, 6341.
- 283 Q. Li, B. Guo, J. Yu, J. Ran, B. Zhang, H. Yan and J. R. Gong, J. Am. Chem. Soc., 2011, 133, 10878-10884.
- 284 P.-Q. Wang, Y. Bai, P.-Y. Luo and J.-Y. Liu, Catal. Commun., 2013, 38, 82-85.

- 285 M. Long, Y. Qin, C. Chen, X. Guo, B. Tan and W. Cai, J. Phys. Chem. C, 2013, 117, 16734-16741.
- 286 Y. Tang, X. Hu and C. Liu, Phys. Chem. Chem. Phys., 2014, 16, 25321-25329.
- 287 S. Ali, A. Razzaq and S.-I. In, Catal. Today, 2018, 335, 39-54.
- 288 M. Xing, W. Fang, X. Yang, B. Tian and J. Zhang, Chem. Commun., 2014, 50, 6637-6640.
- 289 L.-Y. Lin, Y. Nie, S. Kavadiya, T. Soundappan and P. Biswas, Chem. Eng. J., 2017, 316, 449-460.
- 290 I. Shown, H. C. Hsu, Y. C. Chang, C. H. Lin, P. K. Roy, A. Ganguly, C. H. Wang, J. K. Chang, C. I. Wu, L. C. Chen and K. H. Chen, Nano Lett., 2014, 14, 6097-6103.
- 291 P. Madhusudan, S. Wageh, A. A. Al-Ghamdi, J. Zhang, B. Cheng and Y. Yu, Appl. Surf. Sci., 2020, 506, 144683.
- 292 L.-L. Tan, W.-J. Ong, S.-P. Chai, B. T. Goh and A. R. Mohamed, Appl. Catal., B, 2015, 179, 160-170.
- 293 W.-J. Ong, L.-L. Tan, S.-P. Chai and S.-T. Yong, Chem. Commun., 2015, 51, 858-861.
- 294 X. Wang, K. Li, J. He, J. Yang, F. Dong, W. Mai and M. Zhu, Nano Energy, 2020, 78, 105388.
- 295 Y. F. Mu, W. Zhang, G. X. Dong, K. Su, M. Zhang and T. B. Lu, Small, 2020, 16, 1-8.
- 296 L. Wang, H. Tan, L. Zhang, B. Cheng and J. Yu, Chem. Eng. J., 2021, **411**, 128501.
- 297 X. Lin, S. Wang, W. Tu, H. Wang, Y. Hou, W. Dai and R. Xu, ACS Appl. Energy Mater., 2019, 2, 7670-7678.
- 298 Z. Otgonbayar, K. Y. Cho and W. C. Oh, ACS Omega, 2020, 5, 26389-26401.
- 299 Z. Otgonbayar, Y. Liu, K. Y. Cho, C.-H. Jung and W.-C. Oh, Mater. Sci. Semicond. Process., 2021, 121, 105456.
- 300 R. Gusain, P. Kumar, O. P. Sharma, S. L. Jain and O. P. Khatri, Appl. Catal., B, 2016, 181, 352-362.
- 301 C. Bie, B. Zhu, F. Xu, L. Zhang and J. Yu, *Adv. Mater.*, 2019, 31, 1-6.
- 302 R. B. Lin, S. Xiang, H. Xing, W. Zhou and B. Chen, Coord. Chem. Rev., 2019, 378, 87-103.
- 303 Z. Ma, Q. Zhang, W. Zhu, D. Khan, C. Hu, T. Huang, W. Ding and J. Zou, Sustainable Energy Fuels, 2020, 4, 2192-2200.
- 304 M. C. Singo, X. C. Molepo, O. O. Oluwasina and M. O. Daramola, Energy Procedia, 2017, 114, 2429-2440.
- 305 L. Zhao, A. Wang, A. Yang, G. Zuo, J. Dai and Y. Zheng, Int. J. Hydrogen Energy, 2020, 45, 31863-31870.
- 306 Y. P. Zhu, J. Yin, E. Abou-Hamad, X. Liu, W. Chen, T. Yao, O. F. Mohammed and H. N. Alshareef, Adv. Mater., 2020, 32, 1-8.
- 307 Y. Gao, J. Wu, J. Wang, Y. Fan, S. Zhang and W. Dai, ACS Appl. Mater. Interfaces, 2020, 12, 11036-11044.
- 308 C. Lin, H. He, Y. Zhang, M. Xu, F. Tian, L. Li and Y. Wang, RSC Adv., 2020, 10, 3084-3091.
- 309 S. Bordiga, C. Lamberti, G. Ricchiardi, L. Regli, F. Bonino, A. Damin, K. P. Lillerud, M. Bjorgen and A. Zecchina, Chem. Commun., 2004, 2300-2301.
- 310 D. Sun, Y. Gao, J. Fu, X. Zeng, Z. Chen and Z. Li, Chem. Commun., 2015, 51, 2645-2648.
- 311 R. Li, J. Hu, M. Deng, H. Wang, X. Wang, Y. Hu, H. Jiang, J. Jiang, Q. Zhang and Y. Xie, Adv. Mater., 2014, 26, 4783-4788.

- 312 Z. C. Kong, J. F. Liao, Y. J. Dong, Y. F. Xu, H. Y. Chen, D. Bin Kuang and C. Y. Su, ACS Energy Lett., 2018, 3, 2656-2662.
- 313 H. Q. Xu, J. Hu, D. Wang, Z. Li, Q. Zhang, Y. Luo, S. H. Yu and H. L. Jiang, J. Am. Chem. Soc., 2015, 137, 13440-13443.
- 314 H. Dong, X. Zhang, Y. Lu, Y. Yang, Y. P. Zhang, H. L. Tang, F. M. Zhang, Z. Di Yang, X. Sun and Y. Feng, Appl. Catal., B, 2020, 276, 119173.
- 315 X. Liu, H. Yang, J. He, H. Liu, L. Song, L. Li and J. Luo, Small, 2018, 14, 1704049.
- 316 K. S. Novoselov, A. Mishchenko, A. Carvalho and A. H. Castro Neto, Science, 2016, 353, aac9439.
- 317 M. Xu, T. Liang, M. Shi and H. Chen, Chem. Rev., 2013, 113, 3766-3798.
- 318 Y. Sun, S. Gao and Y. Xie, Chem. Soc. Rev., 2014, 43, 530-546.
- 319 D. Voiry, J. Yang and M. Chhowalla, Adv. Mater., 2016, 28, 6197-6206.
- 320 Q. H. Wang, K. Kalantar-Zadeh, A. Kis, J. N. Coleman and M. S. Strano, Nat. Nanotechnol., 2012, 7, 699-712.
- 321 D. Voiry, A. Mohite and M. Chhowalla, Chem. Soc. Rev., 2015, 44, 2702-2712.
- 322 M. Asadi, K. Kim, C. Liu, A. V. Addepalli, P. Abbasi, P. Yasaei, P. Phillips, A. Behranginia, J. M. Cerrato, R. Haasch, P. Zapol, B. Kumar, R. F. Klie, J. Abiade, L. A. Curtiss and A. S. Khojin, Science, 2016, 353, 467-470.
- 323 H. Schmidt, F. Giustiniano and G. Eda, Chem. Soc. Rev., 2015, 44, 7715-7736.
- 324 L. Cheng and Y. Liu, J. Am. Chem. Soc., 2018, 140, 17895-17900.
- 325 A. J. Meier, A. Garg, B. Sutter, J. N. Kuhn and V. R. Bhethanabotla, ACS Sustainable Chem. Eng., 2018, 7, 265-275.
- 326 F. Xu, B. Zhu, B. Cheng, J. Yu and J. Xu, Adv. Opt. Mater., 2018, 6, 1800911.
- 327 H. Jung, K. M. Cho, K. H. Kim, H.-W. Yoo, A. Al-Saggaf, I. Gereige and H.-T. Jung, ACS Sustainable Chem. Eng., 2018, 6, 5718-5724.
- 328 D. Long, J. Liu, L. Bai, L. Yan, H. Liu, Z. Feng, L. Zheng, X. Chen, S. Li and M. Lu, ACS Photonics, 2020, 7, 3394–3400.
- 329 B. Khan, F. Raziq, M. B. Faheem, M. U. Farooq, S. Hussain, F. Ali, A. Ullah, A. Mavlonov, Y. Zhao and Z. Liu, J. Hazard. Mater., 2020, 381, 120972.
- 330 R. Kim, J. Kim, J. Y. Do, M. W. Seo and M. Kang, Catalysts, 2019, 9, 998.
- 331 W. Tu, Y. Li, L. Kuai, Y. Zhou, Q. Xu, H. Li, X. Wang, M. Xiao and Z. Zou, *Nanoscale*, 2017, **9**, 9065–9070.
- 332 Y. Wang, Z. Zhang, L. Zhang, Z. Luo, J. Shen, H. Lin, J. Long, J. C. S. Wu, X. Fu and X. Wang, J. Am. Chem. Soc., 2018, 140, 14595-14598.
- 333 W. Dai, J. Yu, Y. Deng, X. Hu, T. Wang and X. Luo, Appl. Surf. Sci., 2017, 403, 230-239.
- 334 R. A. Geioushy, S. M. El-Sheikh, I. M. Hegazy, A. Shawky, S. El-Sherbiny and A.-H. T. Kandil, Mater. Res. Bull., 2019, 118, 110499.
- 335 C. Yang, Q. Tan, Q. Li, J. Zhou, J. Fan, B. Li, J. Sun and K. Lv, Appl. Catal., B, 2020, 268, 118738.

- 336 J. Low, L. Zhang, T. Tong, B. Shen and J. Yu, J. Catal., 2018, 361, 255-266.
- 337 Y. Li, Z. Yin, G. Ji, Z. Liang, Y. Xue, Y. Guo, J. Tian, X. Wang and H. Cui, Appl. Catal., B, 2019, 246, 12-20.
- 338 Q. Tang, Z. Zhou and Z. Chen, Wiley Interdiscip. Rev.: Comput. Mol. Sci., 2015, 5, 360-379.
- 339 M. Naguib, V. N. Mochalin, M. W. Barsoum and Y. Gogotsi, Adv. Mater., 2014, 26, 992-1005.
- 340 M. W. Barsoum, Prog. Solid State Chem., 2000, 28, 201-281.
- 341 M. Naguib, M. Kurtoglu, V. Presser, J. Lu, J. Niu, M. Heon, L. Hultman, Y. Gogotsi and M. W. Barsoum, Adv. Mater., 2011, 23, 4248-4253.
- 342 Y. Gogotsi and B. Anasori, ACS Nano, 2019, 13, 8491-8494.
- 343 Q. Tang, Z. Zhou and P. Shen, J. Am. Chem. Soc., 2012, 134, 16909-16916.
- 344 M. Ghidiu, M. R. Lukatskaya, M.-Q. Zhao, Y. Gogotsi and M. W. Barsoum, Nature, 2014, 516, 78-81.
- 345 W.-F. Chen, J. T. Muckerman and E. Fujita, Chem. Commun., 2013, 49, 8896-8909.
- 346 O. Mashtalir, K. M. Cook, V. N. Mochalin, M. Crowe, M. W. Barsoum and Y. Gogotsi, J. Mater. Chem. A, 2014, 2, 14334-14338.
- 347 H. Huang, Y. Song, N. Li, D. Chen, Q. Xu, H. Li, J. He and J. Lu, Appl. Catal., B, 2019, 251, 154-161.
- 348 Z. Guo, J. Zhou, L. Zhu and Z. Sun, J. Mater. Chem. A, 2016, 4, 11446-11452.
- 349 K. Huang, C. Li, H. Li, G. Ren, L. Wang, W. Wang and X. Meng, ACS Appl. Nano Mater, 2020, 3, 9581-9603.
- 350 J. Wu, Y. Zhang, P. Lu, G. Fang, X. Li, W. Y. William, Z. Zhang and B. Dong, Appl. Catal., B, 2021, 286, 119944.
- 351 J. Ran, G. Gao, F.-T. T. Li, T.-Y. Y. Ma, A. Du and S.-Z. Z. Qiao, Nat. Commun., 2017, 8, 1-10.
- 352 A. Pan, X. Ma, S. Huang, Y. Wu, M. Jia, Y. Shi, Y. Liu, P. Wangyang, L. He and Y. Liu, J. Phys. Chem. Lett., 2019, 10, 6590-6597.
- 353 S. Cao, B. Shen, T. Tong, J. Fu and J. Yu, Adv. Funct. Mater., 2018, 28, 1800136.
- 354 W. Sun, S. A. Shah, Y. Chen, Z. Tan, H. Gao, T. Habib, M. Radovic and M. J. Green, J. Mater. Chem. A, 2017, 5, 21663-21668.
- 355 Z. Zeng, Y. Xu, Z. Zhang, Z. Gao, M. Luo, Z. Yin, C. Zhang, J. Xu, B. Huang, F. Luo, Y. Du and C. Yan, Chem. Soc. Rev., 2020, 49, 1109-1143.
- 356 A. Kumar, A. Kumar and V. Krishnan, ACS Catal., 2020, 10, 10253-10315.
- 357 J. C. Hemminger, R. Carr and G. A. Somorjai, Chem. Phys. Lett., 1978, 57, 100-104.
- 358 C. Luo, J. Zhao, Y. Li, W. Zhao, Y. Zeng and C. Wang, Appl. Surf. Sci., 2018, 447, 627-635.
- 359 K. Xie, N. Umezawa, N. Zhang, P. Reunchan, Y. Zhang and J. Ye, Energy Environ. Sci., 2011, 4, 4211-4219.
- 360 D. Li, S. Ouyang, H. Xu, D. Lu, M. Zhao, X. Zhang and J. Ye, Chem. Commun., 2016, 52, 5989-5992.
- 361 D. Mateo, J. Albero and H. García, Joule, 2019, 3, 1949-1962.
- 362 J. Lin, J. Hu, C. Qiu, H. Huang, L. Chen, Y. Xie, Z. Zhang, H. Lin and X. Wang, Catal. Sci. Technol., 2019, 9, 336-346.

- 363 K. Teramura, S. Okuoka, H. Tsuneoka, T. Shishido and T. Tanaka, Appl. Catal., B, 2010, 96, 565-568.
- 364 H. Zhou, P. Li, J. Guo, R. Yan, T. Fan, D. Zhang and J. Ye, Nanoscale, 2015, 7, 113-120.
- 365 J. Qin, L. Lin and X. Wang, Chem. Commun., 2018, 54, 2272-2275.
- 366 S. Wang, Y. Hou and X. Wang, ACS Appl. Mater. Interfaces, 2015, 7, 4327-4335.
- 367 H. Shi, G. Chen, C. Zhang and Z. Zou, ACS Catal., 2014, 4, 3637-3643.
- 368 A. Kumar, G. Sharma, M. Naushad, T. Ahamad, R. C. Veses and F. J. Stadler, Chem. Eng. J., 2019, 370, 148-165.
- 369 Y. Wang, M. Liu, W. Chen, L. Mao and W. Shangguan, J. Alloys Compd., 2019, 786, 149-154.
- 370 S. Tu, Y. Zhang, A. H. Reshak, S. Auluck, L. Ye, X. Han, T. Ma and H. Huang, Nano Energy, 2019, 56, 840-850.
- 371 M. Que, Y. Zhao, Y. Yang, L. Pan, W. Lei, W. Cai, H. Yuan, J. Chen and G. Zhu, ACS Appl. Mater. Interfaces, 2021, 13, 6180-6187.
- 372 S. S. Bhosale, A. K. Kharade, E. Jokar, A. Fathi, S. Chang and E. W.-G. Diau, J. Am. Chem. Soc., 2019, 141, 20434-20442.
- 373 F. Xu, K. Meng, B. Cheng, S. Wang, J. Xu and J. Yu, Nat. Commun., 2020, 11, 1-9.
- 374 Y.-F. Xu, M.-Z. Yang, B.-X. Chen, X.-D. Wang, H.-Y. Chen, D.-B. Kuang and C.-Y. Su, J. Am. Chem. Soc., 2017, 139, 5660-5663.
- 375 Y. Jiang, J.-F. Liao, Y.-F. Xu, H.-Y. Chen, X.-D. Wang and D.-B. Kuang, J. Mater. Chem. A, 2019, 7, 13762-13769.
- 376 Y. Mu, W. Zhang, G. Dong, K. Su, M. Zhang and T. Lu, Small, 2020, 16, 2002140.
- 377 S. Wan, M. Ou, Q. Zhong and X. Wang, Chem. Eng. J., 2019, 358, 1287-1295.
- 378 C. Tang, C. Chen, W. Xu and L. Xu, *J. Mater. Chem. A*, 2019, 7, 6911-6919.
- 379 S. Shyamal, S. K. Dutta and N. Pradhan, J. Phys. Chem. Lett., 2019, 10, 7965-7969.
- 380 G.-X. Dong, W. Zhang, Y.-F. Mu, K. Su, M. Zhang and T.-B. Lu, Chem. Commun., 2020, 56, 4664-4667.
- 381 J. Zhu, Y. Zhu, J. Huang, L. Hou, J. Shen and C. Li, Nanoscale, 2020, 12, 11842-11846.
- 382 Y.-F. Xu, M.-Z. Yang, H.-Y. Chen, J.-F. Liao, X.-D. Wang and D.-B. Kuang, ACS Appl. Energy Mater., 2018, 1, 5083-5089.
- 383 Z. Chen, Y. Hu, J. Wang, Q. Shen, Y. Zhang, C. Ding, Y. Bai, G. Jiang, Z. Li and N. Gaponik, Chem. Mater., 2020, 32, 1517-1525.
- 384 L. Wu, Y. Mu, X. Guo, W. Zhang, Z. Zhang, M. Zhang and T. Lu, Angew. Chem., Int. Ed., 2019, 58, 9491-9495.
- 385 M. Que, Y. Zhao, L. Pan, Y. Yang, Z. He, H. Yuan, J. Chen and G. Zhu, Mater. Lett., 2021, 282, 128695.
- 386 L. Zhou, Y. Xu, B. Chen, D. Kuang and C. Su, *Small*, 2018, 14, 1703762.
- 387 Z. Liu, H. Yang, J. Wang, Y. Yuan, K. Hills-Kimball, T. Cai, P. Wang, A. Tang and O. Chen, Nano Lett., 2021, 21, 1620-1627.
- 388 Y. Wang, H. Huang, Z. Zhang, C. Wang, Y. Yang, Q. Li and D. Xu, Appl. Catal., B, 2021, 282, 119570.

- 389 C. Lu, D. S. Itanze, A. G. Aragon, X. Ma, H. Li, K. B. Ucer, C. Hewitt, D. L. Carroll, R. T. Williams, Y. Qiu and S. M. Geyer, Nanoscale, 2020, 12, 2987-2991.
- 390 R. Verma, R. Belgamwar and V. Polshettiwar, ACS Mater. Lett., 2021, 3, 574-598.
- 391 Y. Tamaki and O. Ishitani, ACS Catal., 2017, 7, 3394-3409.
- 392 C. Clavero, Nat. Photonics, 2014, 8, 95-103.
- 393 X.-C. Ma, Y. Dai, L. Yu and B.-B. Huang, Light Sci. Appl., 2016, 5, e16017.
- 394 M. Wang, M. Ye, J. Iocozzia, C. Lin and Z. Lin, Adv. Sci., 2016, 3, 1600024.
- 395 S. Yu, A. J. Wilson, G. Kumari, X. Zhang and P. K. Jain, ACS Energy Lett., 2017, 2, 2058-2070.
- 396 G. Kumari, X. Zhang, D. Devasia, J. Heo and P. K. Jain, ACS Nano, 2018, 12, 8330-8340.
- 397 L. Collado, A. Reynal, J. M. Coronado, D. P. Serrano, J. R. Durrant and V. A. De la Peña O'Shea, Appl. Catal., B, 2015, 178, 177-185.
- 398 S. Zeng, E. Vahidzadeh, C. G. VanEssen, P. Kar, R. Kisslinger, A. Goswami, Y. Zhang, N. Mahdi, S. Riddell, A. E. Kobryn, S. Gusarov, P. Kumar and K. Shankar, Appl. Catal., B, 2020, 267, 118644.
- 399 I. García-García, E. C. Lovell, R. J. Wong, V. L. Barrio, J. Scott, J. F. Cambra and R. Amal, ACS Sustainable Chem. Eng., 2020, 8, 1879-1887.
- 400 H. Li, Y. Gao, Z. Xiong, C. Liao and K. Shih, Appl. Surf. Sci., 2018, 439, 552-559.
- 401 H. Song, X. Meng, T. D. Dao, W. Zhou, H. Liu, L. Shi, H. Zhang, T. Nagao, T. Kako and J. Ye, ACS Appl. Mater. Interfaces, 2018, 10, 408-416.
- 402 D. Hong, L.-M. Lyu, K. Koga, Y. Shimoyama and Y. Kon, ACS Sustainable Chem. Eng., 2019, 7, 18955-18964.
- 403 W. Tu, Y. Zhou, H. Li, P. Li and Z. Zou, *Nanoscale*, 2015, 7, 14232-14236.
- 404 L. K. Putri, W.-J. Ong, W. S. Chang and S.-P. Chai, Catal. Sci. Technol., 2016, 6, 744-754.
- 405 J. Balajka, M. A. Hines, W. J. I. DeBenedetti, M. Komora, J. Pavelec, M. Schmid and U. Diebold, Science, 2018, 361, 786-789.
- 406 G. W. Busser, B. Mei, A. Pougin, J. Strunk, R. Gutkowski, W. Schuhmann, M. Willinger, R. Schlögl and M. Muhler, ChemSusChem, 2014, 7, 1030-1034.
- 407 L. Yuan, K. Q. Lu, F. Zhang, X. Fu and Y. J. Xu, Appl. Catal., B, 2018, 237, 424-431.
- 408 B. Wang, X. Wang, L. Lu, C. Zhou, Z. Xin, J. Wang, X. K. Ke, G. Sheng, S. Yan and Z. Zou, ACS Catal., 2018, 8, 516-525.
- 409 C. C. Yang, Y. H. Yu, B. Van Der Linden, J. C. S. Wu and G. Mul, J. Am. Chem. Soc., 2010, 132, 8398-8406.
- 410 H. Zhang, T. Itoi, T. Konishi and Y. Izumi, J. Am. Chem. Soc., 2019, 141, 6292-6301.
- 411 H. Zhang, T. Itoi, T. Konishi and Y. Izumi, Angew. Chem., Int. Ed., 2021, 60, 9045-9054.
- 412 M. Borges OrdonIfo and A. Urakawa, J. Phys. Chem. C, 2019, 123, 4140-4147.
- 413 A. Bazzo and A. Urakawa, ChemSusChem, 2013, 6, 2095-2102.

- 414 T. Yui, A. Kan, C. Saitoh, K. Koike, T. Ibusuki and O. Ishitani, ACS Appl. Mater. Interfaces, 2011, 3, 2594-2600.
- 415 C. C. Yang, J. Vernimmen, V. Meynen, P. Cool and G. Mul, J. Catal., 2011, 284, 1-8.
- 416 S. Ishihara, P. Sahoo, K. Deguchi, S. Ohki, M. Tansho, T. Shimizu, J. Labuta, J. P. Hill, K. Ariga, K. Watanabe, Y. Yamauchi, S. Suehara and N. Lyi, J. Am. Chem. Soc., 2013, 135, 18040-18043.
- 417 K. Kamogawa, Y. Shimoda, K. Miyata, K. Onda, Y. Yamazaki, Y. Tamaki and O. Ishitani, Chem. Sci., 2021, 12, 9682-9683.
- 418 A. Rafiee, K. Rajab Khalilpour, D. Milani and M. Panahi, J. Environ. Chem. Eng., 2018, 6, 5771-5794.
- 419 M. A. Sabri, S. Al Jitan, D. Bahamon, L. F. Vega and G. Palmisano, Sci. Total Environ., 2021, 790, 148081.
- 420 M. Aresta, A. Dibenedetto and A. Angelini, J. CO2 Util., 2013, 3-4, 65-73.
- 421 P. Gabrielli, M. Gazzani and M. Mazzotti, Ind. Eng. Chem. Res., 2020, 59, 7033-7045.
- 422 P. Nejat, F. Jomehzadeh, M. M. Taheri, M. Gohari and M. Z. A. Majid, Renewable Sustainable Energy Rev., 2015, 43, 843-862.
- 423 H. M. Wee, W. H. Yang, C. W. Chou and M. V. Padilan, Renewable Sustainable Energy Rev., 2012, 16, 5451-5465.
- 424 S. Ali, T. Fazal, F. Javed, A. Hafeez, M. Akhtar, B. Haider, M. S. ur Rehman, W. B. Zimmerman and F. Rehman, J. Clean. Prod., 2020, 259, 120729.
- 425 R. G. Newell, D. Raimi and G. Aldana, Resources for the Future, 2019, pp. 8-19.
- 426 T. Covert, M. Greenstone and C. R. Knittel, J. Econ. Perspect., 2016, 30, 117-138.
- 427 G. De Pietro, L. J. Gallo Robert Howlett and L. C. Jain, Smart Innovation, Systems and Technologies 98 Intelligent Interactive Multimedia Systems and Services Proceedings of 2018 Conference, 2018.
- 428 E. S. Rubin and H. Zhai, Environ. Sci. Technol., 2012, 46, 3076-3084.
- 429 X. Yang and D. Wang, ACS Appl. Energy Mater, 2018, 1, 6657-6693.
- 430 R. Snoeckx and A. Bogaerts, Chem. Soc. Rev., 2017, 46, 5805-5863.
- 431 S. Cheng and B. E. Logan, Proc. Natl. Acad. Sci. U. S. A., 2007, 104, 18871-18873.
- 432 Y. A. Wu, I. McNulty, C. Liu, K. C. Lau, Q. Liu, A. P. Paulikas, C. J. Sun, Z. Cai, J. R. Guest, Y. Ren, V. Stamenkovic, L. A. Curtiss, Y. Liu and T. Rajh, Nat. Energy, 2019, 4, 957-968.
- 433 J. Albero, Y. Peng and H. García, ACS Catal., 2020, 10, 5734-5749.
- 434 T. Yui, Y. Tamaki, K. Sekizawa and O. Ishitani, Top. Curr. Chem., 2011, 303, 151-184.
- 435 Y. Mi, X. Peng, X. Liu and J. Luo, ACS Appl. Energy Mater., 2018, 1, 5119-5123.
- 436 H. Yamashita, K. Ikeue, T. Takewaki and M. Anpo, Top. Catal., 2002, 18, 95-100.
- 437 Y. Wang, S. Zhou and H. Huo, Renewable Sustainable Energy Rev., 2014, 39, 370-380.

- 438 M. H. Chakrabarti, M. Ali, S. Baroutian and M. Saleem, Process Saf. Environ. Prot., 2011, 89, 165-171.
- 439 F. Graf, Power to gas state of the art and perspectives. MARCOGAZ-General Assembly: Workshop New Developments, DVGW Research Center at Engler-Bunte-Institut of KIT, 2014.
- 440 I. P. K. M. Oberdorf, KIT-KIT-Media-Press Releases-Power to Gas: Storing the Wind and Sun in Natural Gas, 2014.
- 441 C. C. Economy, The carbon cycle is broken . . . Can we close it again? ... and how? 2021.
- 442 S. Docao, A. R. Koirala, M. G. Kim, I. C. Hwang, M. K. Song and K. B. Yoon, Energy Environ. Sci., 2017, 10, 628-640.
- 443 B.-H. Lee, E. Gong, M. Kim, S. Park, H. R. Kim, J. Lee, E. Jung, C. W. Lee, J. Bok, Y. Jung, Y. S. Kim, K.-S. Lee, S.-P. Cho, J.-W. Jung, C.-H. Cho, S. Lebègue, K. T. Nam, H. Kim, S.-I. In and T. Hyeon, Energy Environ. Sci., 2021, DOI: 10.1039/d1ee01574e.

- 444 X. Li, Y. Sun, J. Xu, Y. Shao, J. Wu, X. Xu, Y. Pan, H. Ju, J. Xhu and Y. Xie, Nat. Energy, 2019, 4, 690-699.
- 445 B. Kim, H. Seong, J. T. Song, K. Kwak, H. Song, Y. C. Tan, G. Park, D. Lee and J. Oh, ACS Energy Lett., 2020, 5,
- 446 A. M. Yousef, W. M. El-Maghlany, Y. A. Eldrainy and A. Attia, Energy, 2018, 156, 328-351.
- 447 S. Luo, Q. Zhang, L. Zhu, H. Lin, B. A. Kazanowska, C. M. Doherty, A. J. Hill, P. Gao and R. Guo, Chem. Mater., 2018, 30, 5322-5332.
- 448 A. Goeppert, M. Czaun, G. K. S. Prakash and G. A. Olah, Energy Environ. Sci., 2012, 5, 7833-7853.
- 449 Musk Foundation, \$100M Prize for Carbon Removal, 2021.
- 450 European Innovation Council, Fuel from the Sun: Artificial Photosynthesis.