RSC Advances



PAPER

View Article Online
View Journal | View Issue



Cite this: RSC Adv., 2023, 13, 7597

Development of NaY₉Si₆O₂₆:Yb³⁺ phosphors with high thermal stability for NIR anti-counterfeiting: study of its crystal structure and luminescent properties

Near-infrared (NIR) radiation has generated considerable industrial and research interest. However, NIR phosphors for this are limited by low quantum efficiency and broad spectra. Rare-earth-containing compounds doped with activators as host systems for NIR phosphors may resolve these limitations. Yb³+-doped NaY₉Si₆O₂₆ phosphors were synthesized using a conventional solid-state reaction method. The main phase of the synthesized phosphor samples exhibited a hexagonal structure NaY₉Si₆O₂₆:Yb³+ phosphors showed a near-infrared emission from 950 to 1100 nm, which was attributed to the $^2F_{5/2} \rightarrow ^2F_{7/2}$ transition of Yb³+ ions under 270 and 920 nm excitation. The excitation spectra, recorded by monitoring the emission at 985 nm, showed two bands in the ultraviolet and infrared regions, which correspond to the charge transfer transition and the $^2F_{7/2} \rightarrow ^2F_{5/2}$ transition of Yb³+ ions. At 300 °C, the emission intensity of the NaY₉Si₆O₂₆:Yb³+ phosphor remained constant at 82%. Furthermore, the thermal degradation was negligible after cooling, suggesting the possibility of application in advanced anti-counterfeiting applications.

Received 20th January 2023 Accepted 27th February 2023

DOI: 10.1039/d3ra00427a

rsc.li/rsc-advances

Introduction

Since its discovery, near-infrared (NIR) radiation has attracted considerable industrial and research interest. This type of radiation has promising potential for varied applications, mostly related to the characterization of chemicals, security, pharmaceutical, medical, cosmetic, food, and agricultural industries, which contribute to the continued advancement of modern technology.1-5 Radiation sources such as tungsten halogen lamps, NIR light-emitting diodes (LEDs), and phosphor-converted LEDs (pc-LEDs) can emit in the infrared range.6 However, the selection of these radiation sources for varied applications is based on the wavelength, full width at half maximum (FWHM), lifetime, efficiency, and thermal stability. For commercial applications, considering the manufacturing cost and size of radiation sources is essential. Conventional NIR tungsten halogen lamps have low efficiency, a large size, high thermal effect, and short lifetimes.7 NIR LEDs also do not meet the commercial requirements owing to their narrow FWHM.8,9

NIR pc-LEDs, conversely, are considered the most suitable light sources because they provide suitable emission, high efficiency, a long lifetime, and excellent durability. Therefore, pc-LEDs are highly preferred alternative radiation sources for NIR applications in devices such as automotive sensors, security applications, remote controls, and spectrometers. In recent years, the limitations associated with NIR phosphors, including low quantum efficiency and broad spectra, have been extensively studied.

Yb3+ has been widely investigated as a simple electronic structure with two multiplets: the ²F_{5/2} level in the excited state and ${}^{2}F_{7/2}$ level in the ground state. In recent years, numerous studies have been conducted on the development of Yb³⁺-doped inorganic materials, and their potential use in optical materials such as lasers,18 solar cells,19,20 upconversion phosphors,21-23 applications.24 and biological Rare-earth-containing compounds have been studied as host systems for NIR phosphors because of their large stokes shifts and emission with doped activators. Among them, compounds with an apatite structure (space group $P6_3/m$) have been extensively investigated as effective hosts for luminous materials owing to their excellent chemical stability and high efficiency for activated ions.25-27 $NaY_9Si_6O_{26}$ is a type of oxyapatite compound, $M_{10}(AO_4)_6B_2$ (M = Ca, Ba, La, Y, ...; A = P, Si, ...; B = F, Cl, OH, ...), which has two types of Y3+ lattice sites (Wyckoff 4f and 6h).28

^aAdvanced Materials Convergence R&D Division, Display Materials Center, Korea Institute of Ceramic Engineering and Technology, Jinju 52851, Korea. E-mail: skim80@kicet.re.kr

^bAdvanced Resources Team, Yeongwol Industrial Promotion Agency, 21-28 Palgoe 1 Nonggongdanji, Yeongwolgun, 26240, Korea

[†] These authors contributed equally to this work.

RSC Advances

In the present study, a new NIR phosphor Yb3+-doped NaY₉Si₆O₂₆ was synthesized using a solid-state reaction, and their crystal structures were identified using Rietveld refinement. The addition of an excess amount of Na₂CO₃ as a raw material results in a drastic increase in the ratio of the NaY₉-Si₆O₂₆ phase. As a result, a compound close to a single phase was obtained. The synthesized NaY₉Si₆O₂₆:Yb³⁺ phosphor had an angular shape with an average grain size of 1-3 µm. The emission and excitation properties of NaY₉Si₆O₂₆:Yb³⁺ phosphor were investigated to obtain a better understanding of its thermal stability.

Experimental

Yb³⁺-doped NaY₉Si₆O₂₆ phosphors were synthesized using a conventional solid-state reaction. In the powdered form, Na₂CO₃ (Junsei Chemical Co., Ltd, 99%), Y₂O₃ (Daejung Chemical & Metal Co., Ltd, 99%), SiO₂ (Junsei Chemical Co., Ltd, 99%), and Yb₂O₃ (Wako, 99.9%) were used as starting materials to synthesize NaY₉Si₆O₂₆:Yb³⁺ phosphor. The amount of Yb3+ was adjusted between 1 and 15 mol% in the Yb3+-doped NaY₉Si₆O₂₆ phosphor. Using an agate mortar, these raw materials were mixed in a nonstoichiometric ratio of 30 mol% with an excess of Na₂CO₃ as the chemical parameter for the single phase. For 8 h, the mixture was sintered at 1400 °C. After sintering, the samples were ground using an agate mortar.

The crystal structures of the synthesized powder samples were identified using X-ray powder diffraction (XRD, Bruker D8 Advance). Rietveld analysis using the RIETAN-FP package was carried out to obtain detailed crystallographic data. The morphology of the powder was characterized by scanning electron microscopy (SEM, JEOL, JSM6700F). luminescence emission (PL) and excitation (PLE) spectra were measured at room temperature using a fluorescence spectrophotometer (PSI, DARSA PRO 3400). The PL spectra of NaY₉-Si₆O₂₆:Yb³⁺ phosphor were obtained under 270 and 920 nm excitation, and the PLE spectra were recorded under 985 nm emission. Temperature-dependent PL spectra were measured in the temperature range 25-300 °C as appropriate.

Results and discussion

Fig. 1(a) shows the XRD patterns of the synthesized NaY₉Si₆-O₂₆:Yb³⁺ phosphors with an excess amount of Na₂CO₃ as raw material. NaY₉Si₆O₂₆:Yb³⁺ was synthesized with a large amount of yttrium silicate impurities in a sample synthesized by stoichiometric mixing without the addition of Na₂CO₃. Yttrium silicate impurities are formed by the remaining Y and Si due to the volatilization behaviour of Na₂CO₃ raw material during sintering. The amount of impurities decreased with an increase in the amount of excess of Na₂CO₃. The sample with the least amount of impurities was synthesized at the addition of 30 mol% Na₂CO₃, and the impurities increased when more than 40 mol% Na₂CO₃ was added. The Rietveld refinement results for the XRD data of Na(Y_{0.9}Yb_{0.1})₉Si₆O₂₆ phosphor are shown in Fig. 1(b). The refined crystallographic data and parameters of the XRD patterns of Na(Y_{0.9}Yb_{0.1})₉Si₆O₂₆ phosphor are




Fig. 1 (a) XRD patterns of $Na(Y_{0.9}Yb_{0.1})_9Si_6O_{26}$ phosphor with excess of Na₂CO₃, (b) Rietveld refinement result for X-ray powder diffraction data of $Na(Y_{0.9}Yb_{0.1})_9Si_6O_{26}$ [red symbol: measured pattern, green solid line: calculated pattern, blue solid line: the difference between their intensities], (c) schematic of the NaY₉Si₆O₂₆ crystal structure, (d) SEM images of NaY₉Si₆O₂₆:Yb³⁺ phosphor.

summarized in Table 1. The data from the Joint Committee on Powder Diffraction Standards (JCPDS No. 35-0404) corresponding to the NaY₉Si₆O₂₆ phase with hexagonal structure obtained were used as the starting model. As shown in Table 1, the final R-factor values, $R_{\rm wp}$, $R_{\rm p}$, and S, converged to 5.84, 4.08, and 3.20%, respectively, which verifies the phase purity of the as-prepared sample. The XRD pattern of Na(Y_{0.9}Yb_{0.1})₉Si₆O₂₆ indexed mostly with the reported data, and also detected the presence of a small amount of Y2SiO5 impurity phase, which accounted for 6%. The final refined Na(Y_{0.9}Yb_{0.1})₉Si₆O₂₆ phase was hexagonal in the space group $P6_3/m$ (No. 176) with refined lattice parameters a = b = 0.93386(0) nm, c = 0.67562(0) nm, and $V = 0.58920 \text{ nm}^3$. Fig. 1(c) shows a schematic of the NaY₉Si₆O₂₆ crystal structure produced using VESTA,²⁹ which corresponds to the apatite structure with two other Y3+ sites: Wyckoff 4f and 6h.28 The Y3+ situated at the 6h site (Y1) was surrounded by seven oxygen atoms, whereas the Na⁺ and Y³⁺ situated at the 4f sites (Y2) were coordinated by nine oxygen atoms. Simultaneously, the Si4+ ion was 4-fold coordinated by

Table 1 Refined crystallographic data for Na(Y_{0.9}Yb_{0.1})₉Si₆O₂₆ sample. Hexagonal, space group $P6_3/m$, a = 0.93386(0) nm, b = 0.93386 nm, c = 0.93386= 0.67562(0) nm, R_{wp} = 5.84%, R_p = 4.08%, S = 3.20%, d_1 = 0.3295, and $d_2 = 0.6511$

Atom	Site	Occ.	x	у	z	$B_{ m eq.}$
Y1	6h	0.85	0.23336	0.23788	0.25	0.5
Yb1	6h	0.15	0.23336	0.23788	0.25	0.5
Y2	4f	0.75	0.33333	0.66667	0.49888	0.5
Na1	4f	0.25	0.33333	0.66667	0.49888	0.5
Si1	6h	1	0.39760	0.02662	0.25	0.5
O1	2a	1	0.0	0.0	0.25	0.5
O2	6h	1	0.59474	0.12790	0.25	0.5
O3	6h	1	0.33109	-0.15883	0.25	0.5
O4	12i	1	0.33882	0.08590	0.06434	0.5

Paper

four oxygen atoms to form a tetrahedron. The ionic radii of 7-coordinated Y^{3^+} and Yb^{3^+} were calculated to be 0.0960 and 0.0925 nm, respectively, whereas those of 9-coordinated Y^{3^+} and Yb^{3^+} were calculated to be 0.1075 and 0.1042 nm, respectively. Therefore, based on their similar ionic radii and identical valences, the Yb^{3^+} ions were expected to substitute the Y^{3^+} lattices in the $NaY_9Si_6O_{26}$ crystal structure. The shapes of $NaY_9Si_6O_{26}:Yb^{3^+}$ phosphors measured by SEM are shown in Fig. 1(d). The phosphor powder particles were composed of angular-shaped fine grains with an average size of 1–3 μ m.

Fig. 2 shows the XRD patterns of NaY₉Si₆O₂₆:Yb³⁺ phosphors with varying concentrations. The XRD peaks of all the samples were almost identical to those of the NaY₉Si₆O₂₆ phase (JCPDS No. 35-0404), which had hexagonal structure with space group $P6_3/m$. As the Yb³⁺ ion concentration in the NaY₉Si₆O₂₆:Yb³⁺ phosphors increased, a peak shift to a higher diffraction angle was observed because Y³⁺ ions (ionic radius: 0.0960 nm for 7 coordination) in the host material were partially substituted with smaller Yb³⁺ ions (ionic radius: 0.0925 nm for 7 coordination) to form a solid solution.

The excitation and emission spectra of NaY₉Si₆O₂₆:Yb³⁺ phosphors with varying concentrations of Yb³⁺ ions are shown in Fig. 3. The PLE spectra recorded by monitoring the emission at 985 nm exhibited a excitation band from 220 to 300 nm. A peak was observed at 270 nm in the ultraviolet region owing to the charge transfer transition, which involves transfer of electrons from the ligand anion O²⁻ to the central cation Yb³⁺ ion.³⁰ The PL spectra of the NaY₉Si₆O₂₆:Yb³⁺ phosphors recorded under 270 nm excitation showed a strong NIR emission band in the range 950–1100 nm, which corresponds to the ${}^2F_{5/2} \rightarrow {}^2F_{7/2}$ spin-allowed transitions of Yb3+ ions. The simple 4f13 electron configuration of Yb3+ has a unique spectral term with two multiplets: ground state multiplets ${}^2F_{7/2}$ and excited state multiplets ²F_{5/2}. Variation in the splitting of the Stark level of Yb³⁺ ions was observed because of the differences in the local crystal fields. The ground state, ²F_{7/2} splits into four Stark levels, and the excited state, 2F_{5/2} splits into three levels.31 The




Fig. 2 XRD patterns of NaY $_9$ Si $_6$ O $_26$:Yb $^{3+}$ phosphor doped with varying concentrations and NaY $_9$ Si $_6$ O $_{26}$ as reference (JCPDS #35-0404).

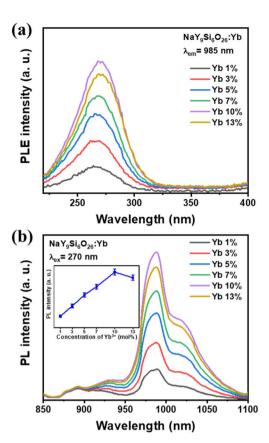


Fig. 3 (a) Excitation ($\lambda_{em}=985$ nm), and (b) emission ($\lambda_{ex}=270$ nm) spectra of NaY₉Si₆O₂₆:Yb³⁺ phosphors with varying concentrations of Yb³⁺ ions.

emission peak intensity of $NaY_9Si_6O_{26}$: Yb^{3+} phosphors increased with increasing Yb^{3+} concentration up to 10 mol% and then decreased, probably because of the concentration quenching effect.

In recent years, counterfeiting technology of security materials has advanced, making anti-counterfeiting technology an important tool for protecting the legitimate rights of consumers and enterprises.32,33 It is therefore imperative to develop new materials for advanced anti-counterfeiting security. For this application, it is necessary to develop an NIR-emitting material that is sensitive in the NIR region beyond the existing method of checking security through ultraviolet excitation. In terms of security level, it can be applied to level 3 (forensic), which can be read only with dedicated equipment, beyond level 1, which can be visually identified, and level 2, which can be verified with general equipment. In order to explore the possibilities of these applications, the excitation and emission spectra of NaY₉Si₆-O₂₆:Yb³⁺ phosphors in the NIR region and are shown in Fig. 4. The PLE spectra recorded by monitoring the emission at 985 nm exhibited a excitation band from 870 to 930 nm, as shown in Fig. 4(a). This can be attributed to the transition from the lowest ground state Stark level to the excited state Stark level in Yb³⁺ ions. In Fig. 4(b), the PL spectra of NaY₉Si₆O₂₆:Yb³⁺ phosphors excited at 920 nm show NIR emission from 960 to 1100 nm, which was attributed to the transition from the lowest Stark

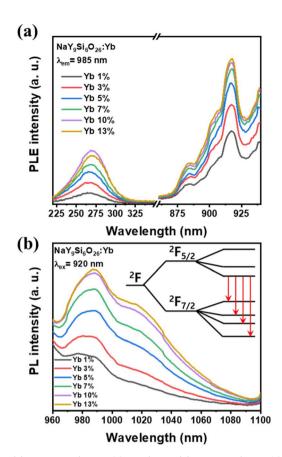


Fig. 4 (a) Excitation ($\lambda_{em}=985$ nm), and (b) emission ($\lambda_{ex}=920$ nm) spectra of NaY₉Si₆O₂₆:Yb³⁺ phosphors with varying concentrations of Yb³⁺ ions in NIR region.

level of $^2F_{5/2}$ to four Stark levels of the ground state $^2F_{7/2}$ in Yb^{3+} ions

The thermal degradation behavior of NIR phosphors is an imperative factor for advanced anti-counterfeiting security because excellent thermal conductivity is necessary to employ the NIR emitting material in fiber application products (clothes, banknotes, passports, *etc.*). The temperature dependence of




Fig. 5 Temperature dependence of the PL emission intensity of $NaY_9Si_6O_{26}$: Yb^{3+} phosphor. The inset shows the emission spectra.

NaY₉Si₆O₂₆:Yb³⁺ phosphor emission was measured to investigate its thermal stability. Fig. 5 shows the temperature-dependent PL intensity under 270 nm excitation in the temperature range 25–300 °C. The emission intensity of NaY₉Si₆O₂₆:Yb³⁺ phosphor decreased with increasing temperature. The relative PL intensity of NaY₉Si₆O₂₆:Yb³⁺ phosphor was 82% of the initial PL intensity at 300 °C, indicating its excellent thermal stability. Moreover, its thermal quenching behavior can be attributed to the non-radiative relaxation of thermally activated electron–phonon coupling. Finally, after heating the NaY₉Si₆O₂₆:Yb³⁺ phosphor to 300 °C and then cooling to room temperature, the NIR emission intensity recovered nearly 100% of its initial intensity, indicating that thermal degradation was minimal. This suggests applicability to advanced anticounterfeiting applications.

Conclusions

We developed the new NIR-emitting Yb3+-doped NaY9Si6O26 phosphors using conventional solid-state reaction. The synthesized phosphors showed a hexagonal crystal structure corresponding to the apatite compound with a small amount of yttrium silicate impurities. It showed angular-shaped fine grains with an average grain size of 1-3 µm. The PLE spectra of the NaY₉Si₆O₂₆:Yb³⁺ phosphors, monitored at an emission wavelength of 985 nm, showed two excitation bands, 220-300 nm and 870-970 nm, respectively. The former was attributed to the charge transfer transition of Yb3+ ions, and the latter was attributed to the transition from the lowest Stark level of the ground ${}^{2}F_{7/2}$ to three Stark levels of the excited ${}^{2}F_{5/2}$ in Yb³⁺ ions. The emission spectra under 270 and 920 nm excitation presented a NIR emission band from 950 to 1100 nm, which corresponds to the transition of Yb3+ ions from the lowest Stark level of the excited ${}^{2}F_{5/2}$ to four Stark levels of the ground ${}^{2}F_{7/2}$. These luminescent properties indicate that it can be used as a material in the security field that is sensitive to the NIR as well as the ultraviolet region. The excellent thermal stability of NaY₉Si₆O₂₆:Yb³⁺ phosphor was evident from the fact that the relative PL intensity of NaY₉Si₆O₂₆:Yb³⁺ phosphor was 82% of the initial PL intensity at 300 °C. The emission intensity that showed thermal quenching up to 300 °C recovered to its initial emission intensity when cooled to 25 °C. Thus, it was confirmed that a minimal amount of thermal degradation occurred. The results of our study suggest that NaY₉Si₆O₂₆:Yb³⁺ phosphors are promising next-generation candidates for advanced anticounterfeiting applications.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

This work was supported by the Technology Innovation Program (20021925, Development of Environment-Friendly Security Fiber and Application Products Using Near-Infrared Paper

Light Pigments Over 1000 nm) funded by the Ministry of Trade, Industry & Energy (MOTIE, Korea).

Notes and references

- 1 H. W. Siesler, Y. Ozaki, S. Kawata and H. M. Heise, Near-Infrared Spectroscopy: Principles, Instruments. Applications, John Wiley & Sons, Germany, 2008.
- 2 Z. Y. Wang, Near-Infrared Organic Materials and Emerging Applications, CRC Press, Boca Raton, 2013.
- 3 K. Svoboda and S. M. Block, Biological Applications of Optical Forces, Annu. Rev. Biophys. Biomol. Struct., 1994, 23, 247-285.
- 4 M. Wolf, M. Ferrari and V. Quaresima, Progress of nearinfrared spectroscopy and topography for brain and muscle clinical applications, J. Biomed. Opt., 2007, 12, 062104.
- 5 V. Ntziachristos, C. Bremer and R. Weissleder, Fluorescence imaging with near-infrared light: new technological advances that enable in vivo molecular imaging, Eur. Radiol., 2003, 13, 195.
- 6 V. Rajendran, H. Chang and R. S. Liu, Recent progress on broadband near-infrared phosphors-converted emitting diodes for future miniature spectrometers, Opt. Mater.: X, 2019, 1, 100011.
- 7 V. Rajendran, M.-H. Fang, G. N. D. Guzman, T. Lesniewski, S. Mahlik, M. Grinberg, G. Leniec, S. M. Kaczmarek, Y.-S. Lin, K.-M. Lus, C.-M. Lin, H. Chang, S.-F. Hu and R.-S. Liu, Super broadband near-infrared phosphors with high radiant flux as future light sources for spectroscopy applications, ACS Energy Lett., 2018, 3, 2679.
- 8 D. Kim, Y. Jung, K.-A. Toh, B. Son and J. Kim, An empirical study on iris recognition in a mobile phone, Expert Syst. Appl., 2016, 54, 328.
- 9 R. Filippo, E. Taralli and M. Rajteri, LEDs: sources and intrinsically bandwidth-limited detectors, Sensors, 2017, 17,
- 10 S. Fuchi and Y. Takeda, Wideband near-infrared phosphor by stacking Sm³⁺ doped glass underneath Yb³⁺, Nd³⁺ codoped glass, Phys. Status Solidi C, 2011, 8, 2653.
- 11 Q. Shao, H. Ding, L. Yao, J. Xu, C. Liang and J. Jiang, Photoluminescence properties of a ScBO₃:Cr³⁺ phosphor and its applications for broadband near-infrared LEDs, RSC Adv., 2018, 8, 12035.
- 12 Q. Shao, H. Ding, L. Yao, J. Xu, C. Liang, Z. Li, Y. Dong and J. Jiang, Broadband near infrared light source derived from Cr³⁺-doped phosphors and a blue LED chip, *Opt. Lett.*, 2018, 43, 5251.
- 13 Z. Pan, Y.-Y. Lu and F. Liu, Sunlight-activated long-persistent luminescence in the near infrared from Cr3+-doped zinc gallo germanates, Nat. Mater., 2011, 11, 58.
- 14 H. Zeng, T. Zhou, L. Wang and R. J. Xie, Two-site occupation for exploring ultrabroadband near-infrared phosphordouble-perovskite La₂MgZrO₆:Cr³⁺, Chem. Mater., 2019, 31, 5245.
- 15 T. Gao, W. Zhuang, R. Liu, Y. Liu, C. Yan, J. Tian, G. Chen, X. Chen, Y. Zheng and L. Wang, Site occupancy and enhanced luminescence of broadband NIR gallo

- germanate phosphors by energy transfer, J. Am. Ceram. Soc., 2019, 103, 202.
- 16 Y. Zhong, S. Gai, M. Xia, S. Gu, Y. Zhang, X. Wu, J. Wang, N. Zhou and Z. Zhou, Enhancing quantum efficiency and tuning photoluminescence properties in far-redemitting phosphor Ca₁₄Ga₁₀Zn₆O₃₅:Mn⁴⁺ based on chemical unit engineering, Chem. Eng. J., 2019, 374, 381.
- 17 L. Zhang, D. Wang, Z. Hao, X. Zhang, G. h. Pan, H. Wu and J. Zhang, Cr³⁺-doped broadband NIR garnet phosphor with enhanced luminescence and its application in NIR spectroscopy, Adv. Opt. Mater., 2019, 7, 1900185.
- 18 L. Sánchez-García, M. O. Ramírez, R. M. Solé, J. J. Carvajal, F. Díaz and L. E. Bausá, Plasmon-induced dual-wavelength operation in a Yb3+ laser, Light Sci. Appl., 2019, 8, 1.
- 19 B. T. Huy, D. H. Kwon, S. S. Lee, V. D. Dao, H. B. Truong and Y. I. Lee, Optical properties of Sr₂YF₇ material doped with Yb³⁺, Er³⁺, and Eu³⁺ ions for solar cell application, J. Alloys Compd., 2022, 897, 163189.
- 20 Y. Xu, L. Zhang, L. Dong, S. Yin, X. Wu and H. You, Novel SrGd₂Al₂O₇:Mn⁴⁺, Nd³⁺, and Yb³⁺ phosphors for c-Si solar cells, Dalton Trans., 2021, 50, 7017.
- 21 J. Miao, M. Chen, Z. Chen, L. Zhang, S. Wei and X. Yang, Yb^{3+} Effect of concentration on upconversion luminescence and optical thermometry sensitivity of La₂MoO₆: Yb³⁺, Er³⁺ phosphors, Appl. Opt., 2021, **60**, 1508.
- 22 S. Liu, H. Ming, J. Cui, S. Liu, W. You, X. Ye, Y. Yang, H. Nie and R. Wang, Color-tunable upconversion luminescence and multiple temperature sensing and optical heating properties of Ba₃Y₄O₉:Er³⁺/Yb³⁺ phosphors, J. Phys. Chem. C, 2018, 122, 16289.
- 23 K. Pavani, J. Suresh Kumar, K. Srikanth, M. J. Soares, E. Pereira, A. J. Neves and M. P. E. Graca, Highly efficient upconversion of Er3+ in Yb3+ codoped non-cytotoxic strontium lanthanum aluminate phosphor for low temperature sensors, Sci. Rep., 2017, 7, 17646.
- 24 D. K. Zharkov, A. G. Shmelev, A. V. Leontyev, V. G. Nikiforov, V. S. Lobkov, M. H. Alkahtani, P. R. Hemmer and V. V. Samartsev, Light converting Yb3+/Er3+ doped YVO4 nanoparticles for biological applications, Laser Phys. Lett., 2020, 17, 075901.
- 25 M. Shang, D. Geng, D. Yang, X. Kang, Y. Zhang and J. Lin, Luminescence and Energy Transfer Properties $Ca_2Ba_3(PO_4)_3Cl$ and $Ca_2Ba_3(PO_4)_3Cl$: A $(A = Eu^{2+}/Ce^{3+}/Dy^{3+}/Dy^{3+}/Dy^{3+})$ Tb³⁺) under UV and Low-Voltage Electron Beam Excitation, Inorg. Chem., 2013, 52, 3102.
- 26 L. Wang, B. K. Moon, B. C. Choi, J. H. Kim, J. Shi and J. H. Jeong, Photoluminescent properties and site occupation preference in Bi3+, Eu3+ doped CaY4(SiO4)3O phosphor, Ceram. Int., 2016, 42, 12971.
- 27 W. Zhou, F. Pan, L. Zhou, D. Hou, Y. Huang, Y. Tao and Site Occupancies, Luminescence, Thermometric Properties of LiY₉(SiO₄)₆O₂:Ce³⁺ Phosphors, Inorg. Chem., 2016, 55, 10415.
- 28 G. R. Redhammer and G. Roth, Lithium and Sodium Yttrium Orthosilicate Oxyapatite, LiY₉(SiO₄)₆O₂ and NaY₉(SiO₄)₆O₂, at Both 100 K and Near Room Temperature, Acta Crystallogr., 2003, 59, i120.

- 29 K. Momma and F. Izumi, VESTA: a three-dimensional visualization system for electronic and structural analysis, *J. Appl. Crystallogr.*, 2008, **41**, 653.
- 30 G. Blasse and B. C. Grabmaier, *Luminescent Materials*, Springer, Heidelberg, 1994.
- 31 L. Sánchez-García, M. O. Ramírez, C. Tserkezis, R. Sole, J. J. Carvajal, M. Aguiló, F. Díaz and L. E. Bausá, Anisotropic Enhancement of Yb³⁺ Luminescence by Disordered Plasmonic Networks Self assembled on RbTiOPO₄ Ferroelectric Crystals, *Nanoscale*, 2017, 9, 16166.
- 32 G. Cai, T. Delgado, C. Richard and B. Viana, ZGSO Spinel Nanoparticles with Dual Emission of NIR Persistent

- Luminescence for Anti-Counterfeiting Applications, *Materials*, 2023, **16**, 1132.
- 33 Y. Xiao, P. Xiong, S. Zhang, K. Chen, S. Tian, Y. Sun, P. Shao, K. Qin, M. G. Brik, S. Ye, D. Chen and Z. Yang, Deep-red to NIR mechanoluminescence in centrosymmetric perovskite MgGeO₃: Mn²⁺ for potential dynamic signature anticounterfeiting, *Chem. Eng. J.*, 2023, **453**, 139671.
- 34 M. Kaczkan, M. Malinowski, A. Suchocki, D. A. Pawlak and S. Turczyński, Temperature and concentration dependent luminescence of Yb³⁺ centers in YAM, *J. Alloys Compd.*, 2020, 842, 155893.