RSC Advances



REVIEW

View Article Online



Cite this: RSC Adv., 2023, 13, 22945

Research progress of vanadium pentoxide photocatalytic materials

Yanlin Li, (10 ** Shenghua Chen, ** Wenyuan Duan, (10 ** Yanli Nan, (10 ** Donghai Ding**) and Guoging Xiao^a

Photocatalytic reactions convert solar energy into chemical energy through a clean and green reaction process. Photocatalytic technology based on semiconductor materials provides us with a new idea in energy utilization and environmental governance. It was found that vanadium pentoxide (V_2O_5) has a narrow band gap, wide response range in the visible region, high oxygen density in the V_2O_5 lattice, high oxidation state of V5+, small energy requirement, and superior catalytic activity in partial oxidation. Therefore, the utilization rate of sunlight and photocatalytic oxidation can be greatly improved using V_2O_5 materials. However, the narrow band gap of V_2O_5 also makes it easier for the photogenerated electrons and holes to recombine in the excited state, and the stored energy is instantly consumed by carrier recombination. Therefore, how to promote the carrier separation of V₂O₅ and improve the photocatalytic efficiency are the key problems to be solved. Herein, several methods to improve the photocatalytic performance of V₂O₅ are reviewed, including metallic ion doping, non-metallic ion doping, semiconductor recombination, and noble metal deposition. Finally, it is suggested that future research directions should focus on a variety of modification methods simultaneously to promote photocatalytic efficiency and lower the cost, which will enable V₂O₅ to have a broad development prospect in the field of photocatalysis.

Received 31st May 2023 Accepted 15th July 2023

DOI: 10.1039/d3ra03648k

rsc.li/rsc-advances

Introduction

At present, owing to the rapid industrial development, energy and environment problems are becoming increasingly severe.1 The construction of an efficient, clean, low carbon and recycling green manufacturing system is put forward as one of the main strategic tasks to improve the efficiency of resource utilization and promote the efficient recycling of resources. Notably, the photocatalytic technology based on semiconductor materials provides us with a new way of thinking in energy utilization and environmental governance.

There are many excellent semiconductors in the literature dealing with the photocatalytic performance, especially for transition metal oxides. Among them, due to its excellent performance, V₂O₅ as a highly ordered two-dimensional layered oxide² has aroused great interest for a variety of important applications, such as lithium batteries, medicine, and nonferrous metal processing. It was found that V₂O₅ has a narrow band gap (2.2 eV), requires little energy, and shows superior catalytic activity in partial oxidation.3-7 The crystal structure and band structure of V₂O₅ are shown in Fig. 1. Therefore,

photocatalysis by V₂O₅ materials can greatly improve the utilization rate of sunlight. Initial research studies were performed on V₂O₅ photocatalytic raw material mainly extracted from vanadium ore directly, but its photocatalytic performance was low. With the continuous development of nanoscience and preparation technology, researchers worldwide are actively exploring to obtain V₂O₅ materials by means of hydrothermal/ solvothermal method, sol-gel method, electrodeposition, and high-temperature calcination to study the photocatalytic degradation and other properties of V₂O₅. For example, flowerlike V_2O_5 microspheres with a diameter of $\sim 3~\mu m$ were synthesized by a facile hydrothermal method using ammonium metavanadate as a vanadium source, and the as-prepared V2O5 microspheres had a large surface area.8 Song et al. developed mesoporous V2O5 nanosheets by a simple hydrothermal method and subsequent instantaneous heating and calcination.9 The V₂O₅ nanosheets had a unique mesoporous nanostructure containing oxygen vacancies. A novel hierarchical starfish-like vanadium oxide was also synthesized by a direct hydrothermal method using a functional V₂O₅ sol as a vanadium source. Results demonstrated that the V2O5 material was composed of single crystals of a metastable VO₂ (B) phase, which grew along the (110) plane, and four oblique sheets, which grew on the flanks of the (110) plane. 10 Then, the starfishlike structure could be obtained after phase transition to the orthorhombic V₂O₅ phase while sintering at 350 °C. V₂O₅

aSchool of Materials Science and Engineering, Xi'an University of Architecture & Technology, Xi'an 710055, China. E-mail: liyanlin@xauat.edu.cn; nanyl@xauat.

^bXi'an Key Laboratory of Advanced Photo-electronics Materials and Energy Conversion Device, Xiiing University, Xi'an 710123, China

RSC Advances Review

materials could be also synthesized via a sol-gel method, which was confirmed by Yang et al. to fabricate the V₂O₅ nanoribbon.¹¹ Le et al. reported a kind of micro-nano structural V₂O₅ films, which were constructed by an electrodeposition method using an aqueous solution of NH₄VO₃. The results showed that the surface morphology, crystal structure, and properties strongly relied on the annealing temperature. Furthermore, the excessive temperature was more likely to collapse α -V₂O₅ structures, which inevitably introduced a lot of defects. An interesting approach was described by Wahab et al. wherein a novel black V₂O₅ material was synthesized by a controllable and environmentally friendly physicochemical reduction method using NH₄VO₃ in an alumina crucible with heating at 550 °C. Furthermore, DFT analysis results revealed that tuning a high degree of surface oxygen vacancies considerably promoted the visible light photoactivity of practically inactive pristine V₂O₅.¹³

As a transition metal oxide of high oxidation state, V2O5 has quite a few advantages of narrow band gap, high oxygen density, high decomposition temperature, high temperature resistance, low cost, good chemical and optical stability. It shows much potential to be an excellent choice of photocatalyst. 14-16

Photocatalytic reaction mechanism

In terms of semiconductors, all valence electrons reside in the valence band. The band with higher energy than the valence band is the conduction band, while the gap between the valence band and the conduction band is called the forbidden band. Thus, the photocatalytic oxidation process is simply described as electrons in the valence band being excited by light and then jumping to the conduction band to form electron-hole pairs, which trigger a series of other reactions.

The photocatalytic reaction process of V₂O₅ mainly includes three basic steps: firstly, when light with energy greater than the band gap width (E_{φ}) is used to irradiate the photocatalyst, the electrons in the valence band of the photocatalyst are excited and jump over the band gap into the conduction band, generating electron e in the conduction band and leaving positive hole h⁺ in the valence band; secondly, the photogenerated hole h⁺ with strong oxidizing property and the photogenerated

electron e with strong reducing property combine to form a redox system; finally, when the photogenerated electron-hole migrates to the surface, e can reduce the electron acceptor adsorbed on the catalyst surface, while h⁺ can combine with the electron donor adsorbed on the catalyst surface to oxidize the substances.

The specific principle of the photocatalytic reaction of V₂O₅ is as follows:

$$e^- + O_2 \rightarrow {}^{\cdot}O_2^-$$
 (1)

$$e^- + R \rightarrow R^- \tag{2}$$

$$h^{+} + H_{2}O \rightarrow \cdot OH + H^{+}$$
 (3)

$$h^+ + OH^- \rightarrow OH$$
 (4)

$$h^+ + R \to R^+ \tag{5}$$

$$'O_2^- + H^+ \rightarrow 'HO_2$$
 (6)

$${}^{\cdot}O_2^- + H_2O \rightarrow {}^{\cdot}OOH + OH^-$$
 (7)

$$2 \cdot OOH \rightarrow O_2 + H_2O_2$$
 (8)

$$H_2O_2 + e^- \rightarrow 'OH + OH^-$$
 (9)

$$2 \cdot HO_2 \rightarrow O_2 + H_2O_2$$
 (10)

$$H_2O_2 + O_2^- \to OH + OH^- + O_2$$
 (11)

$$H_2O_2 + hv \rightarrow {}^{\bullet}OH$$
 (12)

$$R (R^-, R^+) + OH \rightarrow CO_2 + H_2O$$
 (13)

However, the narrow band gap of V₂O₅ makes it easier for the photogenerated electrons and holes to recombine in the excited state, and the stored energy is instantly consumed due to carrier recombination. This recombination process occurs both on the surface and inside of the photocatalyst. After the activated e recombines with h, it will dissipate its energy in the form of radiation. Therefore, how to promote the carrier

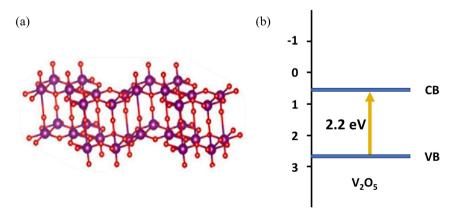


Fig. 1 (a) The crystal structure and (b) band structure of V_2O_5

Review **RSC Advances**

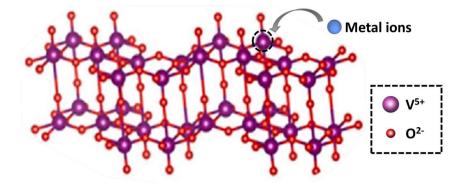


Fig. 2 The scheme of metallic ion doping into the lattice of V₂O₅

separation and improve the photocatalytic efficiency of V2O5 have become the critical problems to be addressed.

$$V_2O_5(h^+) + V_2O_5(e^-) \rightarrow \text{energy}$$
 (14)

Modification methods

There are several ways to improve the photocatalytic efficiency of V₂O₅ semiconductors, such as metallic ion doping, nonmetallic ion doping, semiconductor recombination and noble metal deposition.

Metallic ion doping

Electron-hole capture and recombination are two competing processes that have great influence on photocatalytic oxidation. If there is no appropriate electron and hole trapping agent in the semiconductor catalyst, the photogenerated electrons and

holes will recombine inside or on the surface of the semiconductor and release energy. The recombination process can be inhibited to a certain extent by generating appropriate defects in the catalyst or introducing appropriate impurity ions as electron-hole trapping agents. Studies have shown that Fe, Co, Ni, Cu, Pt, Cr, V, Ru, Y and other metal ions doped into the semiconductor lattice can change the phase transition temperature, and then affect the photocatalytic activity.

The ideal doping is a metal ion with an ionic radius close to the V⁵⁺ radius so that the doped metal ions can effectively enter the V₂O₅ lattice (Fig. 2). By doping metal ions into the V₂O₅ lattice, new impurity levels can be introduced to broaden the response range of V2O5 to sunlight and effectively inhibit the rapid recombination of charge carriers in V2O5 materials. For example, Fe³⁺ has a similar radius to V⁵⁺ and easily enters the V₂O₅ lattice.¹⁷ The transition metal ions Cu-doped V₂O₅ nanosheets were investigated for their photocatalytic efficiency using organic dye (methyl blue (MB) and rhodamine B (RhB)) under light illumination.18 The results (Fig. 3) showed that Cu

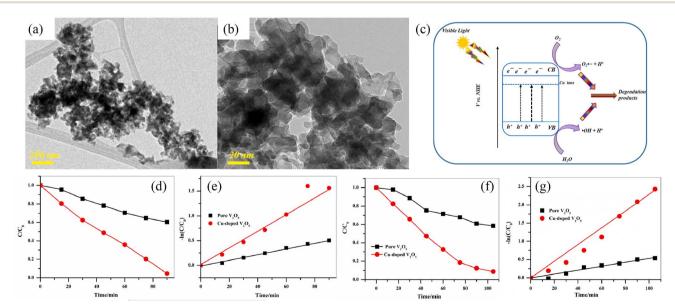


Fig. 3 (a) TEM of V₂O₅, (b) TEM of Cu-doped V₂O₅, (c) mechanism of photocatalytic activity, (d and e) photocatalytic degradation of MB, (f and g) photocatalytic degradation of RhB (reproduced from ref. 18 with permission from [Elsevier], copyright [2023]).

RSC Advances Review

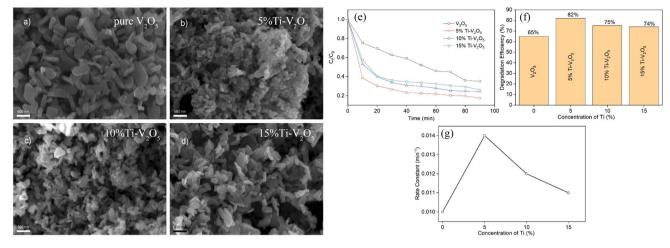


Fig. 4 (a-d) SEM of V_2O_5 and Ti-doped V_2O_5 , (e-g) photocatalytic degradation of MB (reproduced from ref. 19 with permission from [Elsevier], copyright [2022]).

incorporation into the host V_2O_5 matrix improved the photo-degradation efficiency for MB and RhB pollutants under visible light irradiation, which was attributed to the dopant ions that could separate the photoinduced electron-hole pairs and accelerate the charge movement. However, the radius of Cu^{2+} differs greatly from that of V^{5+} , so the photocatalytic efficiency cannot be improved significantly by incorporation of metallic Cu. Neelima *et al.* investigated the visible-light-induced photocatalytic activity of V_2O_5 nanostructures doped with various amounts of Ti (Fig. 4). The radius of Ti^{4+} was close to that of V^{5+} . It demonstrated that the Ti^{4+} introduced into the V_2O_5 lattice formed trap states within the forbidden gap. The Ti-doped V_2O_5 nanostructure exhibited a lower recombination rate than pure V_2O_5 and enhanced the photocatalytic activity. ¹⁹ The

improvement of the photocatalytic efficiency of Ti-doped V_2O_5 was higher than that of Cu-doped V_2O_5 .

The choice of doped metal ions is an important factor. Suvijak et~al. studied the effect of multiple metal ion doping on photocatalysis, such as Nb, La, Y, and Zr. They found that V_2O_5 modification by Nb or La dopants, which had the extra valence cations or larger ionic radius, suppressed the oxygen vacancies formation, leading to lower activity. Meanwhile, Y and Zr exhibited good capability of H_2S removal, and the amount of surface oxygen and H_2S conversion of the Y-doped V_2O_5 were more than that of the Zr-doped V_2O_5 .

The concentration of metal ions is another important factor affecting the photocatalytic performance. Studies have shown that a lower concentration of metal ions entering the

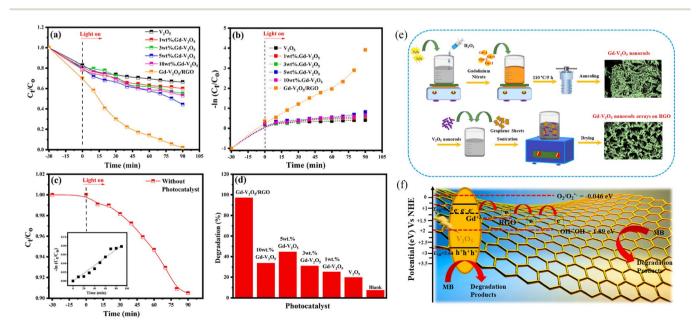


Fig. 5 (a-d) Photocatalytic degradation of MB, (e) schematic representation of the synthesis of $Gd-V_2O_5$, (f) mechanism of photocatalytic activity (reproduced from ref. 21 with permission from [Elsevier], copyright [2021]).

Review

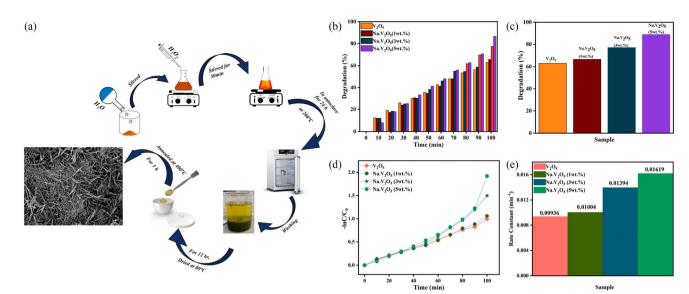


Fig. 6 (a) Schematic representation of the synthesis of Na-V₂O₅, (b-e) photocatalytic degradation of RhB (reproduced from ref. 22 with permission from [Elsevier], copyright [2022])

semiconductor lattice can appropriately improve its photocatalytic ability. However, the high concentration of metal ions located at the lattice site would become the carrier recombination center, which inhibited the photocatalytic activity. In addition, if the doped metal ion concentration was too high, it was easier to form a thick layer of space charge on the surface, and to a certain extent, hinder the photon absorption, thus reducing the catalytic activity. For example, a series of Gd-doped V₂O₅ (1 wt%, 3 wt%, 5 wt% and 10 wt%) photocatalysts had been prepared through a facile wet chemical approach, as shown in Fig. 5. The results demonstrated that 5 wt% Gd-V₂O₅ nanorod was in favor of MB photodegradation, and this optimum concentration probably occurred due to the quantum tunneling effect.21 Shahid et al. reported on Na-doped V2O5 nanorods for visible light-irradiated photocatalytic performance for the degradation of rhodamine dye, as shown in Fig. 6, and found that 5 wt% Na-doped V2O5 exhibited the maximum degradation with 88.9% degradation rate.22 Basu et al. found that the 2 mol% Nb-doped V₂O₅ nanorods achieved the maximum photocatalytic degradation of complex organic caffeine and removed 91% in 2 hours (Fig. 7).23

Given the above results, doping metal ions into the V₂O₅ lattice can introduce new impurity levels, broaden the response range of V₂O₅ to sunlight, and effectively inhibit the rapid recombination of electrons and holes in the V2O5 semiconductor.

Non-metallic ion doping

Non-metallic ion doping is also confirmed to be an effective method to improve the separation efficiency of photogenerated electron-hole and inhibit the recombination of electron-hole pairs, thus promoting the quantum efficiency and catalytic activity by visible light. There are two theories in terms of nonmetallic ion doping for improving photocatalytic properties. One theory states that the non-metallic elements enter the crystal lattice of the V2O5 photocatalyst. This leaves a lot of oxygen vacant defects in the forbidden band, which drive the photogenerated electrons to jump into the conduction band in two steps, resulting in it absorbing more visible light. The other theory states that non-metallic ions replace oxygen to form the structure of X-V-O-V, and then form a gap in the crystal lattice of V₂O₅. This introduces a new hybrid state between the

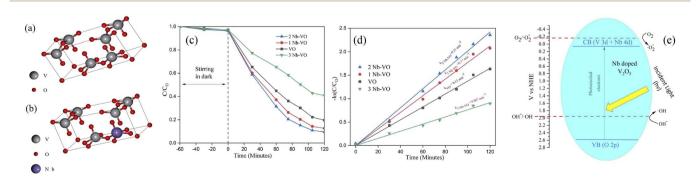


Fig. 7 Optimized geometries of (a) the V₂O₅ unit crystal and (b) the Nb-doped V₂O₅ crystal, (c and d) photocatalytic degradation of caffeine, (e) mechanism of photocatalytic activity (reproduced from ref. 23 with permission from [RSC], copyright [2022]).

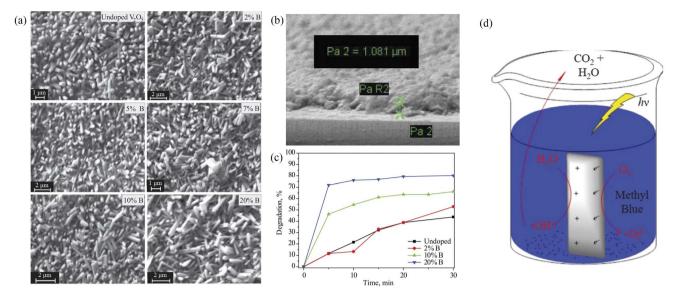


Fig. 8 (a) SEM of V_2O_5 and B-doped V_2O_5 , (b) SEM of B-doped V_2O_5 thin film, (c) photocatalytic degradation of MB, (d) mechanism of photocatalytic activity (reproduced from ref. 24 with permission from [Springer], copyright [2019]).

conduction band and valence band to reduce the band gap width, so that the V_2O_5 photocatalyst has catalytic activity under visible light and improves the catalytic performance. Studies have shown that the incorporation of B, C, N, S, F, Cl and other non-metallic ions can improve the photocatalytic activity.

For example, the boron-doped V_2O_5 thin films fabricated by a spray pyrolysis technique had a large surface area. The photocatalytic degradation of methyl blue was measured in approximately 30 min in water samples under xenon light. Because of the smaller ionic radius of B^{3+} compared to that of V^{5+} , the presence of boron on the surface, grain boundaries or V_2O_5 matrix could easily be integrated into the V_2O_5 skeleton without changing the initial morphology of V_2O_5 . B-doped V_2O_5 was more uniform and compact than the undoped structure. This reduced the band gap width of V_2O_5 and enhanced the

absorption of the UV and visible regions, which may be caused by the decrease of band gap energy and the increase of surface area (Fig. 8).

Shim *et al.* studied 2D S-doped V_2O_5 flakes synthesized *via* a facile hydrothermal procedure (Fig. 9a). The doping of S into the host V_2O_5 matrix caused a positive influence on its structure, electrical conductivity and ion diffusion, and showed about 4.7 folds improvement in photocurrent density and reduced charge resistance compared to the pure V_2O_5 . Sulfur has a larger atomic radius. Thus, doping sulfur at the oxygen site was supposed to significantly change the electronic structure of V_2O_5 . The structural oxygen vacancies and lattice defects of S-doped V_2O_5 were used as carrier capture centers to reduce the photoinduced electron–hole recombination rate. In addition, S doping narrowed the band gap energy of V_2O_5 , redshifted

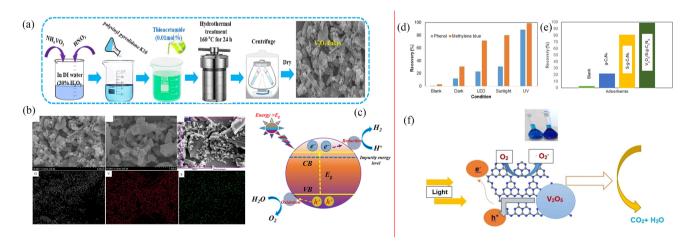


Fig. 9 (a) Schematic representation of the synthesis of S-doped V_2O_5 , (b) SEM of S-doped V_2O_5 , (c) mechanism of photocatalytic activity (reproduced from ref. 25 with permission from [Elsevier], copyright [2023]). (d and e) Photocatalytic degradation of phenol and MB, (f) mechanism of photocatalytic degradation (reproduced from ref. 26 with permission from [Wiley], copyright [2019]).

Table 1 The results of the doping effect in the literature

Doping elements	Results	Ref.
Cu	Improved photodegradation efficiency for MB and RhB	15
Ti	Improvement of photocatalytic efficiency of Ti-V ₂ O ₅ that is higher than that of Cu-V ₂ O ₅	16
Nb, La	Lower activity	17
Y, Zr	Good capability of H ₂ S removal	17
Gd	Favors photodegradation of MB	18
Na	Maximum degradation with 88.9% degradation rate to RhB	19
Nb	Removed 91% organic caffeine in 2 hours	20
В	Photodegradation for MB within 30 min in water samples under xenon light	21
S	4.7-Fold improvement in photocurrent density	22
S	Improved photodegradation for MB and phenol	23




Fig. 10 The scheme of the band structure of $\rm V_2O_5$ and other semi-conductor composites.

the absorption edge, and enhanced the visible light catalytic activity. Chegeni $et\ al.$ also studied the S-doped V_2O_5 nanocomposites, which showed highly efficient degradation and adsorption for methylene blue and phenol, ²⁶ as shown in Fig. 9b. However, the sulfur ions were beneficial for changing the electron structure. It was difficult to replace the oxygen ions in the lattice of V_2O_5 because of the larger radius of sulfur ions. As a result, S-doped modification requires further study. Furthermore, we summarized the doping effects of metallic ion doping and non-metallic ion doping from references, which are shown in Table 1.

Semiconductor recombination

In order to promote carrier separation, the semiconductors with different band structures were combined. Thus, the wide-band gap photocatalysts were sensitized with narrowband gap semiconductors to improve the photocatalytic performance. By combining the V_2O_5 semiconductor with materials with different bandgap widths, the composite semiconductors were prepared, so as to effectively improve the utilization efficiency of visible light of the V_2O_5 composite materials (Fig. 10). Different oxide or sulfide semiconductors have different effects on the photocatalytic performance of

composites. According to literature reports, the optimal band gap of the actual photocatalyst is about 1.8 eV. Therefore, the reasonable selection of composite is very important to improve the photocatalytic performance of V_2O_5 .

The interfacial transfer rate of electrons and holes is much slower than that of the capture or recombination process of photogenerated charge. If the interfacial transfer rate of electrons and holes can be accelerated to reduce the accumulation of photogenerated charge in the semiconductor, the recombination probability of photogenerated electrons and holes can also be reduced and the efficiency of photocatalytic oxidation can be improved. The band gap of the V2O5 semiconductor is relatively narrow, and the photogenerated electrons and holes generated in the photocatalytic reaction are easy to recombine. However, the band structure and band gap width of different conductors are different. Therefore, the appropriate semiconductor can be selected to combine with V₂O₅. The characteristics of the band structure of the two semiconductors can be used to accelerate the interface transfer rate of electrons and holes, and improve the photocatalytic efficiency.

Typically, when sunlight irradiates the V₂O₅-TiO₂ composites, the electrons in the V2O5 valence band are first excited and jump to the conduction band, where e is produced and h is left in the valence band. TiO2 is then activated to perform the same photogeneration carrier process inside the semiconductor. Due to the difference in their potential, h⁺ in the V₂O₅ valence band flows to the TiO₂ valence band, while e⁻ in the TiO₂ conduction band flows to the V₂O₅ conduction band. Thus, photogenerated electrons and holes can be effectively separated, and the accumulation of photogenerated charges in semiconductor can be reduced. Furthermore, the recombination probability of photogenerated electrons and holes can be reduced, and the efficiency of photocatalytic oxidation can be improved. In Fig. 11, V₂O₅-TiO₂ nanocomposites were synthesized by a one-step mechanical alloying method. The photocatalytic degradation of rhodamine B under visible light had been enhanced significantly in comparison with both nanocrystalline TiO2 and V2O5.27

One semiconductor composite with only ${\rm TiO_2}$ modification has a limit for improvement of photocatalytic performance. Furthermore, corrosion-resistant and stable WO₃ materials have attracted much attention. Wu *et al.* developed an efficient

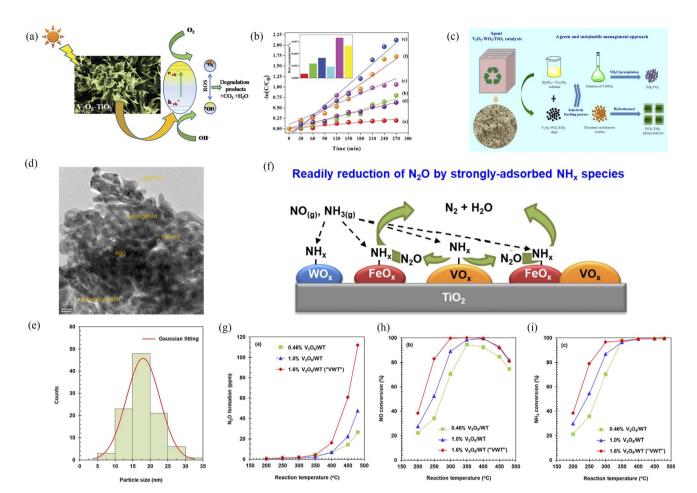


Fig. 11 (a and b) Schematic photocatalytic degradation and photocatalytic properties of V_2O_5 -TiO₂ (reproduced from ref. 27 with permission from [RSC], copyright [2019]). (c) Schematic synthesis of V_2O_5 -WO₃/TiO₂ (reproduced from ref. 28 with permission from [ACS], copyright [2018]). (d–i) Formation and depression of N_2O in the selective reduction of NO by NH₃ over V_2O_5 -WO₃/TiO₂ catalysts (reproduced from ref. 29 with permission from [Elsevier], copyright [2021]).


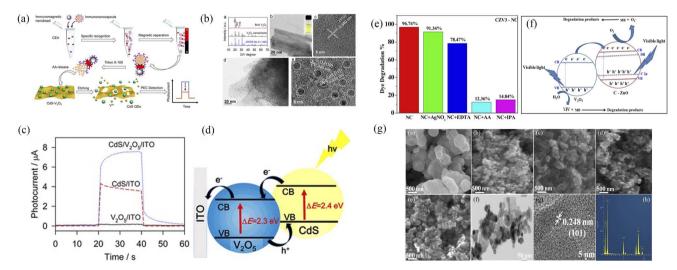


Fig. 12 (a–d) Synthesis, morphology and photocatalytic degradation of V_2O_5 –CdS (reproduced from ref. 30 with permission from [ACS], copyright [2022]). (e–g) Morphology and photocatalytic degradation of V_2O_5 –ZnO (reproduced from ref. 32 with permission from [Springer], copyright [2022]).

Review **RSC Advances**



The scheme of the band structure of V₂O₅ and the noble metal.

and sustainable process for the recovery of vanadium and produced V₂O₅-WO₃/TiO₂ photocatalytic materials.²⁸ Nguyen et al. also reported the formation and depression of N₂O in the selective reduction of NO by NH3 over V2O5-WO3/TiO2 catalysts.29 As a result, the use of both WO3 and TiO2 was more effective for improving photocatalytic performance than that with only TiO_2 or pure V_2O_5 .

In addition, there were alternative semiconductor materials to recombine with V₂O₅, such as CdS quantum dots, ^{30,31} ZnO, ³² and others (Fig. 12).

Noble metal deposition

The Fermi energy levels between noble metals and semiconductors are significantly different. When noble metals are deposited on the surface of semiconductors, photogenerated electrons will migrate from the semiconductors to the noble metals. Once the Fermi energy levels of the two are matched, the noble metals capture a large amount of negative charge, while the semiconductors obtain the corresponding positive charge, leading to the band bending and formation of the Schottky barrier, which can effectively prevent carrier recombination and improve the yield of photogenerated electrons (Fig. 13). Studies have shown that the photocatalytic activity of the composite materials modified by gold (Au), silver (Ag), platinum (Pt) and other noble metals is better than that of the photocatalytic materials prepared by pure semiconductor oxides. Adding an appropriate amount of noble metals can promote efficient electron-hole separation,33 thus improving the photocatalytic effect. Recently, considerable research efforts have been devoted to Au or Pt nanostructures for modification of photocatalytic materials due to the excellent stability and significant photocatalytic performance. For example, in Fig. 14, Audecorated V2O5 nanorods were prepared through a one-step template-free hydrothermal method by Kumar's group. These nanorods exhibited a higher degradation of R6G dye when compared to pure V₂O₅.³⁴ It was found that superoxide radicals

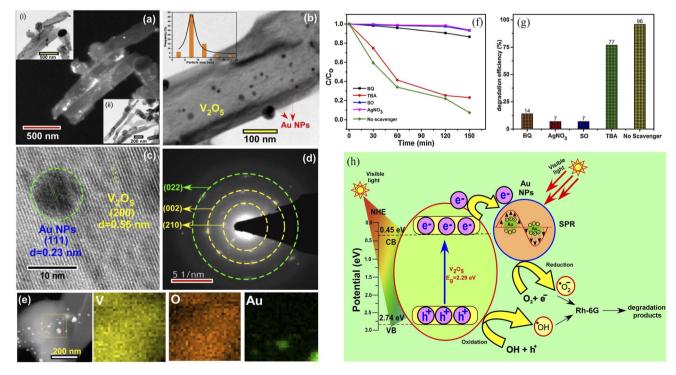


Fig. 14 (a-e) Characterization, (f and g) photocatalytic degradation of R6G, (h) mechanism of Au-decorated V₂O₅ nanorods (reproduced from ref. 34 with permission from [Elsevier], copyright [2019]).

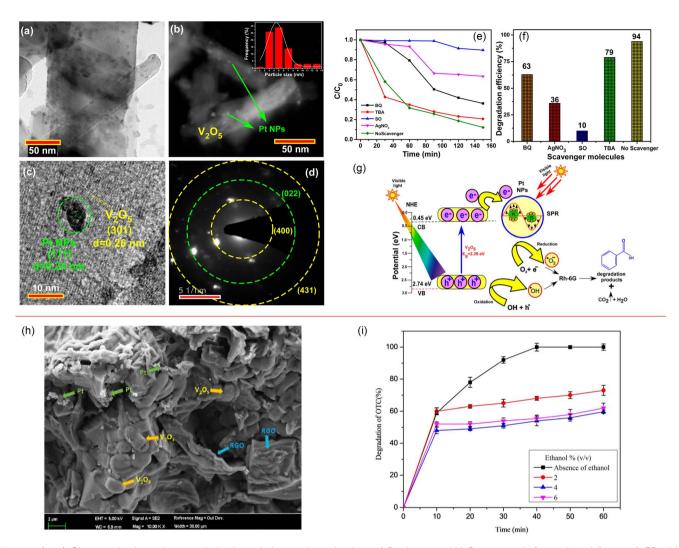


Fig. 15 (a–g) Characterization, photocatalytic degradation and mechanism of Pt-decorated V_2O_5 nanorods (reproduced from ref. 35 with permission from [Elsevier], copyright [2020]). (h and i) Morphology and photocatalytic degradation of TOC of the Pt/ V_2O_5 nanocomposites (reproduced from ref. 36 with permission from [Wiley], copyright [2020]).

 ${
m O}^{2-}$ and ${
m e}^-$ were responsible for the enhanced photodegradation. Kumar *et al.* confirmed that Pt-decorated ${
m V}_2{
m O}_5$ nanorods also showed enhanced photocatalytic degradation of R6G dye under visible light irradiation, and the Pt NPs-assisted ${
m V}_2{
m O}_5$ increased the light response of the photocatalyst in the visible region with a maximum of 94% degradation with 1 wt% Pt,³⁵ as shown in Fig. 15. Seralathan *et al.* also reported on the Pt/V $_2{
m O}_5$ nanocomposites for the efficient photocatalytic degradation of oxytetracycline.³⁶

However, the expensive price and complex preparation process of gold or platinum nanomaterials limited their practical application and large-scale promotion. In contrast, Ag is lower priced than Au or Pt, and may have more potential for commercialization. As can be seen in Fig. 16, the ${\rm Ag/V_2O_5}$ nanocatalyst prepared by Sheshtawy *et al.* exhibited unique catalytic, photocatalytic and post-oxidation/reduction ability for the removal of organic, *p*-nitrophenol, methylene blue and inorganic water pollutants. To n the one hand, by depositing Ag nanoparticles on the surface of ${\rm V_2O_5}$, the recombination of

photogenerated electrons and holes was effectively inhibited by changing the electron energy level structure of the system. On the other hand, by depositing Ag nanoparticles on the surface of V_2O_5 , the surface properties of V_2O_5 were changed and the photon yield of photocatalysis was improved. Moreover, the local surface plasmon resonance effect of Ag nanoparticles was used to enhance the visible light absorption capacity of the composites, and finally improved the photocatalytic performance of V_2O_5 system.

Others

Several excellent reviews and research studies describing these multiple methods are available, and efficiently improved the photocatalytic performance of V_2O_5 . For instance, the asprepared Ag and ZnO co-doped V_2O_5 composites were employed in the photodegradation of Congo red dye under visible irradiation at ambient temperature, ³⁸ which took advantage of both semiconductor recombination and noble metal deposition to increase the photocatalytic activity of pure

Review **RSC Advances**

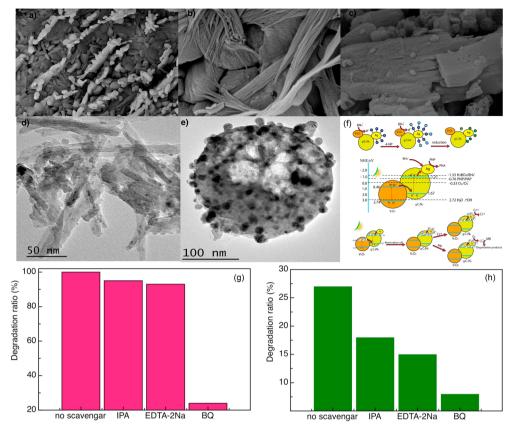


Fig. 16 (a-e) Morphology, (f) mechanism, (g and h) photocatalytic degradation of the Ag/V_2O_5 nanocatalyst (reproduced from ref. 37 with permission from [Elsevier], copyright [2019]).

V₂O₅. The use of special materials, such as MXene, graphene, g-C₃N₄, black phosphorus, and others, was also used to overcome its own defects of V₂O₅. The Ti₃C₂ MXene/NiFe₂O₄/V₂O₅ ternary composites were constructed by Lam and Zeng et al., which exhibited improved photoactivity for the decomposition of RhB, Staphylococcus aureus and Bacillus cereus.39

Application of V₂O₅ photocatalytic materials is not limited to the photodegradation of dyes. It is of great significance to explore the wide range of applications where V₂O₅ photocatalytic materials have been utilized, including pollutant degradation,40 water splitting, 41,42 CO2 reduction, 43-45 and organic synthesis, 46-48 and others.

A variety of characterization techniques for V₂O₅ photocatalytic materials are beneficial to understanding the nature of V₂O₅ and developing the photocatalysts. For example, the crystal growth of V₂O₅ nanopowders prepared by sol-gel and hydrothermal methods was investigated by XRD, and further used with Scherrer's formula to obtain the particle size of V₂O₅ nanopowders.

$$D = \frac{k\lambda}{\beta\cos\theta} \tag{15}$$

The average particle size of V₂O₅ nanopowders prepared by sol-gel method was calculated to be 290 nm, while the average particle size for hydrothermally prepared V2O5 nanopowders was 242 nm.49 Of course, in the sol-gel method, visual

agglomeration of V₂O₅ particles was also found by SEM, which was not conducive to photocatalytic activity. Dizaji et al. also used XRD and SEM to study the graphene oxide-V2O5 nanocomposite prepared by a simple hydrothermal method. 50 It was observed that the V₂O₅ crystalline phase began to appear when the powder was treated at 300 °C. Meanwhile, it presented a higher degree of crystallinity upon increase of the heattreatment temperature to 400 and 500 °C, along with an increase of grain size, according to the Scherrer's equation. With the increase of calcination temperature, most of the V₂O₅ nanorods were converted to nanosheets, as seen from the SEM measurements. The specimen calcined at 400 °C was selected as the best one for preparing the nanocomposite in this work,50 which was confirmed by further photocatalytic properties. Sajid et al. also measured BET and obtained a nitrogen adsorptiondesorption curve because the photocatalytic action was fundamentally related to the adsorption-degradation.49 The results indicated that the enhanced surface area and larger pore size of V₂O₅ by hydrothermal method provided new active sites for the facile transfer of the charge carrier and efficient adsorption of the reactant molecules, 49 leading to superior photocatalytic activity with 99.1% and 82% degradation in 180 min for Congo Red and Methyl Orange, respectively. The UV-visible analysis revealed an energy band gap of 2.3 eV, which demonstrated that V₂O₅ possessed a great affinity for visible light absorption, and helped us understand the photocatalytic mechanism better.49

RSC Advances Review

The optical band gap of the rGO-V₂O₅ nanocomposite was also studied by UV-vis, and calculated by use of Tauc's equation:50

$$\alpha h v = A \left(h v - E_{\rm g} \right)^{\frac{n}{2}} \tag{16}$$

The absorption band gap of the V2O5 nanorod was about 2.26 eV, while the rGO-V₂O₅ nanocomposites exhibited a lower band gap of 1.60 eV, which indicated a higher absorbance of the nanocomposite compared with the V₂O₅ nanorods. As a result, the well-distributed rGO nanosheets and V2O5 nanorods showed a photodegradation efficiency of 85% in 255 min for the decolorization of the methylene blue dye.

Conclusion and prospect

The modified vanadium pentoxide (V₂O₅) catalysts can be used for the selective and effective photocatalytic degradation of dyes, organic pollutants, poisonous gas and other substances. The modified V₂O₅ theoretically has excellent photocatalytic performance. However, V₂O₅ catalysts that are sufficiently stable and efficient for practical use have not yet been realized, and there are still some limitations in commercial application. With regard to doping, whether for metallic ion doping or nonmetallic ion doping, it is inevitably subject to the influence of the type and concentration of doping ions. This brings difficulty in the preparation and regulation of structure, in order to introduce them into the V2O5 lattice and form the stable structure. Concerning semiconductor recombination, there is an urgent need for a perfect match between the valence and conduction potentials of the two semiconductors to form an effective structure. It is not easy for an appropriate choice of semiconductors to recombine with V₂O₅. Moreover, some semiconductors, despite their outstanding photocatalytic activity, are toxic and not environmentally friendly, such as CdS and WO3. Noble metal deposition has been proved to be a kind of efficient and simple means to improve the photocatalytic performance, but the high cost of noble metals is not friendly to the commercial photocatalyst. These special materials do not exhibit stable performance, and their role in the photocatalytic mechanism is not clear. Moreover, the unmarketable MXene, graphene and black phosphorus materials greatly increase the cost of research and development. Therefore, the research direction of V₂O₅ photocatalytic materials in the future should improve the photocatalytic efficiency, as well as reduce the cost.

On the one hand, two or more modification methods can be combined to promote the separation of photogenerated electrons and holes, improve the electron transfer rate, and thus enhance the photocatalytic efficiency. The combination of cheap semiconductors or metallic/non-metallic elements with noble metals may increase the photocatalytic activity of V₂O₅. On the premise of the effective improvement of the photocatalytic performance, it can also decrease the use of expensive noble metals.

On the other hand, during the process of modifying V₂O₅ photocatalytic materials in various ways, the reasonable design of composites needs further exploration and research, such as

how to control the morphology and structure, as well as how to implement interface regulation.

Finally, V₂O₅ and V₂O₅-based composites are currently being extensively studied for the photodegradation of dyes, and have shown a relatively obvious photocatalytic effect. The following work should expand its application range, such as water splitting, organic synthesis, CO₂ reduction, so as to be truly applied in practice.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

This work was supported by the National Natural Science Foundation of Shaanxi Province (2023-JC-QN-0615), the Natural Science Foundation of Xi'an University of Architecture and Technology (ZR21025), the Natural Science Foundation of Shaanxi Provincial Department of Education (No. 22JK0595), and the Scientific Research Fund for High-Level Talents of Xijing University (No. XJ22B10).

Notes and references

- 1 X. Chu, C. I. Sathish, M. Li, J.-H. Yang, W. Li, D.-C. Qi, D. Chu, A. Vinu and J. Yi, Battery Energy, 2023, 2, 20220041.
- 2 B. Liu, D. Yin, F. Zhao, K. K. Khaing, T. Chen, C. Wu, L. Deng, L. Li, K. Huang and Y. Zhang, J. Phys. Chem. C, 2019, 123, 4193-4203.
- 3 L. Al-Alharbi, A. Alrooqi, M. M. Ibrahim, I. M. El-Mehasseb, T. Kumeria, A. Gobouri, T. Altalhi and H. S. El-Sheshtawy, J. Environ. Chem. Eng., 2021, 9, 105044.
- 4 X. Li, Z. Wu, Y. Zeng, J. Han, S. Zhang and Q. Zhong, Chem. Phys. Lett., 2020, 750, 137494.
- 5 Q. Wang, Y. Ding, R. A. Dahlgren, Y. Sun, J. Gu, Y. Li, T. Liu and X. Wang, Anal. Chim. Acta, 2023, 1252, 341072.
- 6 S. Wang, S. Li, R. Shi, X. Zou, Z. Zhang, G. Fu, L. Li and F. Luo, Dalton Trans., 2020, 49, 2559-2569.
- 7 S.-M. Ji, A. Muthurasu, K. Chhetri and H. Y. Kim, J. Colloid Interface Sci., 2022, 618, 475-482.
- 8 Z. Wu, W. Zhou, Z. Liu, Y. Zhou, G. Zeng and H. Chen, Materials Express, 2020, 10, 1697-1703.
- 9 H. Song, C. Zhang, Y. Liu, C. Liu, X. Nan and G. Cao, J. Power Sources, 2015, 294, 1-7.
- 10 X. Liang, G. Gao, G. Wu and H. Yang, Electrochim. Acta, 2016, 188, 625-635.
- 11 H. Yang, G. Wu, G. Gao, J. Wu, X. Zhou, J. Wang, L. Zhang, W. Feng and Z. Zhang, Rare Met. Mater. Eng., 2012, 41,
- 12 T. K. Le, M. Kang and S. W. Kim, Mater. Sci. Semicond. Process., 2019, 94, 15-21.
- 13 A. Badreldin, M. D. Imam, Y. Wubulikasimu, K. Elsaid, A. E. Abusrafa, P. B. Balbuena and A. Abdel-Wahab, J. Alloys Compd., 2021, 871, 159615-159628.
- 14 P. Devi, R. Verma and J. P. Singh, J. CO2 Util., 2022, 65, 102211.

Review

15 R. Verma, S. Singh, M. K. Dalai, M. Saravanan, V. V. Agrawal and A. K. Srivastava, *Mater. Des.*, 2017, 133, 10–18.

- 16 R. Verma, A. Awasthi, P. Singh, R. Srivastava, H. Sheng, J. Wen, D. J. Miller and A. K. Srivastava, *J. Colloid Interface* Sci., 2016, 475, 82–95.
- 17 R. Ghanem, Y. Yousef and A. Hammoudeh, *Desalin. Water Treat.*, 2022, **256**, 89–98.
- 18 C. V. Reddy, R. R. Kakarla, B. Cheolho, J. Shim, M. Rezakazemi and T. M. Aminabhavi, *Chemosphere*, 2023, 311, 137015.
- 19 M. Neelima, S. Vandana, A. Kathirvel, M. Sivakumar and A. U. Maheswari, *Optik*, 2022, 252, 168516.
- 20 S. Phatyenchuen, B. Pongthawornsakun, J. Panpranot and P. Praserthdam, *J. Environ. Chem. Eng.*, 2018, **6**, 5655–5661.
- 21 H. Chaudhary, K. Chaudhary, S. Zulfiqar, M. S. Saif, I. A. Alsafari, I. Shakir, P. O. Agboola, M. Safdar and M. F. Warsi, *Ceram. Int.*, 2021, 47, 32521–32533.
- 22 N. Bashir, S. Zulfiqar, S. Munir, M. M. Ibrahim, M. F. Abou Taleb, S. M. El-Bahy, M. Suleman and M. Shahid, *Ceram. Int.*, 2022, 48, 10932–10940.
- 23 S. S. Basu, S. K. Donode, S. Sengupta and J. K. Basu, *New J. Chem.*, 2022, **46**, 17527–17539.
- 24 S. Kerli, U. Alver, H. Eskalen, S. Urus and A. K. Soguksu, *Russ. J. Appl. Chem.*, 2019, **92**, 304–309.
- 25 W. Y. Jang, C. V. Reddy, A. Daouli, R. R. Kakarla, N. Bandaru, J. Shim, M. Badawi and T. M. Aminabhavi, *Chem. Eng. J.*, 2023, 461, 141935.
- 26 M. Chegeni, F. Goudarzi and M. Soleymani, *ChemistrySelect*, 2019, 4, 13736–13745.
- 27 R. K. Mandal, S. Kundu, S. Sain and S. K. Pradhan, New J. Chem., 2019, 43, 2804–2816.
- 28 Q. Zhang, Y. Wu, L. Li and T. Zuo, ACS Sustainable Chem. Eng., 2018, 6, 12502–12510.
- 29 T. P. T. Nguyen, M. H. Kim and K. H. Yang, Catal. Today, 2021, 375, 565–575.
- 30 J. V. Handy, W. Zaheer, A. R. M. Rothfuss, C. R. McGranahan, G. Agbeworvi, J. L. Andrews, K. E. Garcia-Pedraza, J. D. Ponis, J. R. Ayala, Y. Ding, D. F. Watson and S. Banerjee, *Chem. Mater.*, 2022, 34, 1439–1458.
- 31 Y. Chen, W. Deng, Y. Tan and Q. Xie, ACS Appl. Mater. Interfaces, 2020, 12, 29066–29073.
- 32 N. S. A. Arunsankar, M. Anbuchezhiyan and S. Harish, *J. Mater. Sci.: Mater. Electron.*, 2022, 33, 9743–9754.

- 33 K. Bhunia, M. Chandra and D. Pradhan, J. Nanosci. Nanotechnol., 2019, 19, 332-355.
- 34 J. S. Kumar and P. Thangadurai, *J. Environ. Chem. Eng.*, 2019, 7, 103512.
- 35 S. K. Jayaraj and P. Thangadurai, J. Mol. Liq., 2020, 319, 114368.
- 36 H. Mohan, J.-M. Lim, S.-W. Lee, M. Cho, Y.-J. Park, K.-K. Seralathan and B.-T. Oh, *J. Chem. Technol. Biotechnol.*, 2020, 95, 297–307.
- 37 H. S. El-Sheshtawy, H. M. El-Hosainy, K. R. Shoueir, I. M. El-Mehasseb and M. El-Kemary, *Appl. Surf. Sci.*, 2019, **467**, 268–276
- 38 N. H. H. Shalaby, S. R. R. Al-Mhyawi, A. H. H. Ragab, H. A. Elmawgoud, E. A. A. Al-Swat and N. M. M. Al-Thubaiti, *Catalysts*, 2023, **13**, 584.
- 39 S.-M. Lam, M.-K. Choong, J.-C. Sin, H. Zeng, L. Huang, L. Hua, H. Li, Z. H. Jaffari and K. H. Cho, *J. Environ. Chem. Eng.*, 2022, 10, 108284.
- 40 M. Elena Manríquez-Ramírez, M. T. Valdez, L. V. Castro, M. E. Flores and E. Ortiz-Islas, *Mater. Res. Bull.*, 2022, 153, 111864.
- 41 I. Ashraf, S. Ahmad, F. Nazir, D. Dastan, Z. Shi, H. Garmestani and M. Iqbal, *Int. J. Hydrogen Energy*, 2022, 47, 27383–27396.
- 42 K. K. Dey, S. Jha, A. Kumar, G. Gupta, A. K. Srivastava and P. P. Ingole, *Electrochim. Acta*, 2019, **312**, 89–99.
- 43 S. Li, N. Hasan, H. Ma, G. Zhu, L. Pan, F. Zhang, N. Son, M. Kang and C. Liu, *Chem. Eng. J.*, 2022, **430**, 132863.
- 44 F. Folco, J. V. Ochoa, F. Cavani, L. Ott and M. Janssen, *Catal. Sci. Technol.*, 2017, 7, 200–212.
- 45 R. Espinosa, M. E. Manríquez, M. Trejo-Valdez, F. Tzompantzi, A. F. Bustos and E. Ortiz-Islas, *Environ. Sci. Pollut. Res.*, 2023, 30, 54119–54129.
- 46 S. V. H. S. Bhaskaruni, S. Maddila, W. E. van Zyl and S. B. Jonnalagadda, *Catal. Today*, 2018, **309**, 276–281.
- 47 T. K. Khatab, A. M. Abdelghany and H. A. Soliman, *Appl. Organomet. Chem.*, 2019, 33, 4783.
- 48 J. Li, B. Ren, X. Yan, P. Li, S. Gao and R. Cao, *J. Catal.*, 2021, 395, 227–235.
- 49 M. M. Sajid, N. A. Shad, Y. Javed, S. B. Khan, Z. Zhang, N. Amin and H. Zhai, *Surfaces and Interfaces*, 2020, **19**, 100502.
- 50 E. Aawani, N. Memarian and H. R. Dizaji, *J. Phys. Chem. Solids*, 2019, **125**, 8–15.