

Catalysis Science & Technology

Accepted Manuscript




This is an *Accepted Manuscript*, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this *Accepted Manuscript* with the edited and formatted *Advance Article* as soon as it is available.

You can find more information about *Accepted Manuscripts* in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this *Accepted Manuscript* or any consequences arising from the use of any information it contains.



ARTICLE

Fast TiO₂-catalyzed direct Amidation of neat Carboxylic Acids under mild dielectric Heating

Cite this: DOI: 10.1039/x0xx00000x

E. Calcio Gaudino,^a D. Carnaroglio,^a M.A. Gonçalves Nunes,^b L. Schmidt,^b M.M.E. Flores,^b C. Deiana,^c Y. Sakhno,^c G. Martra,^c and G. Cravotto,^{a*}Received 00th January 2012,
Accepted 00th January 2012

DOI: 10.1039/x0xx00000x

www.rsc.org/

The development of green protocols for amide bond formation is a major socioeconomic goal for chemical and pharmaceutical industries and an important challenge for academic research. We herein report a protocol for the quantitative conversion of carboxylic acids and amines to form amides at 100 °C in the presence of a TiO₂ powder catalyst, under monomodal microwave irradiation. The sustainability of the process appears to be augmented by the ease with which the catalyst is recycled.

1. Introduction

The direct amidation reaction between carboxylic acids and amines is still a difficult task¹ because it requires high temperatures (>180 °C) which are often incompatible with most functionalised molecules.^{2,3} Carboxylic acids can be activated towards nucleophilic attack by coupling⁴ and stoichiometric reagents,^{5,6} forming acid chlorides, anhydrides or esters. The main drawbacks of these time-consuming strategies are the formation of toxic/corrosive by-products, poor atom economy and costly waste streams that clearly mark them out as non-sustainable processes.⁷ In recent years new environmentally benign amide preparation protocols that start with acids and amines have been described. They fundamentally exploit enabling technologies such as microwave (MW) irradiation,⁸ and efficient heterogeneous catalysis,⁹⁻¹¹ and organocatalysis,^{12,13} often in solvent-free conditions.¹⁴ Dielectric heating is a valid response to stubborn, time consuming reactions,¹⁵ and can be applied on a range of scales, from milliliters to kilograms.¹⁶ Many protocols have been developed using homogeneous solid catalysts such as ZrCl₄,^{17,18} and some nano-sized particles are worthy of note as their high specific surface area gives them high reactivity.^{19,20} In particular, titanium dioxide (TiO₂)²¹ (Evonik P25) are used as a stable, non-volatile, odorless, white powder with a high specific surface area that as well known, received since a long time a huge interest as a photocatalyst,^{22,23} but it can be also exploited for thermal catalysis.²¹ Different kinds of TiO₂ have been synthesized and applied in amide bond synthesis giving moderate yields even in long reaction times.²⁴⁻²⁶ In this piece of work, we describe an efficient protocol for the direct amidation of carboxylic acids in a monomode MW reactor in the presence of a TiO₂ catalyst which has supplied a significant increase in

the amidation yield and while allowing for a decrease in the reaction temperature over catalyst-free MW processes.²⁷ The catalyst was furthermore easily recovered from the reaction mixture and recycled after activation, thereby rendering the process economically viable. Finally, as it was recently demonstrated in the vapor phase that carboxylic acids can be activated toward amidation on the surface of an oxide via carboxylate formation,²⁸ an investigation of the interaction of benzoic acid (as it gave the highest yields of the carboxylic acids considered) and the TiO₂ catalyst has been performed.

2. Experimental

2.1. Reagents and Equipment

D₂O (99.90% D) was purchased from Euriso-top, all other solvents and reagents were purchased from Sigma Aldrich - Italy and used without further purification unless otherwise noted.

The commercial TiO₂ powder P25 (ca. 80% anatase, 20% rutile, specific surface area ~ 50 m²/g, average primary particle size 21 nm), AEROXIDE[®] (a highly dispersed titanium dioxide manufactured according to the AEROSIL[®] - process) was kindly provided by Evonik Industries and used as the catalyst. The catalyst was used as found or, in some cases, after treatment in a muffle furnace at 450 °C for 1.5 h, to remove molecular species, in particular any of an organic nature, which may have adsorbed onto the surface of the catalyst while it was simply stored in air.²⁹ This was followed by cooling to room temperature and storage in ambient air before introduction in the reactor.

Reactions were performed in a monomode MW reactor (Monowave 300, Anton Paar, with autosampler MAS24) and in a professional multimode oven (MicroSYNTH – MLS GmbH,

Milestone Srl) equipped both with a built-in IR sensor for temperature control.

GC-MS analyses were carried out in a gas chromatograph Agilent 6890 (Agilent Technologies, USA) fitted with a mass detector Agilent Network 5973 using a capillary column that was 30 m long, had an i.d. of 0.25 mm and a film thickness of 0.25 mm. GC conditions were: injection split 1:20, injector temperature 250 °C, detector temperature 280 °C. Gas carrier: helium (1.2 mL/min), temperature program: from 70 °C (2 min) to 300 °C at 5 °C/min. NMR spectra were recorded on a Bruker Avance 300 (300 MHz and 75 MHz for ¹H and ¹³C, respectively) at 25 °C; chemical shifts were calibrated to the residual proton and carbon resonance of the solvent: CDCl₃ (δ_H = 7.26, δ_C = 77.16). HRMS was determined using MALDI-TOF mass spectra (Bruker Ultraflex TOF mass spectrometer).

2.2. Reaction conditions

In the typical amidation procedure, a finely grinded mixture of benzoic acid (150 mg, 1.2 mmol), benzylamine (140 μL, 1.3 mmol, d = 0.98 g/L), and TiO₂ powder Evonik P25 (100 mg), was irradiated in a MW monomode reactor in a borosilicate glass tube G30 (30 mL). The reaction mixture was heated to 100 °C (average power: 70 W) for 20 min under stirring (600 rpm), and EtOAc (5 mL) was added. The suspension was centrifuged at 3000 rpm for 3 min to remove the TiO₂ catalyst. The recovered organic phase was poured into a separating funnel and washed with H₂O (3 x 5 mL), with a saturated solution of NaHCO₃ (3 x 5 mL), and then with brine (3 x 5 mL). It was finally dried over anhydrous Na₂SO₄, and then evaporated under vacuum which gave the product. Overall conversion and yield were determined by GC-MS analysis. The structure of the products was confirmed by NMR and mass spectrometry.


2.3. IR spectroscopic measurements

For IR spectroscopic measurements, the TiO₂ powder was pressed into self-supporting pellets ("optical thickness" ca. 10 mg/cm²), which were placed in an IR cell equipped with CaF₂ windows and a valve connecting to the vacuum lines (residual pressure 1.0 · 10⁻⁵ mbar) allowing thermal treatment and adsorption/desorption experiments to be carried out *in situ*. Samples were heated inside the cell, under dynamic vacuum, from room temperature to 723 K (ca. 5 K/min) and outgassed at this temperature for 1 h. To compensate for the reductive effect on TiO₂ produced by this dehydration/dehydroxylation treatment, 6 mbar of O₂ were admitted into the cell, and kept in contact with the samples for 1 h at 723 K. The system was subsequently cooled to 473 K in O₂ and finally to room temperature under outgassing. The treated samples appeared perfectly white, as expected for stoichiometric TiO₂. The cell was then transferred to the IR instruments (Bruker Vector 22; detector: DTGS), without exposing the samples to air and connected to another vacuum line for the *in situ* adsorption/desorption of H₂O, D₂O and C₆H₅COOD vapors. The spectra were collected at beam temperature (ca. 50 °C, b.t.)

with a resolution of 4 cm⁻¹ at 100 scans, to assure a good signal-to-noise ratio.

3. Results and discussion

The MW-assisted direct amidation of benzoic acid (**1**) with benzylamine (**2**) was chosen as model reaction (Scheme 1) for the optimization of conditions and parameters.



Scheme 1. Solvent-free MW-assisted amidation of benzoic acid.

We initially conducted some tests comparing multimode and monomode MW reactors and observed that the solvent-free conversion of benzoic acid to amide in the presence of TiO₂ was faster and more efficient when irradiated in a monomode cavity (Table 1).^{30,31} Quantitative conversion was observed in 20 min under neat conditions at 100 °C, while the reaction did not occur with solvents (toluene or acetonitrile; Table 2). Longer reaction times and higher temperature did not improve reaction rate and yield. As reported in Table 1, at low reaction temperature (up to 80 °C) the catalyst pre-activation step is required for water desorbing on TiO₂ surface. Otherwise, at 100 °C and over, the higher power density of the monomode MW reactor makes pre-activation step unnecessary. The high yield at mild reaction conditions is certainly worthy of note as previous catalyst-free protocols require much higher temperatures (200-300 °C), which are often incompatible with many thermo-labile organic moieties, to give their best performance.²⁷

Table 1. Benzoic acid (1) / benzylamine (2) amidation (TiO₂ 33.3 wt%) at different temperature in 20 min.

Entry	Temp. (°C)	Yield (%)	Yield (%) ^a
1	60	0	25
2	80	0	81
3	100	99	97
4	120	72	70
5	160	37	38
6	200	31	30

^a Pre-activated TiO₂ catalyst (450 °C, 1.5 h).

The sequential addition of carboxylic acid and amine to the catalyst powder, with two heating steps was deleterious (Table 2, entries 6, 7).

The catalyst amount was varied over a range of 1.5-150 wt% of total reactant mass. Fig. 1 indicates that the reaction yield is directly proportional to the amount of the catalyst up to a value

of 33 wt%, where the proportionality is reversed. The mole ratio of acid to amine was 1 : 1.1 under the same set of reaction conditions and no significant increase in yield was observed upon increasing the amine excess to over 5%.

Table 2. Benzoic acid (1) / benzylamine (2) amidation (TiO₂ 33.3 wt%, 100 °C) at different reaction times.

Entry ^a	Time (min.)	Yield (%)
1	5	31
2	10	94
3	15	76
4	20	99 (<5) ^b
5	40	100 (<10) ^b
6	(20+20) ^c	77 (<5) ^b
7	(20+40) ^c	69 (<5) ^b
8	40	0 (0) ^b
9	40	0 (0) ^b
10	40	0 ^d


^a TiO₂ catalyst without any pre-activation.

^b Reaction performed in multimode MW reactor in organic solvents (toluene and acetonitrile).

^c Two-steps reaction: 1st (benzoic acid + TiO₂); 2nd (amine addition).

^d Reaction performed without catalyst.

Figure 1. Optimal catalyst loading without pre-activation (neat, 100 °C, 20 min).

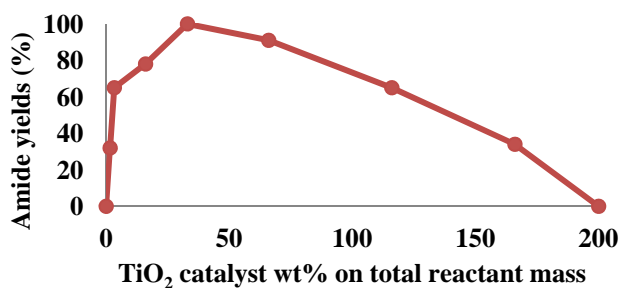

3.1 Recyclability of TiO₂ catalyst

Catalyst recycling was investigated in the solvent-free amidation of benzoic acid (1) with benzylamine (2) (20 min, 100 °C, MW). Over 90% of the catalyst was easily recovered from the reaction mixture after each cycle in a process that included washing with ethyl acetate, centrifugation and drying under vacuum. TiO₂ was regenerated *via* heating in a muffle furnace for 1.5 h at 450 °C. The reused catalyst afforded the amide without any appreciable loss in efficiency for up to five runs (99, 95, 93, 92 and 90%, respectively, Table 3).

Table 3. TiO₂ recycling: MW monomode amidation (100 °C, 20 min) between benzoic acid and benzylamine.

Entry ^a	Cycle ^b	Yield (%)
1	0 ^c	99
2	1	95
3	2	93
4	3	92
5	4	90

^a TiO₂ catalyst 33% wt.

^b TiO₂ catalyst regenerated via heating in muffle furnace (450 °C; 1.5 h).

^c TiO₂ catalyst used directly without any pre-activation.

All the substrates used and the results achieved in the present investigation are summarized in Table 4. The benzylamine that was ortho-substituted with an electron-withdrawing group (chloro) also gave high amide yield (77%) upon reacting with benzoic acid (Entry 3c). Although a little slower than primary amines, even the more sterically hindered 1-phenylethanamine furnished the amide with benzoic acid in good yield (78%) (Entry 2c), while *N*-methylcyclohexanamine and morpholine (entries 5c-6c) were less reactive (67% and 35% respectively). It is interesting to note that, *N*-benzylamide derivatives from different aromatic or aliphatic carboxylic acids can be obtained in good yields with the same protocol (Entries 7-10).

3.2 IR spectroscopy of adsorbed benzoic acid

For the sake of operational condition simplicity, the catalyst was used as received or after calcination in a muffle furnace and subsequent re-exposure to ambient air at room temperature, resulting in the extensive rehydration of the TiO₂ particle surface. Hence, in both cases the catalyst was used in a surface hydrated form. Previous studies on the dehydration of this material indicated that a significant number of H₂O molecules remain adsorbed onto the surface after outgassing 100 °C (i.e., the optimized reaction temperature in the present study), under high vacuum,³² which are more severe conditions than in the reactor. On such a basis, an investigation into the adsorption of benzoic acid (giving origin to the highest yield obtained) onto the hydrated catalyst was carried out by in situ IR spectroscopy (Figure 2). Because of the presence of surface hydroxy groups, contributing to the high frequency region of the IR spectrum of TiO₂ together with the stretching modes of adsorbed water molecules, the effect of the absorption of benzoic acid onto these latter must be monitored through the evolution of the band of the δ H₂O deformation mode (signal at 1621 cm⁻¹, curve a). However, the overlapping between this band and part of the spectral pattern of benzoic acid required the substitution of H₂O molecules with D₂O ones, which gave the δ D₂O band at 1200 cm⁻¹ (curve b). To avoid possible D/H isotopic exchange, deuterated benzoic acid molecules, H₅C₆COOD molecules, hereafter BA-d, were used for this experiment.

Table 4. Amidation reactions (100 °C) in the presence of TiO₂ (33.3 wt%) at different reaction time.


R= alkyl, aryl
R'= H, alkyl

Entry	Carboxylic acid	Amine	Time (min)	Product	Yield (%)
1	1	2	20	3	99
			40		100
2	1		20		36
			40		71
			60		78
3	1		20		20
			40		23
			60		77
4	1		20		<1
			40		49
			60		55
5	1		20		17
			40		54
			60		67
6	1		20		14
			40		20
			60		35
7		2	20		49
			40		89
			60		98
8		2	20		70
			40		71
			60		96 (24) ^a
9		2	20		90
			40		93 (77) ^a
			60		95
10		2	20		62
			40		89
			60		92

^a2 Step reaction: 1st (benzoic acid + TiO₂); 2nd (amine addition)

Therefore, BA-d vapors, produced by the sublimation of BA-d crystals contained in a reservoir connected to the IR cell, were dosed onto the D₂O molecule hydrated catalyst.

Figure 2. IR spectra of: (curve a) TiO₂ activated at 450 °C, then contacted with water vapor pressure and subsequently outgassed at b.t. for 30 min; (curve b) after D₂O adsorption/desorption cycles (until attainment of spectra invariance) and subsequent outgassing at b.t. for 30 min; (curves c-h) increasing amounts of BA-d adsorbed from the vapor phase. Inset: zoomed view of the 1215–1165 cm⁻¹ range of the spectra from D₂O irreversibly adsorbed at b.t. (curve b) to its complete displacement by BA-d (curve h). The full range spectra are reported in Figure S1 in the Supporting Information.

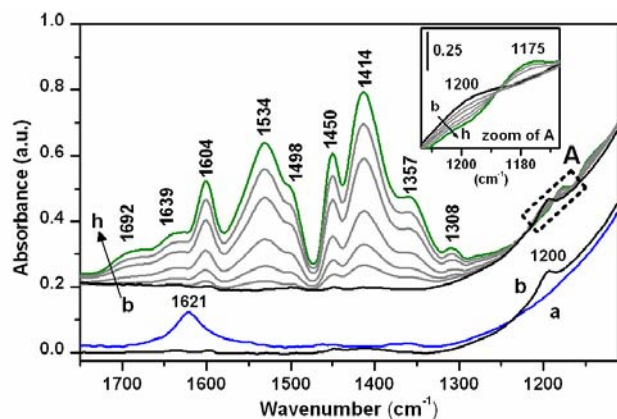

The progressive adsorption of BA-d resulted in the appearance of several components in the 1700–1100 cm⁻¹ range (curves c–h). Besides the signals of C=C and C-H modes of the aromatic ring at 1639, 1604, 1498, 1450, 1357, and 1175 cm⁻¹, bands at 1534 and 1414 cm⁻¹ from the COO⁻ antisymmetric and symmetric stretching modes, respectively, of adsorbed benzoate species, and components at 1692 and 1308 cm⁻¹ assigned to the ν C=O and δ CO_D modes, respectively, of –COOD moieties, were observed.^{33–36}

Focusing on the low frequency part of the spectra, it can be seen that the δ D₂O band at 1200 cm⁻¹ progressively decreases in intensity as the amount of adsorbed BA-d increases and this clearly indicated the displacement of adsorbed D₂O molecules by benzoic acid. This finding indicates that carboxylic acid molecules experience direct interaction with the TiO₂ surface, even when the surface is hydrated, where they can then undergo catalytic activation towards amidation.

It seems reasonable that the activation of the benzoate species carboxylate groups should occur as proposed for formate and acetate species adsorbed on TiO₂, i.e. a withdrawal of the electron density from the C atom of the carboxylate moiety resulting from the interaction of the oxygen atoms of such group with surface Ti⁴⁺ ions, acting as Lewis acid centres.²⁸ The investigation of the possible activation of benzoic acid molecules adsorbed in a non-deprotonated form will represent a future extension of this study.

Conclusions

Herein we have described a novel, efficient solvent-free protocol for the amidation reaction using non-toxic and inexpensive TiO₂ powder. The advantages of this environmentally benign and safe protocol include: a simple

reaction setup, very mild reaction conditions and high product yields (significantly more convenient than non-catalysed processes),²⁷ short reaction times and catalyst recycling.

Acknowledgements

This work was supported by the FP7-NMP-2012 project MAPSYN grant n° 309376 and by project ORTO11RRT5 funded by University of Torino and Compagnia di San Paolo.

Notes and references

^a Dipartimento di Scienza e Tecnologia del Farmaco, and Interdepartmental Centre “Nanostructured interfaces and surfaces- NIS, University of Turin, Via P. Giuria 9, 10125 Torino (Italy)

^b Departamento de Química, Universidade Federal de Santa Maria, 97105-900, Santa Maria, RS, Brazil

^c Department di Chimica and Interdepartmental Centre “Nanostructured interfaces and surfaces- NIS , University of Turin, Via P. Giuria 7, 10125 Torino (Italy)

*Corresponding author.

Tel.: +39 011 670 7684; fax: +39 011 670 7687.

E-mail address: giancarlo.cravotto@unito.it

† Electronic Supplementary Information (ESI) available: IR spectra in the 3800–1100 cm⁻¹ range and NMR spectra of the characterization of product. See DOI: 10.1039/b000000x/

- 1 V. R. Pattabiraman, J. W. Bode, *Nature*, 2011, **480**, 471.
- 2 J. A. Mitchell, E. E. Reid, *J. Am. Chem. Soc.*, 1931, **53**, 1879.
- 3 E. E. Shepard, H. D. Porter, J. F. Noth, C. K. Simmans, *J. Org. Chem.*, 1952, **17**, 568.
- 4 E. Valeur, M. Bradley, *Chem. Soc. Rev.*, 2009, **38**, 606.
- 5 U. Schmidt, M. Dietsche, *Angew. Chem., Int. Ed. Engl.*, 1982, **21**, 143.
- 6 M. Thorsen, T. P. Andersen, U. Pedersen, B. Yde, S. Lawesson, *Tetrahedron*, 1985, **41**, 5633.
- 7 D. J. C. Constable, P. J. Dunn, J. D. Hayler, G. R. Humphrey, J. L. Leazer, R. J. Linderman, K. Lorenz, J. Manley, B. A. Pearlman, A. Wells, A. Zaks, T. Y. Zhang, *Green Chem.*, 2007, **9**, 411.
- 8 *Microwaves in Organic Synthesis*, 3rd Edition (2012) Ed. by A. De La Hoz and A. Loupy Springer Science, 233 Spring Street, New York, NY 10013, U.S.A.
- 9 W. J. Comerford, J. H. Clark, D. J. Macquarrie, S. W. Breeden, *Chem. Commun.*, 2009, **18**, 2562.
- 10 M. Hosseini-Sarvari, H. Sharghi, *J. Org. Chem.*, 2006, **71**, 6652.
- 11 P. S. Chaudhari, S. D. Salim, E. V. Sawant, K. G. Akamanchi, *Green Chem.*, 2010, **12**, 1707.
- 12 R. M. Lanigan, P. Starkov, T. D. Sheppard, *J. Org. Chem.*, 2013, **78**, 4512.
- 13 J. R. Dunetz, Y. Xiang, A. Baldwin, J. Ringling, *Org. Lett.*, 2011, **13**, 5048.
- 14 D. Garella, A. Barge, D. Upadhyaya, Z. Rodríguez, G. Palmisano, G. Cravotto, *Synth. Commun.*, 2010, **40**, 120.
- 15 G. Palmisano, W. Bonrath, L. Boffa, D. Garella, A. Barge, G. Cravotto, *Adv. Synth. Catal.*, 2007, **349**, 2338.

- 16 R. Morschhäuser, M. Krull, C. Kayser, C. Boberski, R. Bierbaum, P. A. Püschner, T. N. Glasnov, C. O. Kappe, *Green Process Synth.*, 2012, **1**, 281.
- 17 C. Liana Allen, A. Rosie Chhatwal, J. M. J. Williams, *Chem. Commun.*, 2012, **48**, 666.
- 18 R. M. Lanigan, T. D. Sheppard, *Eur. J. Org. Chem.*, 2013, **33**, 7453.
- 19 D. W. Bahnemann, S. N. Kholuiskaya, R. Dillert, A. I. Kulak, A. I. Kokorin, *Appl. Catal. B*, 2002, **36**, 161.
- 20 M. Hosseini-Sarvari, H. Sharghi, S. Etemad, *Helv. Chim. Acta*, 2008, **91**, 715.
- 21 U. Diebold, *Surface Science Reports*, 2003, **48**, 53.
- 22 M. R. Hoffmann, S. T. Martin, W. Y. Choi, D. W. Bahnemann, *Chem. Rev.*, 1995, **95**, 69.
- 23 A. Fujishima, X. T. Zhang, D. A. Tryk, *Surf. Sci. Rep.*, 2008, **63**, 515.
- 24 S. Nagarajan, P. Ran, P. Shanmugavelan, M. Sathishkumar, A. Ponnuswamy, K. S. Nahm, G. G. Kumar, *New J. Chem.*, 2012, **36**, 1312.
- 25 C. Vila, M. Rueping, *Green Chem.*, 2013, **15**, 2056.
- 26 M. Hosseini-Sarvari, E. Sodagar, M. M. Doroodmand, *J. Org. Chem.*, 2011, **76**, 2853.
- 27 E. Gelens, L. Smeets, L. A. J. M. Sliedregt, B. J. van Steen, C. G. Kruse, R. Leursa, R. V. A. Orru, *Tetrahedron Lett.*, 2005, **46**, 3751.
- 28 C. Deiana, Y. Sakhno, M. Fabbiani, M. Pazzi, M. Vincenti, G. Martra, *ChemCatChem*, 2013, **5**, 2832.
- 29 M. Takeuchi, K. Sakamoto, G. Martra, S. Coluccia, M. Anpo, *J. Phys. Chem. B*, 2005, **109**, 15422.
- 30 U. Schona, J. Messinger, S. Eichner, A. Kirschning, *Tetrahedron Lett.*, 2008, **49**, 3204.
- 31 M. A. Herrero, J. M. Kremsner, C. O. Kappe, *J. Org. Chem.*, 2008, **73**, 36.
- 32 C. Deiana, E. Fois, S. Coluccia, G. Martra, *J. Phys. Chem. C*, 2010, **114**, 21531.
- 33 Y. Kim, K. Machida, *Spectrochimica Acta*, 1986, **42A**, 881.
- 34 S. G. Stepanian, I. D. Reva, E. D. Radchenko, G. G. Sheina, *Vibrational Spectroscopy*, 1996, **11**, 123.
- 35 K. D. Dobson, A. J. McQuillan, *Spectrochimica Acta Part A*, 2000, **56**, 557.
- 36 L.-F. Liao, C.-F. Lien, D.-L. Shieh, F.-C. Chen, J.-L. Lin, *Phys. Chem. Chem. Phys.*, 2002, **4**, 4584.