# Chemical Science



# **EDGE ARTICLE**

View Article Online
View Journal | View Issue



Cite this: Chem. Sci., 2015, 6, 3965

Received 4th March 2015

Accepted 28th April 2015 DOI: 10.1039/c5sc00789e

www.rsc.org/chemicalscience

# Chemical looping of metal nitride catalysts: low-pressure ammonia synthesis for energy storage†

R. Michalsky, \*abc A. M. Avram, ‡a B. A. Peterson, §a P. H. Pfromma and A. A. Peterson<sup>b</sup>

The activity of many heterogeneous catalysts is limited by strong correlations between activation energies and adsorption energies of reaction intermediates. Although the reaction is thermodynamically favourable at ambient temperature and pressure, the catalytic synthesis of ammonia ( $NH_3$ ), a fertilizer and chemical fuel, from  $N_2$  and  $H_2$  requires some of the most extreme conditions of the chemical industry. We demonstrate how ammonia can be produced at ambient pressure from air, water, and concentrated sunlight as renewable source of process heat *via* nitrogen reduction with a looped metal nitride, followed by separate hydrogenation of the lattice nitrogen into ammonia. Separating ammonia synthesis into two reaction steps introduces an additional degree of freedom when designing catalysts with desirable activation and adsorption energies. We discuss the hydrogenation of alkali and alkaline earth metal nitrides and the reduction of transition metal nitrides to outline a promoting role of lattice hydrogen in ammonia evolution. This is rationalized *via* electronic structure calculations with the activity of nitrogen vacancies controlling the redox-intercalation of hydrogen and the formation and hydrogenation of adsorbed nitrogen species. The predicted trends are confirmed experimentally with evolution of 56.3, 80.7, and 128  $\mu$ mol  $NH_3$  per mol metal per min at 1 bar and above 550 °C *via* reduction of  $Nn_6N_{2.58}$  to  $Nn_4N$  and hydrogenation of  $Nn_2N_2$  and  $Nn_3N_2$  and  $Nn_4N_3$  and hydrogenation of  $Nn_3N_3$  and  $Nn_4N_3$  and hydrogenation of  $Nn_4N_3$  and  $Nn_4N_3$  and hydrogenation of  $Nn_4N_3$  and  $Nn_4N_3$  and hydrogenation of  $Nn_4N_3$  and  $Nn_4N_3$  and  $Nn_4N_3$  and  $Nn_4N_3$  and

### 1. Introduction

Ammonia is one of the most important synthetic chemicals in today's economy. With an annual production of about 162 million metric tons,  $^1$  NH $_3$  is irreplaceable as a fertilizer, responsible for growing the food for approximately half of the world's population. $^{2,3}$  However, the catalytic synthesis of NH $_3$  from N $_2$  and H $_2$  is realized at some of the most severe process conditions of the chemical industry, *i.e.*, about 300 bar and 400–500 °C (ref. 4 and 5) (the Haber–Bosch process), and consumes

energy at 28-166 GJ per ton NH3 (ref. 1 and 5) in the form of natural gas, coal, or Naphtha;1 this is 1-2% of the world's annual energy production.6 About 15% of these net energy requirements are consumed for the technologically sophisticated high-pressure operations alone.1 The fossil-fuel dependence links food security to natural gas price fluctuations and results in net CO<sub>2</sub> emissions of 1.9 tons (H<sub>2</sub> generation via steam reforming of natural gas) to 16.7 tons (H<sub>2</sub> generation via partial oxidation of coal) per ton NH3.1 Economies of scale dictate the need for large facilities producing typically 1000-3000 tons NH3 per day,1 which requires a highly developed infrastructure for production and distribution.2 The conceivable development of a catalyst for a low-pressure and lowtemperature Haber-Bosch process could theoretically alleviate these conditions. Although thermodynamically favorable at ambient temperature and pressure, no catalyst has been found that establishes reasonable reaction rates at these conditions,7 which has been rationalized with the scaling of the activation energy for the N2 dissociation and the adsorption energy of nitrogen at the catalyst surface.7-9

Beyond its irreplaceable use in agriculture, the use of NH<sub>3</sub> as a fuel is an attractive proposition since it is easily liquefied, rendering it a stable one-way hydrogen carrier and one of the most energy-dense zero-carbon fuels<sup>10,11</sup> that can be used as a direct substitute for fossil fuels in internal combustion engines.<sup>12</sup> This, and the prospect of zero-CO<sub>2</sub>-emission vehicles, have motivated the development of the "AmVeh" car prototype

<sup>&</sup>lt;sup>a</sup>Department of Chemical Engineering, Kansas State University, 1005 Durland Hall, Manhattan, Kansas 66506, USA. E-mail: michalskyr@ethz.ch; Tel: +41-44-6338383 <sup>b</sup>School of Engineering, Brown University, 184 Hope Street, Providence, Rhode Island 02912, USA

Department of Mechanical and Process Engineering, ETH Zürich, 8092 Zürich, Switzerland

<sup>†</sup> Electronic supplementary information (ESI) available: Experimental and computational details, free energy plots for the NH $_3$  evolution and N $_2$  reduction with Co $_3$ N/Co, Fe $_4$ N/Fe, Mn $_5$ N $_2$ /Mn $_4$ N, Mo $_2$ N/Mo, CrN/Cr $_2$ N, TaN/Ta $_2$ N, NbN/Nb $_2$ N, Li $_3$ N/LiH, Ba $_3$ N $_2$ /BaH $_2$ , Sr $_3$ N $_2$ /SrH $_2$ , and Ca $_3$ N $_2$ /CaH $_2$ , surface oxidation energetics,  $\Delta G_{\rm vac}[{\rm NH}_{xr}^*~y{\rm H}^*]$  based on gas phase H $_2$  as hydrogen source, NH $_3$  evolution with Fe-doped Mn $_4$ N, NH $_3$  evolution with Mn $_6$ N $_2$ .58, Ca $_3$ N $_2$  and Sr $_2$ N after correcting for partial nitride hydrolysis, NH $_3$  yield from Ca $_3$ N $_2$   $\nu$ s. time and H $_2$  gas flow rate. See DOI: 10.1039/c5sc00789e

<sup>‡</sup> Present address: College of Engineering, 4183 Bell Engineering Center, University of Arkansas, Fayetteville, Arkansas 72701, USA.

<sup>§</sup> Present address: Department of Chemical and Biological Engineering, Missouri University of Science and Technology, 143 Schrenk Hall, Rolla, Missouri 65409, USA.

**Chemical Science Edge Article** 

fueled by a 70% NH<sub>3</sub>/30% gasoline blend. <sup>13</sup> Current combustion research is focused on increasing the energy substitution by NH<sub>3</sub> and improving the exhaust treatment for removing uncombusted NH<sub>3</sub>.13,14 Additionally, NH<sub>3</sub> can be used in alkaline fuel cells that decompose NH3 into N2 and H2 fuel15 for direct electricity generation.<sup>16</sup> The development of the electrocatalysts and the cell design are currently limiting the costs and efficiency of this technology.16 The synthesis of ammonia as a "solar fuel",17 could conceivably be deployed beginning with the electrolysis of water with photovoltaic electricity18 (the generated H2, however, would require massive investments into infrastructure for compression, storage and transport, hindering its direct use). Instead, H<sub>2</sub> could be employed for the synthesis of more practical liquid ammonia-based fuels via the conventional Haber-Bosch process. However, this technology requires sophisticated multi-step high-pressure and hightemperature unit operations and high-value electricity to operate these units due to the limited activity of the employed heterogeneous catalysts. 1,2,19

One proposed means to circumvent the high-pressure and high-temperature requirements of the Haber-Bosch process is the electrochemical reduction of N2 to synthesize NH3 with solar-derived photovoltaic electricity at ambient pressure and temperature.20-22 NH3 evolution at the cathode becomes thermodynamically favorable at an equilibrium potential of 0.1 V vs. the reversible hydrogen electrode, RHE, 20,21 and electronic structure calculations have suggested materials may be found that would liberate NH<sub>3</sub> at about -0.5 V vs. RHE. <sup>21,23,24</sup> However, no suitable electrocatalyst has been identified experimentally for these potentials - the observed rates of NH3 evolution are low and the best reported Faradaic efficiencies are in the order of 0.2-2%, 20,25 while more negative (stronger) potentials decrease the Faradaic efficiency further due to the competing hydrogen evolution reaction.

This article introduces an alternative approach: splitting of a catalytic reaction into two separate reaction steps that are facilitated with a looped metal compound catalyst. We demonstrate this approach with looped metal nitride catalysts for solar-driven low-pressure synthesis of ammonia. Solar-driven thermochemical N2 reduction could circumvent the high-pressure requirements of the Haber-Bosch process and the energetic deficiencies of the electrochemical N2 reduction. This approach separates the NH3 synthesis into two reaction steps:26-29 first, N2 is reduced, typically, with a metal oxide and concentrated sunlight at elevated temperatures yielding a metal nitride. In a second step, the metal nitride is oxidized with H<sub>2</sub>O to yield NH<sub>3</sub> and the restored metal oxide at lower temperatures. On paper, the optimization of the reactive materials30,31 and of the solar radiation receiver-reactor technology32 could allow us to approach solar-to-fuel energy conversion efficiencies of 70-75%, for solar radiation concentrated 5000-fold to 800-1500 °C.33 However, while NH<sub>3</sub> can be formed at 1 bar and 200-500 °C by the oxidation of certain metal nitrides with H<sub>2</sub>O, <sup>27,34,35</sup> recycling the metal oxide requires either a chemical reducing agent, such as biomass and/or syngas, or temperatures above 1500 °C.<sup>26-29</sup>

We propose production of NH3 and O2 from H2O and N2, without a sacrificial reducing agent and at moderate temperatures, via solar-driven cleavage of H<sub>2</sub>O into H<sub>2</sub> and O<sub>2</sub> (ref. 30 and 31) and subsequent fixation and hydrogenation of N2 with H2 into NH3 at 1 bar and up to 800 °C using a looped metal nitride catalyst and concentrated solar energy. Looped metal nitrides may decouple scaling of the nitrogen adsorption energy with the activation energy for N2 dissociation that typically limits the activity of Haber-Bosch catalysts,7 since the chemical potential of a metal nitride can be utilized in a lowtemperature oxidation liberating NH3, while N2 can be reduced via recycling the metal nitride at elevated temperatures. At the process scale, this approach does neither require electricity for NH<sub>3</sub> formation nor the infrastructure for supplying natural gas or coal and the know-how and technology for high-pressure operations. As indicated by our previous net-present value analysis of solar-driven NH<sub>3</sub> synthesis via metal nitride hydrolysis,26 such a process can be economically more attractive in geographically, economically, or politically isolated regions than NH<sub>3</sub> from large-scale Haber-Bosch plants.

In a broader context, looped nitride catalysis is analogous to looped oxide catalysis with reduced metal oxides that provide oxygen vacancies for the abstraction of oxygen from, for instance, bio-oils upgraded with H2 into hydrocarbons.36 Looped nitride catalysts provide active lattice nitrogen that is converted with H2 into NH3 and nitrogen vacancies, with ideally high selectivity for NH3 and no formation of N2 and N2H4. This is in contrast to the activity of redox materials, for instance, for solar-driven splitting of CO2 and H2O with total selectivity for CO, H2, and O2. 33,37 In turn, established computational tools for the rational design of heterogeneous catalysts and electrocatalysts, such as free energy minimization to determine reaction paths, 38,39 can be utilized to develop reducible metal nitride catalysts. In the following two Sections we employ electronic structure theory to determine and describe limiting reaction energetics for metal nitrides. Comparable to chemical looping applications, the oxygen vacancies of a looped oxide may be regenerated at high temperatures with concentrated solar energy, while the nitrogen vacancies of a looped nitride are refilled via solar-driven N2 reduction. While we discuss trends in the bond strength of nitrogen adsorbates and lattice nitrogen, the presented principles are expected to apply analogously to the bond strength of oxygen, that governs the adsorption of oxygen at electrocatalysts for the oxygen reduction and evolution reactions (ORR/OER),40,41 the reversible oxygen vacancy formation at metal oxide surfaces for selective deoxygenation,42 and the oxygen exchange capacity of metal oxide redox materials for solar-driven CO2 and H2O splitting. 31,33,37,43 The discussed metal nitrides form a bridge between materials with weak metal-nitrogen bonds for nitrogen activation44-46 and materials with strong metal-nitrogen bonds for hydrogen storage, 10,11,47,48 such as certain Li-based compounds which may reversibly release H2 at reasonable pressures and temperatures (e.g., 0.4-20 bar and 195-285 °C for Li<sub>3</sub>N/Li<sub>2</sub>NH)<sup>47</sup> and that ideally do not liberate NH3.49

In this article we suggest design principles - which we derive from both electronic structure calculations and experiments that can inform the design of a metal nitride for solar-driven ammonia synthesis. Section 2.1 outlines the ammoniasynthesis potential of metal nitrides that facilitate the incorporation of hydrogen into the bulk crystal lattice. This is rationalized in Section 2.2 via electronic structure calculations that describe how nitrogen vacancies control  $NH_3$  evolution at the atomic scale. Sections 2.3 and 2.4 quantify the reaction kinetics of  $NH_3$  evolution and experimentally demonstrate the augmented conversion of lattice nitrogen via hydrogenation of metal nitrides relative to the reduction of metal nitrides.

#### 2. Results and discussion

**Edge Article** 

#### 2.1 Thermochemical reactivity of metal nitride catalysts

We start by using literature data to provide basic reactivity principles for nitrides and to outline the pressure and temperature conditions of the proposed ammonia production via chemical looping of metal nitride catalysts. Similar to the Sabatier principle in catalysis, 7,21,45 producing NH3 from N2 and H<sub>2</sub> via looping of a metal nitride catalyst should have an optimum stability of the metal-nitrogen bond. At one extreme, thermally unstable nitrides - such as Co<sub>3</sub>Mo<sub>3</sub>N, Ni<sub>3</sub>N, Cu<sub>3</sub>N and Zn<sub>3</sub>N<sub>2</sub> - have been shown to yield much NH<sub>3</sub> via denitridation with H2 at about 250-400 °C.44,46 However, the latter three materials are too unstable to be regenerated with N2 at 1 bar46 and a completely reversible recycling of Co<sub>3</sub>Mo<sub>3</sub>N from the formed Co<sub>6</sub>Mo<sub>6</sub>N requires long-time heating for 4 h in H<sub>2</sub>/N<sub>2</sub>.44 On the other extreme, some more stable metal nitrides, when reacted with H2, absorb hydrogen reversibly yielding mixtures of metal imide, amide and hydride (e.g., Li2NH, LiNH2 and LiH from the reaction of Li<sub>3</sub>N with H<sub>2</sub>), rather than being selective to NH3.47,48 These nitrides can liberate some NH3 at elevated temperatures in the presence of H<sub>2</sub>, e.g., from LiNH<sub>2</sub> above 300 °C (ref. 47) and from Ca<sub>3</sub>N<sub>2</sub> above 600 °C.<sup>50</sup> Ideally, an intermediate metal-nitrogen bond strength would balance these

In principle, the reduction of a metal nitride yields NH<sub>3</sub> and a lower nitride phase:

$$\mathbf{M}_{a}\mathbf{N}_{b} + \frac{3\delta}{2}\mathbf{H}_{2} \leftrightarrow \mathbf{M}_{a}\mathbf{N}_{b-\delta} + \delta\mathbf{N}\mathbf{H}_{3} \tag{1}$$

where M represents a metal, a and b are stoichiometric constants and  $\delta$  is the amount of lattice nitrogen extracted. The cycle can be closed if the solid is regenerated with N<sub>2</sub>:

$$\mathbf{M}_{a}\mathbf{N}_{b-\hat{o}} + \frac{\delta}{2}\mathbf{N}_{2} \leftrightarrow \mathbf{M}_{a}\mathbf{N}_{b}$$
 (2)

Ideally, both reactions would have an exergonic region of temperature space, such that  $NH_3$  is synthesized via a temperature-swing operation. Fig. 1A shows thermodynamic calculations of both reactions as functions of temperature for some representative systems. Unfortunately, none of these reactions exhibits this characteristic; instead, this figure generally identifies  $NH_3$  evolution to be endergonic and  $N_2$  reduction to be exergonic, except for  $Fe_4N$  and  $Co_3N$  (ESI†) with reversed reaction energetics. This can be understood due to the low thermal stability of  $Fe_4N$  and  $Co_3N$ .

To understand these trends, Fig. 2A shows the free energy of NH<sub>3</sub> evolution vs. the product of the number of d-electrons in the metal ground state,  $N_{\rm d}$ , and the energy of these electrons,  $E_{\rm d}$ . The analysis suggests increasing NH<sub>3</sub> evolution and decreasing stability of the metal-nitrogen bond with increasing occupancy of the d-states, which indicates their antibonding character. This phenomena is well known from the interaction of adsorbates at transition-metal surfaces. 52 While we did not include Ni<sub>3</sub>N, Cu<sub>3</sub>N and Zn<sub>3</sub>N<sub>2</sub> in this analysis due to limited thermodynamic data, the high NH3 yields with these unstable metal nitrides46 can be understood due to an even higher number of d-electrons, relative to Fe<sub>4</sub>N. We suggest that the trade-off between NH3 evolution and N2 reduction may be optimized for doped transition-metal nitrides by targeting properties intermediate to those of Mn and Fe, that is, an  $N_dE_d$ of about -50 eV. Since the correlation of d-state occupancy and nitride reactivity is linked through the stability of the metalnitrogen bond, for a ternary system  $N_dE_d$  may be defined in first approximation as the arithmetic average of the value for the metals that form metal-nitrogen bonds.

Instead, the yield of  $\mathrm{NH}_3$  could be increased with a material that facilitates exergonic  $\mathrm{NH}_3$  evolution via metal nitride oxidation at low temperatures and exergonic  $\mathrm{N}_2$  reduction at higher temperatures. We suggest that this can be achieved by partially substituting the lattice nitrogen with hydrogen, as we examine for the reaction:

$$\mathbf{M}_{a}\mathbf{N}_{b}\mathbf{H}_{c} + \frac{(3\delta + \varepsilon)}{2}\mathbf{H}_{2} \leftrightarrow \mathbf{M}_{a}\mathbf{N}_{b-\delta}\mathbf{H}_{c+\varepsilon} + \delta\mathbf{N}\mathbf{H}_{3}$$
 (3)

where c is a stoichiometric constant and  $\varepsilon$  is the amount of incorporated lattice hydrogen. Fig. 1B shows an analogous plot for this reaction and suggests that the substitution of the nitrogen vacancies with hydrogen yields NH<sub>3</sub> exergonically at relatively low temperatures. The closing of the cycle:

$$\mathbf{M}_{a}\mathbf{N}_{b-\delta}\mathbf{H}_{c+\varepsilon} + \frac{\delta}{2}\mathbf{N}_{2} \leftrightarrow \mathbf{M}_{a}\mathbf{N}_{b}\mathbf{H}_{c} + \frac{\varepsilon}{2}\mathbf{H}_{2} \tag{4}$$

now has a negative slope - making it exergonic at elevated temperatures - since the evolution of H<sub>2</sub> is entropically favored at elevated temperatures. This feature theoretically circumvents the limited activities of typical Haber-Bosch catalysts due to scaling of the adsorption energies of nitrogen-containing surface species and the activation energy for the N2 dissociation. This may be achieved using a metal nitride that liberates NH<sub>3</sub> via oxidative hydrogenation with H<sub>2</sub> at relatively low temperatures. The chemical potential of the nitride is thereafter re-established via reductive N<sub>2</sub> dissociation at ambient pressure and moderately elevated temperatures. In these materials M is an alkali or alkaline earth metal, and thus we see a correlation with the bonding valance s-electrons in the metal ground state, shown with Fig. 2B. The data indicates that the average energy of the s-states, i.e., the s-band center, can be employed as an approximate descriptor of the reactivity of complex metal nitrides that allow for hydrogen intercalation. We note the deviation of Li-based materials from the correlation of the alkaline earth metal-based compounds can be understood due to the alkali-nature of Li. Generally, such incorporation of Chemical Science

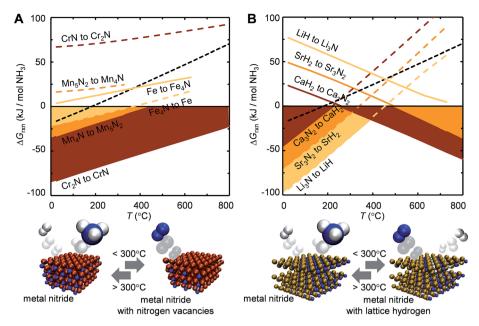


Fig. 1 Ammonia synthesis at 1 bar and up to 800 °C (computed from tabulated free energy data)<sup>51</sup> via (A) metal nitride reduction with H<sub>2</sub> (eqn (1), dashed lines) and N<sub>2</sub> reduction with reduced metal nitrides (eqn (2), solid lines) and (B) metal nitride hydrogenation (eqn (3), dashed line) and N<sub>2</sub> reduction with metal hydrides (eqn (4), solid line). Shaded regions mark exergonic reactions. The equilibrium of NH<sub>3</sub> with 3/2H<sub>2</sub> and 1/2N<sub>2</sub> is shown as reference at 1 bar (dotted line; negative values corresponding to NH<sub>3</sub> evolution).

hydrogen into the solid is desirable for a solar-driven thermochemical ammonia synthesis as it enables lower temperature ammonia evolution.

#### 2.2 Formation of nitrogen vacancies vs. lattice hydrogen

This Section uses electronic structure calculations to outline how nitrogen vacancies control the intercalation of hydrogen and the evolution of  $NH_3$ , focusing on the (0001) surfaces of  $Mn_2N$  and  $Sr_2N$ . To quantify the reactivity of these materials, Table 1 shows free energy changes for key vacancy and surface reactions. We can see a net-energy penalty for forming surface and bulk nitrogen vacancies that is by more than 1 eV higher for  $Sr_2N(0001)$  than for  $Mn_2N(0001)$ . The energy penalty for the

nitrogen vacancy migration into the bulk, *i.e.*,  $\Delta G_{\rm vac, bulk} - \Delta G_{\rm vac}$ , is about equal. This suggests that the nitrogen vacancies of  $\rm Sr_2N(0001)$  require more energy to be formed and are more reactive than those of  $\rm Mn_2N(0001)$ . This is a first indicator for the trend of surface adsorbates such as H\* to fill vacancies. The strong hydrogen binding indicates that in the presence of  $\rm H_2$  both surfaces are expectedly covered with H\*.

To understand the reaction mechanism of the lattice nitrogen with surface hydrogen, Fig. 3A and B show the energetics of forming 1/4 ML  $v_{\rm N}$  at Mn<sub>2</sub>N(0001) and Sr<sub>2</sub>N(0001) yielding NH<sub>x</sub>\* (x=0,1,2 or 3) from surface hydrogen (and partly H<sub>2</sub> gas, in cases where 1 ML H\* does not supply enough hydrogen to yield a specific H\*/NH<sub>x</sub>\* surface coverage). The analysis points out a few general trends: the conversion of




Fig. 2 Scaling of the free energy of the  $NH_3$  evolution at 25 °C (computed from tabulated free energy data as described in Section 3.1) via metal nitride (A) reduction and (B) hydrogenation with the product of the number of electrons in the metal ground state, N, and the energy of these electrons, E, in the (A) d-states and (B) s-states. The metal marks the metallic constituent of the composition given with ESI.† Solid lines are fits to the data shown with solid symbols.

 Table 1
 Theoretical reactivity of the (0001) surface

Energy (eV)	Reaction <sup>a</sup>	$Mn_2N$	$Sr_2N$
$\Delta G_{ m vac}$	$N_{lat}^s + \frac{3}{2}H_2 = v_N^s + NH_3$	0.50	1.52
$\Delta G_{ m vac,\ bulk}$	$N_{lat}^{ss} + \frac{3}{2}H_2 = v_N^{ss} + NH_3$	0.82	1.88
$\Delta G_{ m ads}[{ m H}^*]$	$* + \frac{1}{2}H_2 = H^*$	-0.79	-0.45
$\Delta G_{ m ads}[2{ m H}^*]^b \ \Delta G_{ m ads}[{ m H}_2{ m O}^*] \ \Delta G_{ m ads}[{ m OH}^*]$	$2^* + H_2 = 2H^*$ $^* + H_2O = H_2O^*$	-1.30 <sup>c</sup> -1.47	-1.10 $-0.64$ $-2.20$
$\Delta G_{\rm ads}[{ m OH^*, H^*}]$	$* + H_2O = OH^* + \frac{1}{2}H_2$ $2* + H_2O = OH^* + H^*$	-1.81	-2.73

<sup>a</sup> Lat, s, and ss mark the lattice nitrogen, surface and subsurface.
 <sup>b</sup> Dissociative hydrogen adsorption at increased surface coverage of 1/2 ML H\*.
 <sup>c</sup> H<sub>2</sub>O dissociated to OH\* and H\*.

**Edge Article** 




Fig. 3 Free energy diagrams for (A and B) forming  $1/4 \text{ ML } v_N$  yielding  $1/4 \text{ ML } NH_x^*$  and (C and D) hydrogenating  $NH_{x-1}^*$  to  $NH_x^*$  and y=0 (circles), 1/4 (diamonds), 1/2 (squares), and 3/4 (triangles) ML  $H^*$  adatoms on (A and C)  $Mn_2N(0001)$  and (B and D)  $Sr_2N(0001)$  at  $25\,^{\circ}\text{C}$  and 1 bar. Lines are a guide only. The shaded regions mark energetically favourable surface reactions.

lattice nitrogen into v<sub>N</sub> and N\* is exergonic at Mn<sub>2</sub>N(0001) in the absence of H\* and increasingly complicated in the presence of an increasing H\* coverage. That is, H\* appears to act as a surface "poison" for the adsorption of N\* or NH\* at Mn<sub>2</sub>N(0001). Second, while 1/4 ML N\* is not formed on Sr<sub>2</sub>N(0001) with 1/4 ML v<sub>N</sub>, which is independent of the H\* coverage ( $\pm 0.04$  eV), the formation of  $v_N$  at  $Sr_2N(0001)$  is more favorable if the lattice nitrogen yields NH\* or NH<sub>2</sub> in presence of 1/2-3/4 ML H\* relative to 0-1/4 ML H\*. That is, H\* prevents the filling of  $v_N$  at  $Sr_2N(0001)$  by surface nitrogen. Such energetic promotion of the vacancy formation by H\* co-adsorbates is absent at Mn<sub>2</sub>N(0001) where H\* mostly hinders formation of  $NH_x^*$  with x = 0, 1 or 2. We note the endergonic formation of NH<sub>3</sub> that is stabilized by H\* at both surfaces indicates that the direct formation of 1/4 ML NH<sub>3</sub> from lattice nitrogen and 3/4 ML H\* is unlikely. Furthermore, departures and "crossover" from these free energy trends are due to the source of the hydrogen and the rearrangement of adsorbates (ESI†).

Fig. 3C and D show the energy required to hydrogenate adsorbed nitrogen, which indicates a similar trend: the higher the degree of under-coordination of the adsorbed nitrogen at the surface the easier it is to hydrogenate the nitrogen, which involves breaking surface-nitrogen bonds. Fig. 4 shows that these bonds are favorably formed at three-fold metal sites with charge localization between the adsorbate and the nitrogen vacancy. This is opposed, for instance, to three clearly defined metal-carbon bonds for C\* adsorbates at Mo<sub>2</sub>C(001). The most notable exception from this trend is the highly unfavorable hydrogenation of N\* to NH\* at low H\* coverage on Sr<sub>2</sub>N(0001) which is discussed in the following.




Fig. 4 Charge density differences (C and F), in units of the elementary charge per  ${\dot A}^3$  at the height of the adsorbate N nucleus, between (B) N\* at Mn<sub>2</sub>N(0001) with 1/4 ML v<sub>N</sub> and (A) the stoichiometric surface and the balance N, and for the hydrogenation of (D) 1/4 ML N\* to (E) NH\*.

The optimized adsorption geometries are given with Fig. 5. The figure shows intercalation of hydrogen at Sr<sub>2</sub>N(0001) that is not observed at Mn<sub>2</sub>N(0001). In absence of surface hydrogen, the strong Sr-N bonds result in unstable 1/4 ML N\* that is filling the vacancies at Sr<sub>2</sub>N(0001), which is visualized by the identical geometries shown with panels (2a and 2b) of Fig. 5, while Mn<sub>2</sub>N(0001) yields a stable 1/4 ML N\* surface coverage (Fig. 5, panels 1a and 1b). In presence of surface hydrogen, Fig. 5 shows that the energetic promotion of forming 1/4 ML v<sub>N</sub> and NH\* or NH<sub>2</sub>\* at high H\* coverage at Sr<sub>2</sub>N(0001) but not at Mn<sub>2</sub>N(0001) (shown with Fig. 3A and B) is due to filling of  $v_N$  by H\* yielding lattice hydrogen at Sr<sub>2</sub>N(0001) (Fig. 5, panels 2c and 2d vs. 1c and 1d). These calculations show hydrogen intercalating at the surface. The tendency of this lattice hydrogen to diffuse further into the bulk leading to formation of hydrides is outlined in Section 2.1. Finally, hydrogenating 1/4 ML N\* with H\* to NH\* is energetically demanding at Sr<sub>2</sub>N(0001) relative to Mn<sub>2</sub>N(0001) (Fig. 3C and D) since it requires formation of 1/4 ML  $v_N$  at  $Sr_2N(0001)$  (Fig. 5, panels 2e and 2f vs. 1e and 1f).

In summary, the lattice nitrogen activity was outlined to control the formation and hydrogenation of adsorbed nitrogen and the formation of lattice hydrogen. These trends are analogous to the reactivity of the bulk metal nitrides.

#### 2.3 Ammonia from partial reduction of metal nitrides

In the following two Sections we study the role of nitrogen vacancies experimentally by comparing the reactivity of Mn-based transition-metal nitrides to the reactivity of Ca- and Sr-based alkaline earth metal nitrides. This Section characterizes the NH<sub>3</sub> evolution *via* the reduction of manganese nitride.

Fig. 6A shows the evolution of ammonia from the reaction of manganese nitride with  $H_2$ . The yield of  $NH_3$  relative to the lattice nitrogen available for the reaction was at maximum  $\sim$ 8 mol%  $NH_3$  after 60 min at 700 °C. The location of the optimum at an intermediate temperature is presumably due to slow reaction kinetics at lower temperatures and thermal decomposition of  $NH_3$  at higher temperatures. At low  $NH_3$  yields we observe decreasing  $NH_3$  yields with time, which is presumably due to partial stripping of  $NH_3$  with the  $H_2$  routed through the liquid absorbent. Since we observe this effect only for  $NH_3$  yields between  $10^{-5}$  to  $3 \times 10^{-3}$ ,  $NH_3$  stripping is assumed to not significantly affect  $NH_3$  evolution with higher yields above

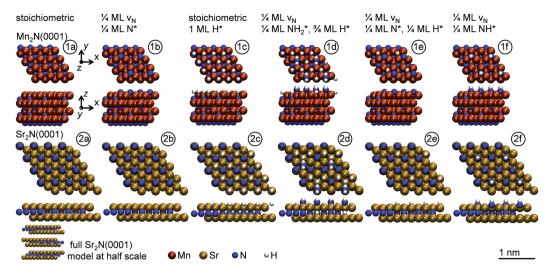


Fig. 5 Optimized adsorption geometries for the indicated surface conditions (top two lines) of (1a to 1f)  $Mn_2N(0001)$  and (2a to 2f)  $Sr_2N(0001)$ . The view along the y-axis of the  $Sr_2N(0001)$  model is limited to the upper layer.

300 °C. More important, the ammonia evolution at 550 and 700 °C is described best by a reaction- or gas diffusion-limited kinetic model with an activation energy estimated from an Arrhenius plot of 98  $\pm$  7 kJ  $\rm mol^{-1}$ . This indicates that the kinetics of the NH $_3$  formation with H $_2$  are more sensitive to temperature than the steam hydrolysis of Mn $_4$ N with an activation energy of 63 kJ  $\rm mol^{-1}$ , where oxygen intercalation fills the nitrogen vacancies.  $^{34}$ 

Fig. 6B shows the composition of the solid after the reaction with  $H_2$ . Increasing temperature decreases the fraction of  $Mn_6N_{2.58}$  and yields a maximum  $Mn_4N$  fraction near 700 °C. This suggests that  $NH_3$  is formed through the reduction of a higher nitride into a lower nitride phase that contains less nitrogen and that decomposes thermally at 1000 °C to Mn and  $N_2$ . The thickness of the reaction front through a particle with constant volume (*i.e.*,  $L = X_N \rho_{\text{nitride}}^{-1} A_{\text{BET}}^{-1}$ , where  $\rho_{\text{nitride}}$  is the density of the reacting nitride and  $X_N$  is the fraction of liberated lattice nitrogen), can be estimated based on a nitrogen mass balance to be 54 nm or 46 nm for  $NH_3$  evolution at 700 °C from




Fig. 6  $\,$  NH $_3$  evolution via isothermal transition-metal nitride reduction: (A) NH $_3$  yield vs. time and (B) solid weight fractions from the reaction of Mn $_4$ N with H $_2$  at 1 bar vs. temperature. Error bars are via error propagation within a 95% confidence interval. Solid lines are shrinking-core models for the data at 550 °C and 700 °C controlled by the chemical reaction or gas phase diffusion.

 $Mn_6N_{2.58}$  or  $Mn_4N$ , respectively. Fig. 6 suggests that this bulk reaction is limited at the surface: by gas-phase diffusion or the surface reaction, that is by the formation of nitrogen vacancies and the hydrogenation of surface nitrogen. We note, attempting to control the lattice nitrogen reactivity  $\nu ia$  doping  $Mn_4N$  with Fe did not increase the  $NH_3$  evolution at 700 °C (ESI†), which may be due to the catalytic activity of Fe in establishing the chemical equilibrium in  $NH_3$ ,  $N_2$  and  $H_2$  gas mixtures.<sup>4</sup>

For comparison, some metal nitrides that cannot be regenerated with 1 bar  $\rm N_2$  may yield significant quantities of NH<sub>3</sub>. Ni<sub>3</sub>N, Cu<sub>3</sub>N, Zn<sub>3</sub>N<sub>2</sub> and Ta<sub>3</sub>N<sub>5</sub> may liberate 30, 25, 23, and 13 mol% of their lattice nitrogen as NH<sub>3</sub> when reacted for at least 30 min at 250, 250, 400, and 700 °C, respectively. Ammonia yields decrease when reacting H<sub>2</sub> with more stable nitrides: such as to 8 mol% with Co<sub>3</sub>Mo<sub>3</sub>N for 60 min at 400 °C. Manganese nitrides can be formed from N<sub>2</sub> at 1 bar, as shown with Fig. 1A, and spent iron-doped manganese nitrides can be regenerated with N<sub>2</sub>, as shown for three consecutive cycles with Fig. S3.† However, stable performance and long-term stability of metal nitrides, in form of pellets or porous structures for instance, 31,33,37 have to be assessed in the future.

# 2.4 Ammonia from formation of hydrogenated metal nitrides

Some alkali and alkaline earth metal nitrides may yield ammonia exergonically from the reaction with  $\rm H_2$  due to the intercalation of hydrogen, as discussed in Section 2.1. The electronic structure calculations reported in Section 2.2 outline how the reactivity of the bulk metal nitrides correlates with the activity of the nitrogen vacancies. With the experimental results in this Section we show the ready evolution of ammonia and the corresponding hydrogenated metal compounds from the nitrides of Ca and Sr under  $\rm H_2$ .

The liberation of the lattice nitrogen of  $Ca_3N_2$  and  $Sr_2N$  as  $NH_3$  may be limited kinetically at the low temperatures that are favored thermodynamically, as was shown with Fig. 1.

**Edge Article** 

Therefore,  $Ca_3N_2$  and  $Sr_2N$ , as well as  $Mn_6N_{2.58}$  as reference, were reacted with  $H_2$  at 1 bar and a range of temperatures including the low and high end of the spectrum, 220–850 °C. Fig. 7A shows the  $NH_3$  yield over the course of three heating cycles.  $Sr_2N$  liberates  $NH_3$  nearly instantaneously during the initial heating period, which is followed by a continuous and comparably slight increase of the  $NH_3$  yield. The absolute  $NH_3$  yield from  $Ca_3N_2$  is lower than that from  $Sr_2N$ , but both alkaline earth metal nitrides liberate  $NH_3$  faster and in significantly larger quantities than the transition-metal nitride.

The minimum apparent reaction rates of hydrogenating lattice nitrogen with  $H_2$  into  $NH_3$  are estimated with  $0.9 \pm 0.2$ , 1.3  $\pm$  0.4 and 2.1  $\pm$  0.2  $\mu$ mol NH<sub>3</sub> (mol metal  $\times$  s)<sup>-1</sup> for Mn<sub>6</sub>N<sub>2.58</sub>, Ca<sub>3</sub>N<sub>2</sub> and Sr<sub>2</sub>N respectively. Since OH and H<sub>2</sub>O adsorb strongly at alkaline earth metal nitrides (Table 1), this is accounting for partial nitride hydrolysis by traces of adsorbed water, although neither Sr<sub>2</sub>N nor Ca<sub>3</sub>N<sub>2</sub> appeared visually oxidized after the reaction. These reaction rates of Ca<sub>3</sub>N<sub>2</sub> and Sr<sub>2</sub>N and significant formation of up to 12 mol% NH<sub>3</sub> from Ca<sub>3</sub>N<sub>2</sub> that we observed with a late onset between 30-60 min heating at various H2 flow rates (ESI†) indicate that NH3 is formed from the reaction of lattice nitrogen and H2. For comparison, these yields are higher than the previously reported 1 mol% NH<sub>3</sub> from Ca<sub>3</sub>N<sub>2</sub> heated for 120 min at 800 °C in H<sub>2</sub>, which can be understood due to the unfavorable NH3-N2/H2 equilibrium that is established during these early studies by F. Haber, et al.50

The intercalation of hydrogen can be observed for  $Ca_3N_2$  yielding mainly  $Ca_2NH$  and  $Sr_2N$  yielding  $SrH_2$ : Fig. 7B shows the composition of  $Ca_3N_2$ , determined via XRD, after the reaction with  $H_2$ . Increasing temperature increases the formation of  $Ca_2NH$ , with nominally 25 mol% lattice hydrogen. From the yield of  $Ca_2NH$ , the activation energy of the  $NH_3$  evolution is about  $42 \pm 7$  kJ mol $^{-1}$ . However, the different surface morphologies, shown with Fig. 8, and the slightly different BET surface areas, given with Table S1 (ESI†), of the nitrides indicate that this value of the activation energy cannot be compared directly to the activation energy of the  $NH_3$  evolution from




Fig. 7 NH $_3$  evolution via metal nitride hydrogenation at various temperatures: (A) NH $_3$  yield vs. time (arithmetic average of three experiments) from the reactions of  $Ca_3N_2$ ,  $Sr_2N$ , and  $Mn_6N_{2.58}$  with  $H_2$  at 1 bar, shown on the upper panel, and the corresponding temperature profile, on the lower panel; (B) weight fraction of  $Ca_3N_2$  heated for 60 min under  $H_2$  (XRD analyses in air). Error bars are via error propagation within a 95% confidence interval. Solid lines are a guide only.




Fig. 8 Scanning electron micrographs of the metal nitrides.

manganese nitride, given in Section 2.3. The lower activation energy of  $Ca_3N_2$  is, however, qualitatively in agreement with the higher  $NH_3$  evolution rate with  $Ca_3N_2$ , relative to  $Mn_6N_{2.58}$ . Furthermore, a 58% higher  $NH_3$  evolution rate from  $Sr_2N$  with a 16% lower specific surface area relative to  $Ca_3N_2$  indicates that the reported results are not solely due to the available surface area. These results confirm that the intercalation of the two alkaline earth metal nitrides by hydrogen promotes the ammonia evolution from the lattice nitrogen at the surface.

#### Methods

#### 3.1 Thermochemical equilibrium calculations

To guide the design of looped metal nitride catalysts, the thermochemical equilibrium of various bulk metal nitrides, H<sub>2</sub>, and their reaction products was determined at 1 bar and as a function of temperature from tabulated free energy data.<sup>51</sup> Per convention, negative free energy differences mark exergonic reactions.

#### 3.2 Electronic structure calculations

To determine the NH<sub>3</sub>-evolution-controlling mechanism at the atomic scale, hexagonal ζ-Mn<sub>2</sub>N and trigonal Sr<sub>2</sub>N were modeled via density functional theory (DFT), performed with the open-source planewave pseudopotential periodic electronicstructure code DACAPO.53-55 Atomic manipulations were handled in the Atomic Simulation Environment (ASE)56 and exchange-correlation interactions were treated by the revised Perdew-Burke-Ernzerhof (RPBE) functional of Hammer, Hansen, and Nørskov57 derived in the generalized gradient approximation (GGA). A k-point sampling of  $4 \times 4 \times 4$  for bulk and  $4 \times 4 \times 4$ 4 × 1 for surface calculations was used for sampling of the Brillouin zone in the x, y and z directions, with the z direction orthogonal to the surface slab. A Fermi-Dirac smearing of 0.1 eV was used to achieve convergence and results were extrapolated to 0 K. The linesearch BFGS algorithm was employed for relaxing atomic geometries until the maximum force on any unconstrained atom was less than 0.05 eV Å<sup>-1</sup>. To avoid reminiscent stress in the calculations, the lattice constants were chosen as the DFT-calculated lattice constants (i.e., (a, c) =(2.81, 4.44) Å for Mn<sub>2</sub>N, and (3.90, 21.15) Å for Sr<sub>2</sub>N), which are within 2.2% of the experimental values (i.e., (a, c) = (2.84, 4.51)Å for  $Mn_2N_5^{58}$  and (3.86, 20.70) Å for  $Sr_2N^{59}$ ). Calculations for Mn<sub>2</sub>N were spin-polarized. All surface calculations were performed for the (0001) facet with  $2 \times 2 \times 4$  or  $2 \times 2 \times 6$  metal atoms in the x, y and z directions of the  $Mn_2N$  or  $Sr_2N$  slab. The surfaces were modeled with 10 Å of vacuum perpendicular to the surface with the lower layers of the slab constrained to the Chemical Science Edge Article

bulk geometry while the atoms in the upper two layers were always optimized to zero-force positions. The interaction between the dipole moments of surfaces was decoupled *via* introduction of a dipole layer in the vacuum.

The correlated electronic structure of certain metal oxides is not well described with simple GGA methods. This is sometimes addressed by the inclusion of an empirical Hubbard U term that accounts for on-site Coulomb repulsion and exchange interactions, thereby correcting self-interaction errors, when modeling certain metal oxides,60-62 while other metal oxides have been modeled well without the additional U parameter<sup>63</sup> (and references therein). The value of *U* can be determined selfconsistently,62 however, commonly it is chosen by fitting the experimental band gap60 or reaction energetics (resulting in a consistent offset of the free energy of reaction with varying U).<sup>64</sup> Introducing nitrogen into a transition metal lattice may lead to partial electron localization with a minor increase in the metal oxidation state, compared to the presence of lattice oxygen. 65 Hence, transition metal nitrides, including Mn<sub>2</sub>N, are typically modeled without a Hubbard U correction. 23,66 Verifying this and assessing the use of GGA + U methods for metal nitride surfaces is an important point. In a prospective article, we will show how adsorption energies respond to the value of U only for metal compounds that possess a (pseudo) band gap. While Sr<sub>2</sub>N and Mn<sub>2</sub>N are metallic conductors, <sup>58,59</sup> Sr<sub>2</sub>N exhibits localized N 2p states.67 Thus, whether GGA + U methods may improve the accuracy of DFT-computed adsorption energies at Sr<sub>2</sub>N surfaces deserves further study.

To aid in our description of nitride activity from first principles, four free-energies are defined. First,  $\Delta G_{\rm vac}$  is the free energy required to form a nitrogen vacancy,  $v_{\rm N}$ , at the surface:

$$\Delta G_{\text{vac}} \equiv G_{\text{s}}[v_{\text{N}}] - (G_{\text{s}} - G_{\text{N}}^{\text{r}}) \tag{5}$$

where  $G_s$  is the free energy of the intact surface,  $G_s[v_N]$  is the free energy of the surface with 1/4 monolayer (ML, relative to the number of surface metal atoms)  $v_N$  and  $G_N^r$  is the reference energy of nitrogen in the gas phase, respectively.

Next,  $\Delta G_{\text{ads}}[A^*]$  is the adsorption energy of the adsorbate(s) A (an asterisk indicates an adsorbed species):

$$\Delta G_{\text{ads}}[A^*] \equiv G_{\text{s}}[A^*] - (G_{\text{s}} + G_{\text{A}}^{\text{r}}) \tag{6}$$

where  $G_s[A^*]$  is the free energy of the surface with the adsorbate(s) and  $G_A^r$  the free energy of the reference adsorbate(s).

Third,  $\Delta G_{\rm vac}[{\rm NH}_x^*, y{\rm H}^*]$  is the free energy change to create adsorbed NH<sub>x</sub> species while creating nitrogen vacancies and leaving y adsorbed H's at the surface; that is to form 1/4 ML v<sub>N</sub> at a surface with z ML H\* (z = 0, 1/4, 1/2, 3/4 or 1) yielding 1/4 ML NH<sub>x</sub>\* (x = 0, 1, 2 or 3, corresponding to 0, 1/4, 1/2 or 3/4 ML H\*) and y ML H\* remaining at the surface (y = 0, 1/4, 1/2 or 3/4):

$$\Delta G_{\text{vac}}[NH_x^*, yH^*] \equiv G_{\text{s}}[v_N, NH_x^*, yH^*] - (G_{\text{s}}[zH^*] + (x + y - z)G_{\text{H}}^r)$$
(7)

where  $G_s[v_N, NH_x^*, yH^*]$ ,  $G_s[zH^*]$  and  $G_H^r$  are the energy of the surface after or before the formation of  $v_N$  and the reference energy of the balance hydrogen gas.

Finally,  $\Delta G_{\text{hyd}}[\text{NH}_x^*, y\text{H}^*]$  is the energy for hydrogenating  $\text{NH}_{x-1}^*$  with (y+1) pre-adsorbed H\*, leaving  $\text{NH}_x^*$  and  $y\text{H}^*$ :

$$\Delta G_{\text{hyd}}[NH_x^*, yH^*] \equiv G_{\text{s}}[v_N, NH_x^*, yH^*] - G_{\text{s}}[v_N, NH_{x-1}^*, (y+1)H^*]$$
(8)

where  $G_s[v_N, NH_{x-1}^*, (y+1)H^*]$  is the energy of the surface before the hydrogenation.

Details on the local optimization procedures, references energies, conversion of electronic energies to free energies, and adsorption energetics in presence of OH and H<sub>2</sub>O and at oxynitride surfaces are given with ESI.†

#### 3.3 Metal nitride preparation

Manganese was nitridated<sup>34</sup> by heating 2 g Mn in N<sub>2</sub> under two different thermal conditions; first, for 120 min at 700 °C which yielded 59-67 wt% ε-Mn<sub>4</sub>N and 25-34 wt% ζ-Mn<sub>6</sub>N<sub>2.58</sub> (denoted as Mn<sub>4</sub>N), and second, for 240 min at 750 °C which yielded 91-94 wt%  $\zeta$ -Mn<sub>6</sub>N<sub>2.58</sub> (denoted as Mn<sub>6</sub>N<sub>2.58</sub>). We note  $\zeta$ -phase manganese nitride ranges from 28.6-33.3 mol% lattice nitrogen including Mn<sub>5</sub>N<sub>2</sub>, Mn<sub>6</sub>N<sub>2,58</sub>, and Mn<sub>2</sub>N.<sup>58</sup> The nitride characterization is summarized with Table S1 (ESI†). Fe-doped Mn nitride, Fe/Mn<sub>4</sub>N, was prepared by heating 2 g of an equimolar mixture Mn and Fe powder for 120 min in  $N_2$  yielding 26  $\pm$  1 wt%  $\epsilon$ -Mn<sub>4</sub>N and 16  $\pm$  1 wt%  $\zeta$ -Mn<sub>6</sub>N<sub>2.58</sub>. All Mn-containing powders were pretreated at 60 °C for 10 min in air to remove water. Ca<sub>3</sub>N<sub>2</sub> and Sr<sub>2</sub>N<sup>34,68</sup> were prepared by heating 4.4 g metal pieces for 240 min (Ca) or 420 min (Sr) in N2 and milling for about 5 min with mortar and pestle. The fraction of hydroxides formed when handling Ca<sub>3</sub>N<sub>2</sub> or Sr<sub>2</sub>N during the X-ray diffraction (XRD) analysis in air were disregarded in NH3 yield calculations since these materials were otherwise handled in Ar. All  $N_2$  flows were 1.9  $\pm$  0.1  $L_{(STP)}$   $N_2$  min<sup>-1</sup>.

#### 3.4 Reduction of Mn<sub>4</sub>N and Mn<sub>6</sub>N<sub>2.58</sub> with H<sub>2</sub>

To probe the reactivity of manganese nitride,  $651 \pm 2$  mg Mn<sub>4</sub>N containing 3.01  $\pm$  0.01 mmol lattice nitrogen was heated in a quartz boat with a tube furnace at ambient pressure. The tube furnace was a HTF55347C model, Lindberg/Blue, with a quartz tube that was purged before each experiment for 10 min with N2 to remove residual O2 and H2O. The temperature was ramped from 100 to 300 °C or from 400 to 550, 700 and 1000 °C respectively.  $H_2$  was supplied at  $0.5 \pm 0.1 L_{(STP)} H_2 min^{-1}$  and final temperatures were held for 60 min. The gas leaving the furnace was routed through a liquid absorbent consisting of 50  $\pm$  5 mL<sub>(STP)</sub> 10 mM HCl, chilled with ice-cold H<sub>2</sub>O. Five mL samples were taken at 0, 5, 10, 30 and  $60 \pm 0.5$  min after the reaction temperature was reached. These samples were analyzed for NH3 as described below. After 60 min the furnace was cooled to below 100 °C. Solids were stored at 4 °C. All liquids were stored at room temperature. Additionally, the NH<sub>3</sub> evolution from Fe-doped Mn<sub>4</sub>N was quantified (ESI†).

#### 3.5 Hydrogenation of Ca<sub>3</sub>N<sub>2</sub> and Sr<sub>2</sub>N with H<sub>2</sub>

The optimum temperature for reacting  $Ca_3N_2$  with 0.5  $\pm$  0.1  $L_{(STP)}$   $H_2$  min $^{-1}$  was determined using the experimental setup

described in Section 3.4 without the absorption vessel. The powder (476  $\pm$  170 mg, *i.e.*, 6  $\pm$  2 mmol lattice nitrogen) was held for 60 min at 300, 500, 700 and 1000 °C and analyzed for the loss of lattice nitrogen. All Ca-containing solids were stored under Ar at 4 °C. The effect of the H<sub>2</sub> flow rate on the NH<sub>3</sub> yield from Ca<sub>3</sub>N<sub>2</sub> was tested (ESI†). To compare the NH<sub>3</sub> evolution kinetics between metal nitride reduction (Mn<sub>6</sub>N<sub>2.58</sub>) and hydrogenation (Ca<sub>3</sub>N<sub>2</sub> and Sr<sub>2</sub>N), 519  $\pm$  18 mg metal nitride (2.8–7.0 mmol lattice nitrogen) were heated in 0.5  $\pm$  0.1 L<sub>(STP)</sub> H<sub>2</sub> min<sup>-1</sup> from 220 to 850  $\pm$  5 °C. After holding temperatures for 2 min, the furnace was cooled to 250 °C. The temperature change was repeated in triplicate. Liquid samples were taken at 250, 550 and 850 °C while the solids were analyzed after three cycles, reintroduced into the furnace, heated for 120 min at 750 °C in 1.9  $\pm$  0.1 L<sub>(STP)</sub> N<sub>2</sub> min<sup>-1</sup> and analyzed anew.

#### 3.6 Analytical

**Edge Article** 

Solids were weighed (AE260 DeltaRange balance,  $\pm 0.1$  mg, Mettler) and analyzed via XRD (Miniflex II diffractometer, Cutarget X-ray tube, Rigaku, 5–80°  $2\theta$  range, 1 or 10°  $2\theta$  per min scan speed, PDXL Software Version 1.6.0.0 for quantitative solid phase analysis). The XRD analysis was in air which explains minor metal oxide and hydroxide fractions. To confirm N2 reduction energy-dispersive X-ray spectroscopy (EDS) was employed using a S-3500N scanning electron microscope (SEM, 20 keV, Hitachi; Link Pentafet 7021 X-ray detector and Inca Energy X-ray analysis software, both Oxford Instruments). The specific BET surface area, ABET, was analyzed using N2 at NanoScale Inc., Manhattan, KS. NH3 was quantified with an NH<sub>3</sub> Ion Selective Electrode and a pH/ISE Controller model 270 (both Denver Instrument). The concentration of dissolved NH<sub>3</sub> was estimated with zeroing for the signal from pure water. As estimated from the pH change, the formation of N<sub>2</sub>H<sub>4</sub> was negligible relative to NH<sub>3</sub> formation in all reported experiments. The outlet of the absorption vessel was equipped with an NH<sub>3</sub> gas detection tube (0.25-3 or 5-70 ppm NH<sub>3</sub> detection range, Dräger). Ammonia yield,  $Y_{\rm NH_3}$ , is reported as the molar ratio of NH<sub>3</sub> captured by the absorbent at a given time relative to the lattice nitrogen stored in the solid initially. The data is fitted to a kinetic model limited by the reaction or gas phase diffusion (ESI†).

#### 3.7 Chemicals

Mn (99.9%, -325 mesh) and Fe (99.9%, -325 mesh) were from Noah Technologies, Ca (99%, granular) and NH<sub>4</sub>Cl (99.5%) were from Acros, Sr (99%, pieces) was from MP Biomedicals and NaOH (99.6%, pellets) and HCl (12.1 N) were from Fisher Scientific. H<sub>2</sub>O was deionized (Direct-Q 3 UV, Millipore) and degassed with Ar. H<sub>2</sub>, N<sub>2</sub> and Ar (all UHP Zero grade) were from Linweld.

### 4. Conclusions

We have introduced chemical looping of metal nitride catalysts for solar-driven synthesis of ammonia at ambient pressure from overall, water, N<sub>2</sub>, and concentrated sunlight as source of renewable process heat. Augmented NH<sub>3</sub> evolution due to the

formation of lattice hydrogen was correlated to the exergonic character of the hydrogenation of alkali and alkaline earth metal nitrides vs. endergonic reduction of transition-metal nitrides. These trends were confirmed experimentally and rationalized via electronic structure calculations which showed that the lattice nitrogen activity controls hydrogen intercalation and the energetics of forming and hydrogenating adsorbed nitrogen. The energy of the metal d-states was discussed as a quantitative descriptor for the design of ternary metal nitrides with reactivities between those of Fe- and Mn-based nitrides, while the energy of the metal s-states may guide the design of, for instance Li-doped, alkaline earth metal nitrides for an NH<sub>3</sub> evolution promoted by the intercalation of surface hydrogen. Stable NH<sub>3</sub> evolution and long-term mechanical stability of metal nitride catalysts, in form of pellets or porous ceramics for instance, have to be assessed in the future.

## Acknowledgements

Kent E. Hampton is acknowledged for his technical assistance. All glass and quartz ware manufactured at Kansas State University was from James R. Hodgson. The experimental components are based upon work supported by National Science Foundation Grant # 0903701: "Integrating the Socioeconomic, Technical, and Agricultural Aspects of Renewable and Sustainable Biorefining Program, awarded to Kansas State University." Funding by the Center for Sustainable Energy, Kansas State University is kindly acknowledged. The theoretical calculations and analysis were supported by the Office of Naval Research (Young Investigator Award N00014-12-1-0851). Electronic structure calculations were conducted at the Center for Computation and Visualization, Brown University.

#### Notes and references

- 1 I. Rafiqul, C. Weber, B. Lehmann and A. Voss, *Energy*, 2005, **30**, 2487–2504.
- 2 V. Smil, Enriching the Earth: Fritz Haber, Carl Bosch, and the Transformation of World Food Production, The MIT Press, Cambridge, Massachusetts, 2004.
- 3 V. Smil, Nature, 1999, 400, 415.
- 4 G. Ertl, Angew. Chem., Int. Ed., 2008, 47, 3524-3535.
- 5 Z. Kirova-Yordanova, Energy, 2004, 29, 2373-2384.
- 6 S. K. Ritter, Chem. Eng. News, 2008, 86, 53.
- 7 A. Vojvodic, A. J. Medford, F. Studt, F. Abild-Pedersen, T. S. Khan, T. Bligaard and J. K. Nørskov, *Chem. Phys. Lett.*, 2014, **598**, 108–112.
- 8 F. Abild-Pedersen, J. Greeley, F. Studt, J. Rossmeisl, T. R. Munter, P. G. Moses, E. Skúlason, T. Bligaard and J. K. Nørskov, *Phys. Rev. Lett.*, 2007, **99**, 016105.
- 9 R. Michalsky, Y.-J. Zhang, A. J. Medford and A. A. Peterson, J. Phys. Chem. C, 2014, 118, 13026–13034.
- 10 A. Klerke, C. H. Christensen, J. K. Nørskov and T. Vegge, J. Mater. Chem., 2008, 18, 2304–2310.
- 11 C. H. Christensen, T. Johannessen, R. Z. Sørensen and J. K. Nørskov, *Catal. Today*, 2006, **111**, 140–144.
- 12 C. W. Gross and S. C. Kong, Fuel, 2013, 103, 1069-1079.

- 13 http://nh3fuelassociation.org/2013/06/20/the-amveh-an-ammonia-fueled-car-from-south-korea/(retrieved 5/2/14).
- 14 A. J. Reiter and S.-C. Kong, Energy Fuels, 2008, 22, 2963-2971.
- 15 F. Vitse, M. Cooper and G. G. Botte, *J. Power Sources*, 2005, **142**, 18–26.
- 16 J. C. Ganley, J. Power Sources, 2008, 178, 44-47.

**Chemical Science** 

- 17 S. Dahl and I. Chorkendorff, Nat. Mater., 2012, 11, 100-101.
- 18 M. Carmo, D. L. Fritz, J. Merge and D. Stolten, *Int. J. Hydrogen Energy*, 2013, **38**, 4901–4934.
- 19 G. P. Van der Laan and A. Beenackers, *Catal. Rev.: Sci. Eng.*, 1999, **41**, 255–318.
- 20 V. Kordali, G. Kyriacou and C. Lambrou, *Chem. Commun.*, 2000, 1673–1674.
- 21 E. Skúlason, T. Bligaard, S. Gudmundsdóttir, F. Studt, J. Rossmeisl, F. Abild-Pedersen, T. Vegge, H. Jónsson and J. K. Nørskov, *Phys. Chem. Chem. Phys.*, 2012, 14, 1235–1245.
- 22 G. Marnellos and M. Stoukides, Science, 1998, 282, 98-100.
- 23 J. G. Howalt and T. Vegge, Phys. Chem. Chem. Phys., 2013, 15, 20957–20965.
- 24 Y. Abghoui, A. L. Garden, V. F. Hlynsson, S. Björgvinsdóttir, H. Ólafsdóttir and E. Skúlason, *Phys. Chem. Chem. Phys.*, 2015, 17, 4909–4918.
- 25 R. Lan, J. T. S. Irvine and S. W. Tao, Sci. Rep., 2013, 3, 1145.
- 26 R. Michalsky, B. J. Parman, V. Amanor-Boadu and P. H. Pfromm, *Energy*, 2012, **42**, 251–260.
- 27 M. E. Gálvez, A. Frei, M. Halmann and A. Steinfeld, *Ind. Eng. Chem. Res.*, 2007, 46, 2047–2053.
- 28 R. Michalsky and P. H. Pfromm, *AIChE J.*, 2012, **58**, 3203–3213.
- 29 R. Michalsky and P. H. Pfromm, Sol. Energy, 2011, 85, 2642– 2654.
- 30 K. M. Allen, N. Auyeung, N. Rahmatian, J. F. Klausner and E. N. Coker, *JOM*, 2013, **65**, 1682–1693.
- 31 P. Furler, J. Scheffe, M. Gorbar, L. Moes, U. Vogt and A. Steinfeld, *Energy Fuels*, 2012, **26**, 7051–7059.
- 32 W. Villasmil, M. Brkic, D. Wuillemin, A. Meier and A. Steinfeld, *J. Sol. Energy Eng.*, 2014, **136**, 011017.
- 33 M. Romero and A. Steinfeld, *Energy Environ. Sci.*, 2012, 5, 9234–9245.
- 34 R. Michalsky and P. H. Pfromm, *J. Phys. Chem. C*, 2012, **116**, 23243–23251.
- 35 M. H. Yang, A. J. Allen, M. T. Nguyen, W. T. Ralston, M. J. MacLeod and F. J. DiSalvo, *J. Solid State Chem.*, 2013, 205, 49–56.
- 36 C. Hargus, R. Michalsky and A. A. Peterson, *Energy Environ. Sci.*, 2014, 7, 3122–3134.
- 37 W. C. Chueh, C. Falter, M. Abbott, D. Scipio, P. Furler, S. M. Haile and A. Steinfeld, *Science*, 2010, 330, 1797–1801.
- 38 W. L. Zhu, R. Michalsky, O. Metin, H. F. Lv, S. J. Guo, C. J. Wright, X. L. Sun, A. A. Peterson and S. H. Sun, *J. Am. Chem. Soc.*, 2013, 135, 16833–16836.
- 39 A. A. Peterson and J. K. Nørskov, *J. Phys. Chem. Lett.*, 2012, 3, 251–258.
- 40 D. Friebel, V. Viswanathan, D. J. Miller, T. Anniyev, H. Ogasawara, A. H. Larsen, C. P. O'Grady, J. K. Nørskov and A. Nilsson, *J. Am. Chem. Soc.*, 2012, 134, 9664–9671.
- 41 N. M. Marković and P. N. Ross, Surf. Sci. Rep., 2002, 45, 117-229.

- 42 C. Doornkamp and V. Ponec, J. Mol. Catal. A: Chem., 2000, 162. 19-32.
- 43 C. L. Muhich, B. W. Evanko, K. C. Weston, P. Lichty, X. H. Liang, J. Martinek, C. B. Musgrave and A. W. Weimer, *Science*, 2013, **341**, 540–542.
- 44 S. M. Hunter, D. McKay, R. J. Smith, J. S. J. Hargreaves and D. H. Gregory, *Chem. Mater.*, 2010, 22, 2898–2907.
- 45 C. J. H. Jacobsen, S. Dahl, B. S. Clausen, S. Bahn, A. Logadottir and J. K. Nørskov, J. Am. Chem. Soc., 2001, 123, 8404–8405.
- 46 A. M. Alexander, J. S. J. Hargreaves and C. Mitchell, *Top. Catal.*, 2012, 55, 1046–1053.
- 47 P. Chen, Z. T. Xiong, J. Z. Luo, J. Y. Lin and K. L. Tan, *Nature*, 2002, **420**, 302–304.
- 48 U. Ash-Kurlander, G. E. Shter, S. Kababya, A. Schmidt and G. S. Grader, *J. Phys. Chem. C*, 2013, 117, 1237–1246.
- 49 D. E. Demirocak, S. S. Srinivasan, M. K. Ram, J. N. Kuhn, R. Muralidharan, X. Li, D. Y. Goswami and E. K. Stefanakos, *Int. J. Hydrogen Energy*, 2013, **38**, 10039–10049.
- 50 F. Haber and G. van Oordt, *Z. Anorg. Chem.*, 1905, **44**, 341–378.
- 51 I. Barin, *Thermochemical Data of Pure Substances*, VCH Verlagsgesellschaft mbH, Weinheim, Federal Republic of Germany, 1993, 0–6940.
- 52 B. Hammer and J. K. Nørskov, Surf. Sci., 1995, 343, 211-220.
- 53 D. Vanderbilt, *Phys. Rev. B: Condens. Matter Mater. Phys.*, 1990, **41**, 7892–7895.
- 54 M. C. Payne, M. P. Teter, D. C. Allan, T. A. Arias and J. D. Joannopoulos, *Rev. Mod. Phys.*, 1992, **64**, 1045–1097.
- 55 G. Kresse and J. Furthmüller, *Comput. Mater. Sci.*, 1996, 6, 15–50.
- 56 S. R. Bahn and K. W. Jacobsen, *Comput. Sci. Eng.*, 2002, **4**, 56-66.
- 57 B. Hammer, L. B. Hansen and J. K. Nørskov, *Phys. Rev. B: Condens. Matter Mater. Phys.*, 1999, **59**, 7413–7421.
- 58 Y. J. Liu, L. M. Xu, X. Y. Li, P. Hu and S. W. Li, *J. Appl. Phys.*, 2010, **107**, 103914.
- 59 N. E. Brese and M. O'Keeffe, *J. Solid State Chem.*, 1990, **87**, 134–140.
- 60 Y. L. Lee, J. Kleis, J. Rossmeisl and D. Morgan, *Phys. Rev. B: Condens. Matter Mater. Phys.*, 2009, **80**, 224101.
- 61 H. J. Kulik and N. Marzari, J. Chem. Phys., 2011, 134, 094103.
- 62 M. Cococcioni and S. de Gironcoli, *Phys. Rev. B: Condens. Matter Mater. Phys.*, 2005, 71, 035105.
- 63 R. Michalsky, A. Steinfeld, V. Botu, C. M. Hargus and A. A. Peterson, *Adv. Energy Mater.*, 2014, 4, 1401082.
- 64 M. García-Mota, M. Bajdich, V. Viswanathan, A. Vojvodic, A. T. Bell and J. K. Nørskov, *J. Phys. Chem. C*, 2012, **116**, 21077–21082.
- 65 A.-M. Alexander and J. S. J. Hargreaves, *Chem. Soc. Rev.*, 2010, 39, 4388–4401.
- 66 X. P. Du, V. C. Lo and Y. X. Wang, *J. Comput. Chem.*, 2012, 33, 18–24.
- 67 C. M. Fang, G. A. de Wijs, R. A. de Groot, H. T. Hintzen and G. de With, *Chem. Mater.*, 2000, **12**, 1847–1852.
- 68 R. Chemnitzer, G. Auffermann, D. M. Többens and R. Kniep, *Z. Anorg. Allg. Chem.*, 2005, **631**, 1813–1817.